Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Using InSyncs 5.2.0 6.1.0 6.3.0

InSyncs synchronizes ServiceNow and Stellar Cyber to streamline case management and enhance communication between the two systems.

Using InSyncs, you can:

- Open and close a Stellar Cyber case in ServiceNow.
- Update a case in Stellar Cyber, which updates a ticket in ServiceNow.
- Request information from ServiceNow and update the Activity Log in Stellar Cyber.
- Retrieve data from ServiceNow data tables to update cases in Stellar Cyber.
- Post data from Stellar Cyber cases to update ServiceNow data tables.
- Delete a Stellar Cyber case, which deletes a case in ServiceNow.

To ensure the data is synchronized, Stellar Cyber listens for updates from ServiceNow and updates the Stellar Cyber cases or alerts every five minutes when changes occur. Updates from Stellar Cyber to ServiceNow are performed live and are applied immediately.


For more information, see the following:

- Using the InSyncs Table
- Configuring InSyncs
- Automatically and Manually Synchronizing
- Viewing InSyncs in Alerts
- Viewing InSyncs in Cases

Using the InSyncs Table

To configure and view integration syncs, select **System | INTEGRATIONS | InSyncs**.

The InSyncs Overview table is displayed in the **InSyncs** tab.

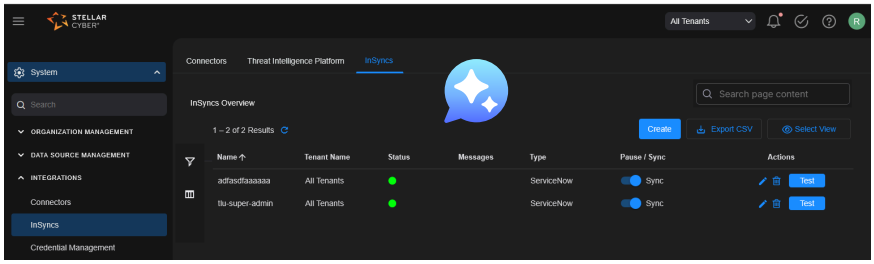

The InSyncs Overview table has the following columns:


- **Name**—name of the integration sync (or InSync)
- **Tenant Name**—name of the tenant. **All Tenants** means that the integration sync can be used across tenants.
- **Status**—status of the integration sync:
    - Success (green)
    - Error (red)
    - Inactive (gray)
- **Messages**—messages about the Status
- **Type**—type of integration sync, such as ServiceNow
- **Pause/Sync**—toggle of the integration sync
- **Actions**—actions available for an integration sync, such as **Edit this row**, **Delete this row**, or **Test**.

Using Search

Use the Search box to search for information about an InSync.


Using Filters

Click the Filters icon () to use defined filters.




To use defined filters:


- For **Name**, select the name of an integration sync using the check boxes or **Select All**. The number of integration syncs of each name is displayed on the right.




- For **Tenant Name**, select **All Tenants** or enter the name of a tenant in the Search box.

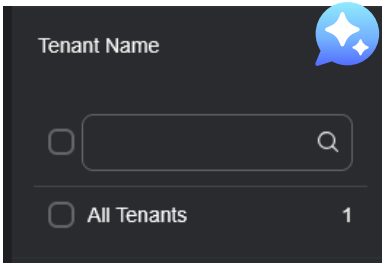


- For **Status**, select the status using the check boxes or **Select All**. The number of integration syncs of each status is displayed on the right.

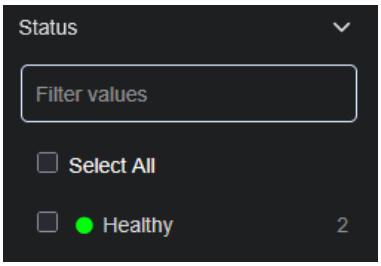


- For **Messages**, select the message using the check boxes or **Select All**. The number of integration syncs of each message is displayed on the right.

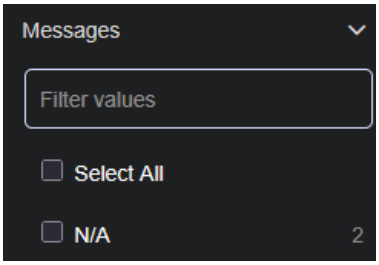


- For **Type**, select the type using the check boxes or **Select All**. The number of integration syncs of each type is displayed on the right.

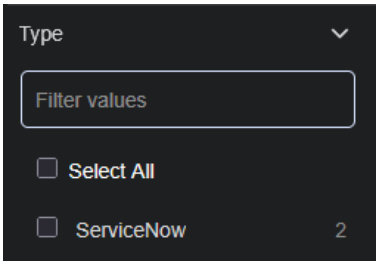


- For **Pause/Sync**, select either Pause or Sync using the check boxes or **Select All**. The number of integration syncs of each toggle is displayed on the right.

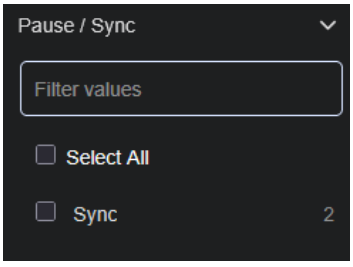


- You can click **Add new filter** to deselect a filter in the dropdown menu.

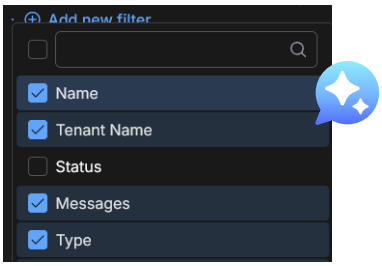

- You can also type in the **Add new filter** box to search for a filter.

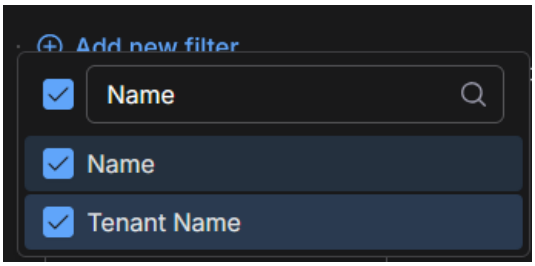

To exit, click the Filter icon again. The configured filters are displayed at the top of the table.

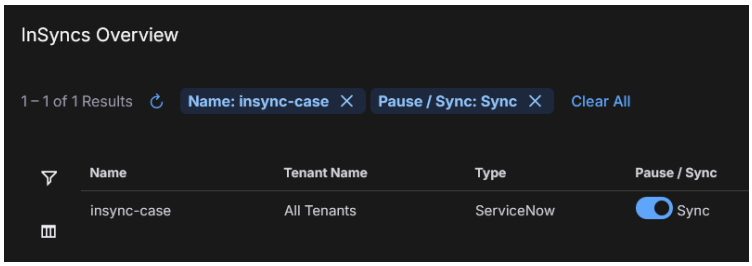


To clear an individual filter, click the icon to the right of the filter ().

To clear all filters, click **Clear All**.

Using Columns

Click the Columns icon () to add or remove columns in the table using check boxes.



To exit, click the Columns icon again.

Pausing InSyncs

To pause an integration sync, click the toggle in the **Pause/Sync** column from Sync to Pause.


Starting InSyncs

To start an integration sync, click the toggle in the **Pause/Sync** column from Pause to Sync.

Editing InSyncs

To edit an existing integration sync, click the Edit icon () on a row in the table. The Edit ServiceNow InSync dialog displays.

To create an integration sync, see Configuring InSyncs.

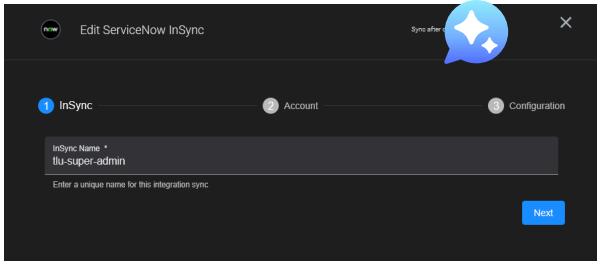

Deleting InSyncs

To delete an integration sync, click the Trash icon ( ) in the **Actions** column for a row in the table.

Testing InSyncs

To test the integration sync, click **Test**. A message displays.

Test only validates credentials, whereas **Status** reflects the import and export of data between ServiceNow and Stellar Cyber. Even when the integration sync is in Error status, the credential test can be successful.

Exporting CSV

Click **Export CSV** to export the table as a spreadsheet file.

You can export **Selected Columns** or **All Columns**. The spreadsheet is downloaded to your Downloads folder.

Selecting View

Click **Select View** to preserve a table layout. See Saved View Configurations for details.

Configuring InSyncs


You can create up to three InSyncs. During the configuration, you will authenticate the user with ServiceNow, select the type of integration sync (alerts, cases, or both), and provide the name of a ServiceNow alert database table, case database table, or both.

You need a **User** role that has access to the system dictionary to read field attributes for InSyncs configuration. If you know the name of the ServiceNow table, you need a **User** role that has access to the table (for reading, creating, and deleting the records in that table). To create a non-admin user and assign roles to it, refer to Creating an App, Tables, and a Default User Role and Creating a Non-Admin User and Assigning a Role.

Make sure that the rules created in ServiceNow will not interfere with the creation of records in the table. If a ServiceNow rule requires certain fields to be populated, and if those fields are not available on Stellar Cyber, the record may not be created.


To create an integration sync:

1. Click **Create**.

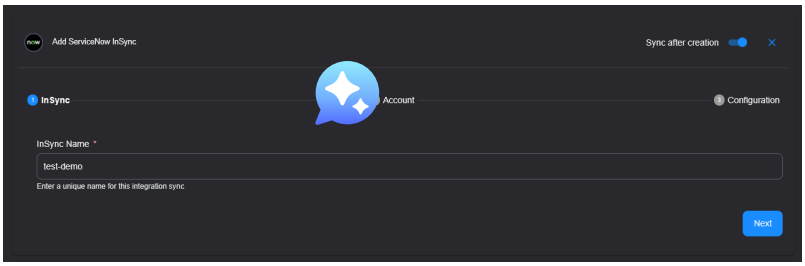

The asterisk (*) indicates a required field.


2. Enter a unique name for the integration sync in the **InSync Name** field.
3. (Optional) You can toggle **Sync after creation** to disabled. It is enabled by default.
4. Click **Next**.

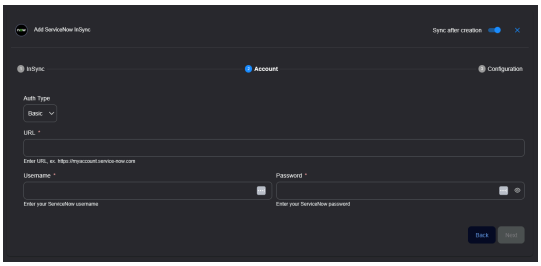

The asterisk (*) indicates a required field.

5. The authentication type is **Basic**, which is already selected.
6. Enter the **URL** to which to synchronize, for example, https://myaccount.service-now.com.
7. Enter the **Username**.
8. Enter the **Password**.
9. (Optional) You can toggle **Sync after creation** to disabled. It is enabled by default.
10. Click **Next**.
11. Select the type of configuration using the buttons for **Cases**, **Alerts**, or **Both**. Depending on your selection, the configuration options are:

    For **Cases**:

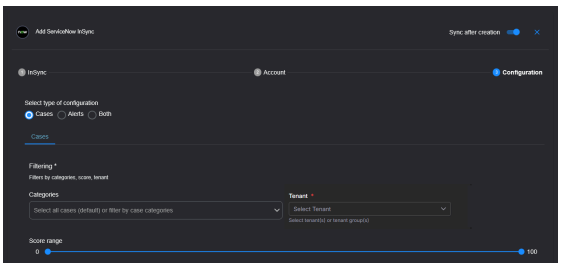


    a. (Optional) Select **Filters by categories, score, tenant**. You can select filters by Assignee, Severity (Critical, High, Medium, or Low), or Status (Escalated, New, In Progress, Resolved, or Canceled). You can also **Select All**. The default is all the case filters.

    b. Select **Tenant**. You can filter by specific tenants, tenant groups, or all tenants. 6.1.0


- To select all tenants, select **All Tenants**. If you select **All Tenants**, you cannot select specific tenant groups or tenants (because they are already included in all).
- To select specific tenant groups, select them from the **Tenant Groups** list. You can select one or more tenant groups.
- To select specific tenants, select them from the **Tenants** list. You can select one or more tenants.

  The resulting list can include a mix of tenant groups and tenants. If there is any overlap between tenant groups and tenants, the duplicates are filtered out. Tenant Groups are prefixed with Group.

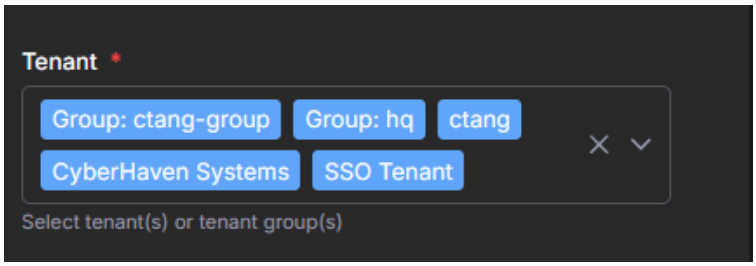

c. Select a **Score range** from 0 to 100 using the slider.

d. Enter the name of a **Case database table** in ServiceNow from which to collect data, then click **Confirm** to verify the database table. A message displays if the database table cannot be found or if fields in the database table cannot be found. To obtain table names, see Obtaining ServiceNow Table Names.



The asterisk (*) indicates a required field.

If the ServiceNow database table is created from an extensible table, only the fields created from the current table, not the parent table, can be used for field mapping.

e. For Field Mapping, match the fields on Stellar Cyber and ServiceNow to synchronize them. If the fields do not match, they will not be synchronized.

Stellar Cyber sends their status to ServiceNow. If the ServiceNow status is changed or updated to a status that matches in Stellar Cyber (case-sensitive), it updates.

The Stellar Cyber fields are on the left side of the Field Mapping table, the arrows in the center of the table indicate the direction of the field mapping, and the ServiceNow fields are on the right side of the table.

In this example, the Stellar Cyber Case Name field is mapped to Name in ServiceNow with bidirectional synchronization (Case Name to Name and


Name to Case Name) and the Tenant Name is mapped to Description with unidirectional synchronization.

Unmapped means that the selected field maps to Null.

In the Field Mapping table, you can select the ServiceNow fields from the dropdown menus, which have different options depending on the ServiceNow database table.

With field mapping, a field type of string can only map to a string field. Likewise, a URL field can only map to a URL. Date and time must follow a specific format. For details, see Supported Field Types.

For **Alerts**:

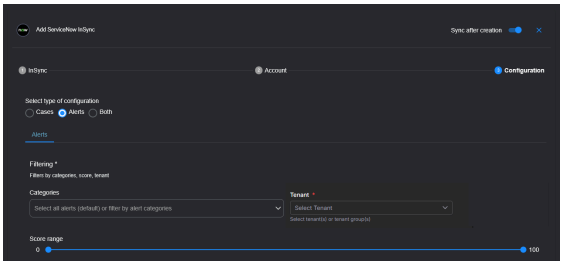


a. (Optional) Select **Filters by categories, score, tenant**. You can select filters by Source (Built-in or Custom) or Status (Closed, Ignored, In Progress, or New). You can also **Select All**. The default is all the alert filters.

b. Select **Tenant**. You can filter by specific tenants, tenant groups, or all tenants.

6.1.0

- To select all tenants, select **All Tenants**. If you select **All Tenants**, you cannot select specific tenant groups or tenants (because they are already included in all).
- To select specific tenant groups, select them from the **Tenant Groups** list. You can select one or more tenant groups.
- To select specific tenants, select them from the **Tenants** list. You can select one or more tenants.


  The resulting list can include a mix of tenant groups and tenants. If there is any overlap between tenant groups and tenants, the duplicates are filtered out. Tenant Groups are prefixed with Group.

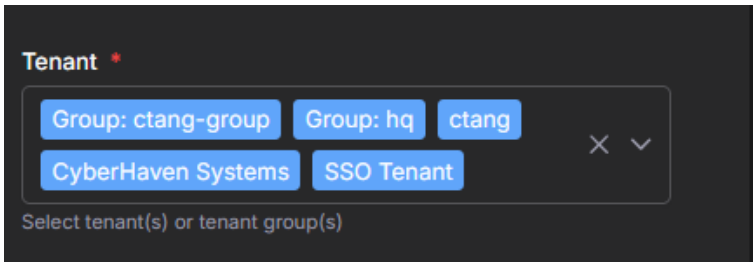

c. Select a **Score range** from 0 to 100 using the slider.

d. Enter the name of an **Alert database table** in ServiceNow from which to collect data, then click **Confirm** to verify the database table. A message

displays if the database table cannot be found or if fields in the database table cannot be found. To obtain table names, see Obtaining ServiceNow Table Names.



The asterisk (*) indicates a required field.

> If the ServiceNow database table is created from an extensible table, only the fields created from the current table, not the parent table, can be used for field mapping.

e. For Field Mapping, match the fields on Stellar Cyber and ServiceNow to synchronize them. If the fields do not match, they will not be synchronized.

   Stellar Cyber sends their status to ServiceNow. If the ServiceNow status is changed or updated to a status that matches in Stellar Cyber (case-sensitive), it updates.

   The Stellar Cyber fields are on the left side of the Field Mapping table, the arrows in the center of the table indicate the direction of the field mapping, and the ServiceNow fields are on the right side of the table.


   In this example, the Stellar Cyber Alert Name field is mapped to alert name in ServiceNow with unidirectional synchronization and the Assignee is mapped to Updated by with bidirectional synchronization (Assignee to Updated by and Updated by to Assignee).

   > Unmapped means that the selected field maps to Null.

   In the Field Mapping table, you can select the ServiceNow fields from the dropdown menus, which have different options depending on the ServiceNow database table.

   With field mapping, a field type of string can only map to a string field. Likewise, a URL field can only map to a URL. Date and time must follow a specific format. For details, see Supported Field Types.

For **Both**:



a. Click the **Cases** tab to configure the same fields as for Cases above.

b. Click the **Alerts** tab to configure the same fields as for Alerts above.


12. (Optional) You can tog**Sync after creation** to disabled. It is enabled by default.
13. Click **Submit**. Once an InSync is created, you can view it in Alerts.

Creating an App, Tables, and a Default User Role


You can create a default user role, which you will need to assign to a non-admin user, when you create an app.

To create an app, the alert and cases database tables, and a default user role:


1. In the App Engine Studio, click **Create app**.

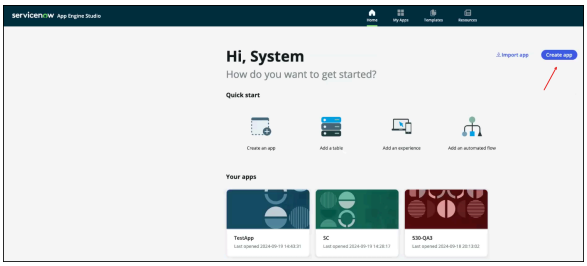


2. Enter a name for the app and click **Continue**.




3. An admin role name and a user role name are automatically created. You can change the name of the user role name and click **Continue**.




4. Wait for the app to be created, then click **Go to app dashboard**.




5. Create two database tables, one for alerts and one for cases. To get started, click **Add** in the **Data** section.

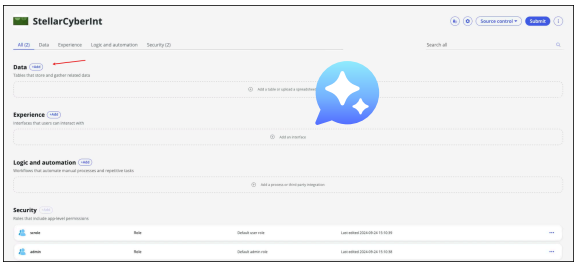


6. Click **Create a blank table** and click **Continue**.

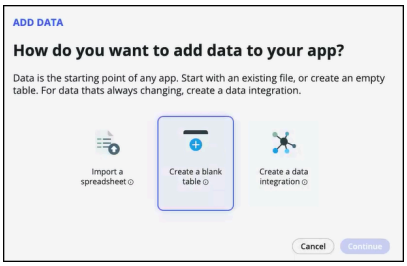


7. Click **Create new table** and click **Continue**.

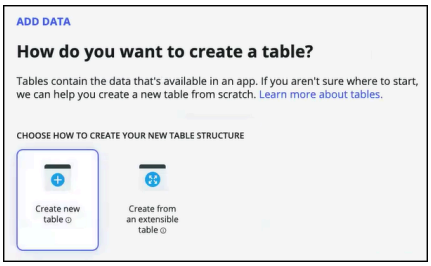


8. Give the table a name, such as Cases, and click **Continue**.




9. Add permissions to your table. Select **All** for both the admin role and the user role, then click **Continue**.

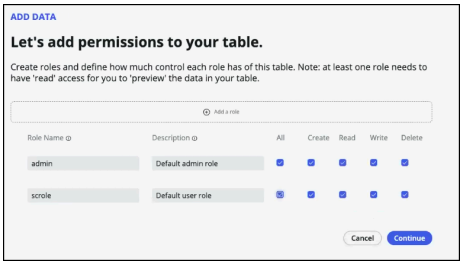


10. Wait for the table to be added, then click **Edit table**.

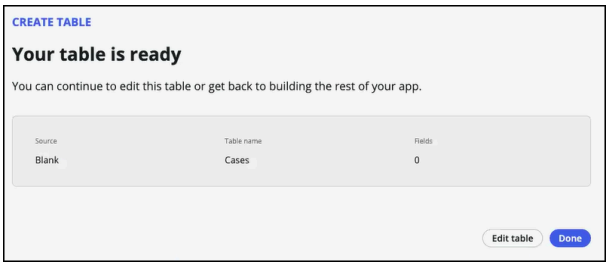


11. Add the columns to the table that are listed in Supported Field Types. (There are different supported field types for cases and for alerts.) To get started, click **Add field**.

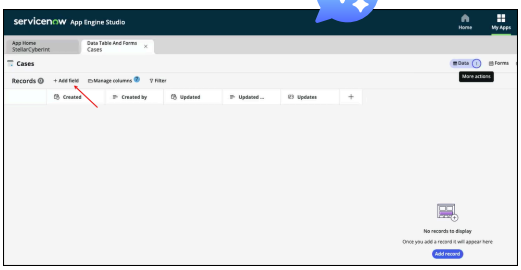


12. Enter the **Column label** and **Column name**, select a **Type**, and click **Add**.

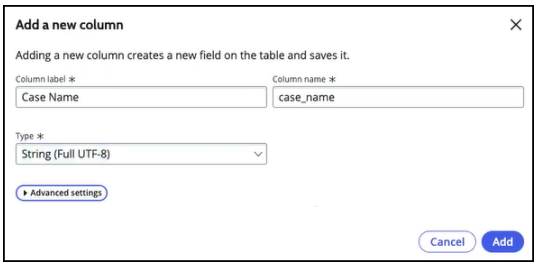


13. The column is added. Click **Add field** to continue adding columns to the table.

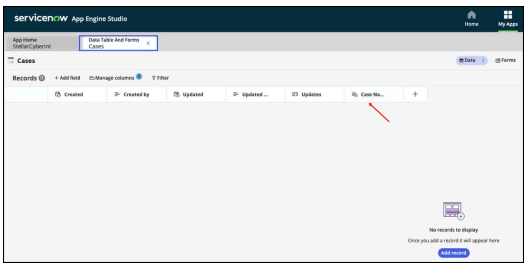

14. You can go to the App Home to see the created table.

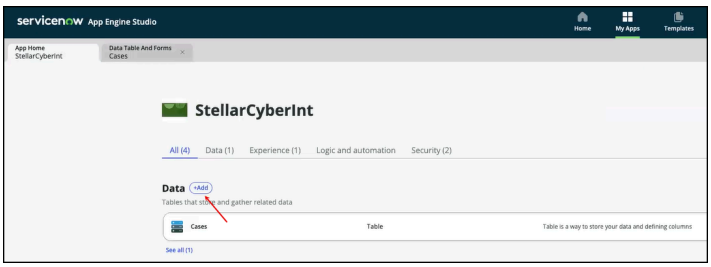

15. To create another table, such as Alerts, click **Add**.
16. Repeat the previous steps to create the other table and add the columns to it. When finished, there are two tables, one for Cases and one for Alerts.

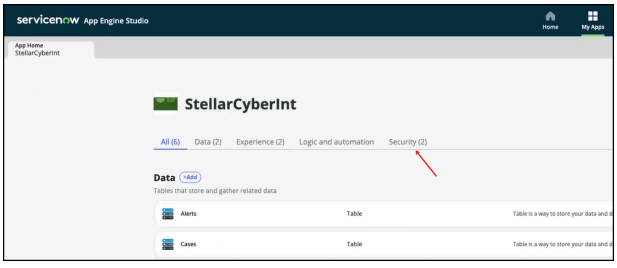


17. Click the **Security** tab. (To access this tab, you must be an admin user.) The Default user role needs to be assigned to a user. Go to the procedure for Creating a Non-Admin User and Assigning a Role.

Creating a Non-Admin User and Assigning a Role


You need a **User** role that has access to the system dictionary to read field attributes for InSyncs configuration. If you know the name of the ServiceNow table, you need a **User** role that has access to the table (for reading, creating, and deleting the records in that table).

To create a non-admin user and assign roles to it:


1. In ServiceNow, click the **All** tab, and search for **Users** under **User Administration**.




2. Click **New**.




3. Enter the information for the new user and click **Submit**.

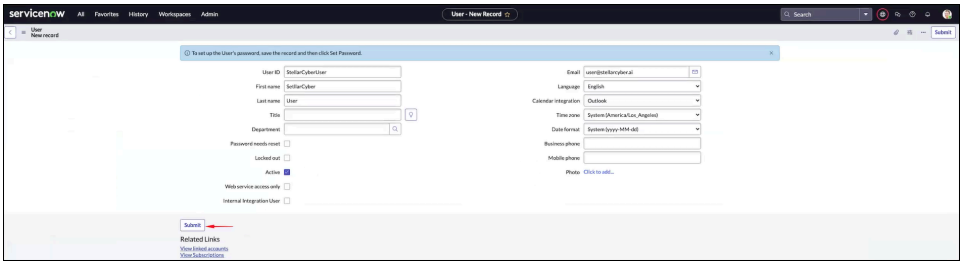


4. Locate the user you created.



5. Select the user to edit it, then select the **Roles** tab and click **Edit**.

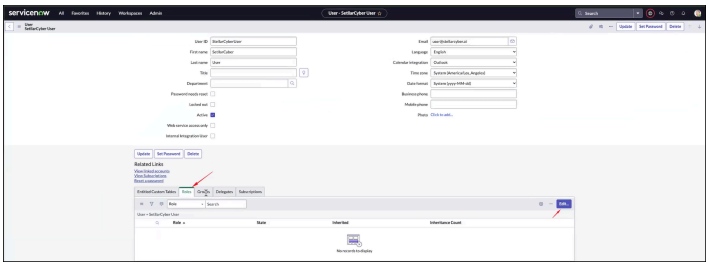

6. Search in the Collection for the `personalize_dictionary`. Also search for a previously created role, which will start with x_ and have the previously created role as part of the role name (a sys_id). Click the right arrow (>) to move a role from the Collection to the Roles List.

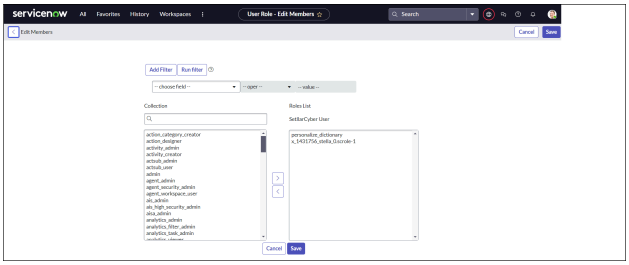

7. Click **Save**. The roles are added.



8. You can also add additional roles, but these two roles are required.


To set a password for the user at this time, you can click **Set password**.

Obtaining ServiceNow Table Names

If you know the name of the ServiceNow table, you need a **User** role that has access to the table (for reading, creating, and deleting the records in that table). If you do not know the name of the ServiceNow table, you need an **Admin** role to obtain it.


In the following procedure, the menu item for **System Definition | Tables** is only displayed for a **User Role** of **Admin** in ServiceNow.

For example, to change your role to **Admin** if your role was **App Engine Studio Creator**, navigate to **Change User Role**. click **Admin**, and then click **Change User Role**.

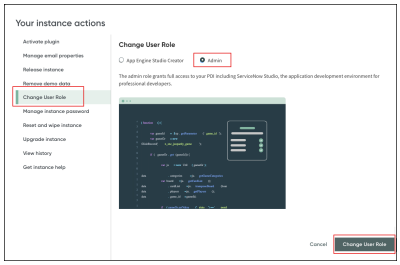


To obtain table names in ServiceNow:


1. In the main ServiceNow browser window, navigate to the **All** menu, click **System Definition**, and then click **Tables**.



2. In the Tables list, click the table **Label**.

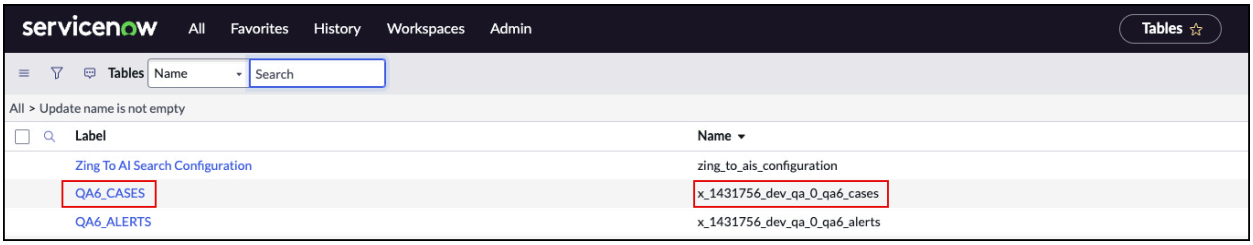

3. Note the table **Name**.

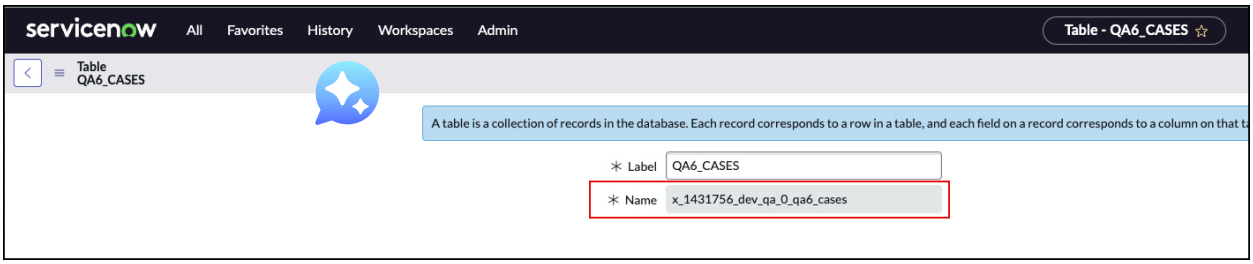

Supported Field Types

Note the following:

- It is recommended you configure URL fields with **URL** type and other string fields with **String (Full UTF-8)** type.
- The date and time format must be %Y-%m-%d %H:%M:%S. See Changing the System Time Format for details.

The following table describes the supported field types for cases.

Field Name	Stellar Cyber Field	Stellar Cyber Field Type	Direction	ServiceNow Field Types Supported
Case Name	name	string	Both	String, String (Full UTF-8)
Who	details.who	list	Out	String, String (Full UTF-8)
What	details.what	list	Out	String, String (Full UTF-8)
When	details.when	int	Out	String, String (Full UTF-8), Date/Time
Where	details.where	list	Out	String, String (Full UTF-8)
Severity	severity	string	Out	String, String (Full UTF-8)
Status	status	string	Both	String, String (Full UTF-8)
Assignee	assignee_name	string	Both	String, String (Full UTF-8)
Score	score	float	Out	String, String (Full UTF-8), Decimal, Floating Point Number, Integer, Long
Stellar Case URL	case_url	string	Out	URL, String, String (Full UTF-8)
Case ID	ticket_id	string	Out	String, String (Full UTF-8)
Tenant ID	cust_id	string	Out	String, String (Full UTF-8)
Close All Alerts	update_alerts	boolean (set to true to close all alerts)	Both	Boolean 5.5.0
Tenant Name	tenant_name	string	Out	String, String (Full UTF-8)
Comments	stellar_comments	list	Both	Journal 5.5.0
Activities	activities	list	Out	Journal 5.5.0

Field Name	Stellar Cyber Field	Stellar Cyber Field Type	Direction	ServiceNow Field Types Supported
Last Updated Comment	last_comment	string	Out	String, String (Full UTF-8) 6.3.0

The following table describes the supported field types for alerts.

Field Name	Stellar Cyber Field	Stellar Cyber Field Type	Direction	ServiceNow Field Types Supported
Alert Name	xdr_event.display_name	string	Out	String, String (Full UTF-8)
Alert Description	xdr_event.description	string	Out	String, String (Full UTF-8)
Stage	xdr_event.xdr_killchain_stage	string	Out	String, String (Full UTF-8)
Tactic	xdr_event.tactic.name	string	Out	String, String (Full UTF-8)
Technique	xdr_event.technique.name	string	Out	String, String (Full UTF-8)
Score	event_score	float	Out	String, String (Full UTF-8), Decimal, Floating Point Number, Integer, Long
Fidelity	fidelity	float	Out	String, String (Full UTF-8), Decimal, Floating Point Number, Integer, Long
Severity	severity	int	Out	Integer, String, String (Full UTF-8)
Threat Intel	threat_score	int	Out	Integer, String, String (Full UTF-8)
Data Period	data_period	int	Out	String, String (Full UTF-8)
Status	event_status	string	Both	String, String (Full UTF-8)
Assignee	assignee	string	Both	String, String (Full UTF-8)
Alert URL	alert_url	string	Out	URL, String, String (Full UTF-8)
Tenant ID	tenantid	string	Out	String, String (Full UTF-8)
Case ID	ticket_id	string	Out	String, String (Full UTF-8) 5.5.0
Tenant Name	tenant_name	string	Out	String, String (Full UTF-8)
Comments	stellar_comments	list	Both	Journal 5.5.0
Activities	activities	list	Out	Journal 5.5.0
Last Updated Comment	last_comment	string	Out	String, String (Full UTF-8) 6.3.0

Changing the Date and Time Formats

The date and time must be in the format: %Y-%m-%d %H:%M:%S. To change the date and time formats, refer to the ServiceNow documentation to Personalize the system date format and Personalize the system time format.

Automatically and Manually Synchronizing 6.1.0

Synchronizing an alert or a case from Stellar Cyber to ServiceNow is fully automated. It is based on the configuration detailed in Configuring InSyncs. As an example, during configuration you select the tenant that you want to synchronize, then, if there is a new alert or a new case belonging to that tenant, it will be synchronized with ServiceNow automatically.

An alert or a case may not be synchronized if it does not satisfy the requirements specified in the configuration. That is, there may be one alert or one case that does not belong to any of the existing configurations.

You can manually synchronize an alert or a case if it cannot be synchronized automatically. The single alert or case can be pushed manually to the existing ServiceNow integrations using a **Sync to ServiceNow** button. This button provides a way to manually synchronize an alert or a case from Stellar Cyber to create a ServiceNow ticket with a single button push. This action will ensure the alert or case is immediately pushed to ServiceNow and linked appropriately.

> The manual push is not for pushing changes in order to synchronize immediately. It is for an alert or a case that cannot be synchronized to any InSync configuration automatically.
>
> Once an alert or a case is manually or automatically synchronized with ServiceNow, any future changes to it will be automatically synchronized.

In addition, the manual synchronization does not consider any filtering selected in the InSync configurations.


All eligible InSync configurations will synchronize the alert or case after a manual push. Eligibility refers to the tenant scope, meaning the scope of the configuration itself, such as **All Tenants**.

See the following:


- Manually Pushing an Alert
- Manually Pushing a Case

Viewing InSyncs in Alerts

Click **Alerts** to go to the **Alerts** page. At the top of the page, there is a status indicator for the integration syncs as well as a button you can click to go back to the **InSyncs** page.

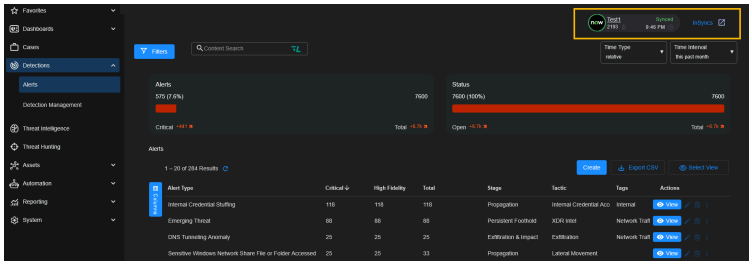

In each indicator, the name of the InSync is listed. There is a count of the number of alerts that have been synced using this InSync and a timestamp of the last synchronization.




The status is indicated in the circle around the NOW icon:


- A green circle indicates a Synced status.
- A gray circle indicates a Paused status.
- A red circle indicates an Error status.

Viewing the Alert Type Table

At the bottom of the **Alerts** page, click **View** on a specific alert type in the table to go deeper into the alert. For example, click **View** on the row for the alert type Emerging Threat.

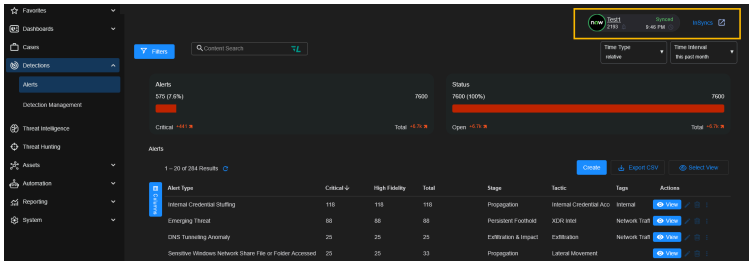


Scroll to the bottom of the Alerts table. The table has an **InSyncs** column showing the alerts that have been synced. When you hover over a NOW icon in the **InSyncs** column, an indicator is displayed with the status, Ticket ID, and Last Synced date and time for each alert.

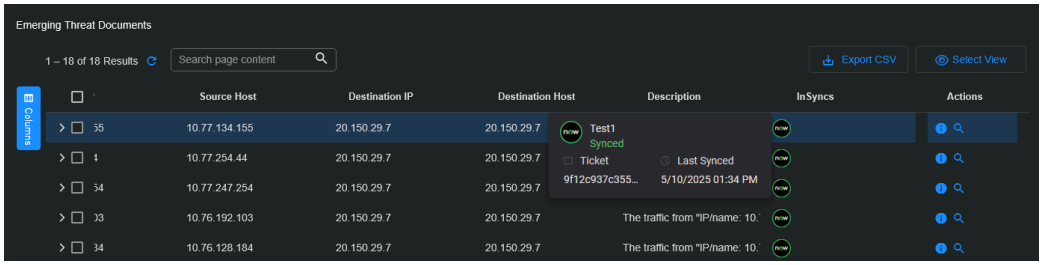


Viewing Alert Details

In the **Actions** column of the table, click **i** to display alert details. In the **Alert Details** page, when you hover over the NOW icon, an indicator is displayed with the status, Ticket ID, and Last Synced date and time.

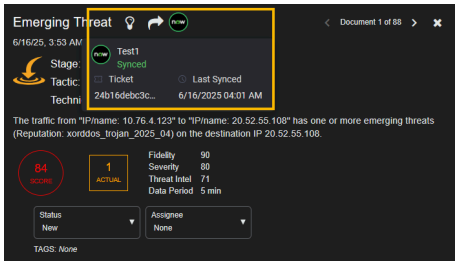


If you want to copy the ticket ID, click the **JSON** tab and search for insyncs and locate the `source_id` field.



The JSON also contains the ServiceNow link (`source_link`).

Manually Pushing an Alert

The manual **Sync to ServiceNow** button is visible in the **Actions** tab when an alert cannot be synchronized to any InSync configuration automatically.




After clicking the **Sync to ServiceNow** button and if the manual synchronization is successful, the button is hidden and the ServiceNow icon displays on the top of the **Alert Details** page.

Either a **Sync to ServiceNow** button or a ServiceNow icon displays on the **Alert Details** page, but not both at the same time.

Adding a New Case from Alerts

From the **Alerts** page, you can add a new case. The new case will be created and synchronized automatically with ServiceNow.

Select a row in the Alert Details table, click **Add to Case**, and select **New Case**.

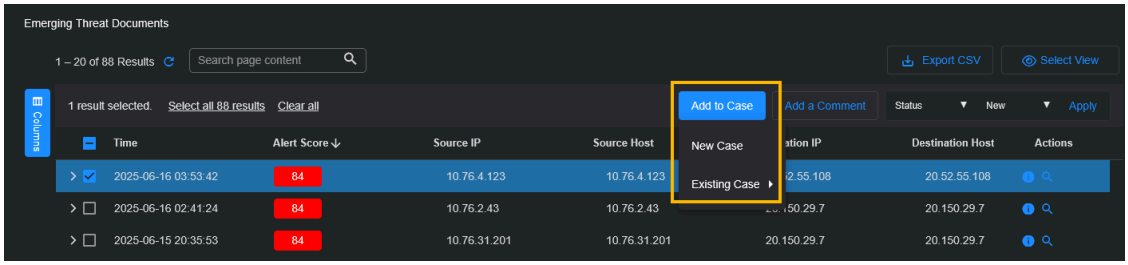


Viewing InSyncs in Cases

This section describes how InSyncs are integrated into the Cases displays. Start by clicking **Cases** to go to the **Cases** page. Then, refer to the sections below for information on the integrations provided for InSyncs.


InSyncs in the Case Queues Panel

At the top of the Case Queues panel, there is an **InSyncs** button that you can click to navigate to the **InSyncs** page.

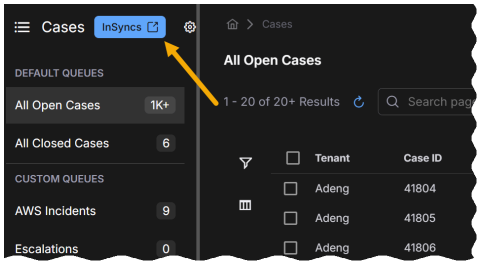


InSyncs Column in the Cases Table

The Cases table has an **InSyncs** column showing the cases that have been linked (if the **InSyncs** column doesn't appear, you may need to add it using the column selector). When you hover over an icon in the **InSyncs** column, the status, Ticket ID, and Last Synced date and time for the InSync are displayed.

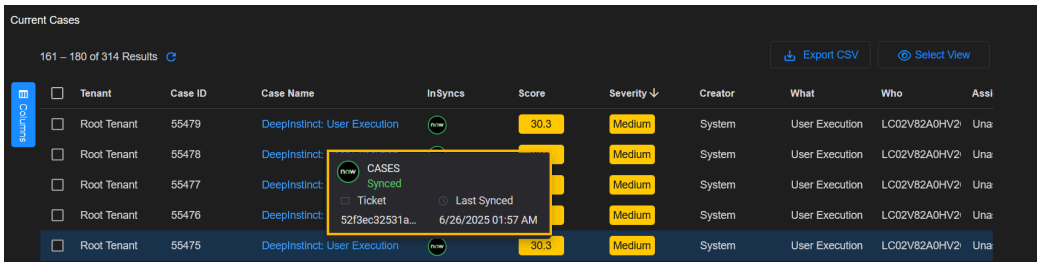


Click a **Case Name** in the Cases table to go to the **Case Details** page.

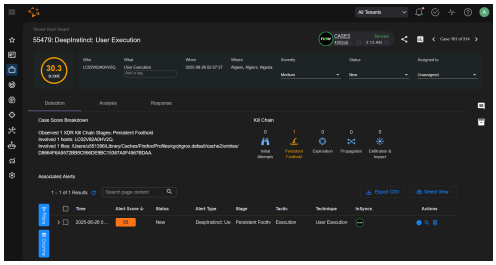

Manually Pushing a Case from Case Details

In the **Case Details** page, the manual **Sync to ServiceNow** button is visible when an alert cannot be synchronized to any InSync configuration automatically.

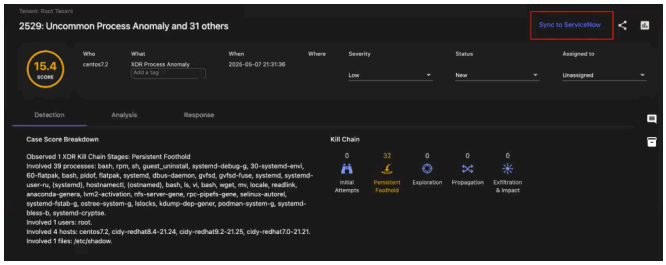


After clicking the **Sync to ServiceNow** button and if the manual synchronization is successful, the button is hidden and the ServiceNow icon displays in the same area of the **Case Details** page.

Either a **Sync to ServiceNow** button or a ServiceNow icon displays on the **Case Details** page, but not both at the same time.

Viewing InSyncs in Case Details

You can scroll to the bottom of the **Case Details** page to see the Associated Alerts table with a separate row for each alert associated with the case. The table has an **InSyncs** column showing the alert that has been synced. When you hover over a NOW icon in the **InSyncs** column, the status, Ticket ID, and Last Synced date and time are displayed.

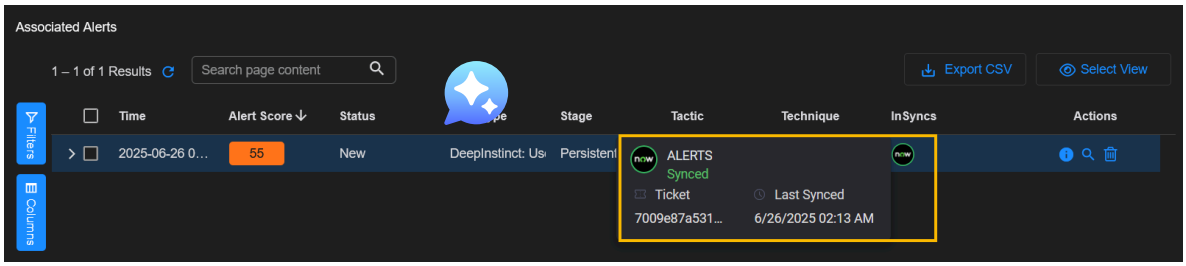


Note that the alerts that are correlated to cases are those that can also be synchronized to ServiceNow.

Cases are created for all alerts except those from the Sensor Monitoring index. See Alerts Correlated to Cases.


Viewing Case Activity

Scroll to the right on the **Case Details** page. Click the icon ( ) for Case Activity. The Case Activity is displayed.




Viewing the ServiceNow Record

Click the Ticket ID link in the status indicator on the **Case Details** page to open the ServiceNow record.

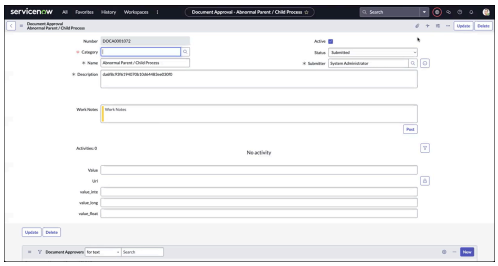


If you added a new case, it is added to the ServiceNow table. You may have to refresh the window.

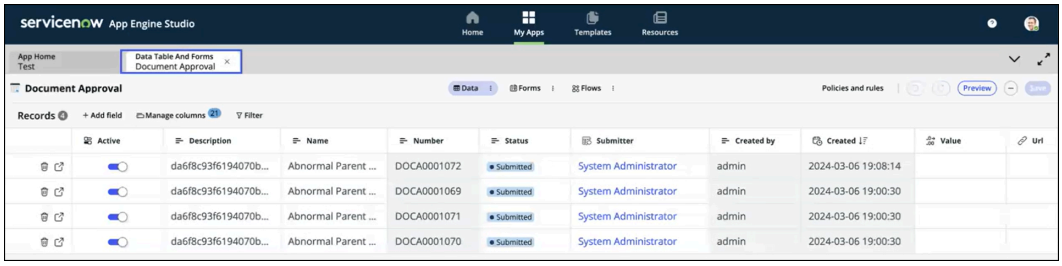


Updating the Case Name Example

As an example, you can change the name of a case in Stellar Cyber and see it changed in ServiceNow:

1. Click on the name of a case in the **Case Details** page, then type a new case name in Stellar Cyber.

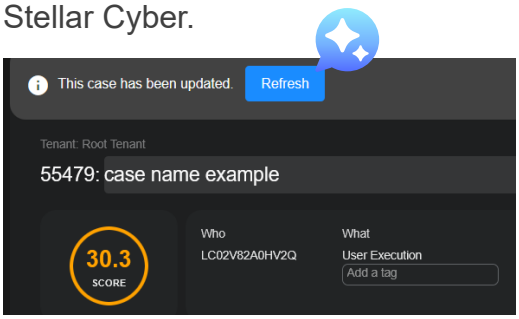


2. The case name in ServiceNow is updated. You may have to refresh the window.

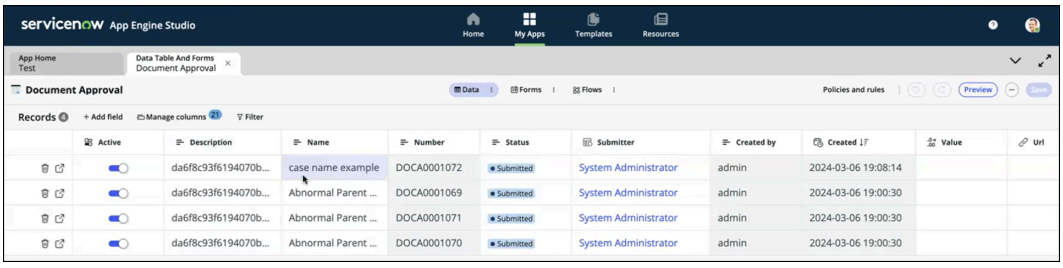

Viewing Cases in ServiceNow

In ServiceNow, you can preview cases. This provides a view of the data from Stellar Cyber in ServiceNow.

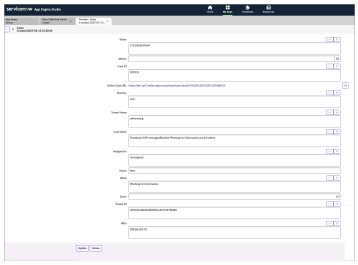

© 2026 Stellar Cyber . All rights reserved.