Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

# Using Toolbar Filters

The primary function of Stellar Cyber is to surface important information from a very large data set. Use this topic to understand how to use Stellar Cyber's display filters to find information more quickly and more easily.

There are additional tools that allow you to create and reuse filters and queries and apply them to sensors directly. Review related features described in **Configuring Global Shared Resources**.

See the following sections for details:

- **Use Cases for Display Filters**
- **Display Filters in the User Interface**
- **Using Options in the Toolbar**
- **Setting Filters in the Filters Panel**
- **Other Filters that Affect Data Display (Tenant Selection and Indices)**


## Use Cases for Display Filters

Display filters are useful in any situation where you want to reduce the amount of data appearing in the user interface and focus on just the information that interests you. For example:


- **Choose a period of time**. The systems starts with a default time period of the last five hours. The results will show what is going on in the network in real time. However, if you're investigating a case from a few days ago, set the time filter to display only results from that time period.
- **Examine what a given host is doing** (or has done). The host in question can be either internal or external. If you suspect a host might be infected with malware, use the host or sensor filters to find that host.
- **Research events related to your cases**. Use the assignee filter to see only events related to cases you own.
- **Research events related to an open case**. Use the case filter to see only events for that case, or use the events filter to see related events not specific to the case.

# Display Filters in the User Interface

The Filters panel is available in a **collapsible panel** in the upper left of most displays. For example, on the **Detections | Alerts** page:

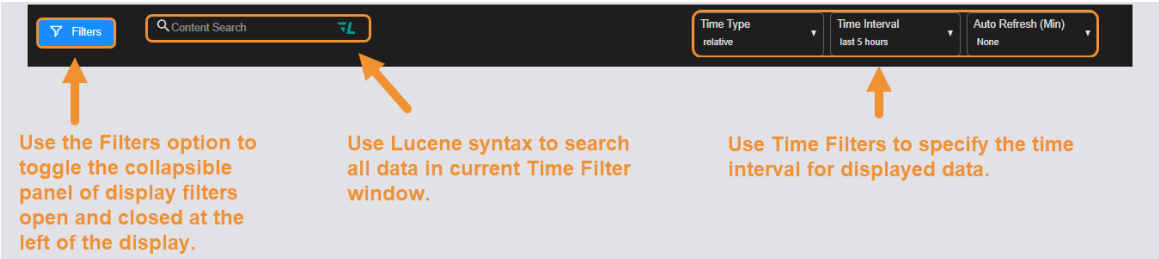


Selecting the Filters button opens a set of choices for filtering the data displayed on the page:

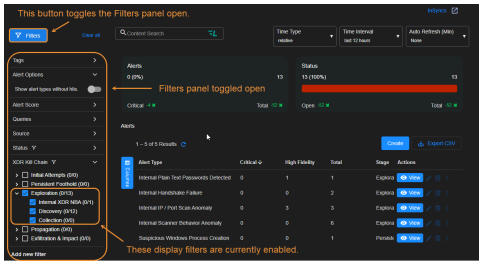


When you set a filter, the displayed data is immediately updated.

The filter settings are persistent within a session. If you go to another page, the search results remain the same. For example, if you set a filter on the **Kill Chain** page and then go to the **Threat Hunting** page, the same filtered records are displayed there too.

# Using Options in the Toolbar

This section describes the options available in the Stellar Cyber toolbar:

## Searching Displayed Data

The Search control provides a powerful way to use Lucene syntax to search for data across all pages of the currently displayed table.

A basic search is just a string of characters, such as "Intel" or "Google". Other common usages include country names that appear in the geolocation references for IP addresses, or even IP addresses themselves. An unqualified string searches all fields in the database. This could be slow if the data set is very large.

See the Search page for details on constructing searches.

See the Interflow overview for field names that are useful in searches.

## Setting Time Filters in the Toolbar

The **Time Type** filter is often the first filter you should set. It controls the range of time for displayed events, and can help greatly narrow the query results. This useful setting gives you a quick view of what is currently happening in the network. To investigate an event in the past, set this filter accordingly. To set the time range, choose a **Time Type**. When you choose a type, the control immediately to the right of **Time Type** changes.

Changes you make in the Time Filter are preserved within your local browser session storage, not within Stellar Cyber. If you log out of Stellar Cyber and log back in, or if you switch users, the time setting remains the same as you left it. Storage for different browser types is independent, so the time setting you make while using one type does not affect the time setting in another type (such as when you switch between using Chrome and Firefox).

The three available Time Types:

- Relative
- Daily
- Absolute

### Relative Time

Relative time sets the time range from the current time of day going backwards. When you choose relative time, the **Time Interval** drop-box appears to the right. When you select an interval less than 24 hours, an Auto Refresh (Min) menu is displayed, allowing you to specify how frequently you want the data refreshed.

Relative time is a moving window. As time progresses, new events are added to the results while older ones drop off.

### Daily Time

Daily time isolates individual days. When you choose daily time, the day selection box appears to the right. Click the arrows to move forward or back by a day at a time. Click the date in the center to see a calendar pop-up. The time is UTC.

### Absolute Time

Absolute time allows you to search within a sequence of days.




To set absolute time:

1. Choose **absolute** in the **Time Type** drop-down list.

   The **Range** box appears to the right.

2. Select the **From** date to set the start day on the calendar pop-up.

   You can also set the hour and minute. The **Search** button starts blinking.

3. Select the **To** date to set the end day on the calendar pop-up.

   You can also set the hour and minute.

4. Select the blinking **Search** button.

This is a rare filter that does **not** take effect immediately. Instead, the control waits, allowing you to set both dates without having the query execute before you can finish narrowing the results.

# Setting Filters in the Filters Panel

The filters available in the filters panel depend on the table you're currently displaying. This section provides an overview of some of the most common and useful filters available in the filters panel:

## Alert Score Filter

Use this option to narrow your results to events with a specific score range.

## Event Status Filter

Filter on the status of events. By default **All Open** events are included. The choices include:

- No Filter
- All Open
- New
- In Progress
- Ignored
- Closed



Keep in mind that the global Status filters available here apply only to security events – alerts. They do not apply to Cases. You can apply Status filters to Cases, too, but only from the Cases interface itself.

## Sensor Filter

A Stellar Cyber system includes any number of sensors. There are different types but they all collect data and send it to the data processor via Interflow messages. Each sensor is identified by a unique name in the system.

You can use the filter to select for all sensors or for a specific sensor. **All Sensors** is the default.

If you choose a specific sensor, the search results only include data that involves that sensor. If you choose **All Sensors**, the filter has no effect on the results.

This filter is useful when investigating the activities that appear in a specific place in the network. If you choose a Windows or Linux agent sensor, then the results focus on those specific systems.

See the Architecture Overview page for more information on sensors.

## User Name Filter

Filter on a specific Stellar Cyber user.

## Event / Asset Tag Filter

Filter on events or assets using a specific tag.

## Assignee Filter

Filter on the Stellar Cyber user assigned to investigate.

## Additional Scoring Filters


Optionally set specific filters by fidelity, severity, and Threat Intel scores.

# Using Table Filters and the Search Bar

You can also set filters directly f table cells. Once set, they appear in the Filters panel. This section provides some tips on using the global search bar, table filters, and the filters panel to find what you're looking for:

## Filtering and Searching Interflow Data 5.2.0

You can apply quick filters to control which Interflow key-pairs are displayed and perform searches. You can apply quick filters to display only **detections**, only **TI (Threat Intelligence) enrichments**, 6.6.0 only **Enriched** fields, 6.6.0 only **Non-Enriched** fields, or any combination of these filters. When you don't apply a filter, you see all the key-value pairs for an event.



When you apply the **Detection** filter, Stellar Cyber displays only the key-value pairs with field names that begin with `xdr_event`.

When you apply the **TI Enrichments** filter, Stellar Cyber displays the following fields if the event has been enriched with this information:

- `srcip_reputation`
- `dstip_reputation`
- `srcip_reputation_source`
- `dstip_reputation_source`
- `srcip_geo` and all its subproperties
    - `srcip_geo.city`
    - `srcip_geo.countryCode`
    - `srcip_geo.countryName`
    - `srcip_geo.latitude`
    - `srcip_geo.longitude`
    - `srcip_geo.region`
- `dstip_geo.region` and all its subproperties
    - `dstip_geo.city`
    - `dstip_geo.countryCode`
    - `dstip_geo.countryName`
    - `dstip_geo.latitude`
    - `dstip_geo.longitude`

- dstip_geo.region

If the above fields for an event have not been enriched with information, Stellar Cyber does not display them.

When you apply the **Enriched** filter, Stellar Cyber displays only fields that Stellar Cyber added to the record after ingestion. This filter is broader than TI enrichments because it includes all platform-added enrichment fields, not only threat intelligence and geolocation fields.

When you apply the **Non-Enriched** filter, Stellar Cyber displays only fields that came from the original detection or log record before Stellar Cyber enrichment. This filter is useful when you want to review the source facts separately from the context added by Stellar Cyber.

For example, if you're acting as an MSSP analyst and are preparing an alert summary for a customer, you can use **Non-Enriched** to focus on the original detection facts, then use **Enriched** to review the added platform context separately. To learn more about configured enrichments, see **Configuring Data Enrichment** .


When you apply multiple filters, Stellar Cyber displays key-value pairs that match any selected filter.

Search for any term that appears in a field key, name, or value and use commas to separate multiple terms. Stellar Cyber displays all results that match any of the search terms you enter. If you're applying a filter at the time of a search, then Stellar Cyber limits its search to just the filtered data. If no filter is applied, then it searches through all unfiltered data.


## Searching for a Specific Interflow Key and Value

You can search for Interflow keys with specific values in a table in several ways:

- Expand an entry in the table to view key-value pairs and use the **Filter For** button for one of the key-value pairs to search for matching records. Once you add a term as a filter in this way, it automatically appears in the Filter Panel at the left of the display, too. For example, in the figure below, we're searching for Tactics matching the displayed value.

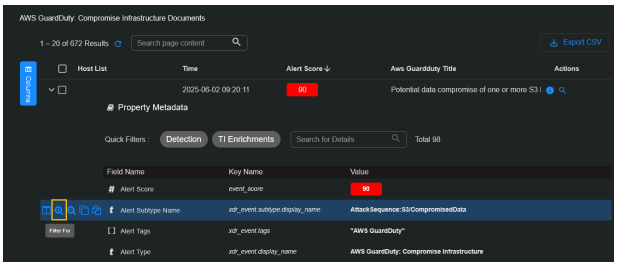


- Add the Interflow key directly in the Filter Panel. If the attribute you want to search for is not already listed in the panel, you can use the **Add new filter** functionality to add it. Then, supply the value in the field. For example:

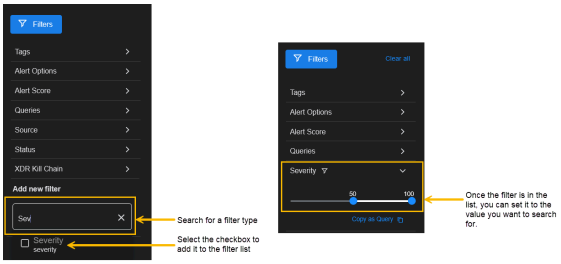


## Searching for a Value Without a Key

If you know the value you want to search for but aren't certain of the Interflow key (for example, a number), your best route is the Content Search box at the top of all Stellar Cyber pages. Take advantage of the full Lucene syntax to search for partial matches, fuzzy matches, and so on.


## Excluding Values from a Table

Sometimes, it can be useful to narrow a search by temporarily excluding all records with a certain Interflow key value. This is the perfect time to use the Filter Out button in a table cell. For example, in the figure below, we're excluding all records matching the selected Host IP address:

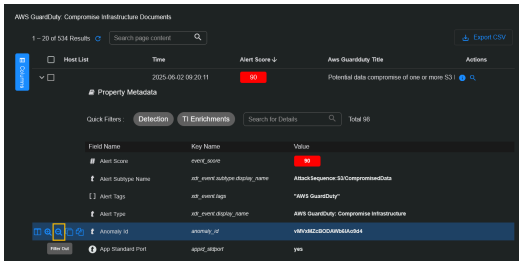



## Removing Some Filter Criteria

You can remove individual filter criteria from the current search by deselecting the check box in the filter panel. For example:




## Removing All Filter Criteria

You can remove all filter criteria by clicking the **Clear all** button at the top of the filter panel. For example:




## Searching for a Specific Alert Type

You can search the Alerts table for all alerts of a specific type using either the Content Search box or a table filter in the Alert Type column:


- Use the Content Search box to search the Alerts table for all alerts of a specific type by including the name of the Alert Type you want to search for in quotation marks. For example, to search for the **Emerging Threat** alert type, you would enter the following in the search bar:




- Use a table filter in the **Alert Type** column as follows:

    1. Click the "hamburger" menu in the **Alert Type** column header.
    2. Navigate to the **Filter** tab in the context menu that appears.
    3. Start typing the name of the alert type for which you want to search in the text box.
    4. When the matching alert type appears, click its box to apply the filter.

       The filter appears at the top of the table, as in the figure below:

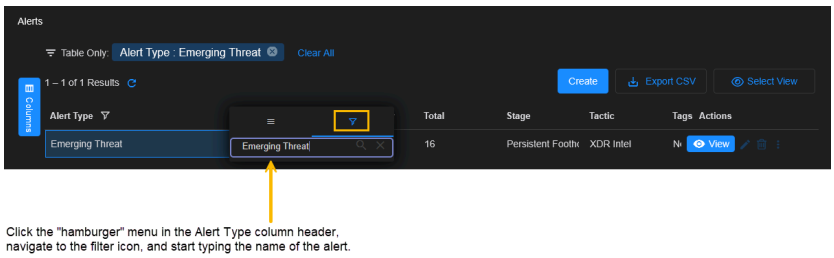


## Search Tips

- When using table data as a filter, be aware of whether the data includes multiple values. For example, the figure below shows values of both **modular_sensor** and **Linux_agent** for the **data_sources** Interflow key. Rather than using the **Filter For** button to add this entire term as a search filter, try manually supplying one or the other in the Filters panel at the left of the display.




- If you encounter inconsistent results when using regular expressions in Lucene search, the underlying cause may be the computational cost of the generated query. Complex or overly broad regex patterns can produce resource-intensive queries that impact platform performance and result consistency.

  To ensure reliable and efficient execution, define regular expressions as narrowly and specifically as possible. Avoid overly generic patterns, and constrain the scope of matching wherever feasible.

- If you are searching for a string in a specific field and not receiving results, try including the field both with and without a `.keyword` suffix.

  For example, to search for a specific value in the `event_data.TargetUserName` field, try using a search for the string in both the `event_data.TargetUserName` and `event_data.TargetUserName.keyword` fields. For example:

```
event_data.TargetUserName: "W2K16N527164H51$" OR
event_data.TargetUserName.keyword: "W2K16N527164H51$"
```

# Other Filters that Affect Data Display (Tenant Selection and Indices)

As you navigate Stellar Cyber, notice these primary settings that affect data visibility in conjunction with the other settings you make in both the toolbar and the filters panel.

## Tenant Filter

The Tenant selection menu is displayed at the top of the Stellar Cyber interface. While the tenant selection is not in the filter controls, selecting a tenant filters the results just as any other filter. You can also select **All Tenants** to essentially remove that filter. If your role is a tenant admin or user, your tenant is automatically selected and cannot be changed. This maintains privacy between tenants.

## Indices

The Data Lake stores data in indices. Each index is used for a different purpose depending on what the source of data is. For example, there is one index for **Linux** events and another for **Syslog** records. When building your filter, remember that:

- The search results always display data from a single index.
- The filter controls do **not** include a control for which index is used to produce the results. This parameter is usually supplied invisibly by the current page.
- On the XDR Kill Chain Home Page the **Alerts** index is used. Other pages might use a different index depending on their function.
- The **Threat Hunting** page defaults to the **Alerts** index; a menu is available from this page for you to change the index to match the threat type you are investigating. Select one or more indices to complement the filter you set in the toolbar.

The indices are defined here.


© 2026 Stellar Cyber . All rights reserved.