Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Using the Alerts Page

Learn more at Stellar Cyber Academy.

The following links take you to courses on the Stellar Cyber Academy technical training portal where you can learn more about a topic by watching the suggested lessons.

J02 Introduction to Features in the User Interface (02h:24m)

Alerts in the UI (10m:00s)

Explore the Alerts view, learning how to filter, sort, and manage Alerts within the Stellar Cyber Platform. Understand how machine learning drives alert generation and prioritization, and how to use these alerts to create custom Cases.

Alert Management (33m:00s)

Explore available views for managing and investigating alerts, including the Alerts Table, Kill Chain, and Threat Hunting views within the Stellar Cyber Platform. Learn to leverage MITRE ATT&CK data, threat intelligence, and toolbar filters to enhance alert triage and investigation workflows. Follow along with a demonstration on interacting with alerts across different views, applying search tool queries, and conducting threat-hunting activities efficiently. Discover how to tune alert settings and use custom filtering options for focused analysis across the data lake.

J03 Investigations and Workflows (05h:48m)

Workflow Tools in the Stellar Cyber UI (35m:00s)

Explore workflow tools within the Stellar Cyber UI, including case management, knowledge sharing, task assignment, and alert triage. Discover ways to enhance collaboration, automate notifications, and integrate the UI tools into efficient SOC workflows.

Building Workflows in Stellar Cyber - Foundations (45m:00s)

Discover foundational strategies for building workflows in the Stellar Cyber Platform, focusing on tools that support knowledge transfer, case management, and task tracking. Learn how to structure workflows to streamline operations within your SOC.

Alert Triage and Investigation Fundamentals (32m:00s)

Master the basics of alert triage, including prioritizing alerts by severity and relevance. See how the Stellar Cyber UI can assist in managing high-priority alerts and grouping related events for streamlined analysis.

Alert Handling (90m:00s)

Follow practical examples of investigating command anomalies, DNS tunneling activity, and privilege escalation alerts. Learn techniques to analyze these high-risk behaviors, understand their impact on network security, and see how Stellar Cyber workflow and investigation tools help identify, manage, and mitigate advanced threats.

The first time you access a link on the portal during a session, you must log in to access content.

Select **Detections | Alerts** to navigate to the **Alerts** page. This page allows you to view observed alerts organized by the XDR Kill Chain and analyzed with machine learning. From here, you can also access alert details and create custom alert types. Stellar Cyber generates alerts by using machine-learning algorithms to search for specific security-related events. You can get to the **Alerts** page by:

- Selecting the **Detections | Alerts** menu option
- Clicking a stage in the XDR Kill Chain loop


- See **Machine Learning and Analytics Overview** for an introduction to Stellar Cyber's machine-learning technology and links to individual alert descriptions organized by index and XDR Kill Chain stage.
- See **All Alert Types by Name** for details on the available alert types and the actions you should take when one is triggered.
- Stellar Cyber also provides an interactive tool that lets you look up alert types by data source, alert name, event type, or source index.

The **Alerts** page lists the available alert types according to the filters set in both the **Filters** panel and the filter controls at the top of the page.


You can always see which display filters are applied to the **Alerts** page by examining the checked boxes in the **Filters** panel at the left of the display.

Alerts Page Components

As shown in the figure below, the **Alerts** page consists of the following main components:

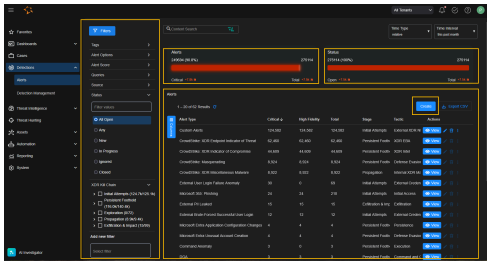


- Alerts and Status panels – Provides at-a-glance status graphs for **Critical vs. Total** and **Open vs. Total** alerts within the filters set in both the Filters panel and the Content Search box at the top of the page. Open alerts are those with a status of either New or In Progress.
- Filters panel – Provides display filters for the **Alerts** page using **XDR Kill Chain** stages and tactics, **Source**, **Tags**, and **Status**, among others. Filters applied here automatically affect the counts shown in the Alerts and Status panels. Depending on how you arrived at the **Alerts** page, some of these filters will often be automatically set (for example, if you arrived by clicking an XDR Kill Chain stage in the Home Dashboard).
- Alerts table – Provides a sortable table listing the alert types available according to the current filters set in both the Filters panel and the Content Search box at the top of the page. By default, only triggered alerts are shown. However, you can change this to view all alert types by toggling the Show alert types without hits option in Alert Options in the Filters panel. You can sort the table by columns such as Critical, High Fidelity, or Total to see which alerts have been triggered. When you are ready to dive deeper, use the View button to see the Alert Detail page for the corresponding alert.
- The table includes a **Create** button that takes you to the standard workflow for creating a new alert type. You can create new alert types that are available for use in Automated Threat Hunting (ATH) playbooks.
- The visible alerts are restricted to those accessible to the currently active tenant. Refer to "Which Custom Alert Types Can I See?," below, for information on which customer alert types are visible to you, depending on how you are logged in. The columns for **Tenants** and **Tenant Group** are displayed only for Partner users and Root users.
- InSyncs – If there are any integration syncs, they are displayed at the top of the **Alerts** page.

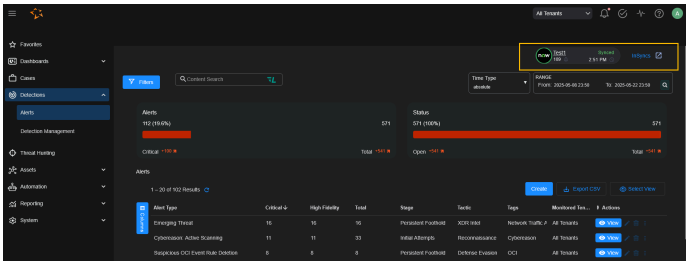

Understanding the Alerts and Status Cards

The **Alerts** and **Status** cards appear immediately above the **Alerts** table as illustrated below:

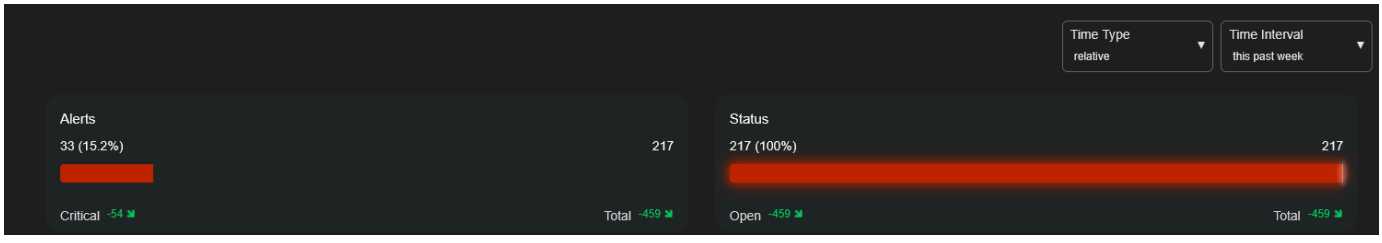


- **Alerts Card** – Use this card to assess the number of **Critical** versus **Total** alerts for the selected **Time Interval** and filters.

    - The bar graph shows the number of critical alerts and the percentage of the total number of alerts that match the selected filters. Critical alerts are those with an Alert Score of 75 or greater.
    - The **Critical** indicator shows you the trend in critical alert generation, comparing the net increase or drop in critical alerts to the previous **Time Interval** of the same size.
    - The **Total** indicator shows you the trend in total alerts, comparing the net increase or drop in total alerts generated to the previous **Time Interval** of the same size.
- **Status Card** – Shows the number of **Open** alerts versus **Total** alerts for the selected **Time Interval** and filters. **Open** alerts are shown both as a count and a percentage of the total. You can also see trend information for both **Open** and **Total**alerts over the selected time interval below the graph.
    - The **Open** indicator shows you the trend in alert closure, comparing the net increase or drop in open alerts to the previous **Time Interval** of the same size.
    - The **Total** indicator shows you the trend in total alerts, comparing the net increase or drop in total alerts generated to the previous **Time Interval** of the same size.

 **Open** alerts are those with a status of either **Open** or **In progress**.

Using Filters in the Filters Panel

The **Filters** panel provides a collapsible set of display filters that can be applied to the **Alerts** page. Click the **Filters** button at the top left of the display to toggle the Filters panel open and closed.




The counters in the **Alerts** and **Status** cards and the alert types listed in the **Alerts** table are all subject to the display filters set in the **Filters** panel. For example, suppose you clicked the **XDR Kill Chain | Initial Attempts** entry in Filters panel:

- The **Alerts** table updates to reflect just those alert types available at the **Initial Attempts** XDR Kill Chain stage.
- The **Alerts** and **Status** cards update to reflect just those alerts triggered at the **Initial Attempts** XDR Kill Chain stage.


Showing Alert Types Without Hits

The Filters panel also includes an **Alert Options | Show Alert types without hits** option. Enable this option and sort the table by **Stage** or **Tactic** to see the alert types available at a particular XDR Kill Chain stage or using a particular tactic (or, alternatively, set a filter for the stage/tactic in the **Filters** panel).

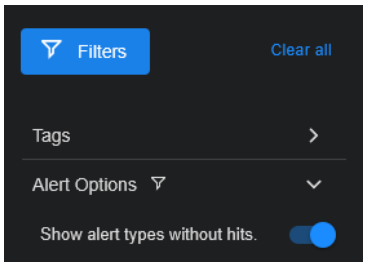

About the XDR Kill Chain Counters in the Filters Panel

The **XDR Kill Chain** entries in the Filters panel also show you **Critical/Total** alert counters subject to the global filters at the top of the display. For example, in the figure below, you can see that there are no critical alerts out of the total alerts at the Exploration stage in the selected Time Interval:

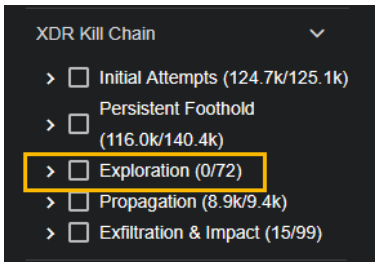


Automatically Configured Filters

Depending on how you arrived at the **Alerts** page, some of the display filters may already be set for you. For example, if you drilled to **Alerts** by clicking an XDR Kill Chain stage in the home dashboard, the corresponding stage is already selected as a filter. You can set the following types of filters in the Filters panel:

- **Tags** – You can set display filters on both predefined and custom tags.
- **Alert Options** – You toggle on and off the display of alert types without hits.
- **Alert Score** – You can limit the display to just those alerts within a specified range of scores. Click **Alert Score** and use the slider to specify the range.
- **Queries** – You can use a configured query as a display filter.
- **Source** – You can set display filters that include or exclude both the **Built-in** alert types (those provided with Stellar Cyber) and any **Custom** alert types available to your tenancy.
- **Status** – You can set display filters that include or exclude alerts based on their status (**All Open**, **Any**, **New**, **In Progress**, **Ignored**, or **Closed**).
- **XDR Kill Chain** – You can set display filters on each XDR Kill Chain stage, as well as their individual associated tactics. Within a stage, tactics are organized from least to most severe.

You can also use the **Add new filter** field to add a new filter to the Filters panel. Click in the **Add new filter** field to see the list of available filters.



Working with the Alerts Table


The **Alerts** table lists the alerts available within the filters set in the Filters panel and the Content Search box at the top of the page. Depending on how you set the **Show alert types without hits** toggle, you can view only triggered alerts (the default) or all alerts (**Show alert types without hits** enabled).

You can use this table to understand the alert types available at different XDR Kill Chain stages and using different tactics, as well as to see the triggered alerts. You work with the Alerts table in the same way you do any Stellar Cyber table. Keep in mind the following techniques that are particularly useful when working with the Alerts table:

- Leave the **Show alert types without hits** option disabled to focus on triggered alerts.
- Sort the table using the **Critical**, **Fidelity**, or **Severity** columns to bring triggered alerts to the top of the table for investigation.
- Enable the **Show alert types without hits** option and sort the table by **Stage** or **Tactic** to see the alert types available at a particular XDR Kill Chain stage or using a particular tactic (or, alternatively, set a filter for the stage/tactic in the **Alert Types** panel).
- Each alert type in the table includes a **View** button that you can use to drill to a detail display of all the alerts triggered for that type.
- The **Monitored Tenants** and **Monitored Tenant Groups** columns help you understand which tenants have access to specific custom alert types.
- Click the **Columns** button at the left of the table to change the columns included in the table.
- The **Playbooks** column lets you see how many ATH Playbooks a given alert type has been assigned to. You can click the entry in this column to drill to a filtered view of the **Automation page** showing just those playbooks to which the corresponding alert type has been assigned.
- Custom alert types are listed with standard **Edit** and **Delete** icons. Keep in mind that you can only delete a custom alert type if it's not assigned to any playbooks. The Playbooks column gives you an easy way to determine if it is. If you still want to delete the custom alert type, you must either remove it from any assigned playbooks or delete its assigned playbooks entirely.

Using InSyncs

If there are any integration syncs, they are displayed at the top of the **Alerts** page. The status of the InSyncs are displayed, as well as a button you can click to go back to the **InSyncs** page.



In each ServiceNow icon, the name of the InSync is listed. There is a count of the number of alerts that have been synced using this InSync and a timestamp of the last synchronization.

The status is indicated in the circle around the NOW icon:

- A green circle indicates a Synced status.
- A gray circle indicates a Paused status.
- A red circle indicates an Error status.


For details, see Using InSyncs.

Common Search and Filter Techniques

Stellar Cyber provides a variety of tools that help you find the data you need. Use the following summary of common search scenarios to help you perform your own searches, either globally, or in specific tables. The examples below are in the Alert Detail view, which you can display by clicking the **View** button for an alert in the Alerts table.

Filtering and Searching Interflow Data 5.2.0

You can apply quick filters to control which Interflow key-pairs are displayed and perform searches. You can apply quick filters to display only **detections**, only **TI (Threat Intelligence) enrichments**, 6.6.0 only **Enriched** fields, 6.6.0 only **Non-Enriched** fields, or any combination of these filters. When you don't apply a filter, you see all the key-value pairs for an event.



When you apply the **Detection** filter, Stellar Cyber displays only the key-value pairs with field names that begin with `xdr_event`.

When you apply the **TI Enrichments** filter, Stellar Cyber displays the following fields if the event has been enriched with this information:

- `srcip_reputation`
- `dstip_reputation`
- `srcip_reputation_source`
- `dstip_reputation_source`
- `srcip_geo` and all its subproperties
    - `srcip_geo.city`
    - `srcip_geo.countryCode`

    - srcip_geo.countryName
    - srcip_geo.latitude
    - srcip_geo.longitude
    - srcip_geo.region
- dstip_geo.region and all its subproperties
    - dstip_geo.city
    - dstip_geo.countryCode
    - dstip_geo.countryName
    - dstip_geo.latitude
    - dstip_geo.longitude
    - dstip_geo.region

If the above fields for an event have not been enriched with information, Stellar Cyber does not display them.

When you apply the **Enriched** filter, Stellar Cyber displays only fields that Stellar Cyber added to the record after ingestion. This filter is broader than TI enrichments because it includes all platform-added enrichment fields, not only threat intelligence and geolocation fields.

When you apply the **Non-Enriched** filter, Stellar Cyber displays only fields that came from the original detection or log record before Stellar Cyber enrichment. This filter is useful when you want to review the source facts separately from the context added by Stellar Cyber.

For example, if you're acting as an MSSP analyst and are preparing an alert summary for a customer, you can use **Non-Enriched** to focus on the original detection facts, then use **Enriched** to review the added platform context separately. To learn more about configured enrichments, see **Configuring Data Enrichment** .


When you apply multiple filters, Stellar Cyber displays key-value pairs that match any selected filter.

Search for any term that appears in a field key, name, or value and use commas to separate multiple terms. Stellar Cyber displays all results that match any of the search terms you enter. If you're applying a filter at the time of a search, then Stellar Cyber limits its search to just the filtered data. If no filter is applied, then it searches through all unfiltered data.


Searching for a Specific Interflow Key and Value

You can search for Interflow keys with specific values in a table in several ways:

- Expand an entry in the table to view key-value pairs and use the **Filter For** button for one of the key-value pairs to search for matching records. Once you add a term as a filter in this way, it automatically appears in the Filter Panel at the left of the display, too. For example, in the figure below, we're searching for Tactics matching the displayed value.

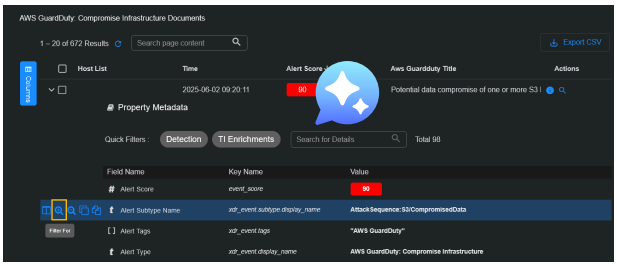

- Add the Interflow key directly in the Filter Panel. If the attribute you want to search for is not already listed in the panel, you can use the **Add new filter** functionality to add it. Then, supply the value in the field. For example:

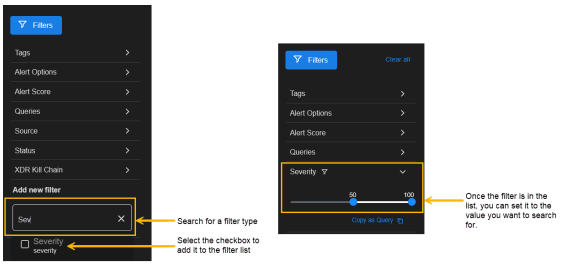


Searching for a Value Without a Key

If you know the value you want to search for but aren't certain of the Interflow key (for example, a number), your best route is the Content Search box at the top of all Stellar Cyber pages. Take advantage of the full Lucene syntax to search for partial matches, fuzzy matches, and so on.


Excluding Values from a Table

Sometimes, it can be useful to narrow a search by temporarily excluding all records with a certain Interflow key value. This is the perfect time to use the Filter Out button in a table cell. For example, in the figure below, we're excluding all records matching the selected Host IP address:

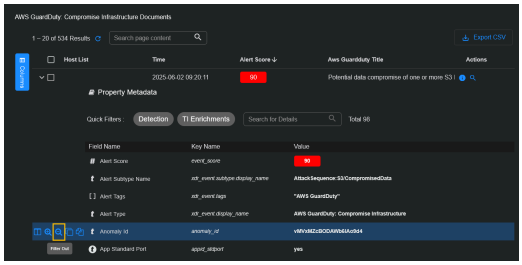


Removing Some Filter Criteria

You can remove individual filter criteria from the current search by deselecting the check box in the filter panel. For example:



Removing All Filter Criteria

You can remove all filter criteria by clicking the **Clear all** button at the top of the filter panel. For example:



Searching for a Specific Alert Type


You can search the Alerts table for all alerts of a specific type using either the Content Search box or a table filter in the Alert Type column:

- Use the Content Search box to search the Alerts table for all alerts of a specific type by including the name of the Alert Type you want to search for in quotation marks. For example, to search for the **Emerging Threat** alert type, you would enter the following in the search bar:



- Use a table filter in the **Alert Type** column as follows:
    1. Click the "hamburger" menu in the **Alert Type** column header.
    2. Navigate to the **Filter** tab in the context menu that appears.
    3. Start typing the name of the alert type for which you want to search in the text box.
    4. When the matching alert type appears, click its box to apply the filter.

       The filter appears at the top of the table, as in the figure below:

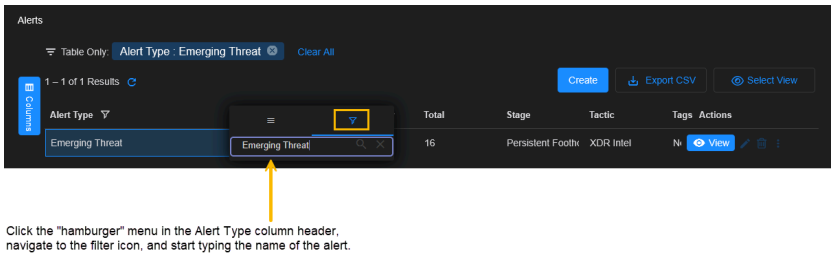

Search Tips

- When using table data as a filter, be aware of whether the data includes multiple values. For example, the figure below shows values of both **modular_sensor** and **Linux_agent** for the **data_sources** Interflow key. Rather than using the **Filter For** button to add this entire term as a search filter, try manually supplying one or the other in the Filters panel at the left of the display.



- If you encounter inconsistent results when using regular expressions in Lucene search, the underlying cause may be the computational cost of the generated query. Complex or overly broad regex patterns can produce resource-intensive queries that impact platform performance and result consistency.

  To ensure reliable and efficient execution, define regular expressions as narrowly and specifically as possible. Avoid overly generic patterns, and constrain the scope of matching wherever feasible.

- If you are searching for a string in a specific field and not receiving results, try including the field both with and without a `.keyword` suffix.

  For example, to search for a specific value in the `event_data.TargetUserName` field, try using a search for the string in both the `event_data.TargetUserName` and `event_data.TargetUserName.keyword` fields. For example:

  ```
  event_data.TargetUserName: "W2K16N527164H51$" OR
  event_data.TargetUserName.keyword: "W2K16N527164H51$"
  ```

Searching for Alerts Without Correlated Cases


You can use the following search in the Lucene Search bar in either the Alerts or Threat Hunting page to see alerts that have not been correlated to cases in the current time window:

```
(NOT ( (_exists_:(xdr_event.name OR event_name) AND _exists_:orig_index) OR
(stellar.ath.type:raw AND stellar.ath.to_incident:true))) OR xdr_event.name:
(ade_outbytes_anomaly OR ade_outbytes_anomaly_flip)
```


Creating a New Alert Type

In addition to the alert types provided by Stellar Cyber, you can create your own custom alert types. Once you've created a custom alert type, you can add it to an automated threat hunting playbook.

1. Navigate to the **Detections | Alerts** page and select **Create**.

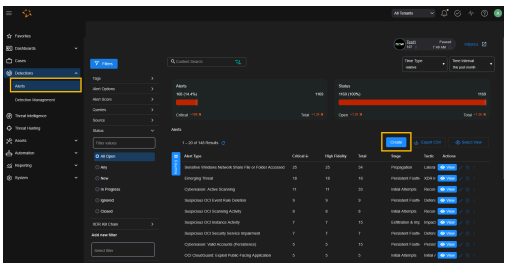   The **Create an Alert Type** dialog box appears.

2. Supply the following information in the **Create an Alert Type** dialog box:

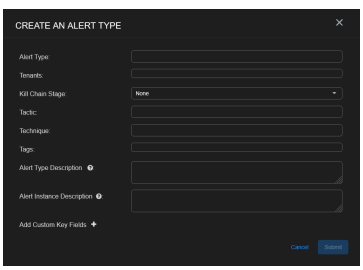- **Alert Type** (Required) – Supply a unique, alphanumeric name for the custom alert type. This name identifies the alert type across the system and communicates the nature or focus of the alerts it generates.
- **Tenants** (Required) – Either set to **All Tenants** or select the tenant groups and tenants that will have access to this custom alert type. For information on how your tenancy determines which alert types are visible to you, refer to **Which Custom Alert Types Can I See and Act Upon?**.
- **Kill Chain Stage** – Choose the applicable XDR Kill Chain stage to which the custom alert type corresponds. This stage helps classify alerts according to a structured threat progression model, supporting better threat detection and response strategies.
- **Tactic** – Choose the tactic associated with this alert type. Tactics represent the goal or objective behind an attacker's behavior, such as credential access or lateral movement. Available options depend on the selected Kill Chain Stage.
- **Technique** – Choose the technique used to carry out the chosen tactic. Techniques define how attackers achieve their goals and provide additional specificity for detection. The list of techniques is filtered based on the chosen Kill Chain Stage and Tactic.

  If you set a value for any one of the fields—**Kill Chain Stage**, **Tactic**, or **Technique**—you must set all three. The system enforces valid combinations.
- **Tags** – Apply tags to help categorize, filter, and search for this alert type. Tags can represent threat categories, response actions, or affected environments. Tags become mandatory if Kill Chain Stage, Tactic, and Technique are not defined.
- **Alert Type Description** – Optionally supply an alphanumeric description for the custom alert type. This field defines the overall purpose or behavior of the alert type and applies to all alert instances that belong to it. The text appears prominently near the top of the Alert Type dashboard when viewing grouped alerts, and it also populates the `xdr_event.description` field in each alert instance—but only when the **Alert Instance Description** field is left empty.

  The description is static and does not support dynamic variables. It's intended to help users quickly understand the function of the alert type at a glance. The maximum length is 200 characters, including spaces.
- **Alert Instance Description** – Optionally define a dynamic description that is rendered uniquely for each alert instance. This field supports merge fields—placeholders wrapped in double curly braces (`{{ }}`)—that are replaced with actual values drawn from the JSON data in an alert record at runtime. When populated, this field overrides the **Alert Type Description** and is written to the `xdr_event.description` field in the alert record. The dynamically rendered description appears both in the **Alert Details** side panel and in the alert instance table on the **Alert Details** page.

This field enables you to embed contextual information specific to each event, such as the affected tenant, user, IP address, or host. For example, entering `Malware alert triggered in {{tenant_name}}.` could produce `Malware alert triggered in Acme Corp.` when rendered. The maximum length is 200 characters, including spaces.

Common Merge Fields for Alert Instance Descriptions

You can use any available JSON field from the alert record as a merge field. Below are common examples:


Merge Field	Description
`{{srcip}}`	Source IP address triggering the alert
`{{dstip}}`	Destination IP address
`{{srcip_username}}`	Hostname of the source IP address
`{{event_name}}`	Name of the triggering event
`{{severity}}`	Alert severity level
`{{report_id|int}}`	Report ID (Note: Add the `int` filter to render the ID number as an integer.)*

* You can use the `int` filter to render numeric field values as integers; for example, `report ID 60735526`. Otherwise, by default, they're rendered as floating point numbers such as `report ID 60735526.0`, which would be an incorrect report ID number. To know if a field type is an integer or not, check if the field is tagged with a hashtag (#) in Details view of the Interflow record for an alert instance. If it is, include the `int` filter here to render it correctly as an integer.

- **Add Custom Key Fields** – You can add key fields to the custom alert type to make them more prominent and readily accessible during alert analysis. Any field in the JSON tab of an alert can be promoted to the Key Fields tab.



Select the plus sign ( ) next to **Add Custom Key Fields** and then select the right angle bracket ( ) to expand a **Custom Field**. 5.2.0

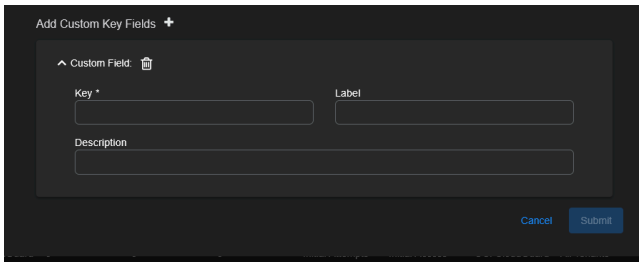


The asterisk (*) indicates a required field.

a. Enter the **Key**. This is a field in the JSON data; for example, `hostip`.

b. (Optional) Enter a **Label**. This is what appears in the user interface; for example, `Host IP`.

c. (Optional) Enter a **Description**. This is what appears in the user interface when you hover over the key field; for example, `The host IP address.`


In the following example alert type, a custom field was created:



3. Select **Submit** to add the custom alert type to the list.

Show All Alert Types to See Your New Alert Type

Your custom alert type will only appear in the list right away if the **Show alert types without hits** option is enabled under **Filters | Alert Options**, as illustrated below. Because you just created the alert type, it likely won't have any hits yet.

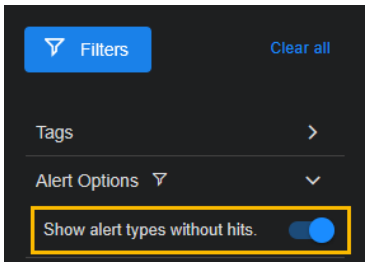


Adding the Custom Alert Type to a Playbook


Once you've created a custom alert type you can add it to an Automated Threat Hunting playbook. You can either do this directly from the **Automation | Automation** page, or you can drill to a pre-filled template for a new playbook using the custom alert type as follows:

1. Create the custom alert type using the procedure in the previous section.
2. Ensure that the **Alert options | Show alert types without hits** option in the Filters panel is enabled and locate your new custom alert type in the Alerts table.

   You can make it easier to find custom alert types by setting the **Source** filter in the Alert Types panel to **Custom** as in the figure below.

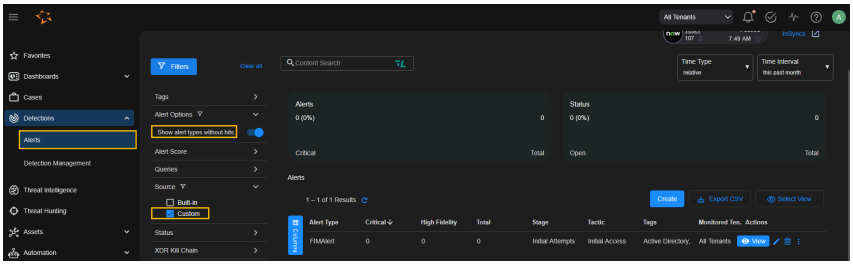

3. We just created the custom alert type named **AutoEx**. Now we can click its three-dot menu and use the **+ Add Playbook** option to launch the standard ATH Playbook workflow with the template pre-filled to use our custom alert type.

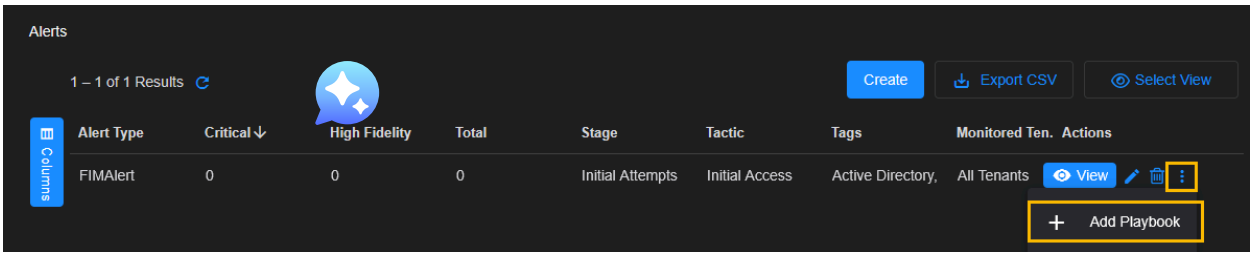

When you start a playbook using this technique, the template is automatically pre-filled with the **Actions** section populated based on the alert type settings:


- **Type** is set to **Create Alert**
- **Alert Type** is set to the selected alert type.
- **Kill Chain Stage**, **Tactic**, **Technique**, **Tags**, and **Description** are all pre-filled based on the custom alert type settings.

Editing Custom Alert Types

You can edit a custom alert type using its standard Edit button at the right of its entry in the Alerts table. Keep in mind, however, that once a custom alert type is assigned to a playbook, you cannot delete its assigned Tenants or Tenant Groups.

Which Custom Alert Types Can I See and Act Upon?

The policy of Stellar Cyber is to restrict access to different objects based on ownership and tenancy. In general, you can only see and act upon custom alert types that were created by or assigned to a tenant or tenant group to which you are logged in as. Start by checking your Tenancy at the upper right of the display. For example, the user below is logged in with the **STML** tenant.



You can always see alert types set to **All Tenants**. From there, your tenancy determines which custom alert types you can see and act upon, as follows:

- If you are logged in with a tenant and the tenant owns the alert type.
- If you are logged in with a tenant and the tenant list for the alert type includes the tenant.
- If you are logged in with a tenant and the alert type is assigned to a tenant group that includes that tenant.
- If you are logged in with a tenant group and the alert type is assigned to that group.
- If you are logged in with a tenant group and a tenant in the tenant group owns the alert type.
- If you are logged in with a tenant group and a tenant in the alert type's tenant list is in the tenant group.

About Deduplication for Custom Alerts

To reduce noise and focus attention, Stellar Cyber automatically deduplicates multiple instances of the same custom alert if they fire within a small window of time (five minutes, by default). Stellar Cyber performs this deduplication by discarding fields that are always different between separate alerts, calculating a hash, and monitoring future events for matches.

You can override the default settings for deduplication of alerts created as part of an ATH Playbook and specify your own time window. Refer to **Create Alert Action** .

Click here to see which fields are not considered for the purposes of custom alert deduplication:

Certain fields are always different between two Interflow records, even if those records represent multiple iterations of the same alert. Because of this, they are discarded before the hash used to identify duplicate alerts is calculated. For that reason, the following fields are not considered when calculating the hash used for deduplication:

Exact matches between:

- stellar_index_id
- stellar_uuid
- timestamp
- timestamp_utc
- write_time
- xdr_event
- index
- id
- type

Fields containing the following substrings:

- stellar
- time
- date
- index

© 2026 Stellar Cyber . All rights reserved.