
Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Using the Response Tab in the Case Details View

The Case Details **Response** tab is where you take action on a case based on your triage and analysis in the Detection and Analysis tabs. Stellar Cyber automatically recommends actions to you based on the case's specifics and the connectors providing data for the observables in the case. For example, if a firewall provided the data for a host in your case, the **Response** tab typically includes a **Block IP** action for that host.

The figure below summarizes the main features of the Response tab:

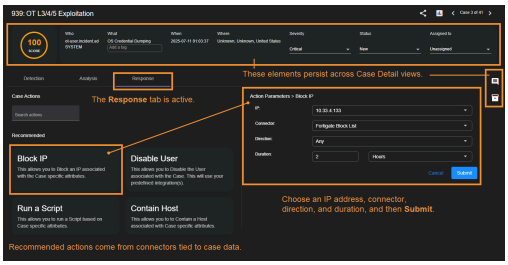

Keep in mind the following when using the **Response** tab:

- The actions available in the **Response** tab depend on the connectors providing data for the observables in the case. As described below, different connectors provide different response actions depending on their configuration and the data seen.

  Because of this, the recommended actions provided by Stellar Cyber can and will vary from case to case.

- If multiple Case Actions are listed, you can use the **Search actions** field to locate the one you're looking for.
- If multiple connectors contributed data to a case, Stellar Cyber intelligently selects the connector that is most relevant to the target of your Case Action.
- Stellar Cyber prepopulates the configuration wizards for case actions with the data corresponding to the case. For example, when configuring a **Block IP** action, the **IP** drop-down list automatically lists just those IP addresses associated with the case. You


can always type in your own address, but the most relevant ones are already listed for you.

- Once you've submitted an action, you can keep track of feedback for the action in the Automation | Action History pages.
- The standard Identification, Evidence Locker, and Case Activity panels all remain persistent in the Response tab.

Recommended Actions in the Response Tab 6.4.0

When AI Case Analysis is enabled in Global Settings, you can run AI Case Analysis to accelerate investigations with AI-generated narratives, insights, and suggested incident responses in the Detection, Analysis, and Response tabs in the Case Detail view.

After running AI Case Analysis on a case, the **Response** tab in the Case Detail view provides case-specific guidance for containment and investigation. As shown in the figure below, this guidance helps you move quickly from analysis to action with recommendations tailored to the specific case:



Recommendations in the **Response** tab can include:

- **Immediate Attention** – High-priority entities such as accounts, hosts, or IPs that require urgent focus.
- **Validation Steps** – Actions to confirm or disprove the working hypothesis (e.g., audit account activity, verify credential use).
- **Recommended Investigations** – Follow-up steps such as forensic analysis, timeline reviews, or enhanced monitoring of suspicious sources.

Next Steps with AI Case Analysis

- To return to the case's high-level summary, you can click on the **Detection** tab.
- To explore analytical details for the case, see the **Hypothesis**, **Timeline**, and **Observables** panels in the **Analysis** tab.

Available Case Actions


This section lists the possible Case Actions together with the information necessary to configure them. In general, the available Case Actions are the same as the External Actions found in Event Details displays.

Refer to **Case Actions by Connector** for details on which connectors are required for different Case Actions.

Block IP

You can immediately respond to case by creating a new firewall rule:

1. From the Case Response tab, select **Block IP**.
2. The **Action Parameters | Block IP** section appears.

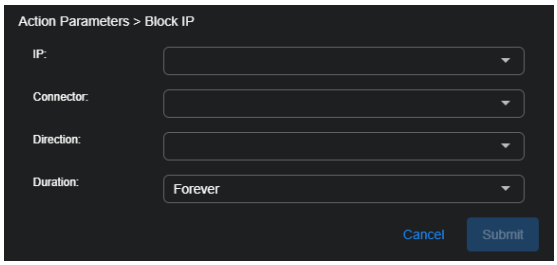

To add a new firewall or switch, see Configuring Connectors.

3. Choose the IP address to be blocked.


   The drop-down list contains all addresses associated with the case.

4. Choose the connector you want to use to perform the action.

   Stellar Cyber automatically attempts to select the best connector for the IP address.

5. Set the Direction:

   - For all firewalls, select **Incoming**, **Outgoing**, or **Any**.
     - When **Incoming** is selected, an **Inbound** firewall rule is created to match the **Source IP address**.
     - When **Outgoing** is selected, an Outbound firewall rule is created to match the **Destination IP address**.

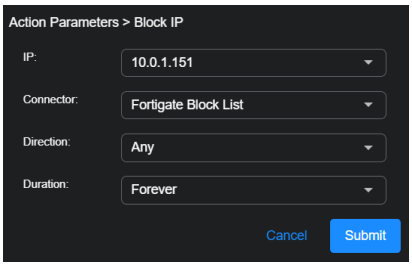

   - If you select a Security Switch, the Direction setting is not applicable.

     These actions are reported in Automation | Action History | Security Switch actions.

6. Choose a **Duration**.

   You can choose **Minutes**, **Hours**, **Days**, or even **Forever**.

7. Select **Submit**.

   The new firewall rule is submitted to the firewall.

8. The status is reported in the Firewall Actions tab on the Action History page (**Automation | Action History | Firewall Actions**).


For Firewall actions, if you block an IP host that is already blocked or if you unblock an IP host that is already unblocked, the action is marked as Succeeded. You can view status details in the **Status Message**.

Disable User

You can immediately respond to a case by disabling a user:

1. From the Case Response tab, select **Disable User**.

   The **Action Parameters | Disable User** section appears.

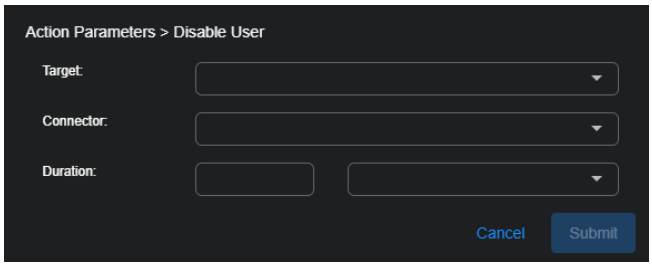

2. Choose which user to disable.

   Depending on the case, you might have only one option.

3. Choose the **Connector**.

4. Set the **Duration**.

   You can choose **Minutes**, **Hours**, **Days**, or even **Forever**.

5. Select **Submit**.

   The user is immediately disabled.


To enable a user after disabling, visit the User Actions tab (**Automation | Action History | User Actions**) to revert the disable action.

Run a Script

You can immediately respond to a case by running a saved script or creating a new script:

1. From the Case Response tab, select **Run a Script**.

   The **Action Parameters | Run a Script** section appears.



2. Choose the **Target** remote host from the drop-down list.

   The connection information is automatically filled in. The dropdown also includes the option to add a new remote host. If needed, select "create new remote host" as the target:

   - Specify the host name, address, port to connect to and the user credentials.

- Specify whether to run the script on the Data Processor or a device sensor.
- Note that the is saved

3. Choose a script to execute from the drop-down list.

   The script is automatically added to the **Script Body** field. To create a new saved script, see Creating a New Script.

   You can also choose **Custom** and create a new script.

   This new script will not be saved.

4. Select **Submit**.

   The script is executed.


The script action appears in the Script Actions tab on the Action History page (**Automation | Action History | Script Actions**).

Contain Host

You can immediately contain (lock down or isolate) a host managed by certain services such as Bitdefender, Cynet, Cybereason, BlackBerry Cylance, SentinelOne, CrowdStrike Falcon, or Microsoft Defender for Endpoint. You must have previously configured a connector to that service in order to perform this action.

1. From the Case Response tab, select **Contain Host**.

   The **Action Parameters > Contain Host** section appears.

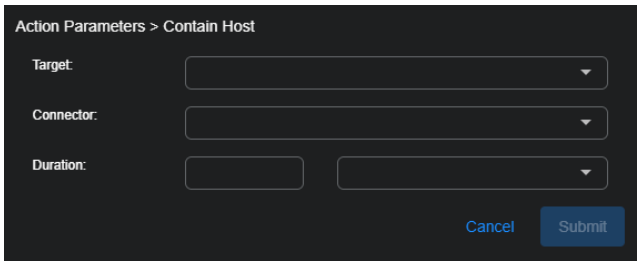

2. Choose the **Target**.

   This menu option allows you to specify the source or destination host associated with the event as the host you want to isolate or lock down. For Cybereason connectors, the **Target Value** is automatically populated with the ID of the Cybereason sensor. For all other connectors, the value is the IP address or MAC ID of that host.

   The **Connector** field is automatically filled in with the connector that manages the chosen host.

3. Choose a **Duration**.

4. Select **Submit**.

   The **Contain Host** action is reported in the Endpoint Actions tab (**Automation | Action History | Endpoint Actions**).

Depending on the originating connector, you may be able to revert a host containment from Stellar Cyber. If this is supported, a **Revert** button is displayed in the row for the containment action of the Automation | Action History | Endpoint Actions table. For supported connectors, using Revert triggers a **Lift Containment** action that is displayed in the same table. If the

API for the managing service does not support a revert option then you need to use that product's UI to manage the host state.

Blackberry Cylance connector's Contain Host action automatically expires upon the requested duration but this action is not reported back to Stellar Cyber. The Endpoint Actions table reports that the containment was successful, but not expired.

If you use a Cynet connector to perform a response action on a host that is not in your Cynet list of hosts, the Automation | Action History | Endpoint Actions row for the action will indicate that with an error message such as: The remote server returned an error: (422) Unprocessable Entity.

Hide Host

The Hide Host response for CrowdStrike Falcon is not available from Case Management. It is still available from Event Details.

Disconnect Host

You can immediately disconnect a host managed by SonicWall Capture:

1. From the Case Response tab, select **Disconnect Host**.

   The **Action Parameters > Disconnect Host** section appears.

2. Choose your SonicWall Capture service from the drop-down list.

   You can add a SonicWall Capture connector from **System | INTEGRATIONS | Connectors**.

3. Choose a **Duration**.

4. Select **Submit**.

   The host is disconnected from the network.


The action appears in the Endpoint Actions tab on the Action History page (**Automation | Action History | Endpoint Actions**).

Initiate Scan

You can immediately scan an asset managed by SonicWall Capture or SentinelOne.

1. From the Case Response tab, select **Initiate Scan**.

   The **Action Parameters > Initiate Scan** section appears.

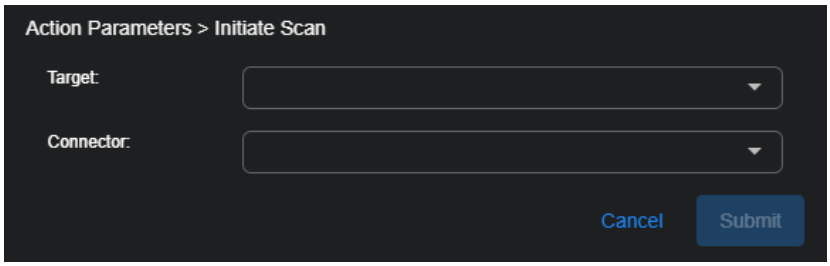

2. Choose the target (asset, device, or agent) from the available list.

   The **Connector** field is automatically filled in based on the chosen target.

3. Select **Submit**.

   A vulnerability scan of  selection is triggered immediately from the service associated with your connector.

The action appears in the Endpoint Actions page tab on the Action History page (**Automation | Action History | Endpoint Actions**).

Restart Machine

You can immediately restart a host managed by SonicWall Capture:

1. From the Case Response tab, select **Restart Machine**.

   The **Action Parameters > Restart Machine Configuration** section appears.

2. Choose your SonicWall Capture service from the dropdown.

   You can add a SonicWall Capture connector from **System | INTEGRATIONS | Connectors**.

3. Select **Submit**.

   The host is immediately restarted.

The action appears in the Endpoint Actions tab on the Action History page (**Automation | Action History | Endpoint Actions**).

Shutdown Host

You can immediately shut down a host managed by SonicWall Capture or Cynet:

1. From the Case Response tab, select **Shutdown Host**.

   The **Action Parameters > Shutdown Configuration** section appears.

2. Specify the target device on which you want to perform the action.

   The **Connector** field is automatically filled in based on the chosen target.

3. Select **Submit**.

   The host is immediately shut down.

The action appears in the Endpoint Actions tab on the Action History page (**Automation | Action History | Endpoint Actions**).

Update Device

You can upload JSON to run actions on a device known to a Forescout connector:

1. From the Case Response tab, select **Update Device**.

   The **Action Parameters > Update Device** section appears.

2. Select the **Target** on which you want to run the Forescout connector update action.

   The target can be one of these: Source Host, Destination Host, Source MAC, or Destination MAC.

   The **Connector** field is automatically filled in based on the chosen target.

3. If your connector was created with default JSON, customize it now or skip this step.

Populate the JSON field with the action you want the connector to transmit to the Forescout app configured in the beginning of this procedure. Note that Stellar Cyber verifies general format of the JSON, not the logic. Following is an example based on ActionAPI-supported JSON properties:

```
{
"connect_actionapi_vlan_assign":true,
"connect_actionapi_vlan_assign_id":"vlan233"
}
```

> Do not include the IP or MAC address, as that is added automatically based on your selection in the previous step. The JSON that is transmitted to Forescout will include the IP or MAC and the property tag, similar to the sample below.
>
> ```
> {
> "mac":"009027390a7c",
> "properties":{
> "connect_actionapi_vlan_assign":true,
> "connect_actionapi_vlan_assign_id":"vlan233"
> }
> }
> ```

Refer to Forescout documentation for supported fields and syntax details.

4. Select **Submit**.

   The connector runs the update action one time.

Kill Threat

For assets managed by a SentinelOne service, if you have configured your connector for Respond actions, you can use this action to kill a threat.

1. From the Case Response tab, select **Kill Threat**.

   The **Action Parameters > Kill Threat** section appears.

2. Then select the **Target** from the available list that is populated based on your connector selection.

   The **Connector** field is automatically filled in based on the chosen target.

3. Select **Submit**.

   A kill threat signal on the target is immediately triggered from the SentinelOne service associated with your connector.


The action appears in the Endpoint Actions tab on the Action History page (**Automation | Action History | Endpoint Actions**).

Quarantine Threat

For assets managed by a SentinelOne service, if you have configured your connector for Respond actions, you can use this action to quarantine a threat.

1. From the Case Response tab, select **Quarantine Threat**.

   The **Action Parameters > Quarantine Threat** section appears.

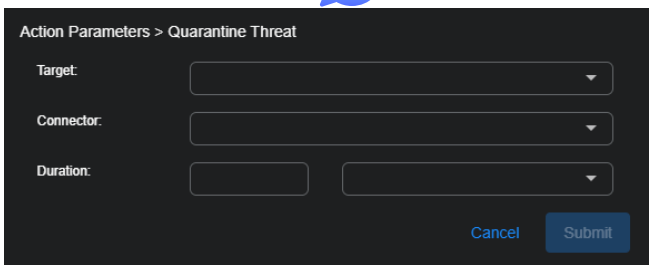

2. Choose the **Target** from the drop-down menu.

   The **Connector** field is automatically populated based on the chosen target.

3. Use the duration fields to specify the length of time to put the target in quarantine.

4. Select **Submit**.

   A quarantine on the target is immediately triggered from the SentinelOne service associated with your connector.

The action appears in the Endpoint Actions tab on the Action History page (**Automation | Action History | Endpoint Actions**).

Remediate Threat

For assets managed by a SentinelOne service, if you have configured your connector for Respond actions, you can use this action to remediate a threat.

1. From the Case Response tab, select **Remediate Threat**.

   The **Action Parameters > Remediate Threat Configuration** section appears.

2. Choose the **Target** from the drop-down list.

   The **Connector** field is automatically populated based on the chosen target.

3. Select **Submit**.

   A remediation signal on the target is immediately triggered from the SentinelOne service associated with your connector.

The action appears in the Endpoint Actions tab on the Action History page (**Automation | Action History | Endpoint Actions**).

Remediate Email

For deployments integrated with the **Barracuda Email Security Service**, you can use Stellar Cyber to create an incident in a **Barracuda Forensics And Incident Response** system.

1. From the Case Response tab, select **Remediate Email**.

   The **Action Parameters > Create Remediate Email** section appears with some sections pre-populated from the JSON associated with the selected event.

2. Choose the applicable connector from the drop-down menu.

3. Optionally, specify whether to search for the email in previously Quarantined and Sent categories.

4. Specify which remediation actions to perform on the Barracuda response system.
    - **Message Act**: Select **None**, **Delete**, or **Quarantine**.
    - **Enable continuous quarantine**: (Visible only when the message action is set to **Delete** or **None**) Select this option to request that the action continue for 72 hours after the initial remediation has completed.
    - **Notify**: Select this option to also send a warning email alert to the affected user.
    - **Send summary**: Select this to copy an incident summary to the configured security team.
5. Select **Submit**.

    An incident is sent to the **Barracuda Forensics And Incident Response** associated with your connector.

The action appears in the Email Actions tab on the Action History page (**Automation | Action History | Email Actions**).

Case Actions by Connector

The available Case Actions depend on the connectors providing data on the observables in the case.

The following table indicates which connector respond actions are applicable for each external action, along with the requirements to enable that action. Specifically, certain connectors must be configured and the indicated fields in the Interflow must contain **non-null, valid data.**

External Action	Connector and Data Requirement* for Action Availability		Applicable Connectors
Block IP / Bl	At least one firewall or security switch connector is configured and required fields are populated	`dstip` or `srcip`	AWS, Azure NSG, 6.1.0 Barracuda Firewall, Check Point, Check Point

ockon Firewall			Smart-1 Cloud 6.6.0 , Cisco FMC, Cisco Meraki, F5 BIG-IP ASM, F5 BIG-IP Firewall, F5 Silverline, Fortigate, FortiManager 6.2.0 , HanDreamnet Security Switch, Hillstone, Palo Alto Networks Firewall, Palo Alto Networks Panorama, SonicWall Firewall, Sophos XG Firewall, Stormshield Network Security (SNS) Firewall 5.5.0 , Versa Networks Firewall 5.5.0
Disa	Active Directory or Microsoft Entra ID (formerly Azure AD) connector required field	`userPrincipalName`	Active Directory, Microsoft

bleUser		Entra ID (formerly Azure Active Directory)

ConfirmCompromised	Microsoft Entra ID (formerly Azure AD) connector required field
	msg_class of Content Type / **User ID on Which to Perform Action**
	`azure_ad_audit` / `initiatedBy.user.id`
	`azure_ad_signin` / `userId`
	`azure_ad_risk_detection` / `userId`
	`azure_ad_risky_user` / `azure_ad.id`
	`user_profile` / `user_profile.id`
		Microsoft Entra ID (formerly Azure Active Directory)

DismissRisk	Microsoft Entra ID (formerly Azure AD) connector required field
	msg_class of Content Type / **User ID on Which to Perform Action**
	`azure_ad_audit` / `initiatedBy.user.id`
	`azure_ad_signin` / `userId`
	`azure_ad_risk_detection` / `userId`
	`azure_ad_risky_user` / `azure_ad.id`
	`user_profile` / `user_profile.id`
		Microsoft Entra ID (formerly Azure Active Directory)

RemoveUserfromGroup	Active Directory or Microsoft Entra ID (formerly Azure AD) connector required field	`user_id` and `group_id`	Microsoft Entra ID (formerly Azure Active Directory) 6.2.0

Revoke Existing Sign-In Sessions	Active Directory or Microsoft Entra ID (formerly Azure AD) connector required field	`userPrincipalName`	Microsoft Entra ID (formerly Azure Active Directory) 6.2.0
Add User to Group	Active Directory or Microsoft Entra ID (formerly Azure AD) connector required field	`user_id` and `group_id`	Microsoft Entra ID (formerly Azure Active Directory) 6.4.0
Run a Script	Always available		SSH Host
Contain	One of the following connectors is configured. The required data varies based on connector to be used for response. • Bitdefender required fields • CrowdStrike required fields	One of `bitdefender.computer_id` or `bitdefender.endpointId` `dstip` or `srcip` or `hostip`	Bitdefender, CrowdStrike, Cybereason

Host (Isolate Endpoint)	• Cybereason required fields `cybereason.pylumId` • Cylance required fields `device` and `device.device` or `cylance` and one of `cylance.device_id` or `srcmac` or `dstmac` or (`host` and `host.mac`) • Cynet required fields are any value other than an IP Address in at least one of these: `hostip_host`, `srcip_host`, `computer_name` or `host.name` • Deep Instinct: required fields `deep_instinct_asset` and `deep_instinct.id` or `deep_instinct_suspiciousevent` and `deep_instinct.device_id` or `deep_instinct_maliciousevent` and `deep_instinct.device_id` • Microsoft Defender for Endpoint required fields `microsoft_defender.id` and `microsoft_defender.machineId` • SentinelOne required fields `sentinelone` and `sentinelone.agentRealtimeInfo` and `sentinelone.agentId` • Sophos Central required fields `sophos.hostip_assetid` • VMware Carbon Black Cloud required fields device_id	, Deep Instinct, BlackBerry Cylance, Cynet, Microsoft Defender for Endpoint, SentinelOne, Sophos Central, VMware Carbon Black
Isolate Endpoint	Palo Alto Networks CORTEX XDR required fields `endpoint_id`	Palo Alto Networks CORTEX XDR
Hide Host	CrowdStrike required fields `dstip` or `srcip` or `hostip`	CrowdStrike
Update Device	Forescout required fields `srcip, dstip, srcmac, dstmac`	Forescout
Initiate	• SentinelOne required fields `sentinelone.agentRealtimeInfo` and `sentinelone.agentId` • SonicWall Capture Client required fields `device.deviceId` and `device.InstallToken`	SentinelOne, SonicWall

Scan		Capture Client
Kill Threat	SentinelOne required fields `msg_origin.source` is `'SentinelOne_endpoint'` or `msg_origin.source` is `SentinelOne` and the following fields are present and valid: `sentinelone.threatInfo`, `sentinelone.threatInfo.threatId`	SentinelOne
Quarantine Threat	SentinelOne required fields `msg_origin.source` is `'SentinelOne_endpoint'` or `msg_origin.source` is `SentinelOne` and the following fields are present and valid: `sentinelone.threatInfo`, `sentinelone.threatInfo.threatId`	SentinelOne
Remediate Threat	SentinelOne required fields `msg_origin.source` is `SentinelOne_endpoint` or `msg_origin.source` is `SentinelOne` and the following fields are present and valid: `sentinelone.threatInfo`, `sentinelone.threatInfo.detectionType`, `sentinelone.threatInfo.threatId` and `sentinelone.threatInfo.detectionType` is `dynamic` The endpoint must also be either a Mac OS or Windows host. if it is not, then a Quarantine is performed instead	SentinelOne
Disconnect Host	SonicWall Capture Client required fields `device.deviceId` and `device.InstallToken`	SonicWall Capture Client
Re	SonicWall Capture Client required fields `device.deviceId` and `device.InstallToken`	SonicWall Capture

startMachine		Client
ShutDown (ShutdownHost)	SonicWall Capture Client required fields `device.deviceId` and `device.InstallToken` Cynet required fields are any value other than an IP Address in at least one of these: `hostip_host`, `srcip_host`, `computer_name` or `host.name`.	SonicWall Capture Client, Cynet
Remediate Email	Barracuda Email Security Service required fields `barracuda.account_id` and `barracuda.subject` and `barracuda.env_from` and `barracuda.hdr_from`	Barracuda Email Security
Webho	N/A	Universal Webhook Responder, ESET Responders

o
k



5.2.0

5.3.0

, WithSecure Elements (Respond) 5.4.0 , BlackBerry Cylance (Respond) 5.5.0 , WatchGuard Firebox Responder 6.1.0 , Acronis Cyber Protect Cloud (Respond) 6.2.0 , Proofpoint on Demand (Respond) 6.4.0 , Netskope (Respond), 6.5.0 , Trend Micro Vision One (Respond) 6.5.0

© 2026 Stellar Cyber . All rights reserved.