
Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Viewing Endpoint Actions

The **Automation | Action History | Endpoint Actions** tab displays the endpoint actions taken manually from the Event Display or automatically by Automated Threat Hunting. In the example below, the **Status** column will show that the action failed, for example, if the selected device is not registered (see the **Error Message** column) with the selected connector.

Endpoint Actions Table

The **Endpoint Actions** table displays up to 1000 endpoint actions by default.

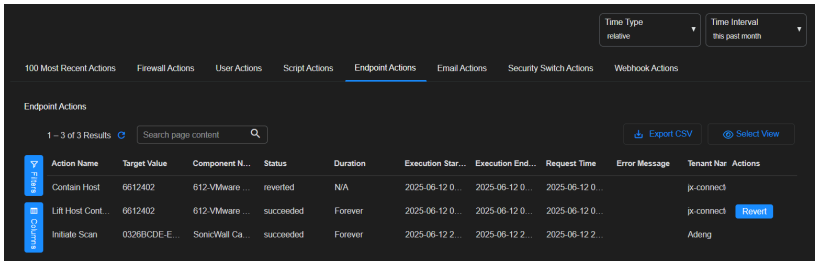

See the Tables page for more information on working with tables.

The **Status** can be:

- **Waiting**—The action is queued. This should take less than a minute.
- **In Progress**—The action is being communicated to the connector.
- **Succeeded**—The action was successfully implemented.
- **Failed**—The action failed. An **Error Message** relayed from the connector provides details.
- **Expiring**—The action is being removed from the connector.
- **Expired**—The action is no longer active.

You can revert some actions:

- If the host was contained, you can click **Revert** to lift the containment from a host. This triggers a new endpoint action **Lift Containment** to appear in the table.
- If the host has a Lift Containment, you can click **Revert**. This triggers a new endpoint action **Contain Host** to appear in the table.

- If the host was hidden, you can click **Revert** to unhide a hidden host.
- If the host was disconnected, you can click **Revert** to reconnect the host to the network.

You cannot revert (or edit) a failed action. If the action failed, you must recreate the action.

Depending on the originating connector, you may be able to revert a host containment from Stellar Cyber. If this is supported, a **Revert** button is displayed in the row for the containment action of the Automation | Action History | Endpoint Actions table. For supported connectors, using Revert triggers a **Lift Containment** action that is displayed in the same table. If the API for the managing service does not support a revert option then you need to use that product's UI to manage the host state.

Blackberry Cylance connector's Contain Host action automatically expires upon the requested duration but this action is not reported back to Stellar Cyber. The Endpoint Actions table reports that the containment was successful, but not expired.

If you use a Cynet connector to perform a response action on a host that is not in your Cynet list of hosts, the Automation | Action History | Endpoint Actions row for the action will indicate that with an error message such as: The remote server returned an error: (422) Unprocessable Entity.

© 2026 Stellar Cyber . All rights reserved.