
Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!

Viewing User Actions

The **Automation | Action History | User Actions** tab displays the user actions taken by Stellar Cyber. If a user is disabled manually from the Event Display or automatically by Automated Threat Hunting, that action appears here.

User Actions Table

The **User Actions** table displays up to 1000 user actions by default.

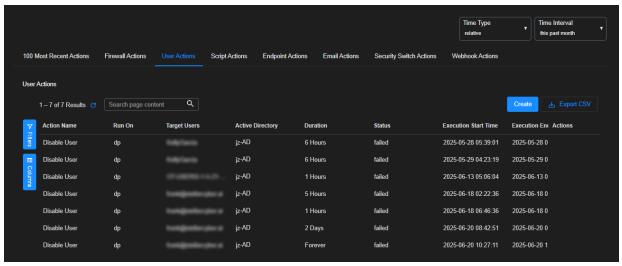

The **Status** can be:

- **Waiting** – The action is queued. This should take less than a minute.
- **In Progress** – The action is being communicated to the firewall.
- **Succeeded** – The action was successfully implemented on the firewall.
- **Failed** – The action failed. An **Error Message** relayed from the firewall provides details.
- **Expiring** – The action is being removed from the firewall.
- **Expired** – The action is no longer active.

You can revert some actions using the **Revert** button.

You cannot revert (or edit) a failed action. If the action failed, you must recreate the action.


See the Tables page for more information on working with tables.

Create a Disable User Action

To create a Disable User action:

1. Select **Create**.

   The **DISABLE USER** screen appears.

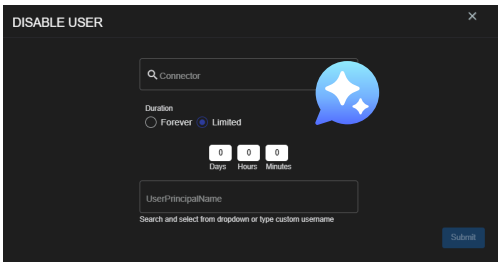

2. Choose a **Connector** from the drop-down list.

   You can select either Active Directory or Microsoft Entra ID (formerly Azure Active Directory) connectors.

3. Choose a **Duration** of either Forever or Limited.

   If you choose Limited, then enter Days, Hours, and Minutes.

4. Choose a user name from the UserPrincipalName dropdown or type the name of the user to disable.

5. Select **Submit**.

   The request to disable a user is sent. Check the Status column in the table to see if the request succeeded or failed. Then check the Error Message column.

© 2026 Stellar Cyber . All rights reserved.