Stellar Cyber 6.6.0s is now live! Discover all the updates in the release notes!


Working with Watchlists

This watchlists feature—formerly called *lookup lists*—(**System | Saved Objects | Watchlists**) lets you centrally create and manage lists of IP addresses, text strings, dates, or numbers for conditional matching in queries, alert filters, and Automated Threat Hunting (ATH) playbooks.

Watchlists provide a single location to maintain reusable collections of values that you can reference across different tools in the platform:

- System | Saved Objects | Queries and Filters
- Threat Hunting
- Automation | Automation
- Reporting | Reports
- System | Saved Objects | Charts
- Dashboards | PREDEFINED | XDR Kill Chain
- Detections | Alerts | Alert Event Details | Actions

This is useful when you need to reuse match values in multiple queries, filters, or reports, and when you want to import values in bulk for consistent conditional logic.

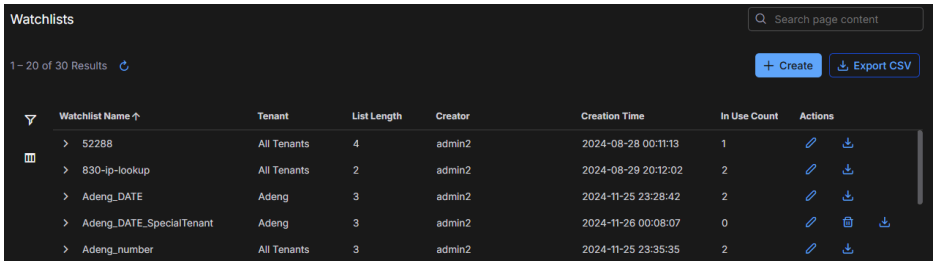

Use of this feature requires the **Watchlists** privilege.

The table has common behaviors to all tables in Stellar Cyber, including column management, sorting, editing, or deleting. The **Export CSV** button at the top of the table is used to export the whole table as a list. Each row includes a **Download CSV** button that lets you download a CSV-formatted list to archive and edit offline.

- **Creating or Editing a Watchlist**

    - Syntax
    - File Format
    - Limits and Validation
- Adding Entries from the Alert Details Page
    - Supported Entity Types
- Deleting a Watchlist
- Exporting a Watchlist
- Using a Watchlist

Creating or Editing a Watchlist

Create your list with the intention of matching against a specific field such as `app_id`. Use the instructions in this procedure to create a new list, edit list entries, or upload a replacement set of values to an existing list.

Note the following points:

- Changes you make to an existing list affect all queries referring to the list.
- You cannot change the tenant for a list that is in use.
- If you want to use a watchlist for different tenants, either set it to **All Tenants**, or create the list again for each individual tenant.



The scope of a query determines which tenants can use it. Whether it's possible to create a query for **All Tenants** depends on the scope of the object being queried, such as charts, correlations, and Automated Threat-Hunting (ATH) rules. In short, the scope of a queried object cannot be more restrictive than the scope of the query itself. For example, if you create an ATH rule for **All Tenants**, then the query for this ATH rule can either be **All Tenants** or just a single tenant, such as "Tenant A" for example. However, if you create an ATH rule for Tenant A, then the query cannot be for **All Tenants** because the other tenants won't have this ATH rule and won't be able to query it. In this case, the query can only be for Tenant A.

1. To create a new watchlist, select the **+ Create** button.

   To edit a list, select the **Edit this row** icon near the far right of a watchlist row.

2. In the **General** section, enter or edit a **Name** for the watchlist; and for a new list, set the **Tenant** and the **Type** of items in the list.


   The **Name** appears in the Query Builder **Value** menu when the **Operator** is either **is in watchlist** or **is not in watchlist**.

   Special characters are not permitted in name fields for queries, watchlists, reports, or dashboards. Letters, underscores, spaces, dashes, numbers and periods are permitted.

   For the **Tenant**, choose either **All Tenants** so that the list is available for all the tenants in your system or choose an individual tenant so that the list is available only for it.

The **Type** indicates the format of the values that the list contains: string, number, IP, or date (see Syntax, below).



3. Select **Next** to advance to the **List Definition** section.


   You have the option to import a list in CSV format or add individual list items manually.

4. To import a list of items in a CSV file, select **Import from CSV** and upload the file (see File Format, below).

   or

   To add individual items manually, enter the first item in the field, and then select the blue **+** (Add) button to create a new field and add the item next item there. Continue adding fields and populating them with items until your list is complete.


   When the import completes or you've added all the items manually, the **List Definition** section displays all the items, one per field, as well as the total number.



   Some notes about importing a CSV file:

   - If you are editing rather than creating a new list, imported records fully replace the existing list.
   - Changes you make to an existing list affect all queries referring to the list.
   - The count of imported records might differ from the number of entries in your import file because the import retrieves only entries that match the specified file type.

5. Select **Next** to advance to the **Review** section and check that the name, tenant, and total number of items are correct and that the configuration is free of error (see Limits and Validation, below).

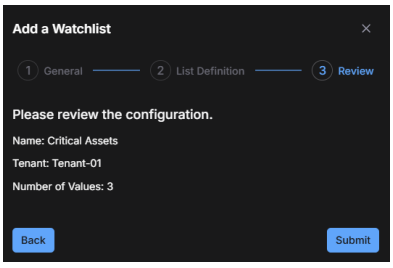

6. When satisfied, select **Submit** to save the watchlist.

Syntax

All entries for a list must be of the same type.

- **String**: Alphanumeric and symbols

  If you are supplying a list of hashes to use in queries, do not include the **SHA=** or **MD5=** prefix. Just include the hash value itself.

- **Number**: Integer and decimal.
- **IP address**: IPv4 and IPv6 format supported. CIDR format is supported (for example, **192.0.1.0/24**).
- **Date**: Unix Epoch or ISO 8601 date formats

  Examples:

  Epoch (in milliseconds is recommended unless you know the field you are matching specifically uses another format)

  `1641852524004`

  Date only forms (variations of YYYY-MM-DD)

  `2021-12`

  `2021-10-25`

  Date plus time forms (variations of above plus time):

  `1995-02-04T24:00`

File Format

Use the following notes as a guide when creating or editing your import file:

- Import files must have a .csv extension.
- The content should be in a single column list, one entry per row.

  If your import file includes more than one column, only the first column is used. For example, given the CSV file entries below:

  ```
  ssh, 22
  http, 8080, 8443
  ubuntu, 631, 5298, 5900
  ```

  The imported list elements are: `ssh`, `http`, and `ubuntu`

Limits and Validation

Stellar Cyber performs the following checks when you are creating or editing a list:

- A maximum of 1000 entries are allowed per list. For efficiency, however, smaller list sizes are strongly recommended.
- Duplicate values are noted but not automatically removed.
- Syntax is matched to the specified list **Type**. Errors are noted for manual correction.

- Numbers and symbols are permitted as String elements.


Special characters are not permitted in name fields for queries, watchlists, reports, or dashboards. Letters, underscores, spaces, dashes, numbers and periods are permitted.

Adding Entries from the Alert Details Page


You can add entries to watchlists directly from the **Detections | Alerts | Alert Details** page. This capability lets you enrich your watchlists as you investigate alerts, without needing to leave the current view.

When reviewing alert information on the **Alert Details** page, hover your cursor over relevant fields to reveal the **Add to Watchlist** icon or option. Depending on the alert type and how its fields are presented, the **Add to Watchlist** button might appear either as an inline icon next to a field or as an option in a pop-up panel.


- In some cases, the **Add to Watchlist** icon appears inline beside supported fields such as **Host Name** and **Host IP Address** in the **Related Events** section. Hover your cursor over a value in one of these fields to display the icon.

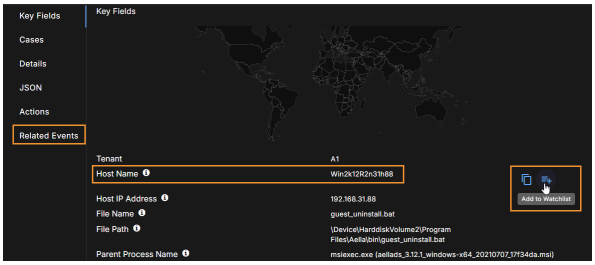


- In other cases, the **Add to Watchlist** option appears in a contextual pop-up panel for supported fields such as **User**, **Host Name**, **Host IP Address**, **Source Host**, and **Destination Host** in the **Key Fields** section. Hover your cursor over the value of a supported field, select the blue three-dot icon that appears on the right, and then choose **Add to Watchlist** from the panel.



When you select **Add to Watchlist**, a dialog box opens where you can add the selected value to an existing watchlist of the same type, or create a new watchlist. Stellar Cyber validates the data type, prevents duplicate entries, and confirms when the value is successfully added.





Supported Entity Types

Entity Type	Common Fields
IP addresses	dns.resolved_ip, dstip, engid_gateway, host.external_ip, host.internal_ip_addr, host.ip, hostip, ipAddress, lastIpAddress, remote_ip, srcip, srcip_list
Hostnames	computer_name, device.name, deviceDnsName, device_name, dstip_host, engid_name, host, host.name, hostip_host, hostname, netid_name, sds_engid_name, srcip_host
Usernames/IDs	accountName, dstip_username, dstip_usersid, event_data.SubjectUserName, event_data.targetusername, exec_user, hostip_username, login_user, process_user, remote_ip_usersid, secondary, smb_username_set, srcip_username, srcip_usersid, user.id, user.identifier, user.name, user.principal_name, userAccount.userPrincipalName, userDisplayName, user_name, username, wineventlog_user
File hashes	action_file_md5, action_file_sha256, actor_process_image_md5, actor_process_image_sha256, file.file_hash, file.hash.md5, file.hash.sha1, file.hash.sha256, fileid, md5, parent.file.md5, parent.file.sha1, parent.file.sha2, process.file.md5, process.file.sha1, process.file.sha2, process.hash.md5, process.hash.sha1, process.hash.sha256, process.parent.hash.md5, process.parent.hash.sha1, process.parent.hash.sha256, sha256
URLs	event.url, url, url_list
Domain names	dns.question.name, dns.question.registered_domain, dns.question.top_level_domain, domain_list, email.domain, senderDomain, user.domain

All types except IP addresses are stored as string values in watchlists.

Deleting a Watchlist

When a watchlist is in use, the delete button is not available.

1. To identify the query that is using the list, hover your cursor over **In Use**.

   A tooltip displays the query names that refer to the list.

2. Access the Queries table to locate the named queries and edit them to remove the watchlist.

   When you remove all references to the list, the delete button becomes available.

Exporting a Watchlist

The CSV export at the top of the table is used to export the whole table as a list. Each row, however, includes a **Download CSV** button that lets you download a list for archiving and editing offline. You can edit the list and reimport it, or you can edit it in the UI.


Using a Watchlist

Use watchlists when you add or edit a condition within an alert filter or query, such as when you are editing a report.


1. Select the **Operator** menu to choose the needed watchlist condition.

   This operator is displayed in the menu when you have the Watchlist privilege enabled.

   - **is in watchlist**: Use this to match any of the items in the selected list (boolean OR).
   - **is not in watchlist**: Use this to match anything that is not in the selected list (boolean AND NOT).

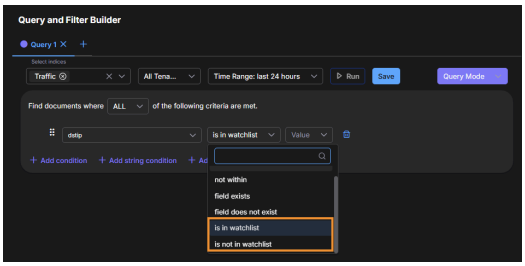

2. For the **Value**, select the watchlist **Name** for use in the rule.

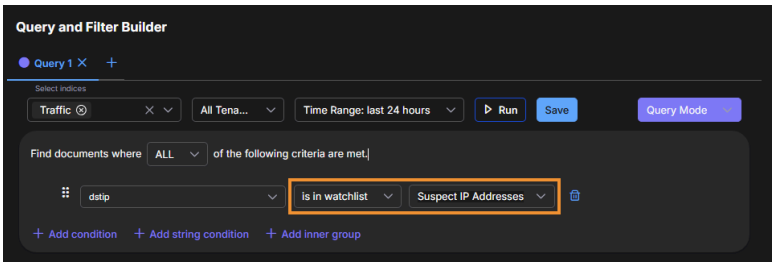

© 2026 Stellar Cyber . All rights reserved.