T2JuniorAPI v1 OAS 3.0

/swagger/v1/swagger.json

Account ⌃

POST /api/Account/register ⌃

Parameters   Try it out

No parameters

Request body   application/json

Example Value   Schema

```
{
  "email": "string",
  "password": "string",
  "firstName": "string",
  "lastName": "string",
  "middleName": "string",
  "phoneNumber": "string",
  "dateOfBirth": "2025-02-13T13:14:54.398Z",
  "gender": "string",
  "organizationId": "3fa85f64-5717-4562-b3fc-2c963f66afa6"
}
```

Responses

Code	Description	Links
200	OK	*No links*

POST /api/Account/login ⌃

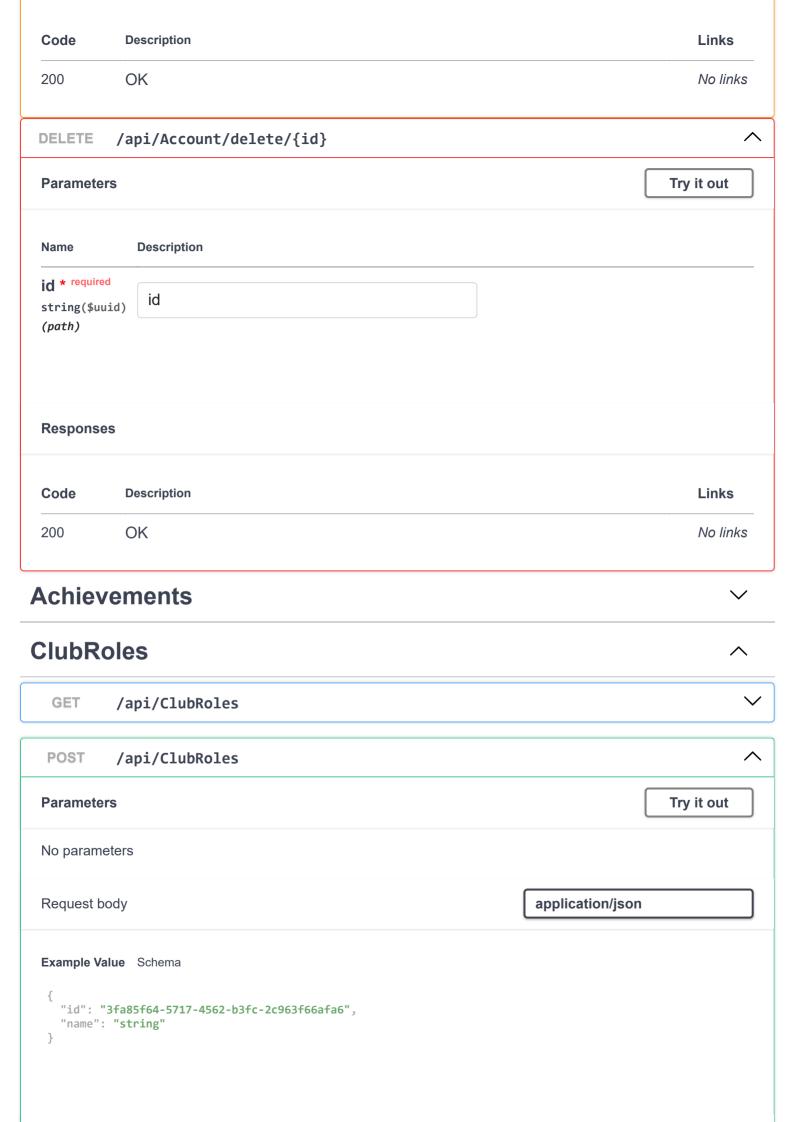**Parameters**   Try it out

No parameters

Request body   application/json

Example Value Schema

```
{
  "email": "string",
  "password": "string",
  "rememberMe": true
}
```

Responses

Code	Description	Links
200	OK	*No links*

GET **/api/Account/profile/{id}** ⌃

Parameters   [Try it out]

Name	Description
id * required string($uuid) *(path)*	[6AAAB4F7-786E-4C72-B93C-BC53E6BB69( ]

Responses

Code	Description	Links
200	OK	*No links*

GET **/api/Account/all** ⌄

PUT **/api/Account/change/{id}** ⌃

Parameters   [Try it out]

Name	Description

id * required
string($uuid)
(path)

`id`

Request body   **application/json**

Example Value   Schema

```
{
  "firstName": "string",
  "lastName": "string",
  "middleName": "string",
  "phoneNumber": "string",
  "dateOfBirth": "2025-02-13T13:14:54.403Z",
  "gender": "string",
  "organizationId": "3fa85f64-5717-4562-b3fc-2c963f66afa6"
}
```

Responses

Code	Description	Links
200	OK	*No links*

PUT   `/api/Account/password-recovery`   ⌄

Parameters   **Try it out**

No parameters

Request body   **application/json**

Example Value   Schema

```
{
  "email": "string",
  "password": "string"
}
```

Responses

Code	Description	Links
200	OK	No links

DELETE /api/Account/delete/{id} ∧

Parameters   [Try it out]

Name	Description
id * required string($uuid) *(path)*	id

Responses

Code	Description	Links
200	OK	No links

Achievements ∨

ClubRoles ∧

GET /api/ClubRoles ∨

POST /api/ClubRoles ∧

Parameters   [Try it out]

No parameters

Request body   application/json

Example Value   Schema

```
{
  "id": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
  "name": "string"
}
```

Responses

Code	Description	Links
200	OK	*No links*

Media type

> **text/plain**

Controls `Accept` header.

Example Value   Schema

```
{
  "id": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
  "name": "string"
}
```

GET **/api/ClubRoles/{id}** ⌃

Parameters   Try it out

Name	Description
id * required string($uuid) *(path)*	id

Responses

Code	Description	Links
200	OK	*No links*

Media type

> **text/plain**

Controls `Accept` header.

Example Value   Schema

```
{
  "id": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
  "name": "string"
}
```

PUT **/api/ClubRoles/{id}** ⌃

Parameters   Try it out

Name	Description

id * required

string($uuid)

(path)

```
id
```

Request body

<div style="border:1px solid #000; padding:4px; display:inline-block">application/json</div>

Example Value   Schema

```
{
  "id": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
  "name": "string"
}
```

Responses

Code	Description	Links
200	OK	*No links*

DELETE   **/api/ClubRoles/{id}**   ⌃

Parameters   [Try it out]

Name	Description

id * required

string($uuid)

(path)

```
id
```

Responses

Code	Description	Links
200	OK	*No links*

Clubs   ⌃

GET   /api/Clubs/by-user/{userId}   ∧

Parameters

<div style="text-align:right">**Try it out**</div>

Name	Description
userId * required string($uuid) *(path)*	userId

Responses

Code	Description	Links
200	OK	*No links*

Media type

text/plain

Controls Accept header.

Example Value   Schema

```
[
  {
    "id": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
    "name": "string",
    "avatarPath": "string",
    "isSubscribe": true
  }
]
```

GET   /api/Clubs/{clubId}/profile   ∧

Parameters

<div style="text-align:right">**Try it out**</div>

Name	Description
clubId * required string($uuid) *(path)*	clubId

Responses

Code	Description	Links
200	OK	*No links*

GET /api/Clubs/{clubId}/info ∧

Parameters

Try it out

Name	Description
clubId * required string($uuid) *(path)*	clubId

Responses

Code	Description	Links
200	OK	*No links*

PUT /api/Clubs/{id} ∧

Parameters

Try it out

Name	Description
id * required string($uuid) *(path)*	id

Request body

application/json

Example Value   Schema

```
{
  "name": "string",
  "rules": "string",
  "target": "string"
}
```

Responses

Code	Description	Links
200	OK	*No links*

DELETE /api/Clubs/{id} ∧

Parameters

Try it out

Name	Description
id * required string($uuid) *(path)*	id

Responses

Code	Description	Links
200	OK	*No links*

POST /api/Clubs ∧

Parameters

Try it out

No parameters

Request body

application/json

Example Value   Schema

```
{
  "name": "string",
  "rules": "string",
  "target": "string",
  "creatorUserId": "3fa85f64-5717-4562-b3fc-2c963f66afa6"
}
```

Responses

Code	Description	Links
200	OK	*No links*

POST /api/Clubs/{clubId}/add-user ⌃

Parameters

Try it out

Name	Description
clubId * required `string($uuid)` *(path)*	clubId

Request body   `application/json`

Example Value   Schema

```
{
  "userId": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
  "roleId": "3fa85f64-5717-4562-b3fc-2c963f66afa6"
}
```

Responses

Code	Description	Links
200	OK	*No links*

DELETE /api/Clubs/{clubId}/delete-user/{userId} ⌃

Parameters

Try it out

Name	Description
clubId * required `string($uuid)` *(path)*	clubId
userId * required `string($uuid)` *(path)*	userId

Responses

Code	Description	Links
200	OK	*No links*

Event ⌃

GET `/api/Event/user-calendar` ⌃

Parameters

Try it out

Name	Description
userId string($uuid) *(query)*	userId
year integer($int32) *(query)*	year
month integer($int32) *(query)*	month

Responses

Code	Description	Links
200	OK	*No links*

Media type

text/plain

Controls `Accept` header.

Example Value   Schema

```
[
  {
    "idEvent": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
    "name": "string",
    "startDatetime": "2025-02-13T13:14:54.426Z",
    "endDatetime": "2025-02-13T13:14:54.426Z"
  }
]
```

| GET | /api/Event/club-calendar | ^ |

Parameters

Name	Description
clubId `string($uuid)` *(query)*	clubId
year `integer($int32)` *(query)*	year
month `integer($int32)` *(query)*	month

Responses

Code	Description	Links
200	OK	*No links*

Media type

```
text/plain
```

Controls `Accept` header.

Example Value   Schema

```
[
  {
    "idEvent": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
    "name": "string",
    "startDatetime": "2025-02-13T13:14:54.428Z",
    "endDatetime": "2025-02-13T13:14:54.428Z"
  }
]
```

| POST | /api/Event/create-event | ^ |

Parameters

No parameters

Request body   multipart/form-data

IdClub * required

`string($uuid)`

IdDirection * required

`string($uuid)`

Name * required

`string`

Place * required

`string`

StartDatetime * required

`string($date-time)`

EndDatetime * required

`string($date-time)`

NumberParticpants * required

`integer($int32)`

FactParticpants

`integer($int32)`

Raiting

`integer($int32)`

File

`string($binary)`

IdUser

`string($uuid)`

Responses

Code	Description	Links
200	OK	*No links*

Media type

> text/plain

Controls `Accept` header.

Example Value   Schema

`3fa85f64-5717-4562-b3fc-2c963f66afa6`

DELETE /api/Event/{eventId} ∧

Parameters [Try it out]

Name	Description
eventId * required string($uuid) *(path)*	eventId

Responses

Code	Description	Links
200	OK	*No links*

GET /api/Event/{eventId} ∧

Parameters [Try it out]

Name	Description
eventId * required string($uuid) *(path)*	eventId

Responses

Code	Description	Links
200	OK	*No links*

Media type

[**text/plain**]

Controls `Accept` header.

Example Value   Schema

```
{
  "idEvent": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
  "idClub": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
  "idDirection": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
  "name": "string",
  "place": "string",
  "startDatetime": "2025-02-13T13:14:54.431Z",
```
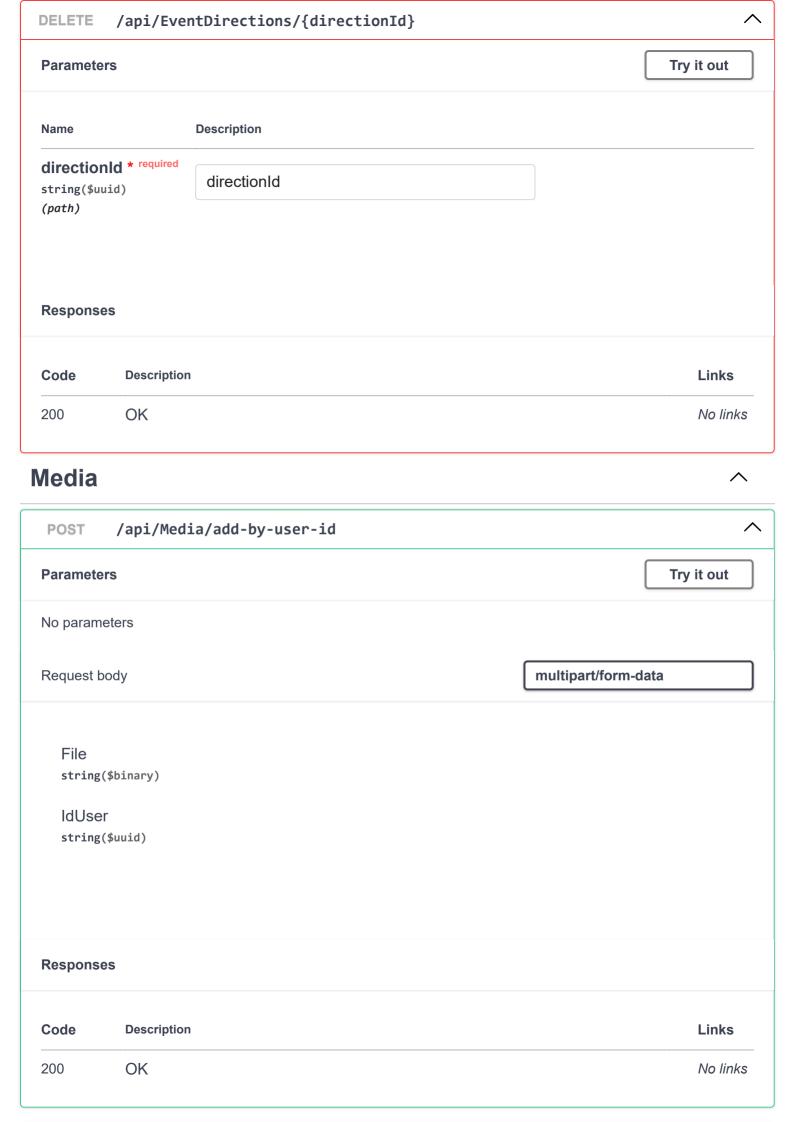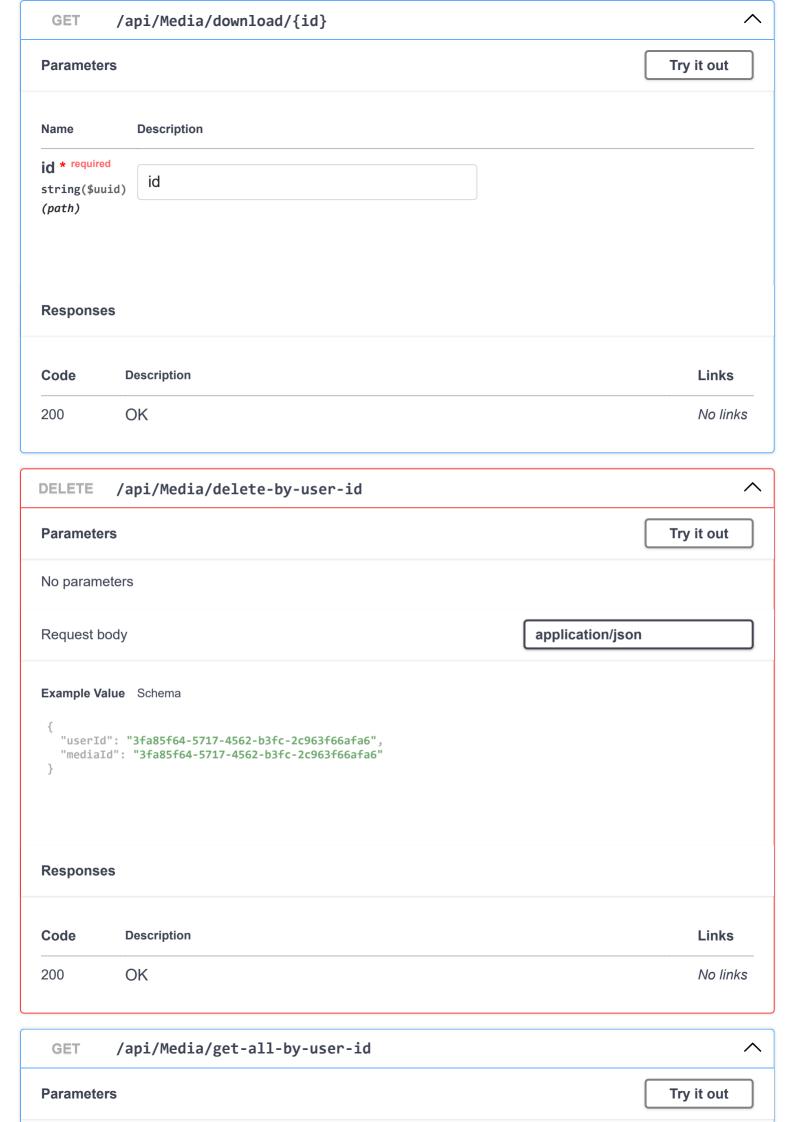
```
        "endDatetime": "2025-02-13T13:14:54.431Z",
        "numberParticpants": 0,
        "factParticpants": 0,
        "raiting": 0,
        "imagePath": "string"
      }
```

PUT /api/Event/update-event ︿

Parameters   Try it out

No parameters

Request body   application/json

Example Value   Schema

```
{
  "idEvent": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
  "idDirection": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
  "name": "string",
  "place": "string",
  "startDatetime": "2025-02-13T13:14:54.432Z",
  "endDatetime": "2025-02-13T13:14:54.432Z",
  "numberParticpants": 0,
  "factParticpants": 0,
  "raiting": 0
}
```

Responses

Code	Description	Links
200	OK	*No links*

EventDirections ︿

GET /api/EventDirections ﹀

POST /api/EventDirections ︿

Parameters   Try it out

No parameters

Request body   application/json

Example Value   Schema

```
{
  "idDirection": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
  "name": "string"
}
```

Responses

Code	Description	Links
200	OK	*No links*

Media type

```
text/plain
```

Controls `Accept` header.

Example Value   Schema

```
3fa85f64-5717-4562-b3fc-2c963f66afa6
```

PUT   `/api/EventDirections`   ⌃

Parameters   [Try it out]

No parameters

Request body   [application/json]

Example Value   Schema

```
{
  "idDirection": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
  "name": "string"
}
```

Responses

Code	Description	Links
200	OK	*No links*

DELETE `/api/EventDirections/{directionId}` ∧

Parameters

Try it out

Name	Description
directionId * required `string($uuid)` *(path)*	directionId

Responses

Code	Description	Links
200	OK	*No links*

Media ∧

POST `/api/Media/add-by-user-id` ∧

Parameters

Try it out

No parameters

Request body · multipart/form-data

File
`string($binary)`

IdUser
`string($uuid)`

Responses

Code	Description	Links
200	OK	*No links*

GET /api/Media/download/{id} ∧

Parameters

Try it out

Name	Description
id * required string($uuid) (path)	id

Responses

Code	Description	Links
200	OK	No links

DELETE /api/Media/delete-by-user-id ∧

Parameters

Try it out

No parameters

Request body   application/json

Example Value   Schema

```
{
  "userId": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
  "mediaId": "3fa85f64-5717-4562-b3fc-2c963f66afa6"
}
```

Responses

Code	Description	Links
200	OK	No links

GET /api/Media/get-all-by-user-id ∧

Parameters

Try it out

Name	Description

userId
string($uuid)
(query)

userId

Responses

Code	Description	Links
200	OK	*No links*

POST **/api/Media/set-avatar-for-user** ⌃

Parameters   Try it out

No parameters

Request body   multipart/form-data

File
string($binary)

IdUser
string($uuid)

Responses

Code	Description	Links
200	OK	*No links*

DELETE **/api/Media/delete-avatar-by-user-id** ⌃

Parameters   Try it out

No parameters

Request body

Example Value   Schema

```
{
  "userId": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
  "mediaId": "3fa85f64-5717-4562-b3fc-2c963f66afa6"
}
```

Responses

Code	Description	Links
200	OK	*No links*

MediaClubs ⌃

POST   **/api/MediaClubs/add/{clubId}**   ⌃

Parameters   Try it out

Name	Description
clubId * required string($uuid) *(path)*	clubId

Request body   multipart/form-data

File
string($binary)

IdUser
string($uuid)

Responses

Code	Description	Links
200	OK	*No links*

DELETE   /api/MediaClubs/delete/{clubId}/{mediaId} ∧

Parameters

Try it out

Name	Description
clubId * required `string($uuid)` *(path)*	clubId
mediaId * required `string($uuid)` *(path)*	mediaId
userId `string($uuid)` *(query)*	userId

Responses

Code	Description	Links
200	OK	*No links*

GET   /api/MediaClubs/{clubId} ∧

Parameters

Try it out

Name	Description
clubId * required `string($uuid)` *(path)*	clubId

Responses

Code	Description	Links
200	OK	*No links*

POST /api/MediaClubs/set-avatar/{clubId} ⌃

Parameters

Try it out

Name	Description

clubId * required
string($uuid)
(path)

Request body multipart/form-data

File
string($binary)

IdUser
string($uuid)

Responses

Code	Description	Links
200	OK	*No links*

DELETE /api/MediaClubs/delete-avatar ⌃

Parameters

Try it out

Name	Description

clubId
string($uuid)
(query)

mediaId
string($uuid)

Name	Description
(query)	
userId `string($uuid)` *(query)*	userId

Responses

Code	Description	Links
200	OK	*No links*

MediaTypes ∧

| GET | /api/MediaTypes | ∨ |

| POST | /api/MediaTypes | ∧ |

Parameters　　　　　　　　　　　　　　　　　　　　　　　**Try it out**

No parameters

Request body　　　　　　　　　　　　　　　**application/json**

Example Value　Schema

```
{
  "id": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
  "name": "string"
}
```

Responses

Code	Description	Links
200	OK	*No links*

| DELETE | /api/MediaTypes/{id} | ∧ |

Parameters　　　　　　　　　　　　　　　　　　　　　　　**Try it out**

Name	Description
id * required string($uuid) *(path)*	id

Responses

Code	Description	Links
200	OK	*No links*

Organizations ⌃

GET	/api/Organizations	⌄

POST	/api/Organizations	⌃

Parameters   [Try it out]

No parameters

Request body   [**application/json**]

Example Value   Schema

```
{
  "id": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
  "name": "string"
}
```

Responses

Code	Description	Links
200	OK	*No links*

PUT	/api/Organizations/{id}	⌃

Parameters

Name	Description
id * required string($uuid) *(path)*	id

Request body

application/json

Example Value   Schema

```
{
  "id": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
  "name": "string"
}
```

Responses

Code	Description	Links
200	OK	*No links*

DELETE   /api/Organizations/{id}   ⌃

Parameters

Try it out

Name	Description
id * required string($uuid) *(path)*	id

Responses

Code	Description	Links
200	OK	*No links*

UserSubscribers   ⌃

GET /api/UserSubscribers/subscribers ⌃

Parameters | Try it out

Name	Description
userId string($uuid) *(query)*	userId

Responses

Code	Description	Links
200	OK	*No links*

Media type

text/plain

Controls `Accept` header.

Example Value Schema

```
[
  {
    "id": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
    "fullName": "string",
    "avatarPath": "string"
  }
]
```

GET /api/UserSubscribers/subscriptions ⌃

Parameters | Try it out

Name	Description
userId string($uuid) *(query)*	userId

Responses

Code	Description	Links
200	OK	*No links*

Media type

text/plain

Controls `Accept` header.

Example Value Schema

```
[
  {
    "id": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
    "fullName": "string",
    "avatarPath": "string"
  }
]
```

POST **/api/UserSubscribers/subscribe** ∧

Parameters [Try it out]

No parameters

Request body **application/json**

Example Value Schema

```
{
  "userId": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
  "subscriberId": "3fa85f64-5717-4562-b3fc-2c963f66afa6"
}
```

Responses

Code	Description	Links
200	OK	*No links*

DELETE **/api/UserSubscribers/unsubscribe** ∧

Parameters [Try it out]

No parameters

Request body **application/json**

Example Value   Schema

```
{
  "userId": "3fa85f64-5717-4562-b3fc-2c963f66afa6",
  "subscriptionId": "3fa85f64-5717-4562-b3fc-2c963f66afa6"
}
```

Responses

Code	Description	Links
200	OK	*No links*

Schemas ⌃

Achievement

AddUserToClubDTO

AllClubsDTO

ApplicationUser

Club

ClubRole

ClubRolesDTO

ClubUser

Comment

CreateClubDTO

Event

EventCalendarDTO

EventDTO

EventDirection

EventDirectionDTO

LoginDto

MediaClub

MediaEvent

MediaNote

MediaTypeDTO

Mediafile

MediafileDeleteDTO

Note

NoteStatus

Organization

OrganizationDto

RecoveryPasswordDTO

RegisterUserDto

SubscribeUserDTO

SubscriberProfileDTO

UnsubscribeUserDTO

UpdateClubDTO

UpdateEventDTO

UpdateUserDto

UserAchievement

UserAvatar

UserSubscribers

Wall

WallType