



By: Mahmoud Abdelaziz

# REACT JS

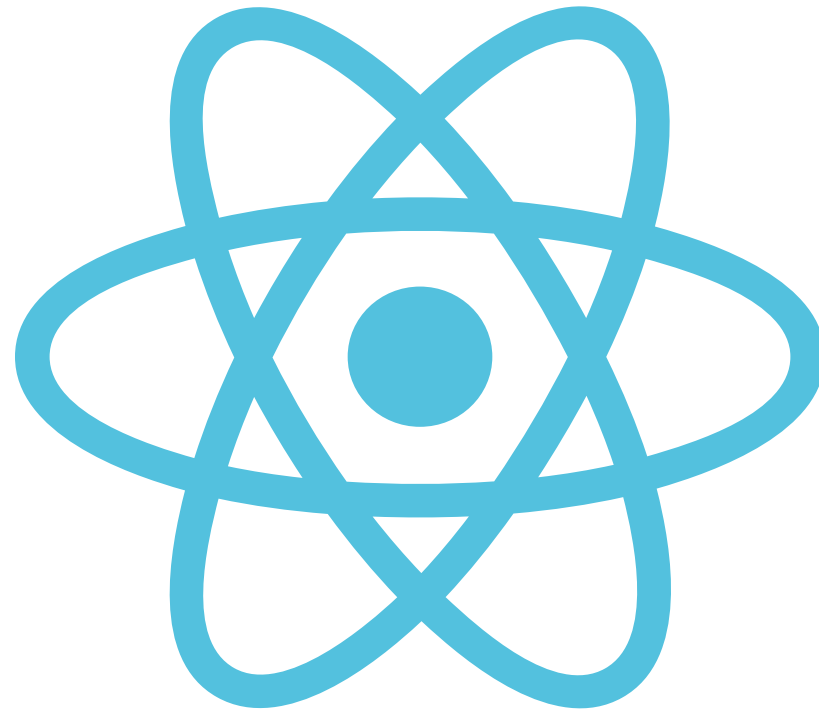

# CONTENT

- JSX
- jsx syntax limitations
- Class vs Fn. Component
- State & Props & Children Props
- Life Cycle Methods
- Events
- Form
- Routing
- Styling
- Pure Components
- React hooks
- Context API
- React.Lazy
- Lifting State up
- uuid , conditional  
Render
- Call Api


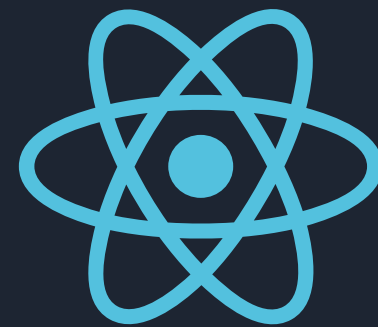


# DAY 1


- Introduction
  - Framework Vs Library
  - Tools Behind
  - Why React
  - MPA Vs SPA
- How React Engine Works
- Create React Project
- Components
  - Class Comp
  - Function Comp
  - State And Props



*Agenda*

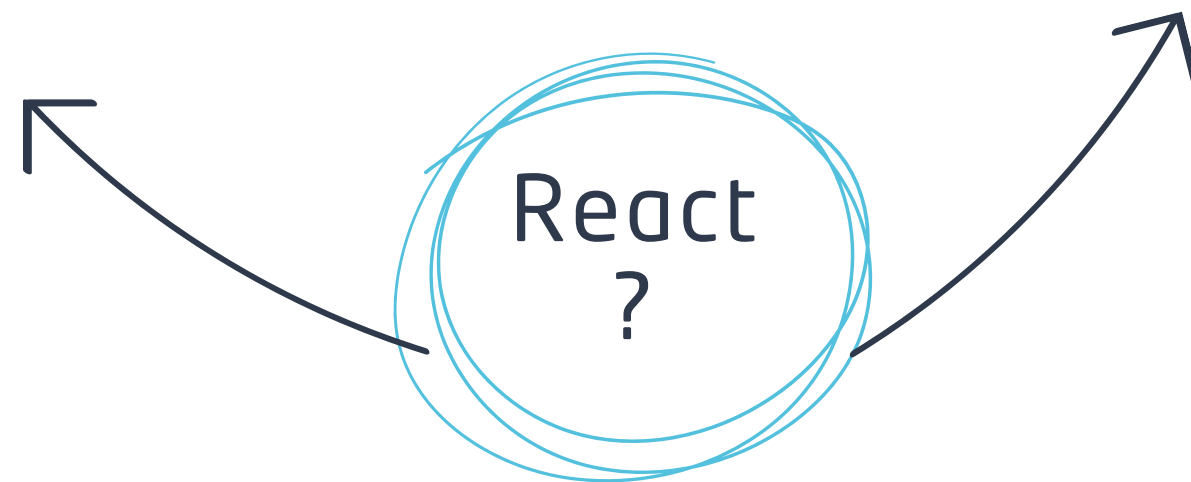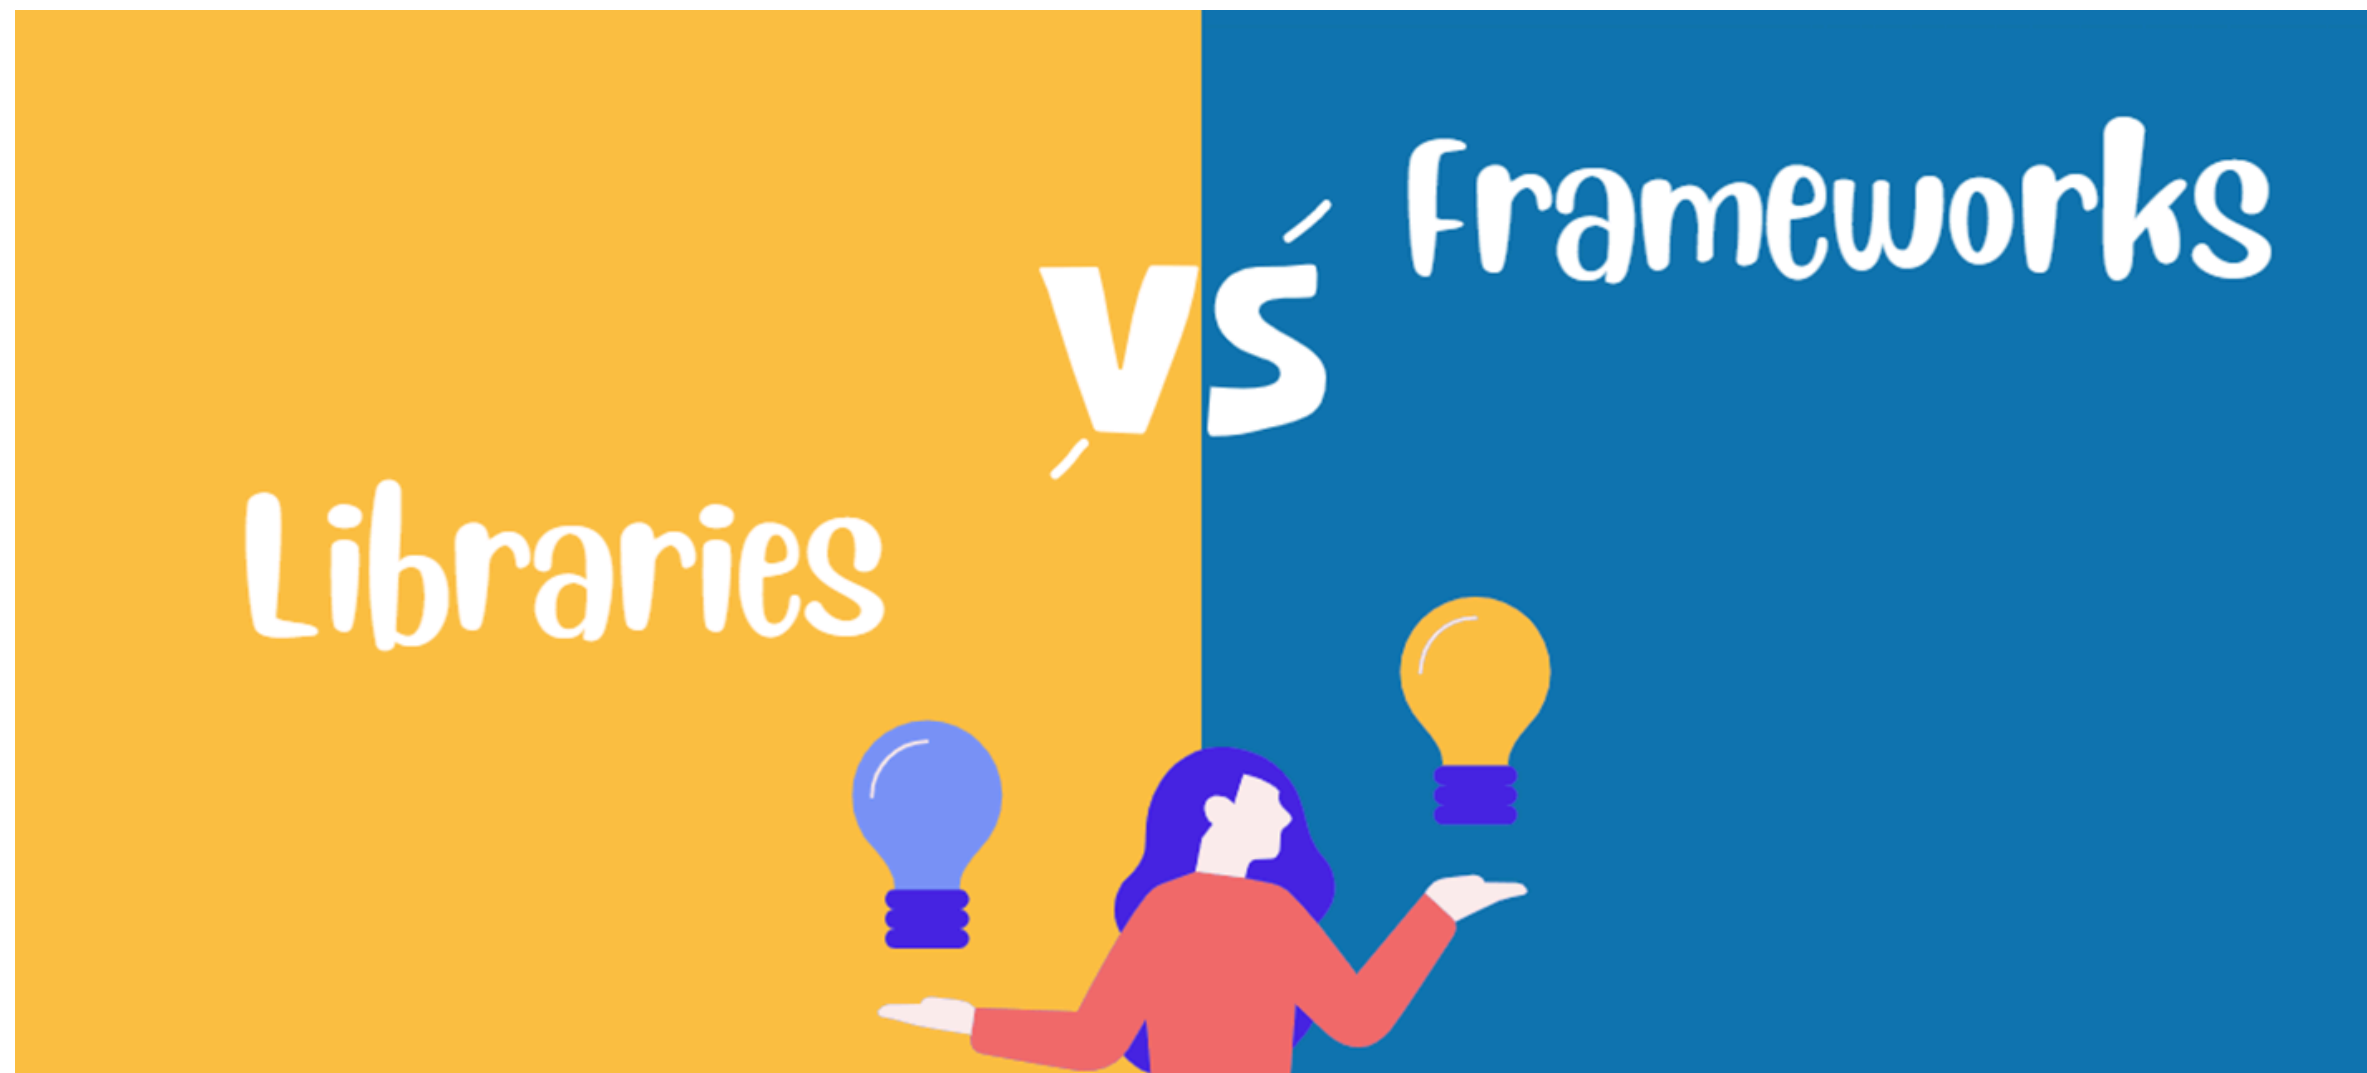


# Framework vs Library

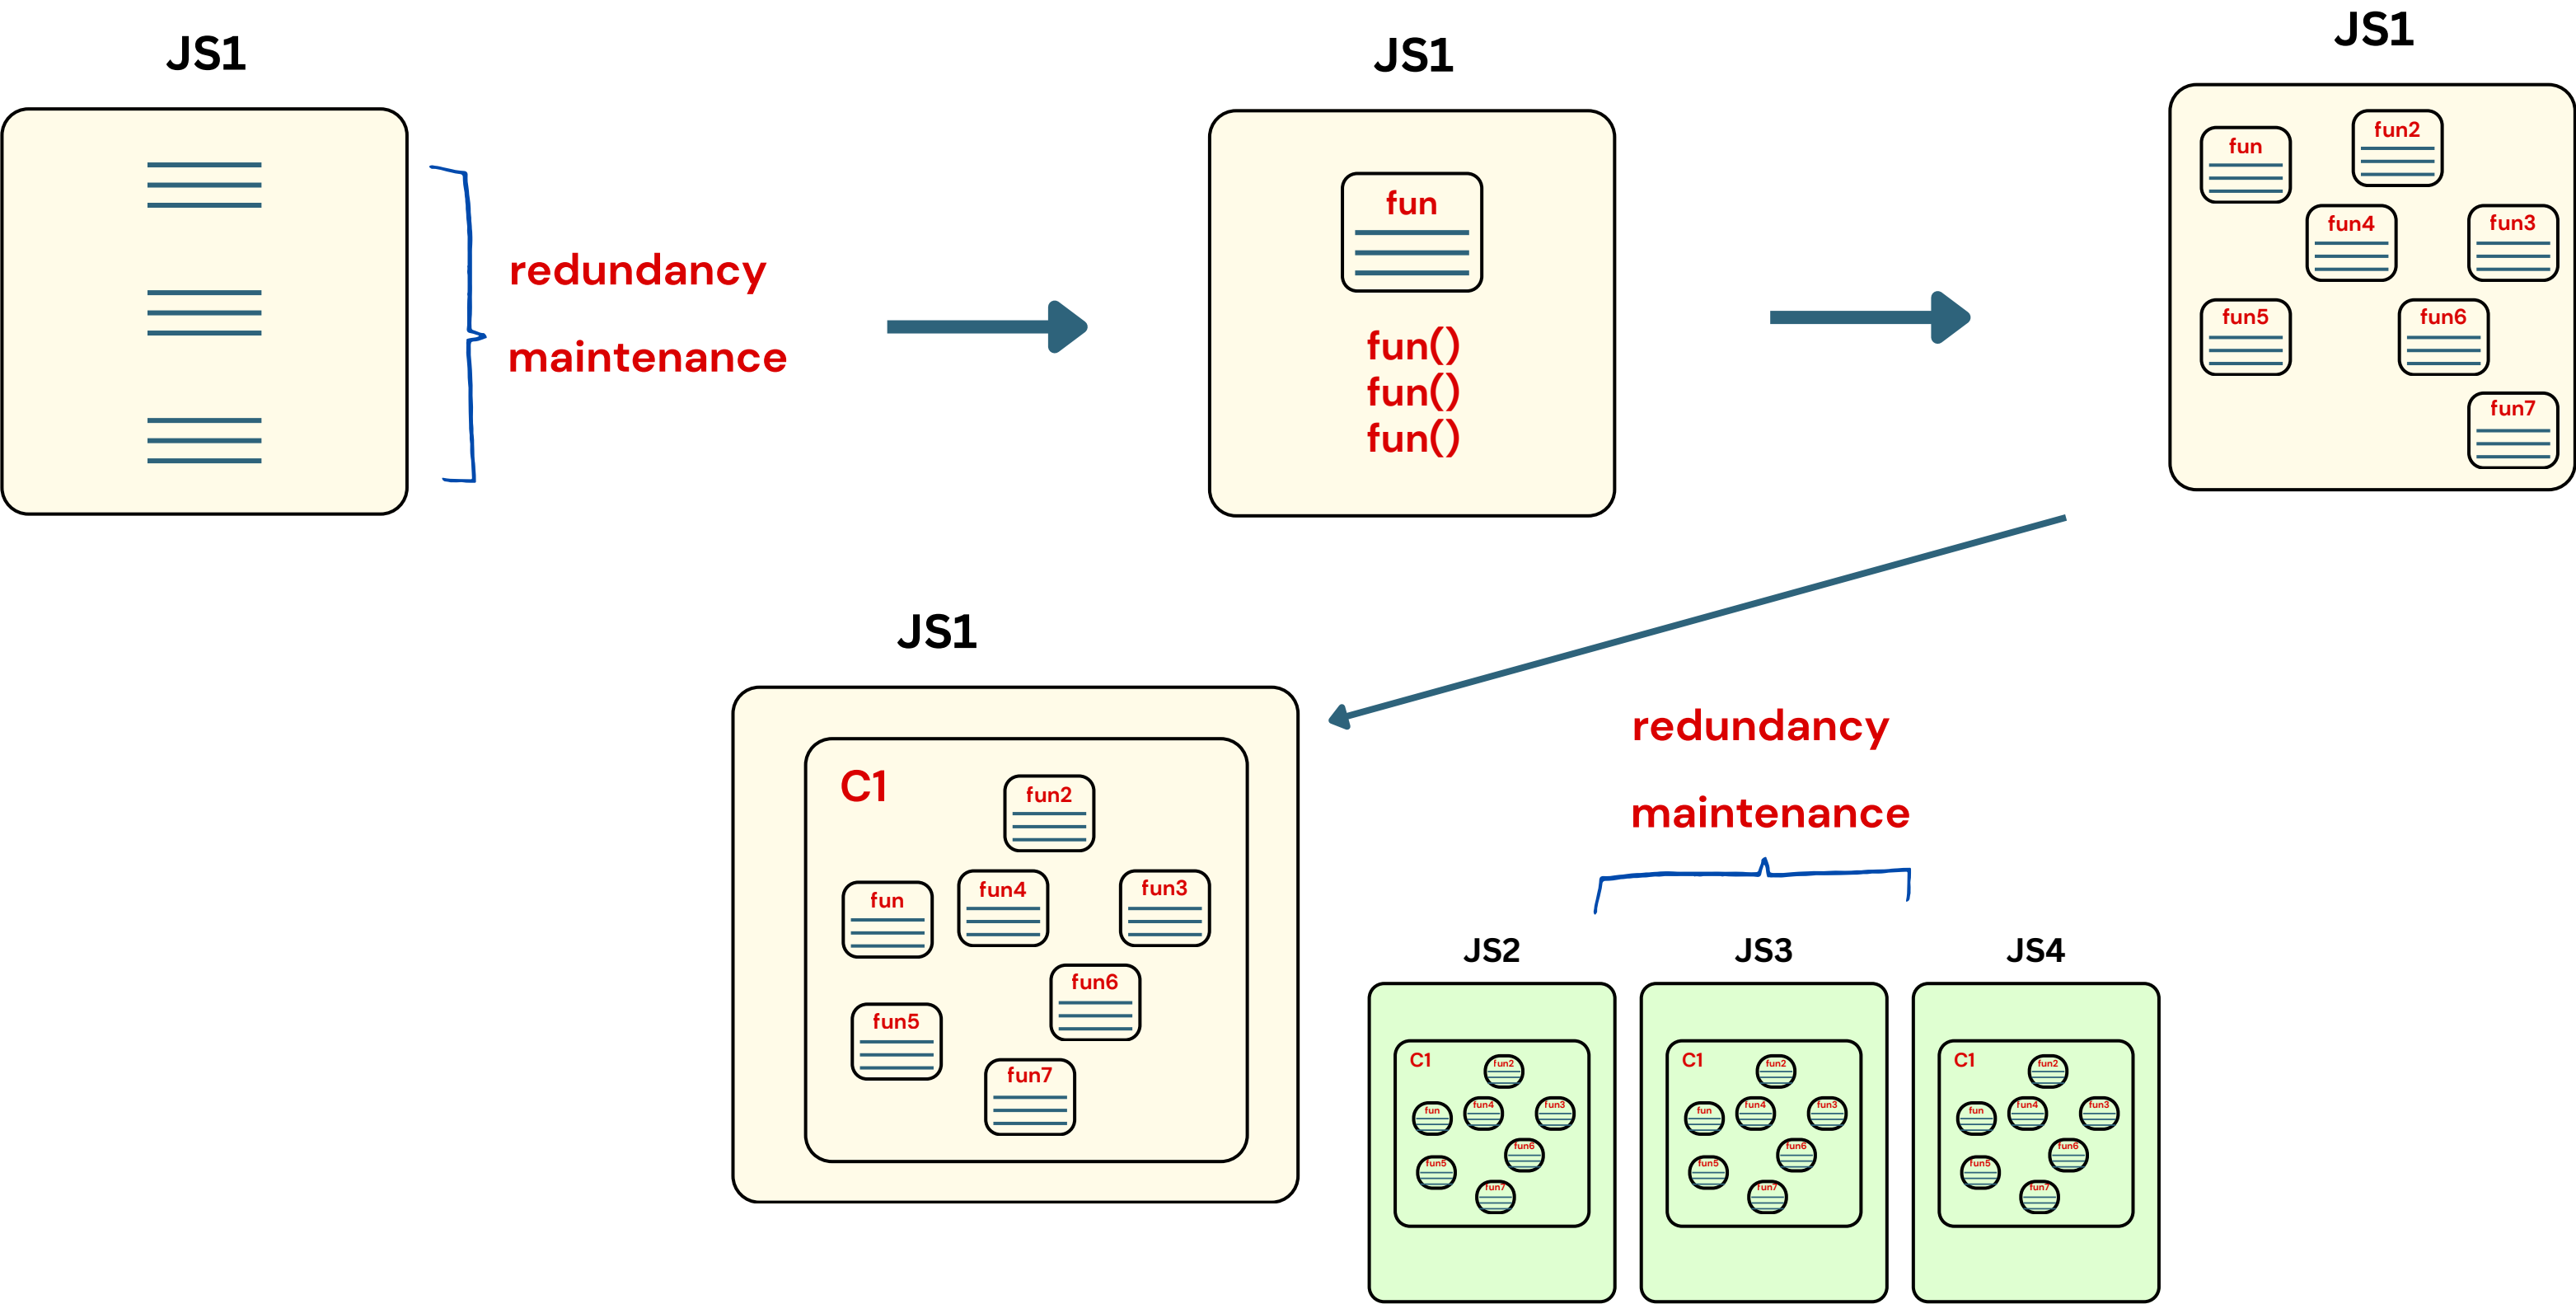





# Framework vs Library

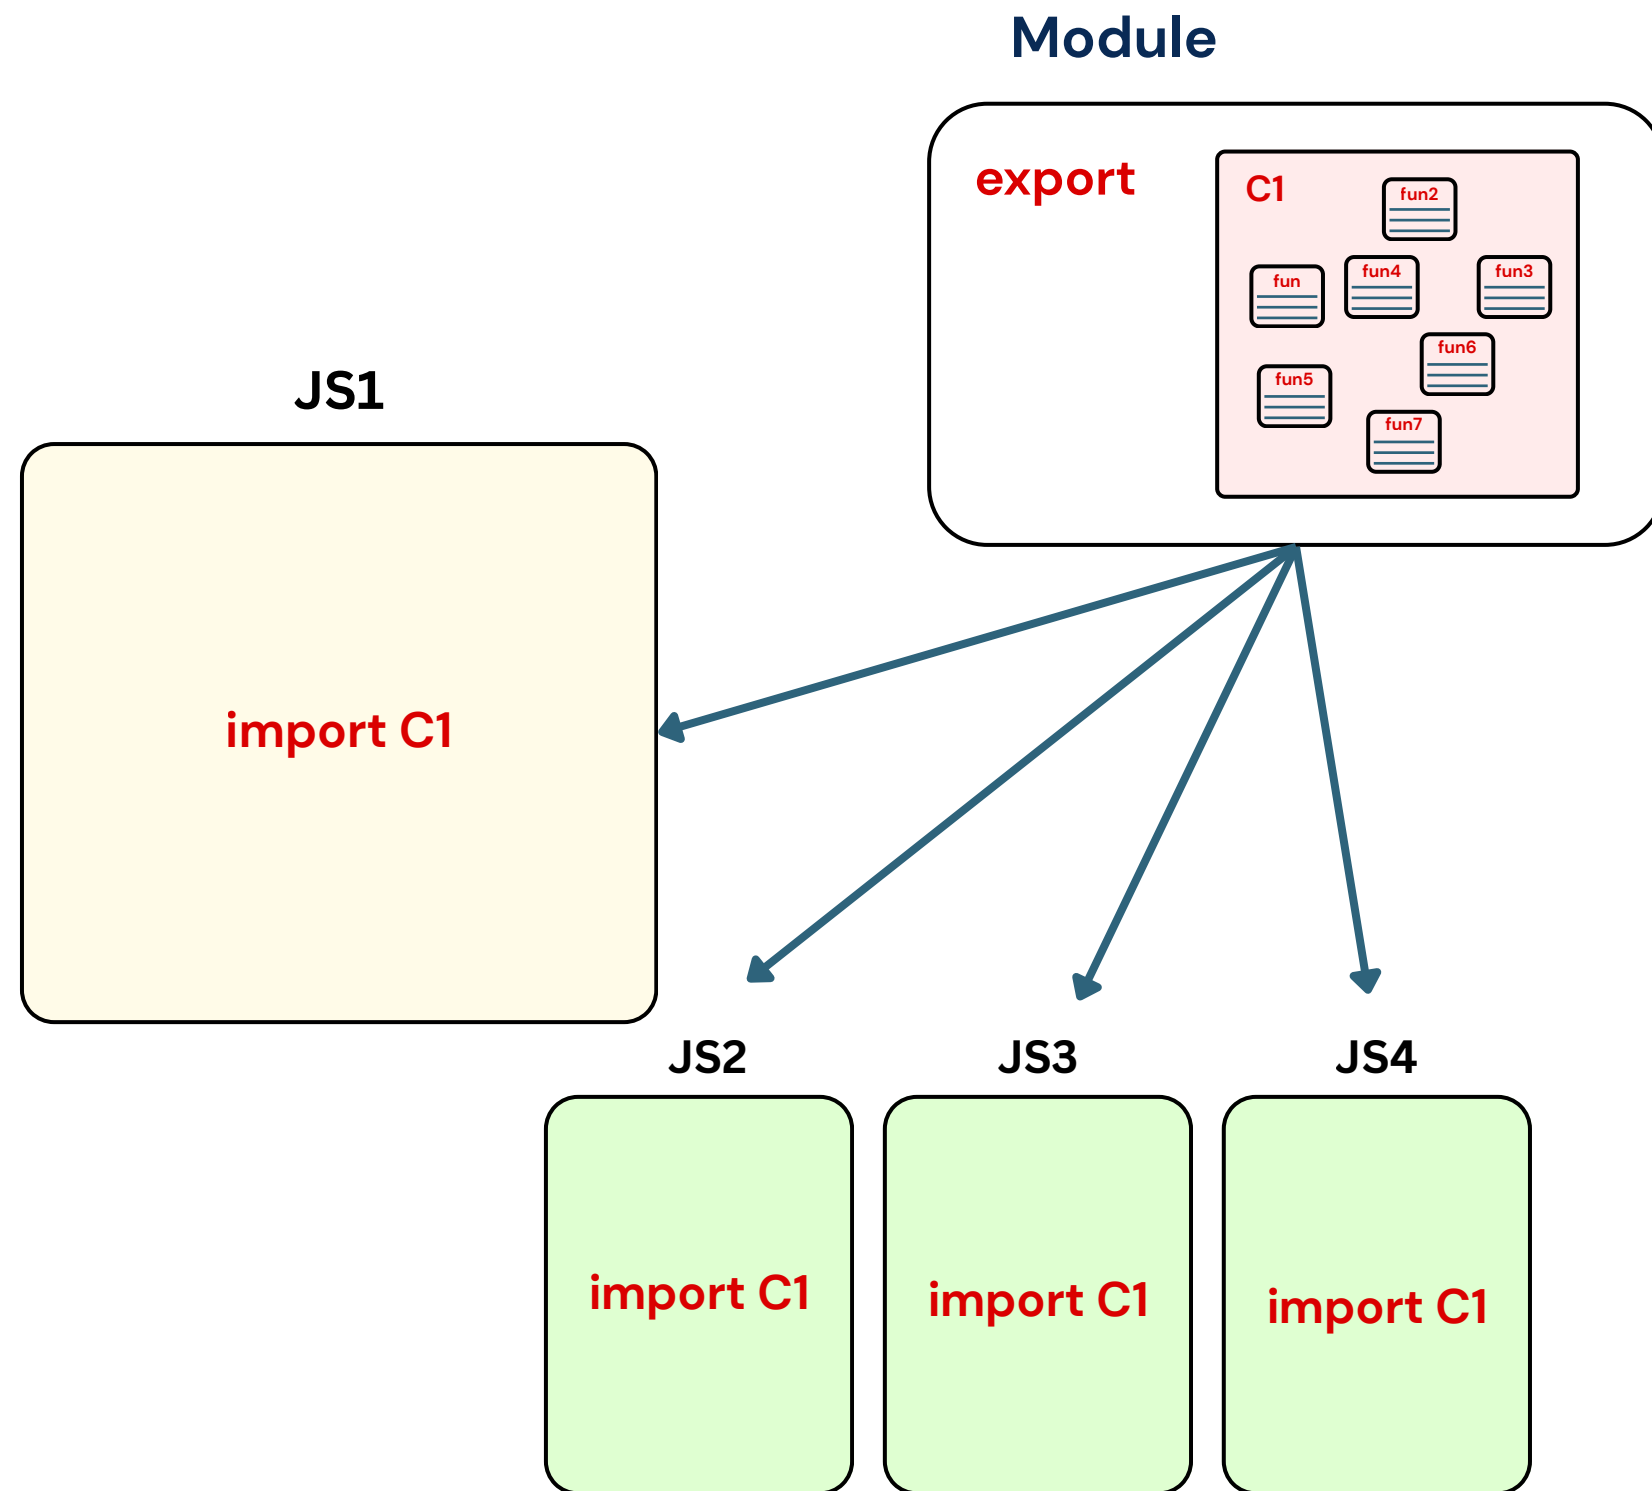

## Framework

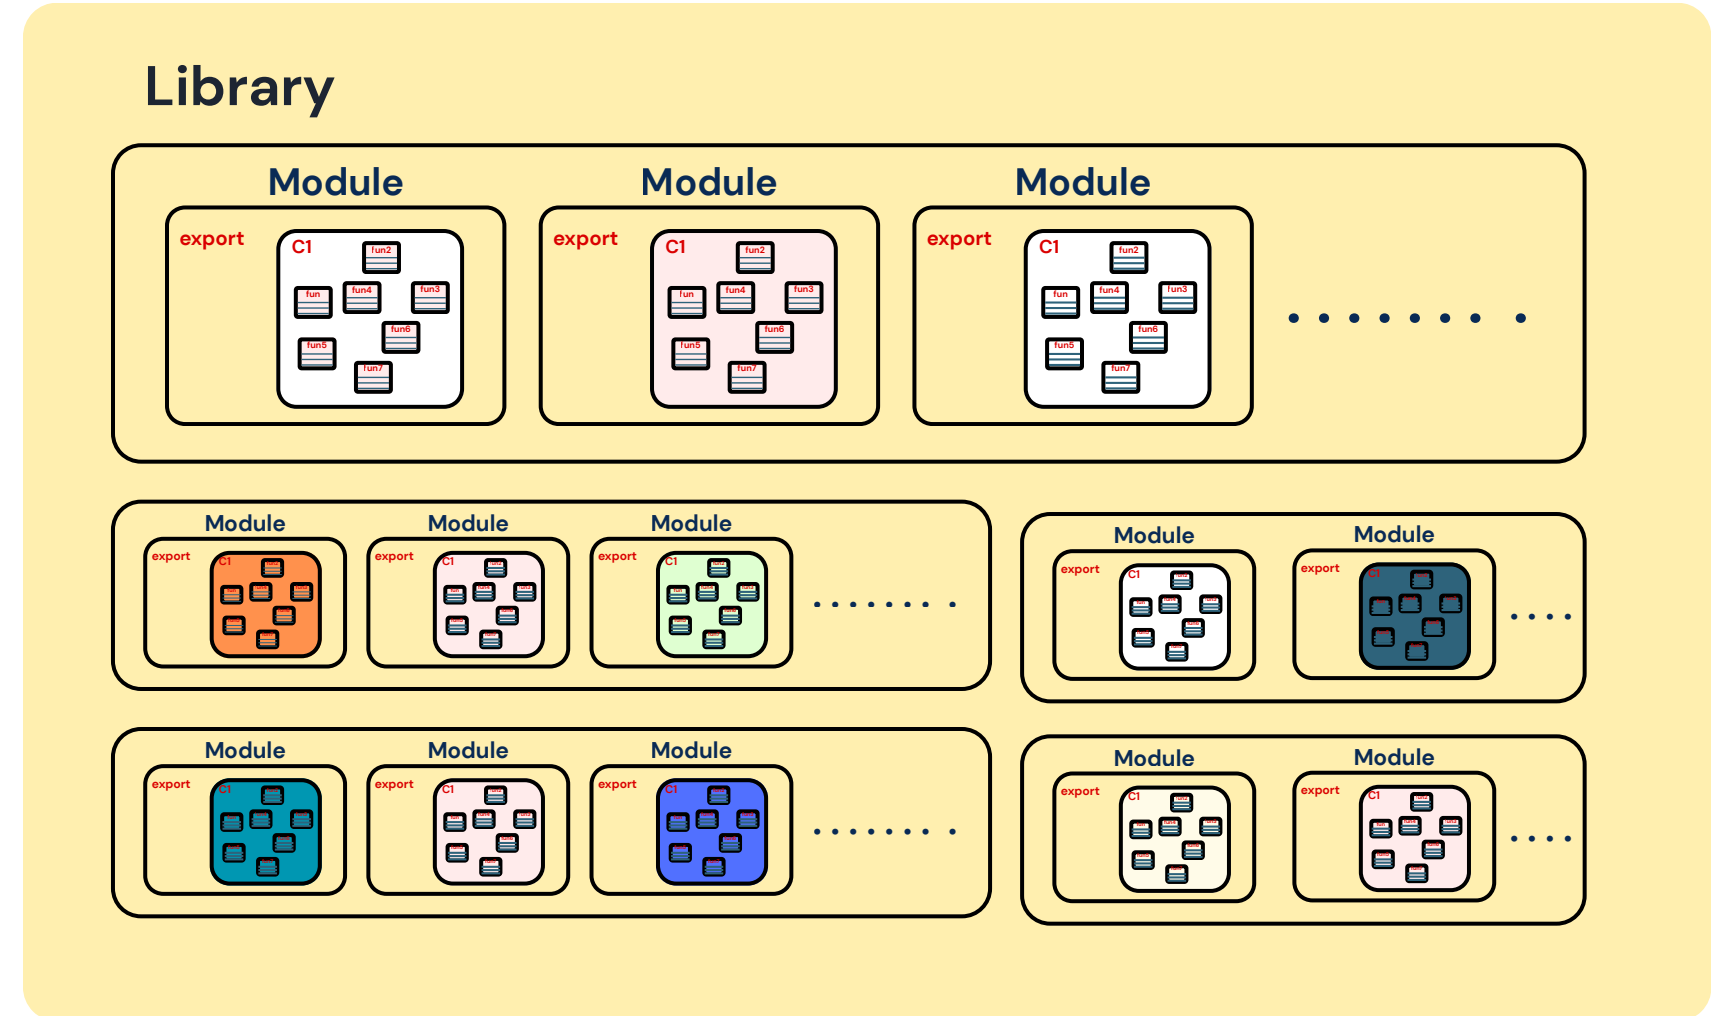


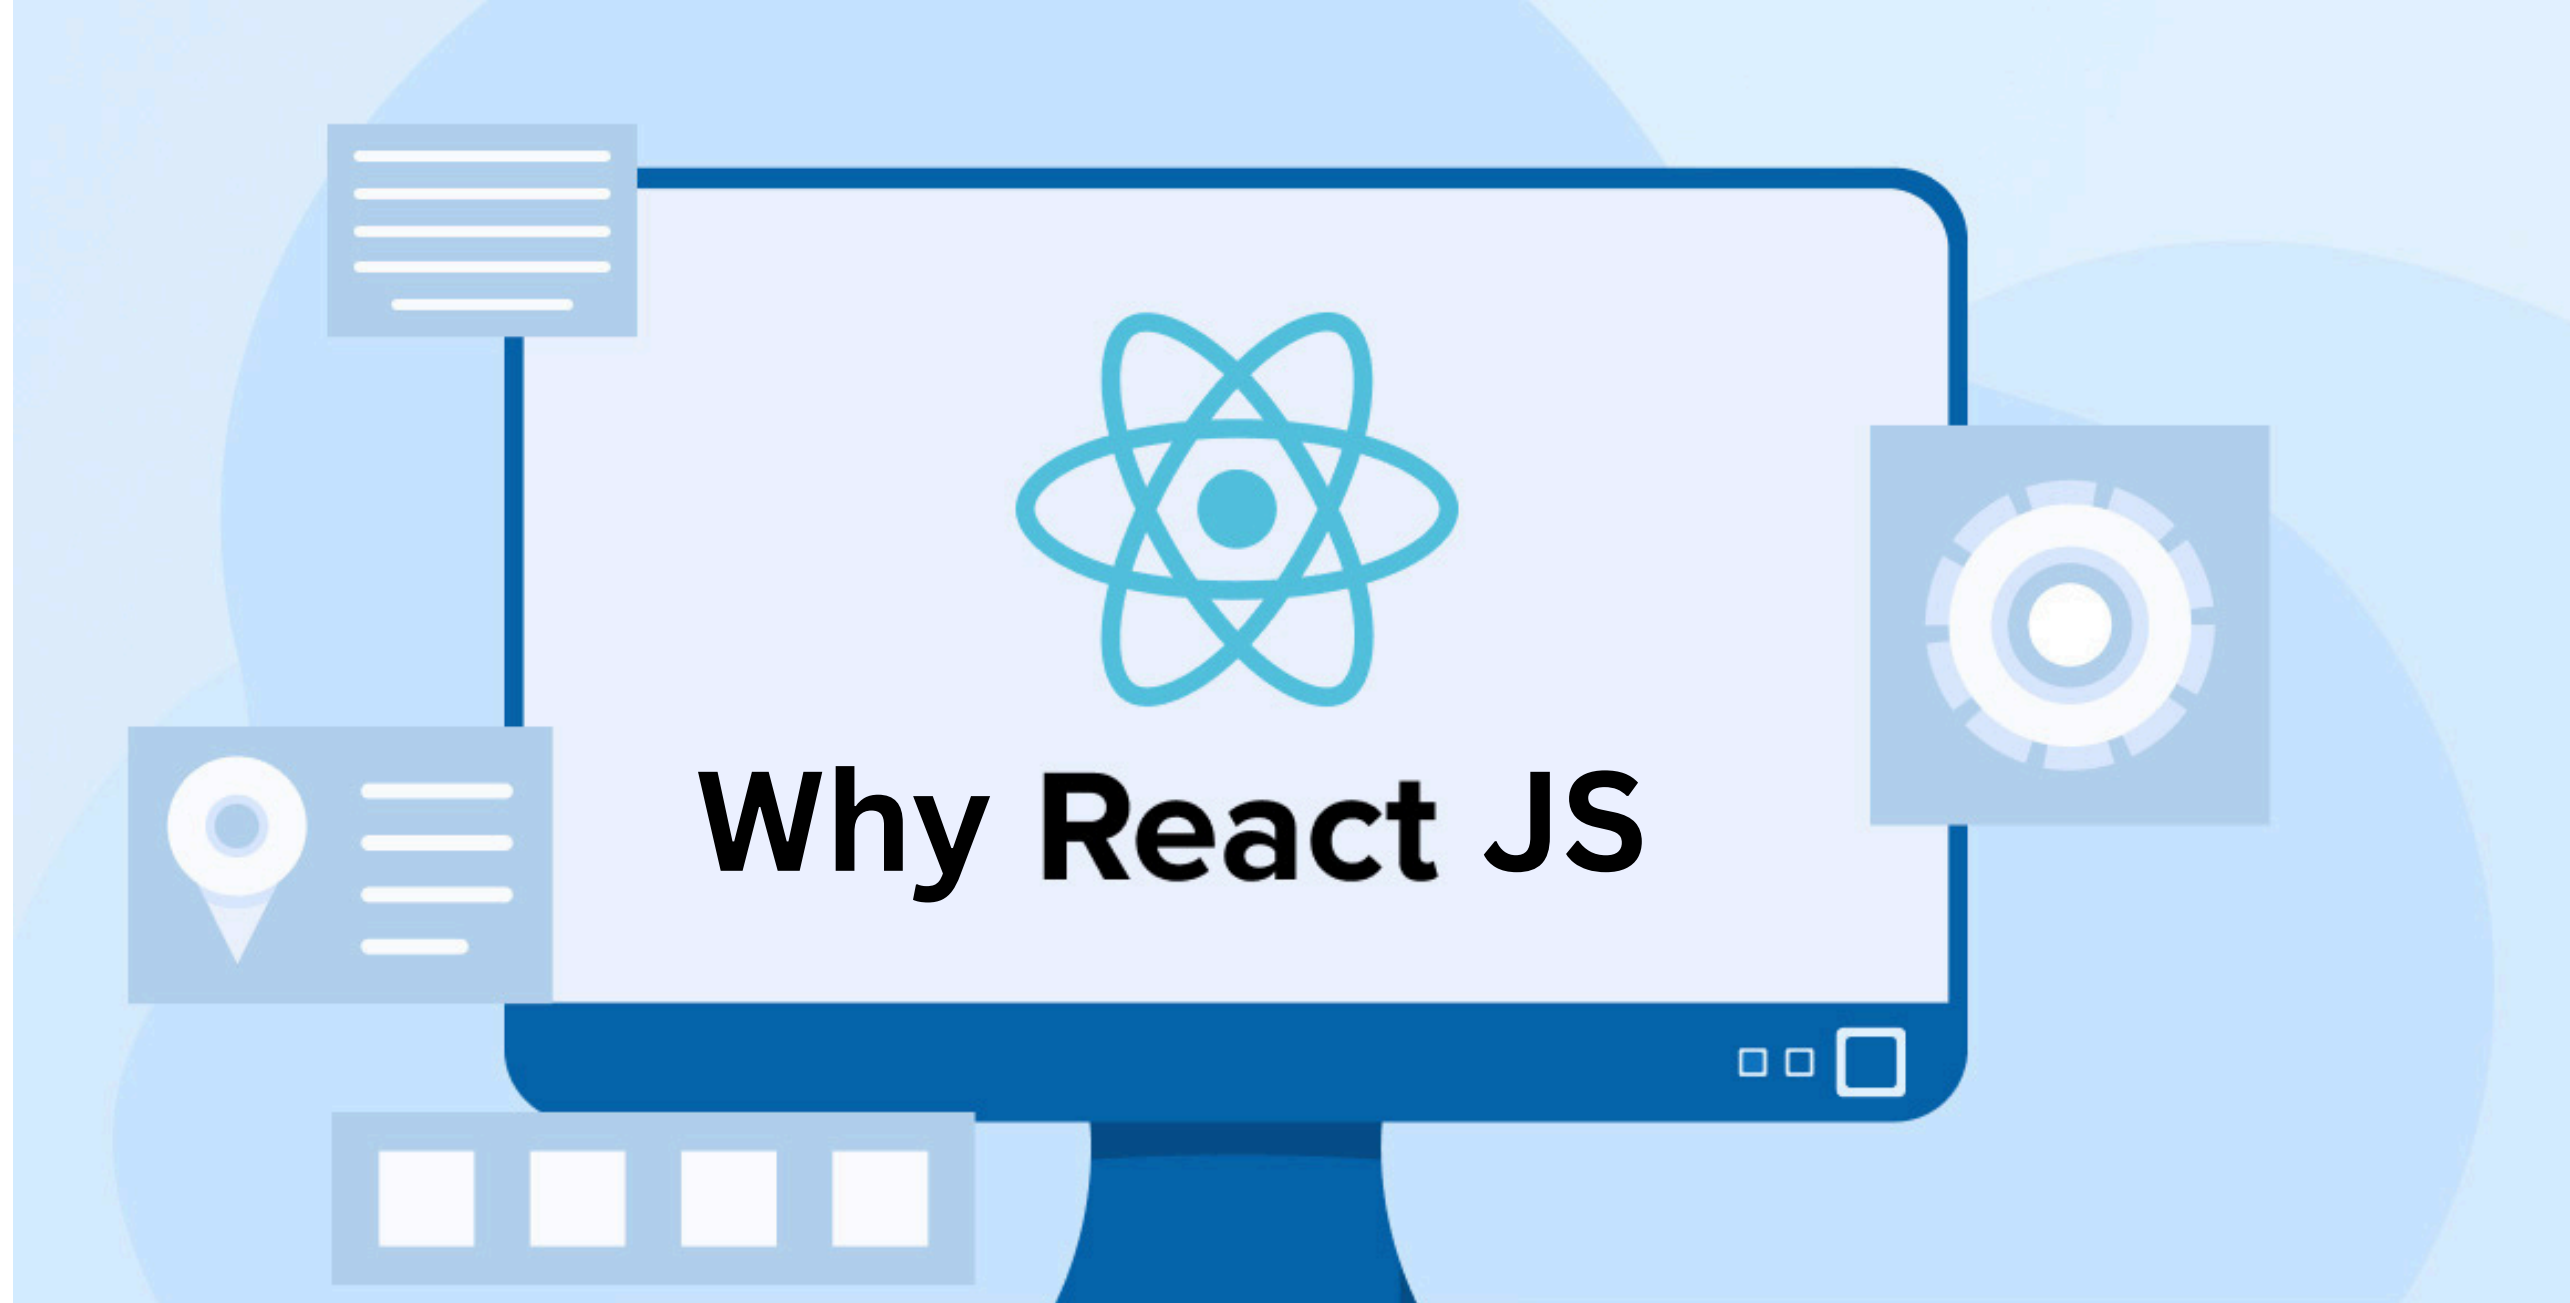


React.js was created by [Jordan Walke](#), a software engineer at Facebook.

He developed React in [2011](#).



React was first used in Facebook's news feed and [2012](#) on Instagram before being open-sourced in [2013](#). Since then, it has grown to become one of the most popular libraries for building web applications.



SP


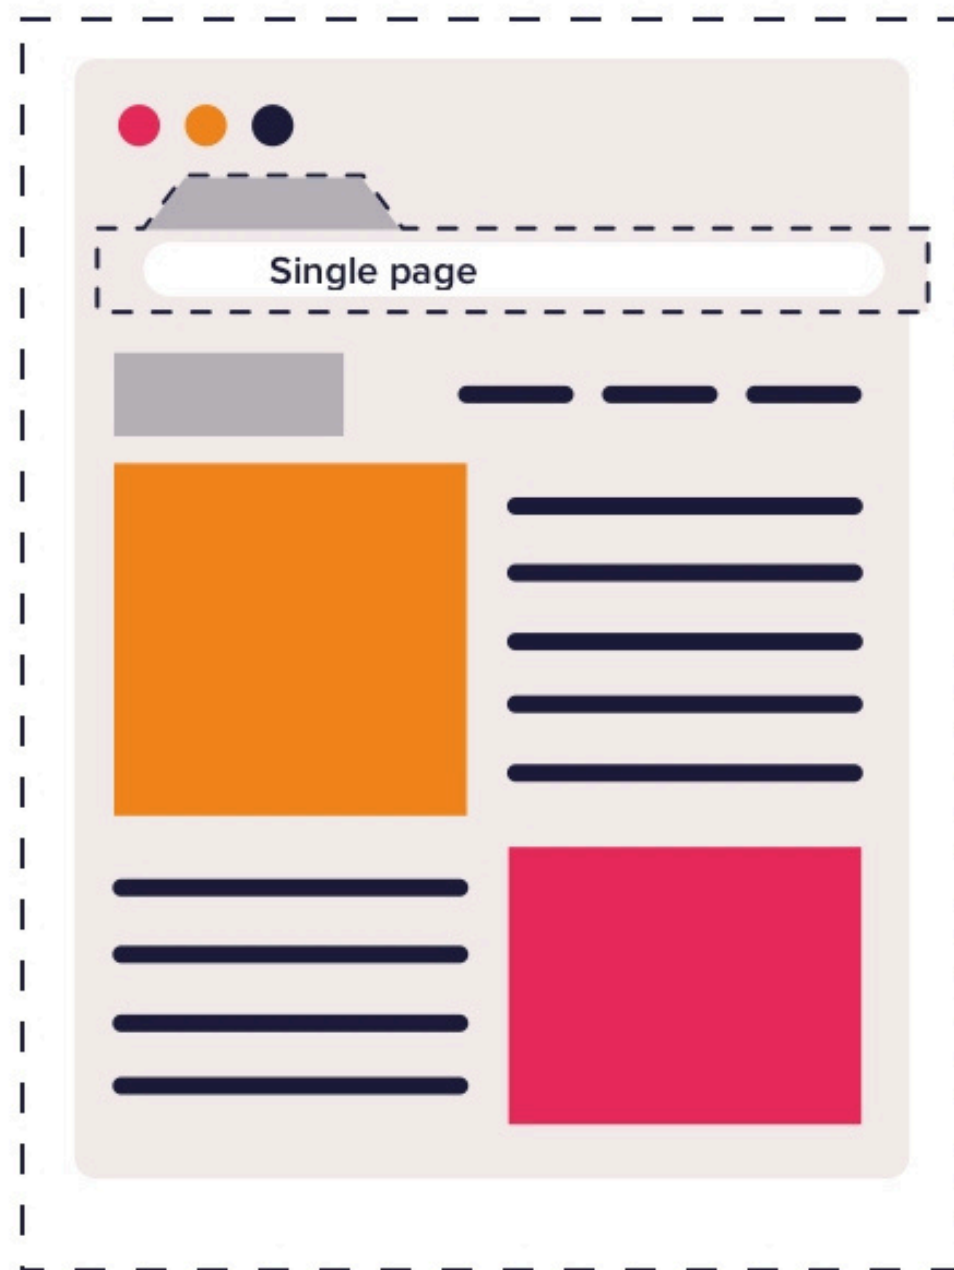


MP

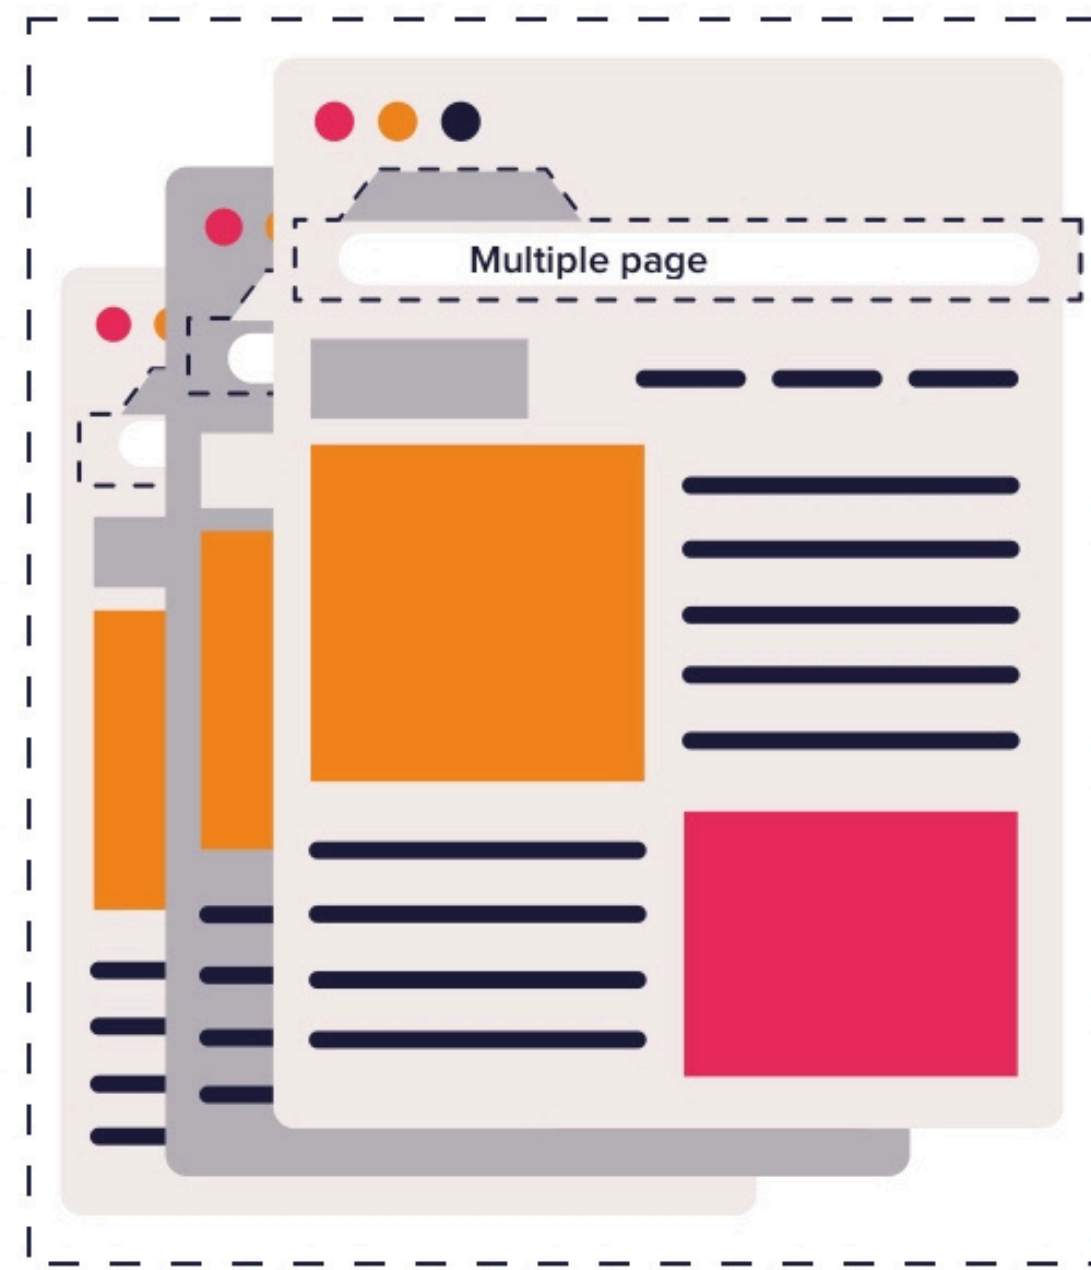





# How React Works

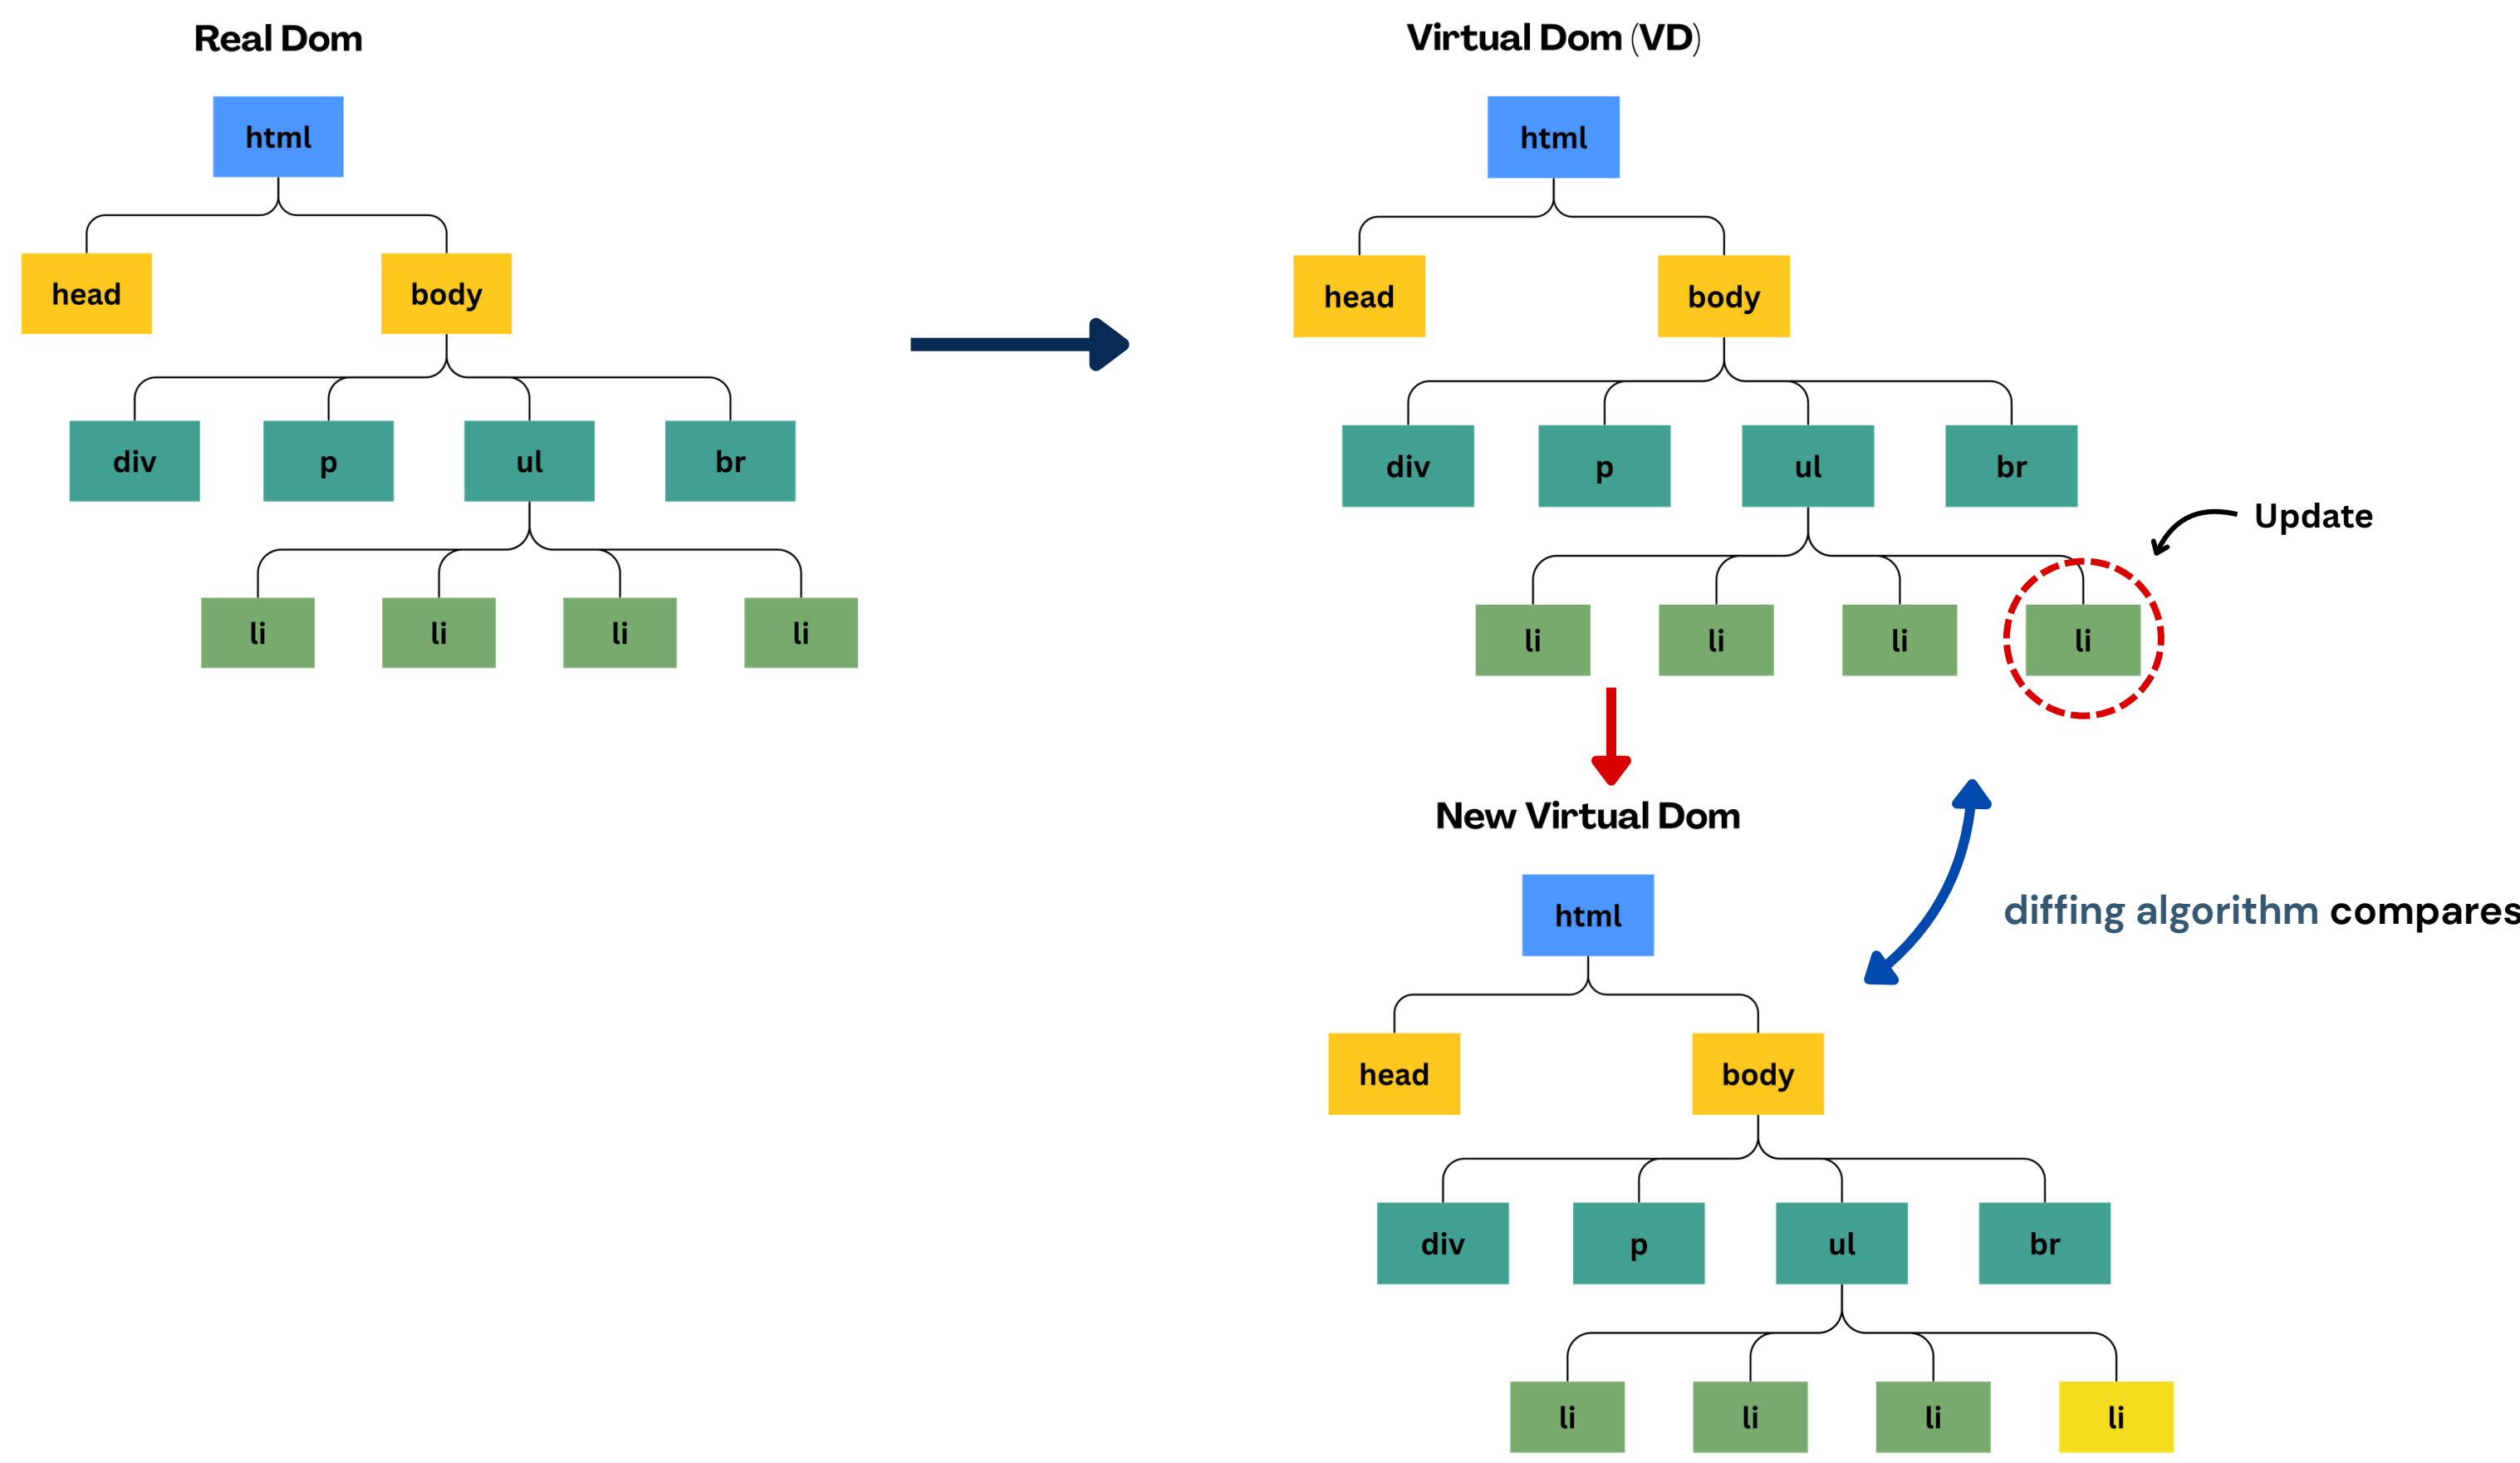

# How React Works

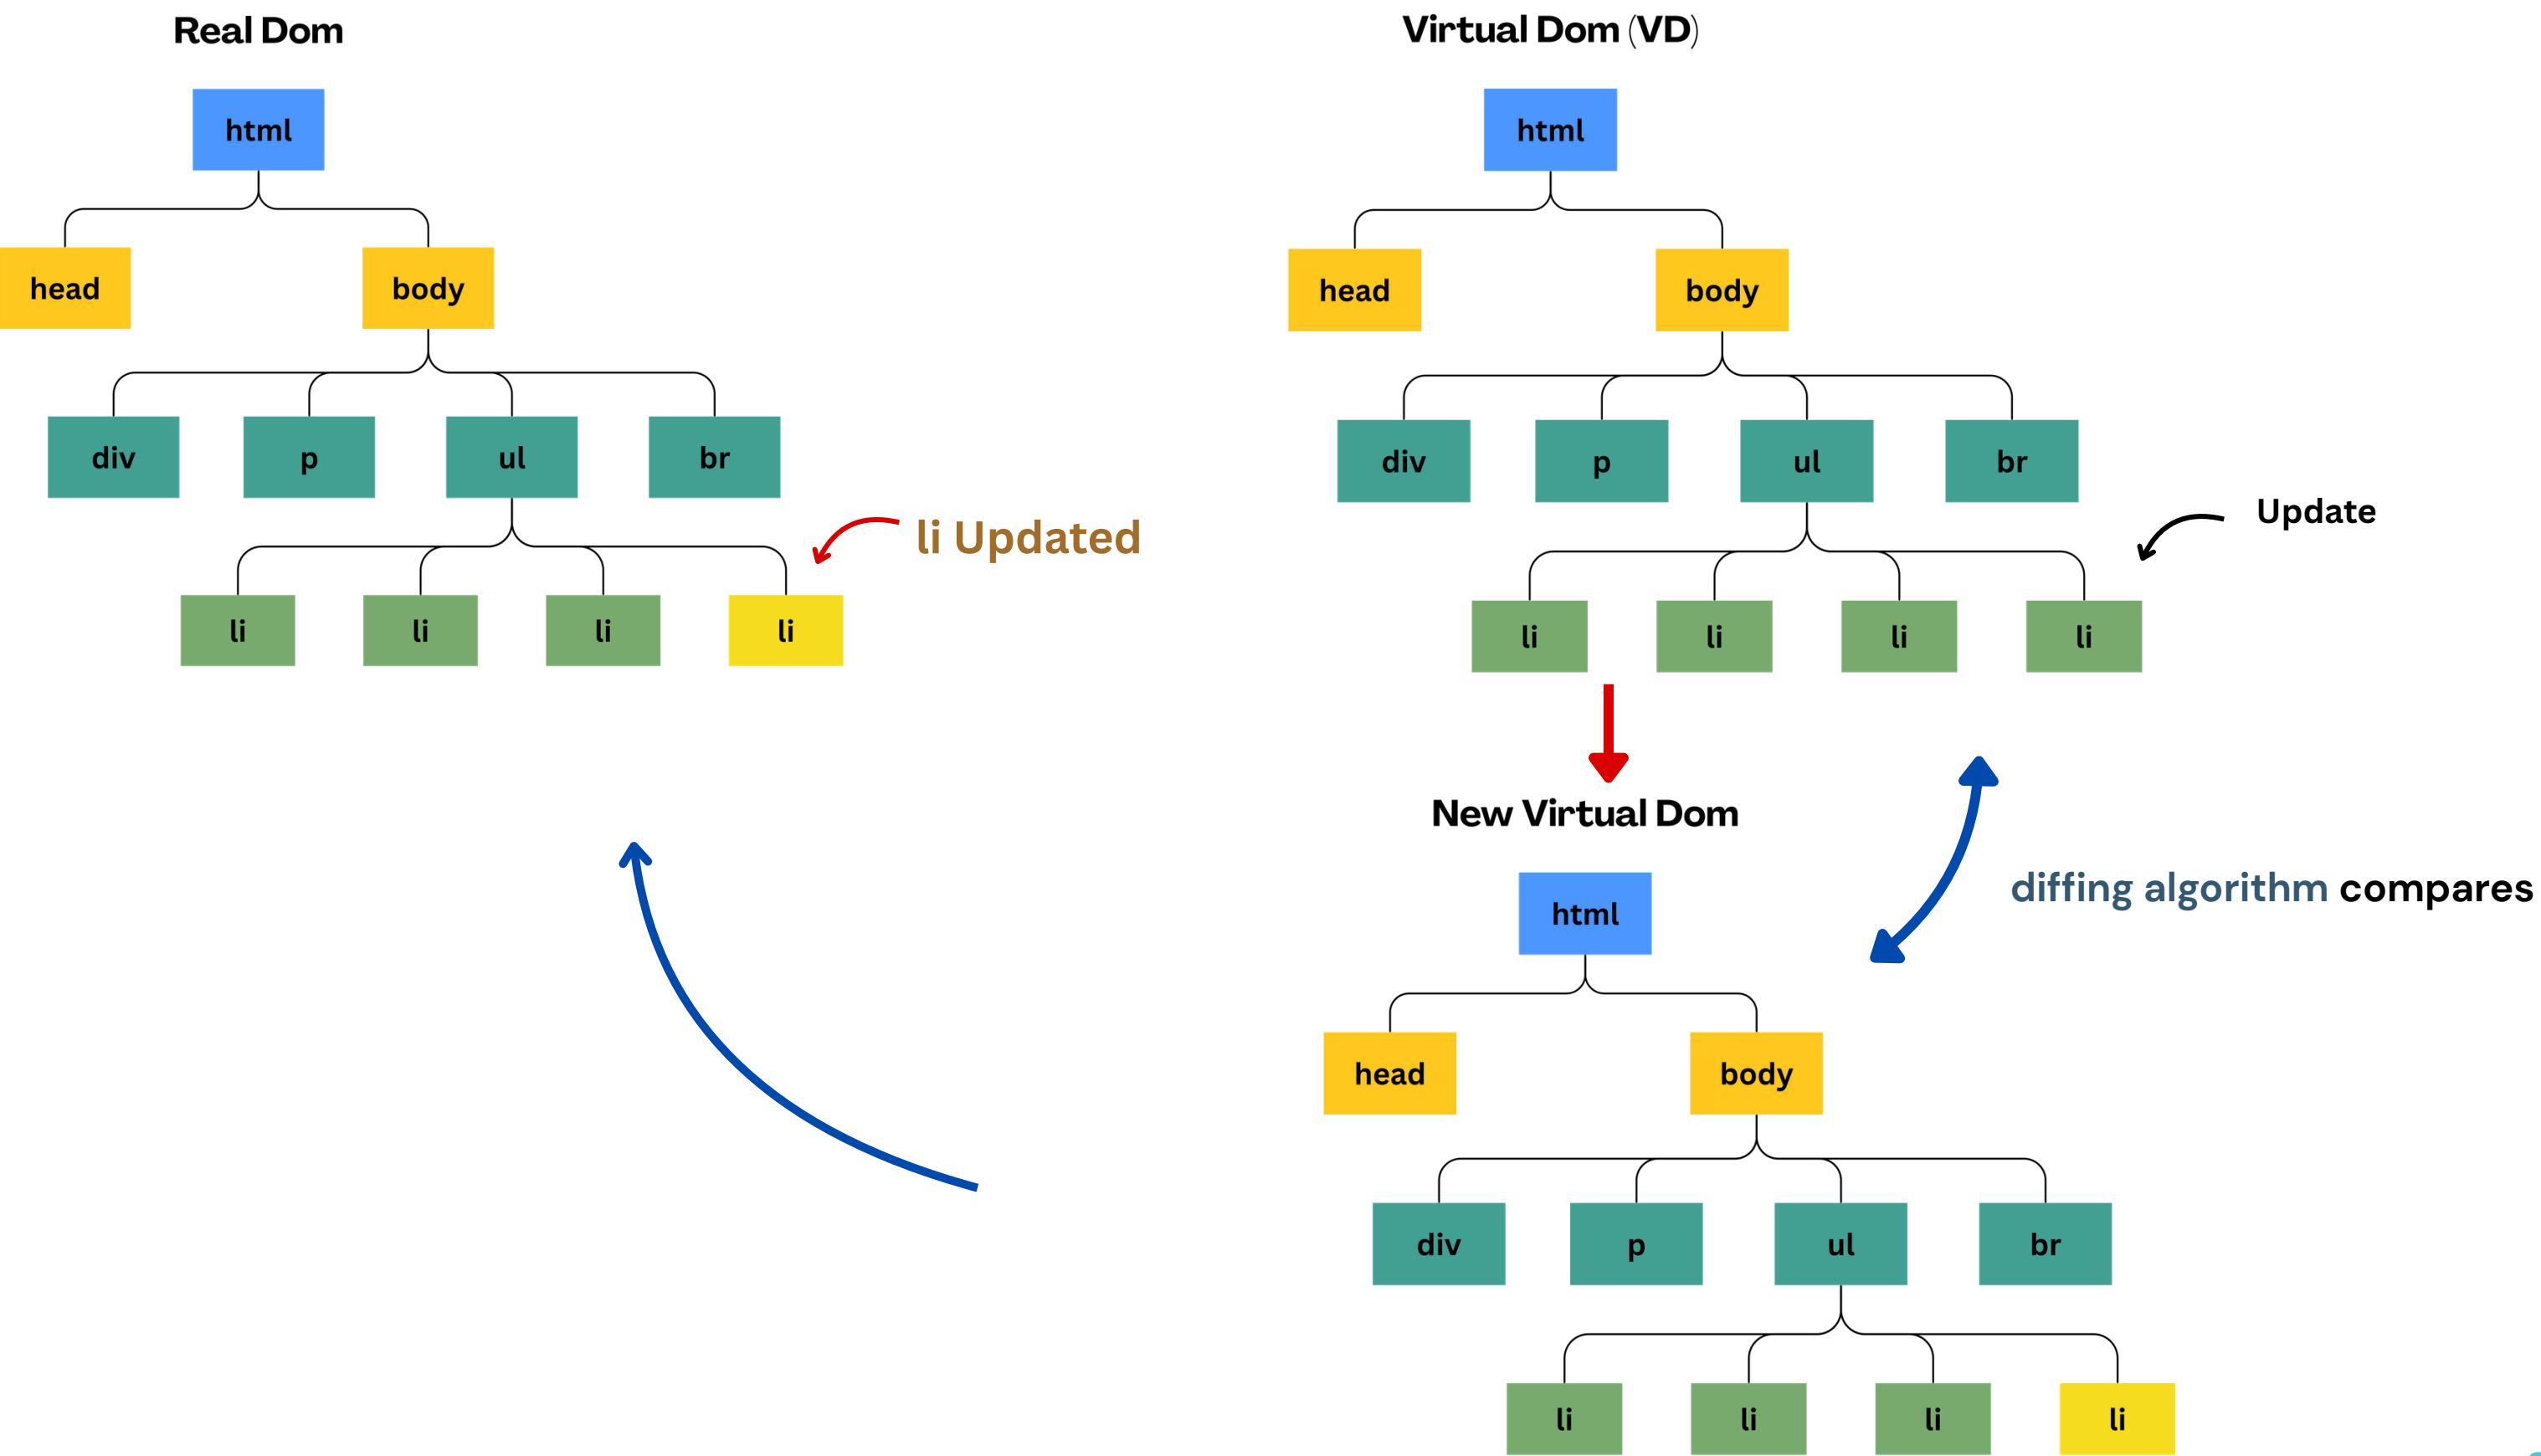


# How React Works

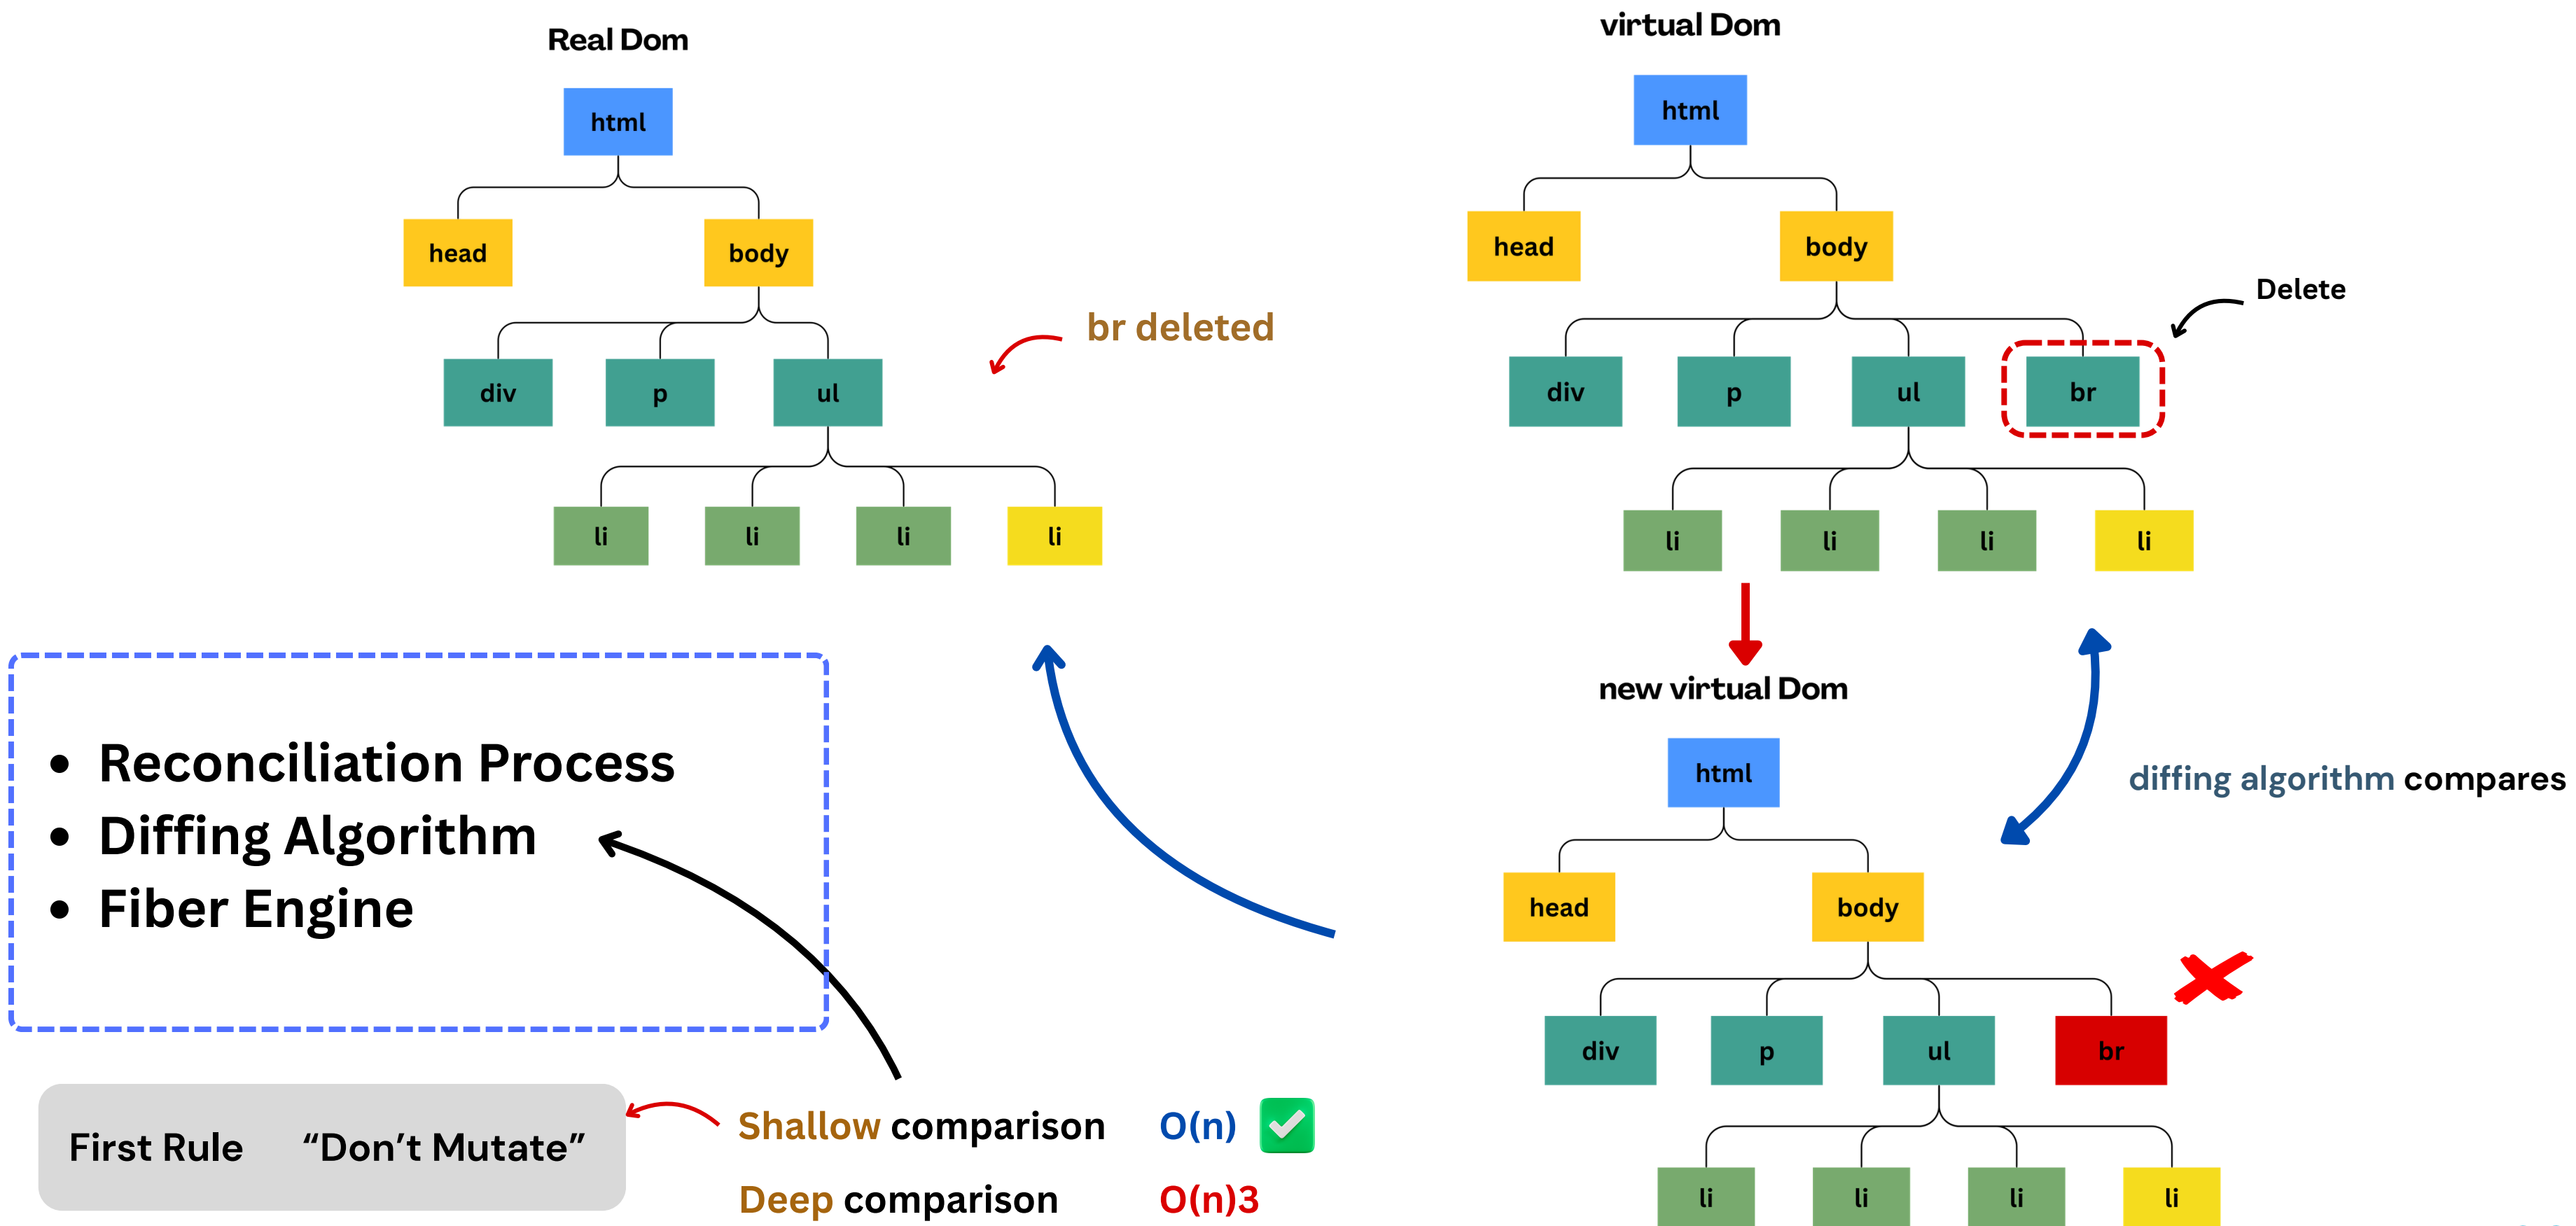

# Diffing rules

## 1. Different Elements Same Position

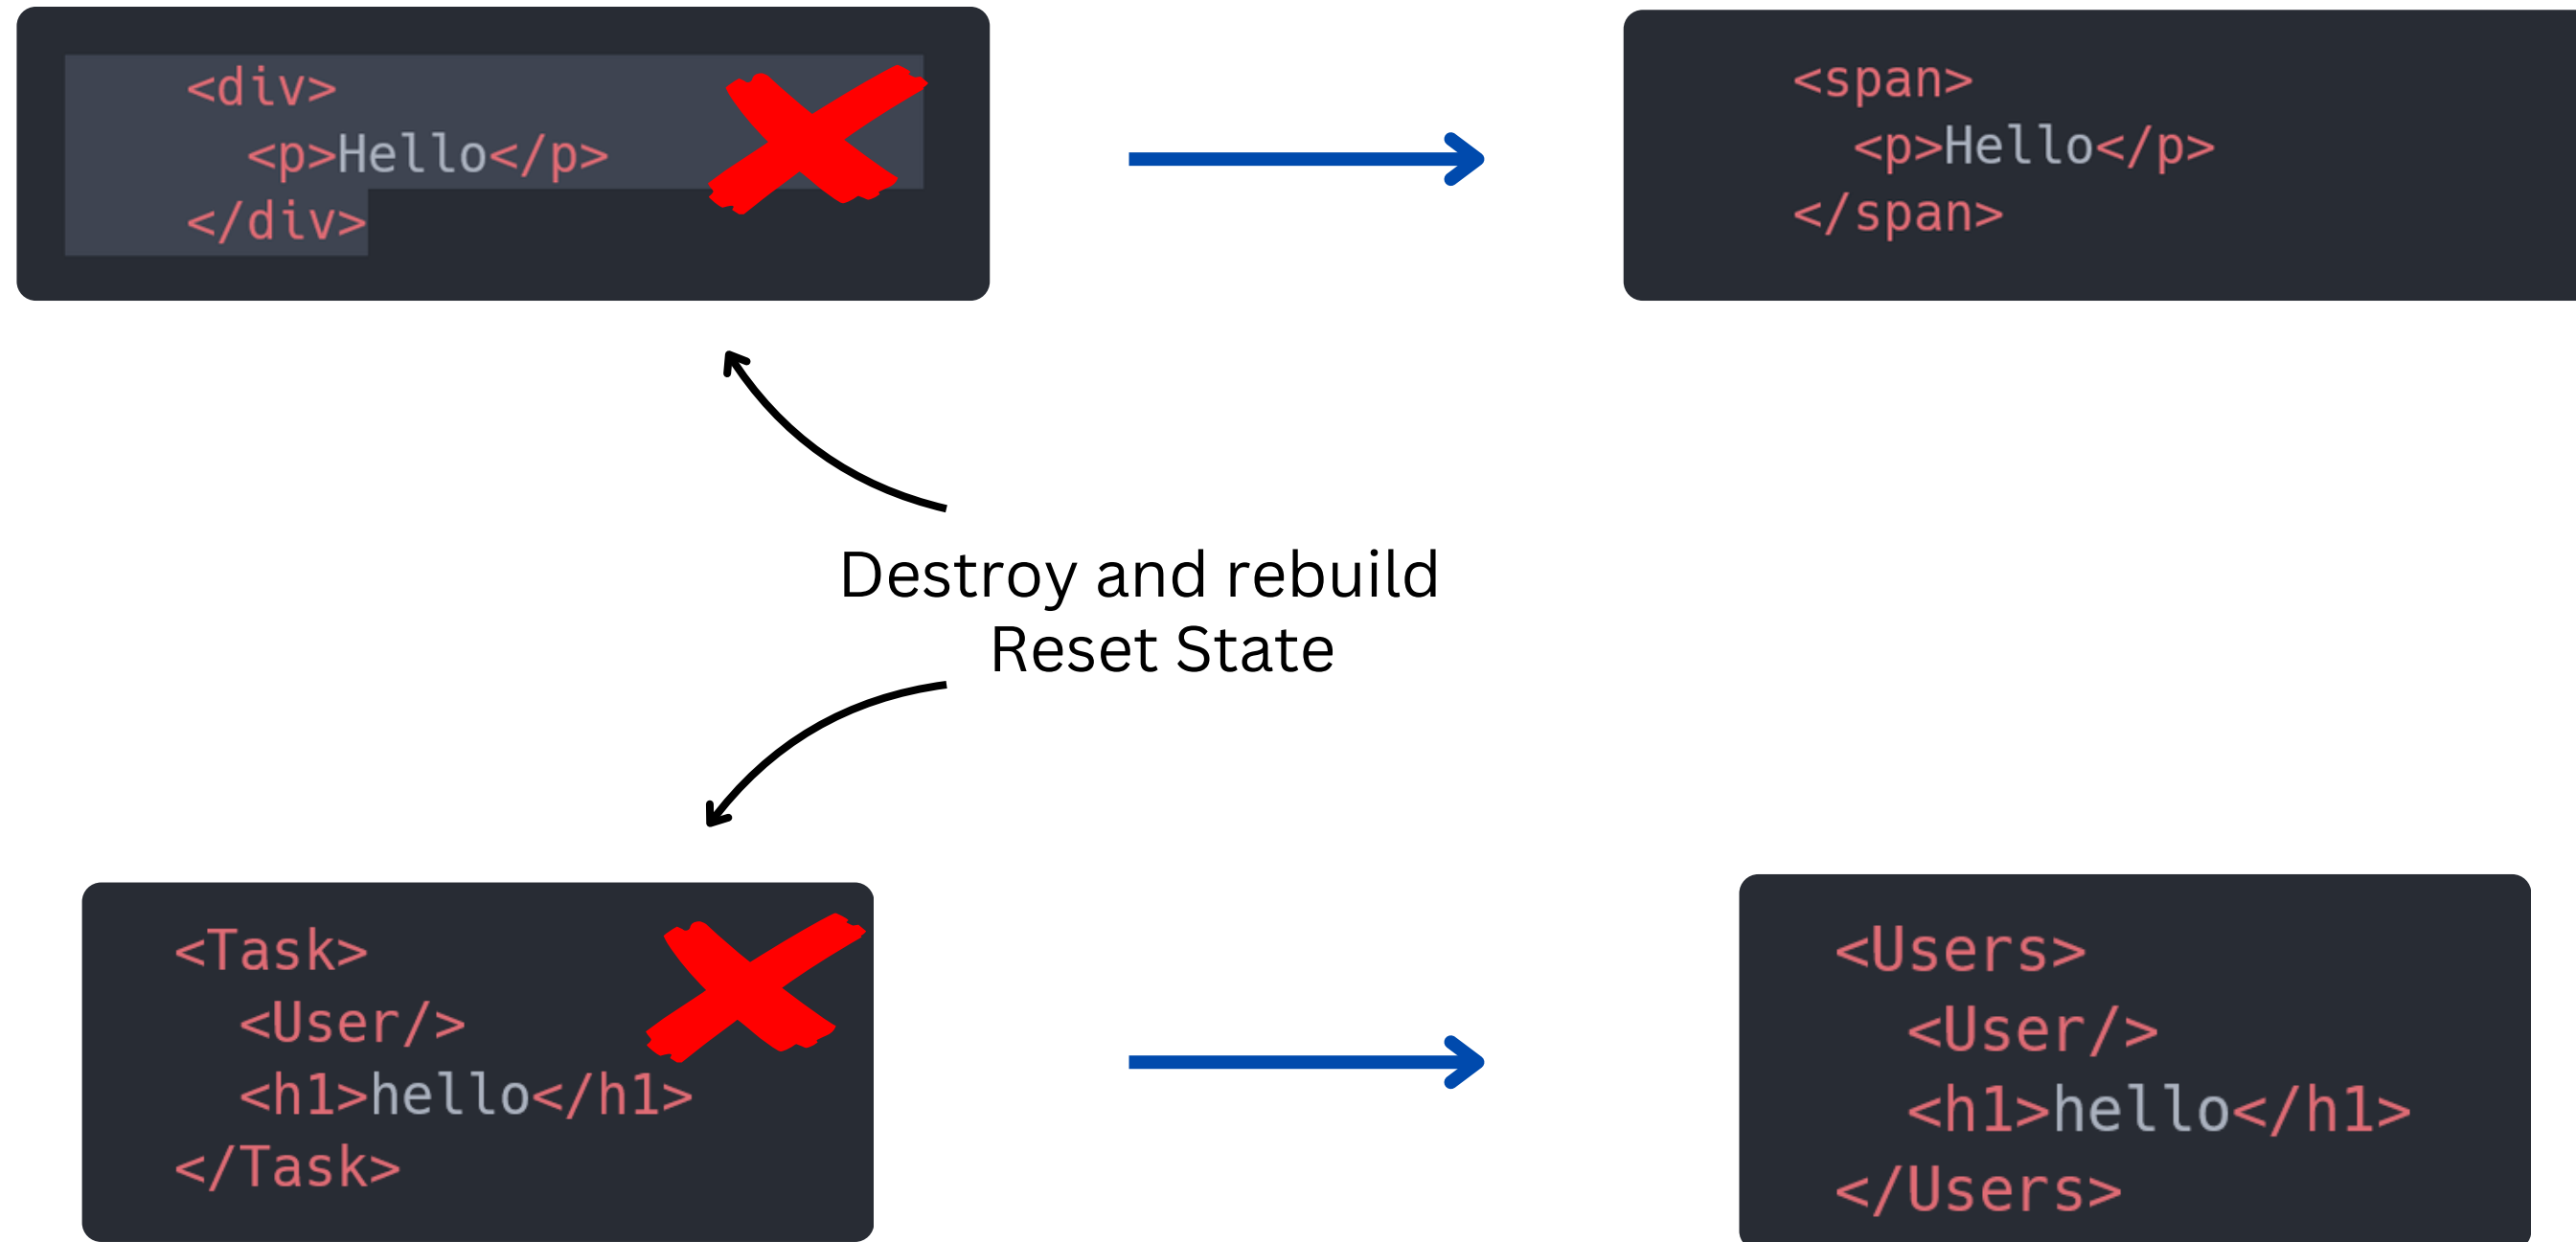


# Diffing rules

## 2. Same Elements Same Position


```
<button className="blue" />
```



```
<button className="red" />
```




Stay same  
State Preserved






# Tools Behind


*With Create-React-App Library*

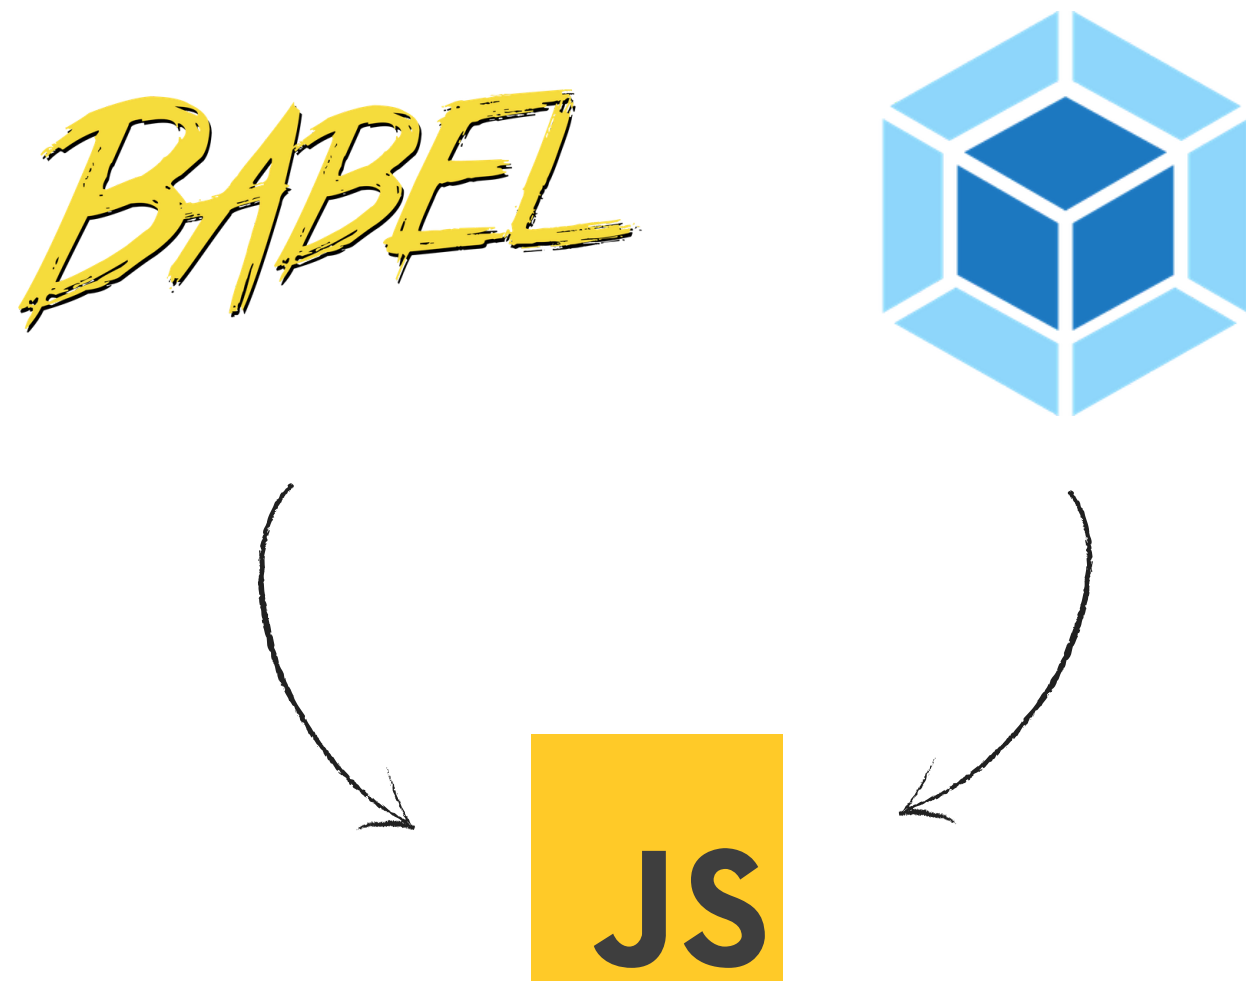

*With Vite* 




With Create-React-App Library

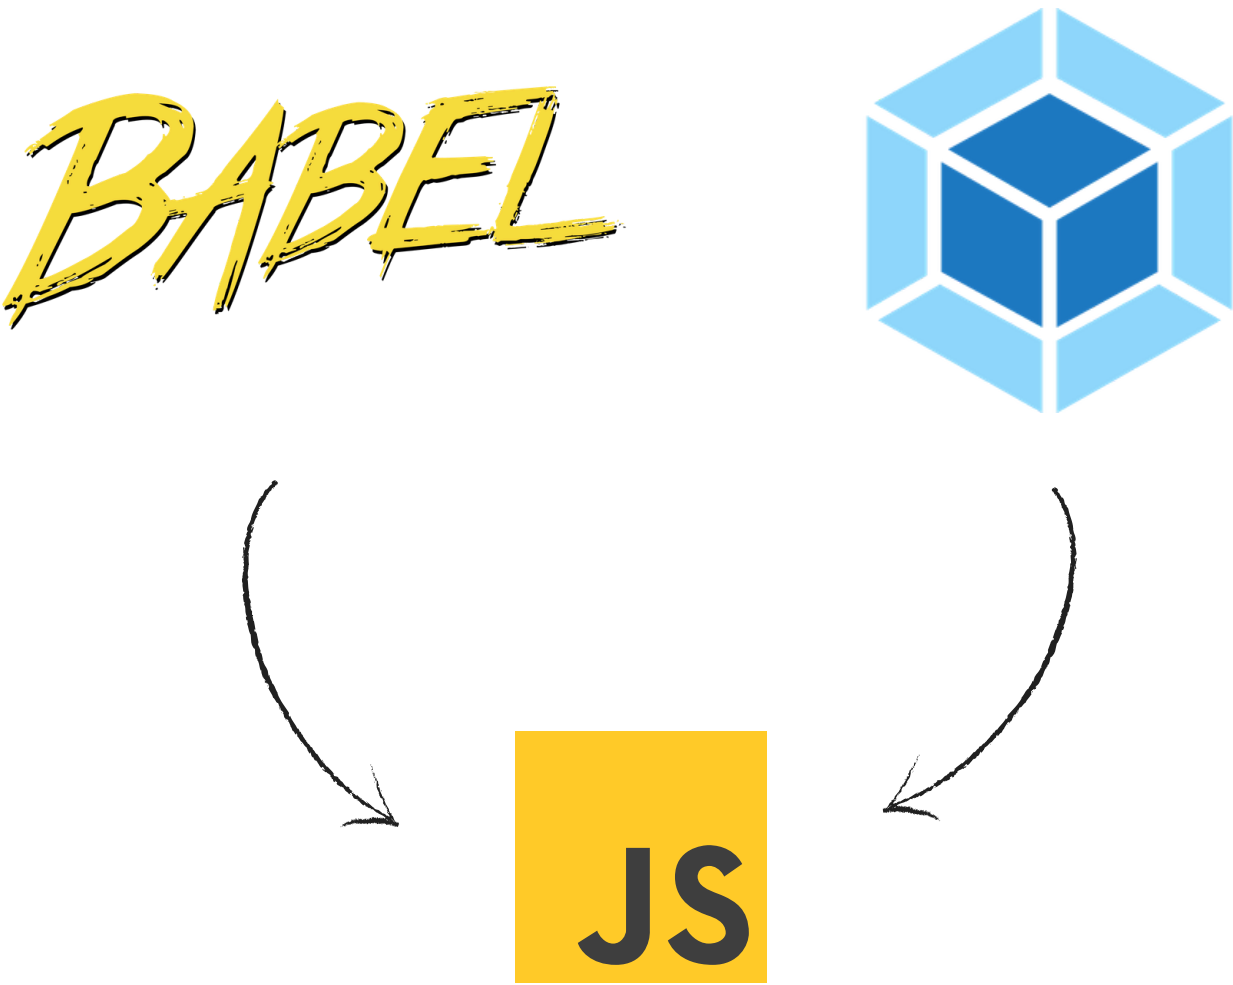


With Vite 



With Create-React-App Library

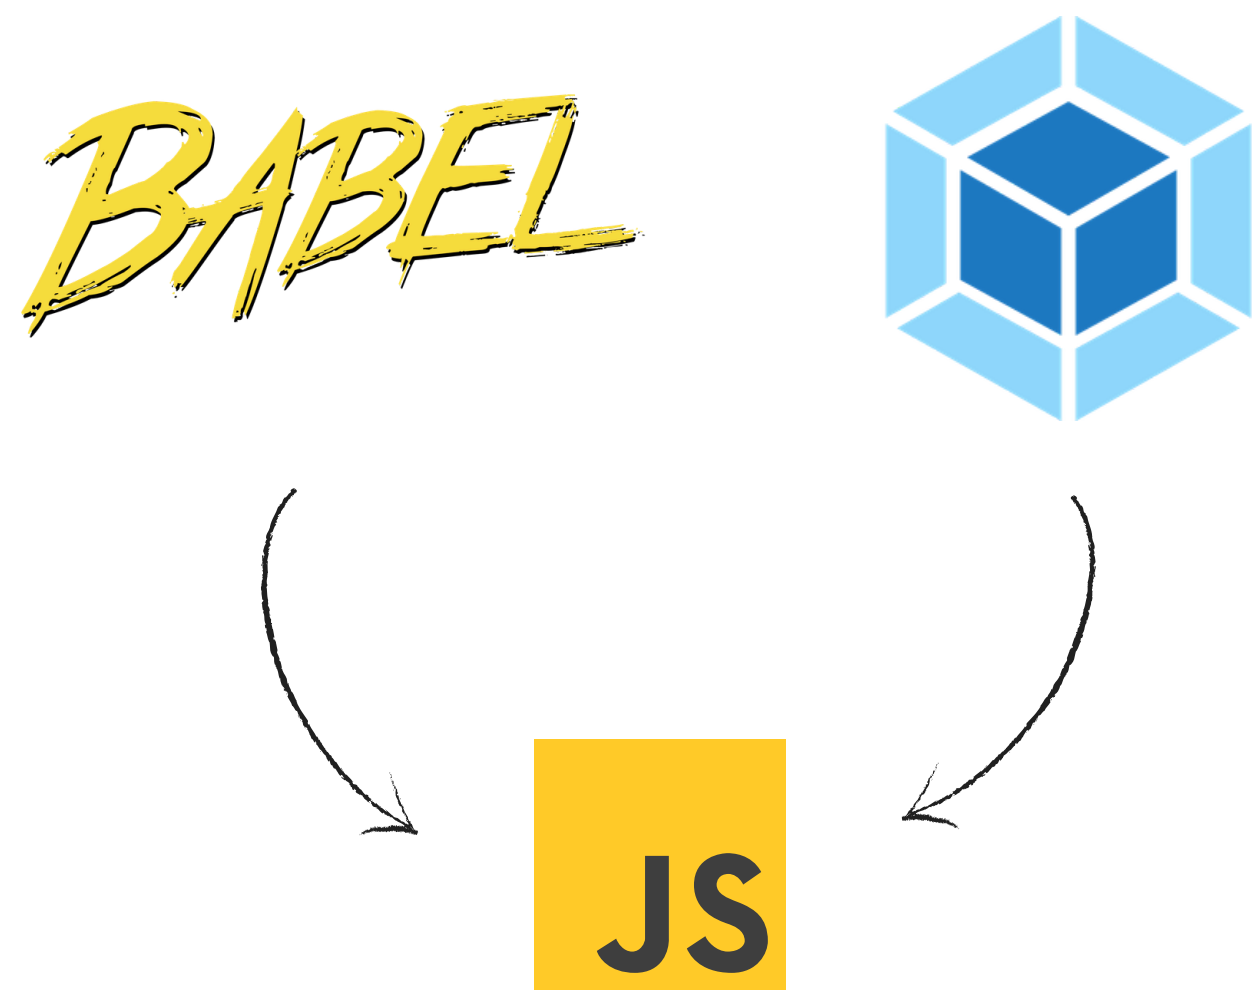

With Vite 

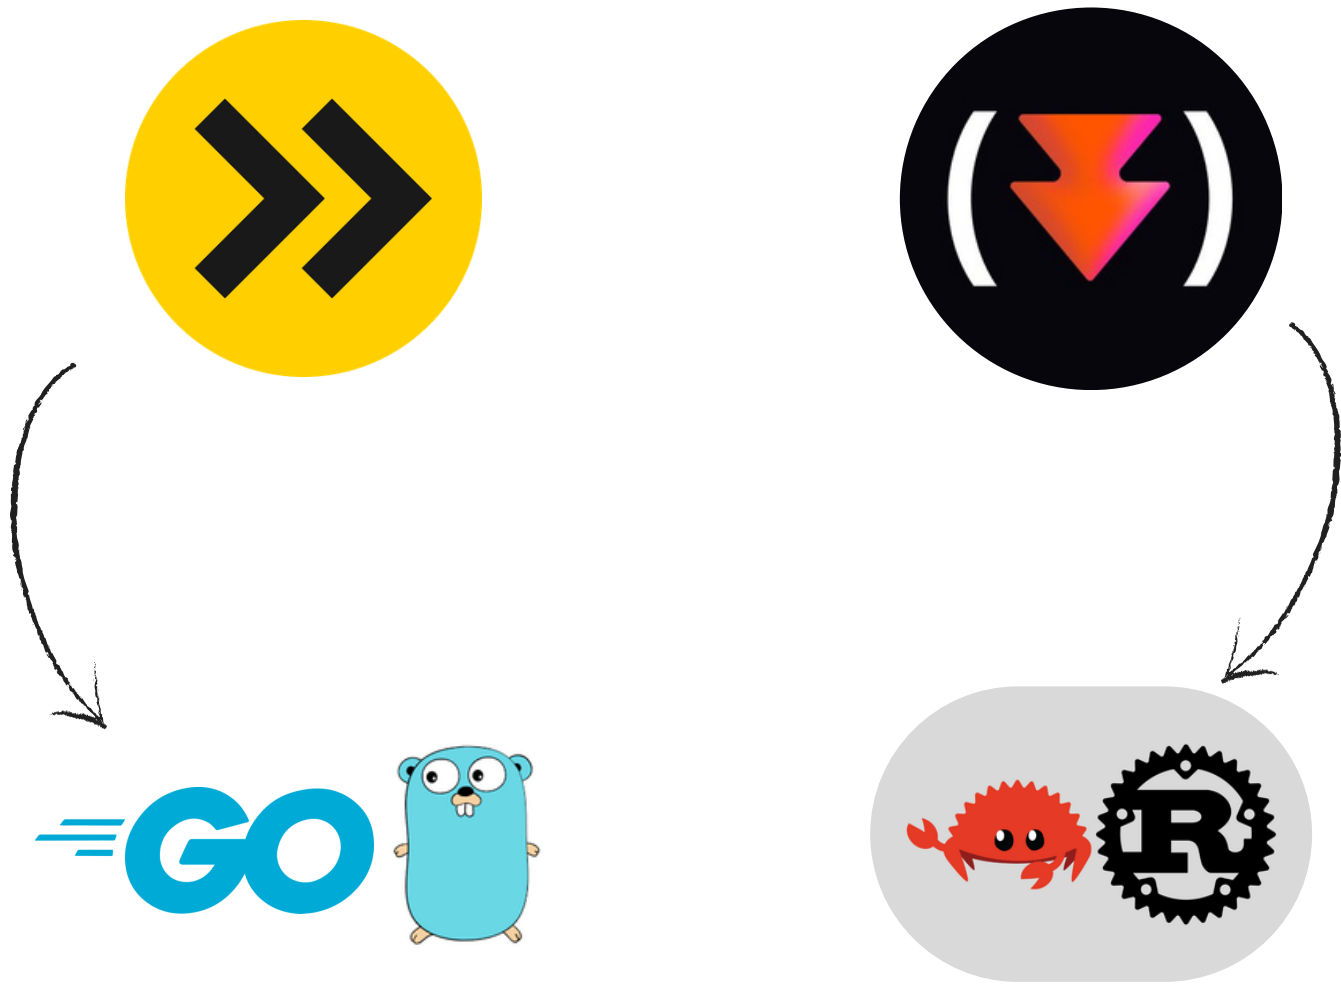



# Create React App

## Step 1: Add a DOM Container to the HTML

First, open the HTML page you want to edit. Add an empty `<div>` tag to mark the spot where you want to display something with React. For example:

```
<!-- ... existing HTML ... -->  
  
<div id="like_button_container"></div>  
  
<!-- ... existing HTML ... -->
```

## Step 2: Add the Script Tags

Next, add three `<script>` tags to the HTML page right before the closing `</body>` tag:

```
<!-- ... other HTML ... -->  
  
<!-- Load React. -->  
<!-- Note: when deploying, replace "development.js" with "production.min.js". -->  
<script src="https://unpkg.com/react@17/umd/react.development.js" crossorigin></script>  
<script src="https://unpkg.com/react-dom@17/umd/react-dom.development.js" crossorigin></script>  
  
<!-- Load our React component. -->  
<script src="like_button.js"></script>  
  
</body>
```

```
// ... the starter code you pasted ...  
  
const domContainer = document.querySelector('#like_button_container');  
ReactDOM.render(e(LikeButton), domContainer);
```

## React From Scratch

### Create-React-App Library



```
npx create-react-app my-app  
cd my-app  
npm start
```



```
npm create vite@latest my-app  
cd my-app  
npm run dev
```



**THANK YOU**