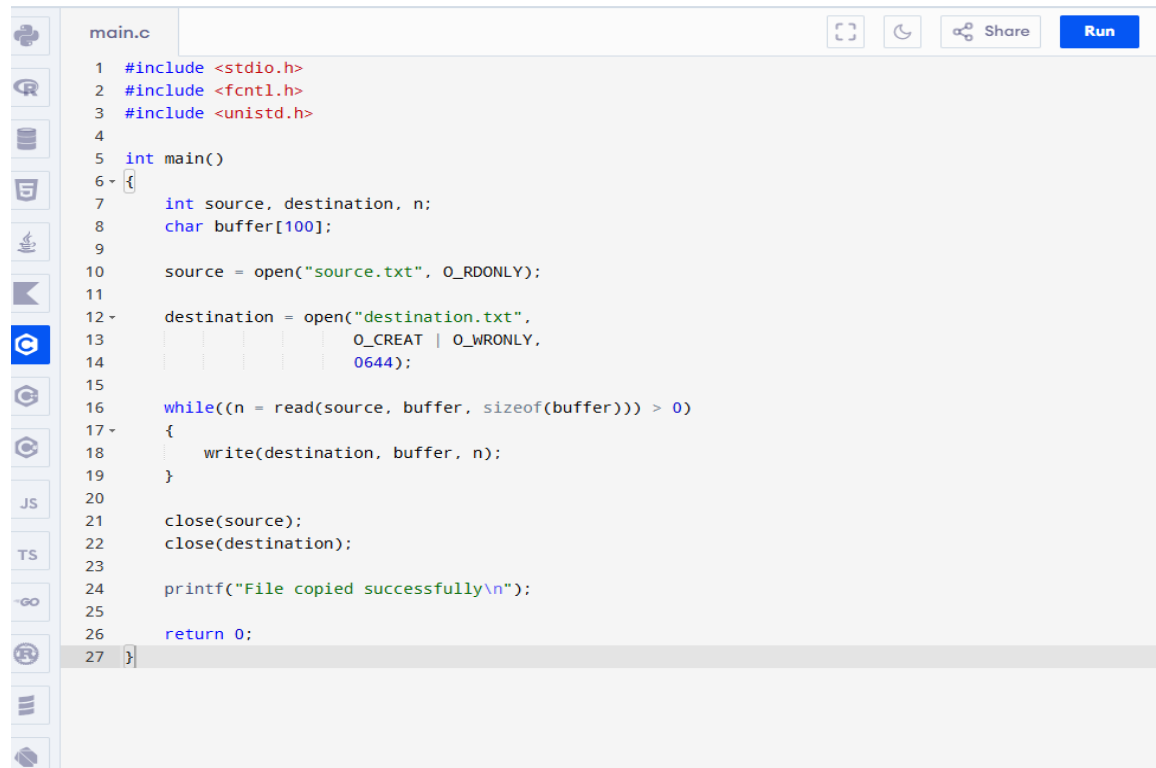


Name: A. Mounish

Reg no :192472273


2. Identify the system calls to copy the content of one file to another and illustrate the same using a C program.

Code:

A screenshot of a code editor window titled 'main.c'. The editor contains a C program for copying a file. The code includes headers for stdio, fcntl, andunistd. It defines a main function that opens 'source.txt' for reading and 'destination.txt' for writing (creating if it doesn't exist). It then uses a while loop with read and write system calls to copy the content of source.txt into destination.txt. After copying, it closes both files and prints 'File copied successfully' followed by a newline. The program returns 0. The editor has a sidebar with various icons and a top bar with 'Share' and 'Run' buttons.

```
1 #include <stdio.h>
2 #include <fcntl.h>
3 #include <unistd.h>
4
5 int main()
6 {
7     int source, destination, n;
8     char buffer[100];
9
10    source = open("source.txt", O_RDONLY);
11
12    destination = open("destination.txt",
13                       O_CREAT | O_WRONLY,
14                       0644);
15
16    while((n = read(source, buffer, sizeof(buffer))) > 0)
17    {
18        write(destination, buffer, n);
19    }
20
21    close(source);
22    close(destination);
23
24    printf("File copied successfully\n");
25
26    return 0;
27 }
```

Output:

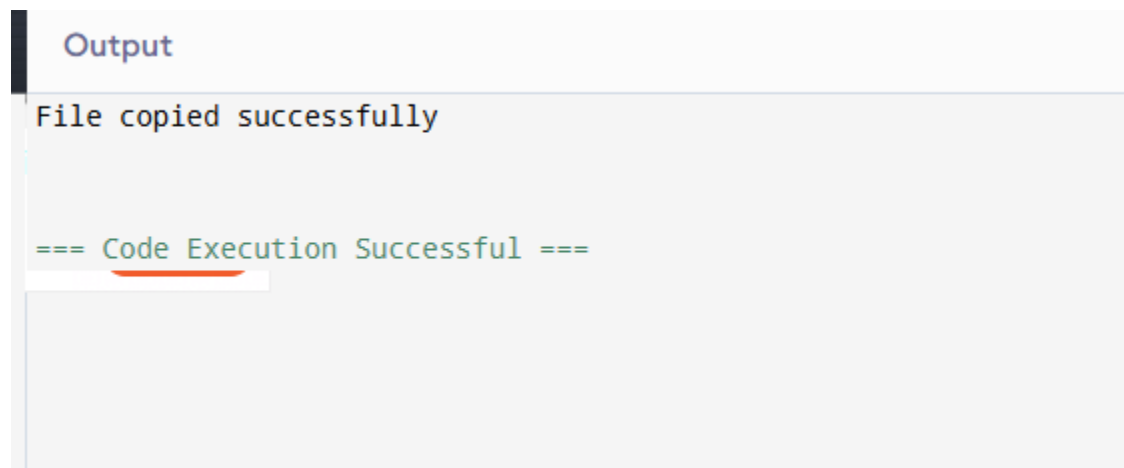A screenshot of the output window. It shows the text 'File copied successfully' on the first line. On the second line, there is a separator '=== Code Execution Successful ===' where 'Code Execution Successful' is highlighted with a red underline. The output window has a title bar that says 'Output' and a vertical scrollbar on the left.

```
Output
File copied successfully

=== Code Execution Successful ===
```