# ASSIGNMENT 23

## DOCKER TOMCAT SERVER HOSTING

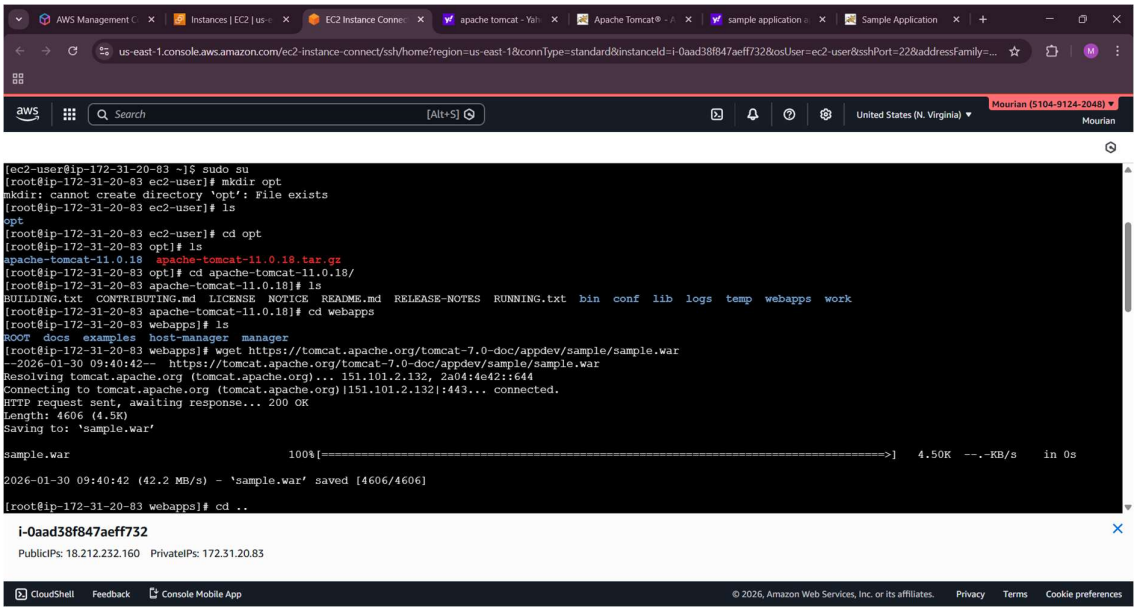


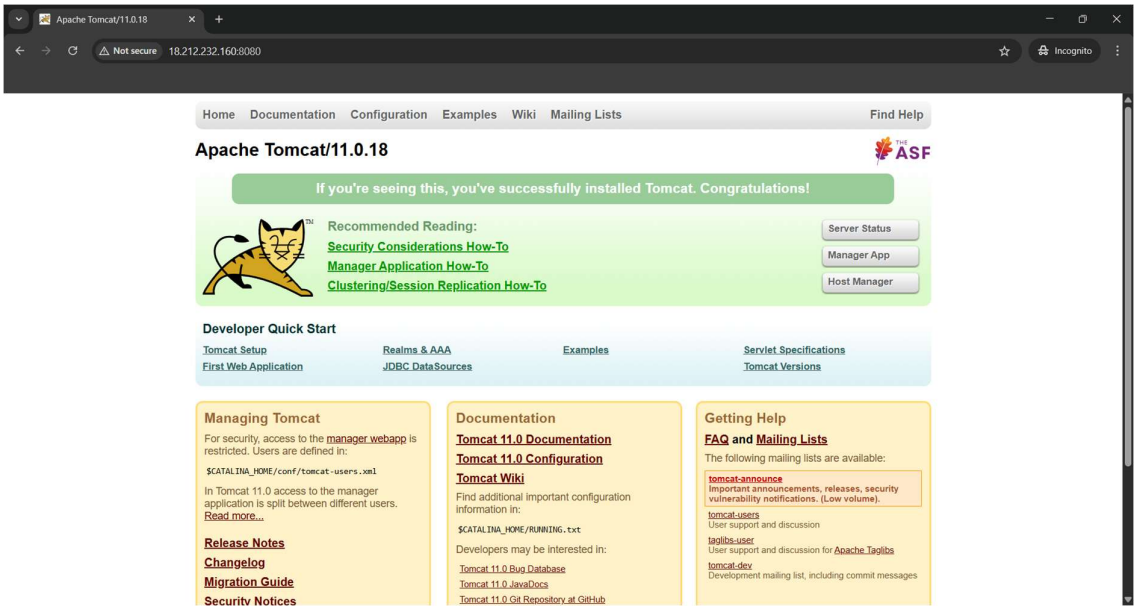

# SAMPLE TOMCAT HTTPD HOSTING:

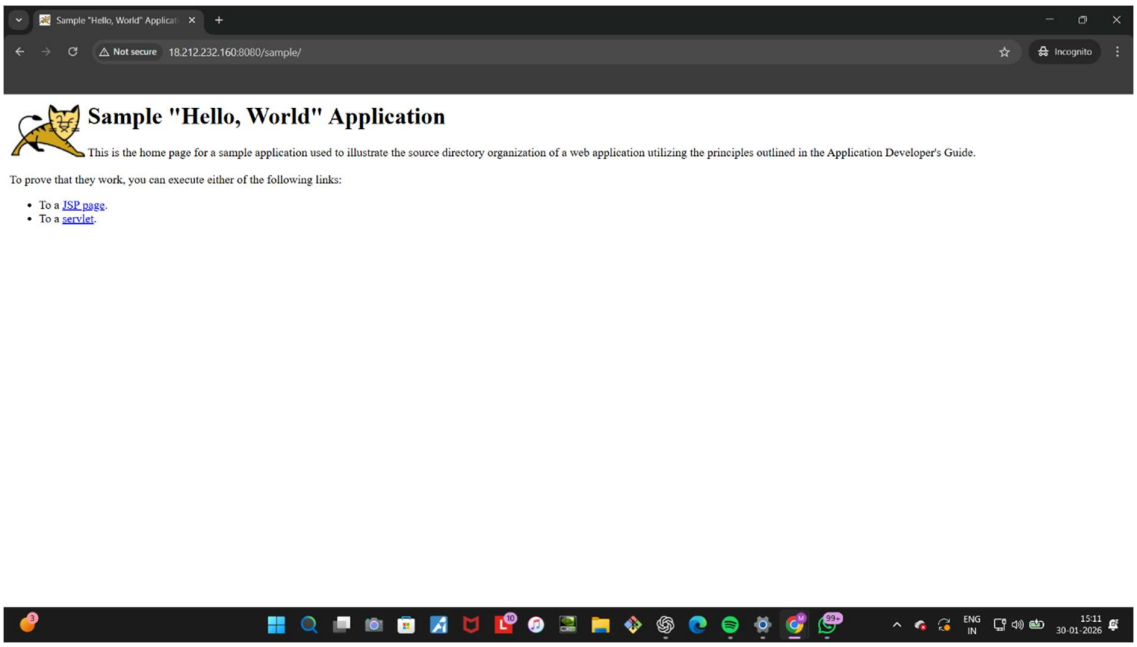


# USED COMMANDS TO EXECUTE THE WEB HOSTING :

---

**1. yum install java**

This command installs Java on the Linux system.
Apache Tomcat is a Java-based application server and requires Java to run.
It provides the Java Runtime Environment needed for web applications.

---

**2. cd /opt**

This command changes the working directory to /opt.
The /opt directory is commonly used for installing third-party software.
Tomcat is usually installed here for better organization.

---

**3. wget apache-tomcat-9.0.115.tar.gz.asc**

This command downloads the Tomcat 9 signature (.asc) file.
The .asc file is used only for verification.
It does not contain the actual Tomcat server files.

---

**4. wget apache-tomcat-11.0.18.tar.gz**

This command downloads the Apache Tomcat 11 installation package.
The .tar.gz file contains all required server files.
This is the correct package used to install Tomcat.

---

**5. rm -rf apache-tomcat-9.0.115.tar.gz.asc**

This command removes the unnecessary signature file.
It helps clean unwanted files from the directory.
Keeps the system organized.

---

**6. tar -xvzf apache-tomcat-11.0.18.tar.gz**

This command extracts the Tomcat 11 archive file.
All Tomcat directories such as bin, conf, and webapps are created.
This completes the Tomcat installation process.

---

**7. mkdir opt**

This command creates a directory named opt.
Directories help organize software files.
Used due to navigation or path correction.

---

**8. cd opt**

This command changes the directory to opt.
It allows operations inside that directory.
Used for file management.

---

**9. chown -R ec2-user:ec2-user apache-tomcat-11.0.18**

This command changes ownership of Tomcat files.
It allows the ec2-user to start and manage Tomcat.
Prevents permission-related errors.

---

**10. ls**

This command lists files and directories.
It helps verify downloaded and extracted files.
Used to confirm Tomcat installation.

---

**11. ls -lrt**

This command lists files with permissions and timestamps.
It shows file ownership and modification details.
Useful for verification and debugging.

---

**12. cd apache-tomcat-11.0.18/bin**

This command navigates to the Tomcat bin directory.
Startup and shutdown scripts are located here.
Used to control the Tomcat server.

---

**13. ./startup.sh**

This command starts the Apache Tomcat server.
Tomcat begins running on port 8080.
Web applications can now be accessed through a browser.

---

**14. cd apache-tomcat-11.0.18/webapps**

This command enters the webapps directory.
All web applications are deployed here.
WAR files placed here are auto-deployed.

---

**15. wget sample.war**

This command downloads a sample Java web application.
The WAR file is automatically deployed by Tomcat.
Used to test Tomcat functionality.

---

**16. ./shutdown.sh**

This command stops the Apache Tomcat server safely.
It shuts down all running services.
Used before restarting or maintenance.

---

**17. history**

This command displays all previously executed commands.
It helps review and track system activity.
Useful for troubleshooting and auditing.

---