

Thực hành


<http://chihaone.22web.org/?i=1>

e: chọn 1 trong 2


=> Sử dụng bootstrap 5 và các plugin nếu có

- [Pioted | Responsive Bootstrap 5 Landing Template \(pioted-bootstrap-4.netlify.app\)](https://pioted.netlify.app)
- Hoặc
- [Pioted | Responsive Bootstrap 5 Landing Template \(pioted-bootstrap-4.netlify.app\)](https://pioted.netlify.app)

22web.org Tiên

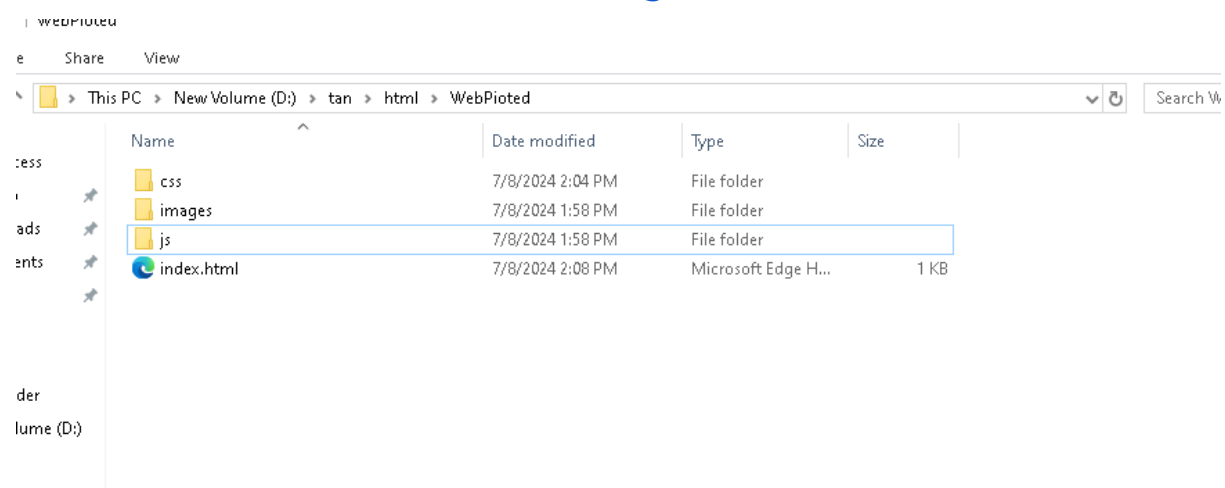


```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5   <meta name="viewport" content="width=device-width, initial-scale=1.0">
6
7   <link rel="stylesheet" href="css/header.css">
8   <link rel="stylesheet" href="css/footer.css">
9   <link rel="stylesheet" href="css/main.css">
10  <link rel="stylesheet" href="css/root.css">
11
12   <title>Web </title>
13 </head>
14 <body>
15   <header>
16
17   </header>
18   <main>
19     <section id="intro">
20     </section>
21     <section id="products">
22     </section>
23   </main>
24   <footer>
25
26   </footer>
27 </body>
28 </html>
```

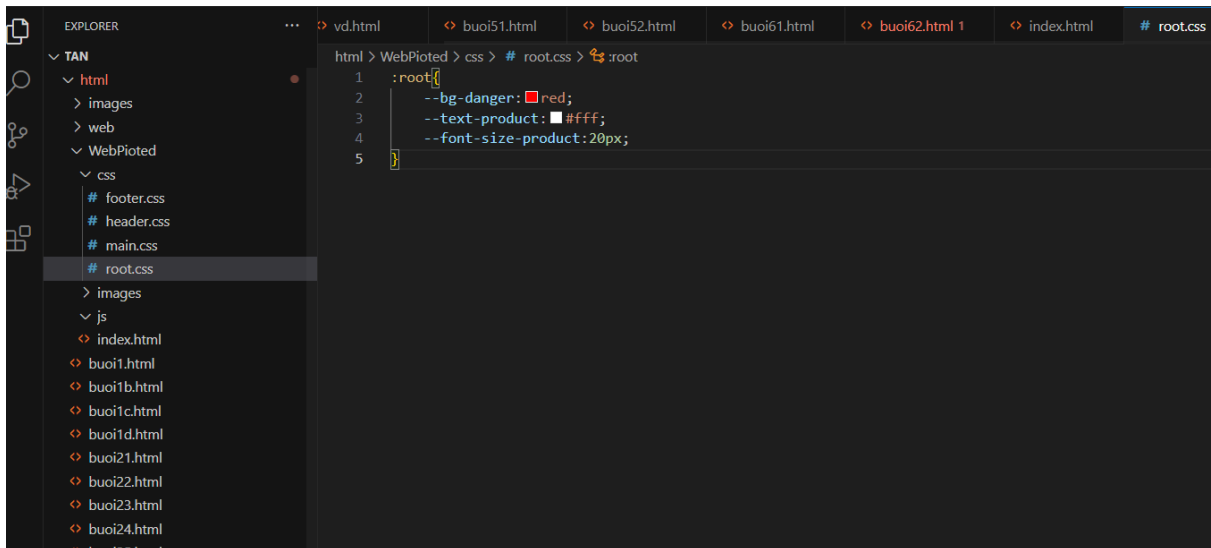

This screenshot shows the Visual Studio Code interface with the Explorer panel on the left and the Editor panel on the right. The Explorer panel shows a project structure with a folder named 'TAN' containing subfolders 'html', 'images', 'web', and 'WebPlioted'. The 'WebPlioted' folder contains a 'css' subfolder with files 'footer.css', 'header.css', 'main.css', and 'root.css'. The 'root.css' file is selected. The Editor panel shows the content of 'root.css', which contains a CSS root selector with three custom properties: '--bg-danger: red;', '--text-product: #fff;', and '--font-size-product: 20px;'. The file path in the breadcrumb is 'html > WebPlioted > css > # root.css > :root'.

```
1 :root{
2   --bg-danger: red;
3   --text-product: #fff;
4   --font-size-product: 20px;
5 }
```

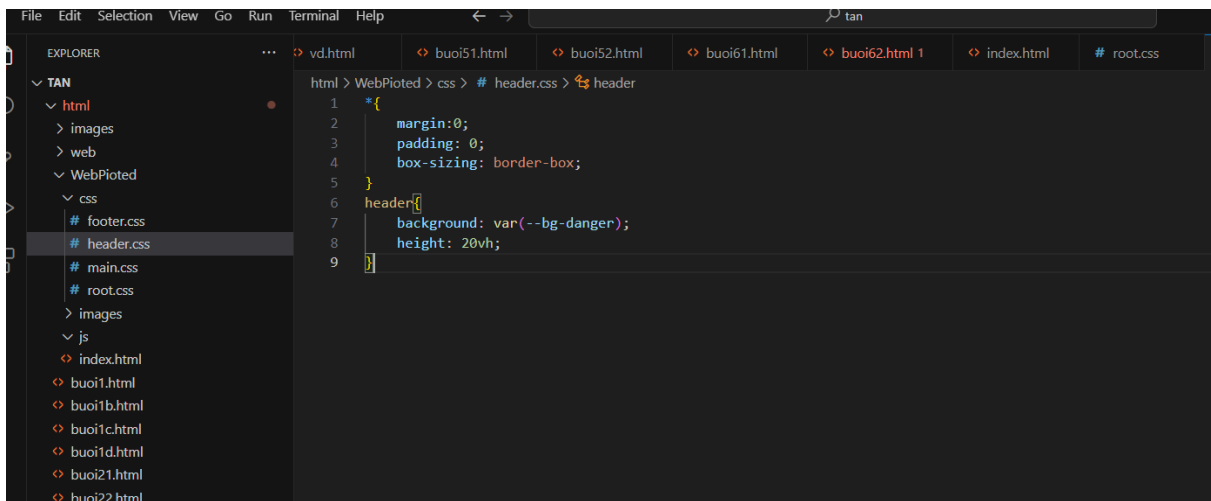

This screenshot shows the Visual Studio Code interface with the Explorer panel on the left and the Editor panel on the right. The Explorer panel shows the same project structure as the first screenshot, but the 'header.css' file in the 'WebPlioted/css' folder is selected. The Editor panel shows the content of 'header.css', which contains a CSS reset for the body and a header selector. The body selector sets 'margin: 0;', 'padding: 0;', and 'box-sizing: border-box;'. The header selector sets 'background: var(--bg-danger);' and 'height: 20vh;'. The file path in the breadcrumb is 'html > WebPlioted > css > # header.css > header'.

```
1 *{
2   margin: 0;
3   padding: 0;
4   box-sizing: border-box;
5 }
6 header{
7   background: var(--bg-danger);
8   height: 20vh;
9 }
```

https://drive.google.com/drive/folders/10i7Tla6D5GRcMy55pJEsjUQH_lYI71qC?usp=sharing

<https://drive.google.com/drive/folders/1u8nMvzZswysUAYeBSfYT6HaAxbOsbI3w?usp=sharing>

Thầy ơi, hơn 3h rồi mà em chưa nghe chuông
nghỉ giữa lao