

(Big) Data Engineering In Depth

Moustafa Mahmoud

Data Solution Architect



Outline

- 1. Hive
 - 1.1 Query data lakes/HDFS using Hive
 - 1.2 Introduction to hive
 - 1.3 Performance Tuning
 - 1.4 Further Readings and Assignment

Chapter: Hive

• Query data lakes/HDFS using Hive.

- Query data lakes/HDFS using Hive.
- Introduction to Hive

- Query data lakes/HDFS using Hive.
- Introduction to Hive
- Comparing Hive to Traditional databases.

- Query data lakes/HDFS using Hive.
- Introduction to Hive
- Comparing Hive to Traditional databases.
- Hive Components and Architecture.

- Query data lakes/HDFS using Hive.
- Introduction to Hive
- Comparing Hive to Traditional databases.
- Hive Components and Architecture.
- Relational Data Analysis with Hive.

- Query data lakes/HDFS using Hive.
- Introduction to Hive
- Comparing Hive to Traditional databases.
- Hive Components and Architecture.
- Relational Data Analysis with Hive.
- Hive Data Management.

- Query data lakes/HDFS using Hive.
- Introduction to Hive
- Comparing Hive to Traditional databases.
- Hive Components and Architecture.
- Relational Data Analysis with Hive.
- Hive Data Management.
- Hive Optimization.

Section: Query data lakes/HDFS using Hive

Query data lakes/HDFS using Hive

- Data lakes and HDFS store vast amounts of petabyte-scale data.
- Data analysts require efficient ways to query this data without delving into intricate Map-Reduce programming.
- SQL is a commonly used language for data manipulation, embraced by data analysts, developers, and business users worldwide.
- Hive, one of the early tools in this field, simplifies data analysis on big data by offering SQL-like querying capabilities for data lakes and HDFS.
- There are other tools like Trino/Presto, Snowflake, and Databricks that can be faster for data lake queries, which we will discuss later.

Section: Introduction to hive

Introduction to hive

Page 7/42

- Apache Hive is a powerful data warehousing and SQL-like query language tool within the Hadoop ecosystem.
- It was developed by Facebook and later contributed to the Apache Software Foundation, making it an open-source project.
- Apache Hive had its initial release on October 1, 2010.
- Hive provides a user-friendly interface to work with and analyze large datasets stored in Hadoop Distributed File System (HDFS) or other compatible storage systems.
- With its SQL-like language called HiveQL, users can write queries to extract, transform, and analyze data, making it accessible to a wide range of data professionals
- Apache Hive bridges the gap between the world of big data and traditional
 Data Engineering In Depth | Moustafa Mahmoud

Sub-Section: Overview of Apache Hive

Overview of Apache Hive


- Apache Hive is a high-level data warehousing and SQL-like query language tool built on top of MapReduce.
- It acts as an abstraction layer, allowing users to work with large datasets stored in Hadoop Distributed File System (HDFS) without needing to write complex MapReduce jobs themselves.
- Under the hood, Hive generates MapReduce jobs that are executed on the Hadoop cluster. This means it leverages the distributed processing capabilities of Hadoop for scalability and parallel processing.
- Hive has evolved beyond MapReduce to support other execution engines, such as Tez and Spark, which can enhance performance and usability. This will be discussed later.

Sub-Section: Abstract Components of Apache Hive

Abstract Components of Apache Hive

- Hive Clients.
- Hive Services.
- Hive Storage and Computing.

Abstract Components of Apache Hive

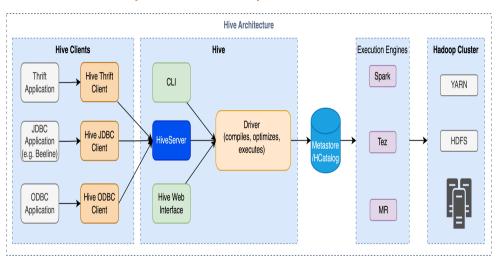

Hive Clients

- Hive provides various drivers for seamless communication with different types of applications.
- For Thrift-based applications, Hive offers the Thrift client for effective communication.
- If you are working with Java-related applications, Hive provides JDBC drivers for smooth integration.
- Additionally, for other types of applications, Hive offers ODBC drivers, ensuring versatility.
- These clients and drivers serve as intermediaries, connecting your applications with Hive Server in the Hive services.



Hive Services

- Hive Services act as the intermediaries for client interactions with Hive.
- When clients need to perform query-related operations in Hive, they communicate through Hive Services.
- The Command Line Interface (CLI) serves as a Hive service for Data Definition Language (DDL) operations.
- All drivers, including JDBC, ODBC, and other client-specific applications, communicate with Hive Server and the primary driver within Hive Services.
- The main driver in Hive Services processes requests from various applications, directing them to the metastore and data systems for further processing.

Hive Services | CLI (Continued)

- Hive Command Line Interface (CLI)
 - The CLI is the most common way to access Hive.
 - Its design can make it challenging to use programmatically.
 - It is a fat client, requiring a local copy of all Hive components and configurations.
 - It needs a copy of a Hadoop client and its configuration.
 - The CLI functions as an HDFS client, a MapReduce client, and a JDBC client (for accessing the metastore).
 - Even with the correct client installation, ensuring all necessary network access can be complex, especially across subnets or datacenters.



- HiveServer2: HiveServer2 is a service that allows clients to submit HiveQL queries programmatically. It provides a remote interface for running Hive queries and managing sessions.
- JDBC and ODBC: Hive supports JDBC (Java Database Connectivity) and ODBC (Open Database Connectivity) protocols, enabling users to connect to Hive using popular programming languages and tools.
- Thrift Service: Hive uses the Apache Thrift framework to provide a cross-language service interface. This enables communication between clients and the Hive server.
- Sessions: When clients connect to HiveServer2, sessions are established to manage their interactions. Sessions help keep track of query state and context.

- Hive provided a SQL abstraction layer for MapReduce.
- Limitations existed, especially regarding ODBC and JDBC client connections.
- Open source community introduced Hive Server to address these issues.
- Hive Server enabled ODBC connections, enhancing compatibility with various applications.

- Hive Server was introduced to overcome limitations.
- Allowed clients to access the metastore using ODBC connections.
- Facilitated integration with applications like Toad, or SQuirreL.

- While a significant improvement, Hive Server had its limitations:
 - User concurrency restrictions.
 - Security integration with LDAP posed challenges.

- HiveServer2 was designed to overcome Hive Server limitations.
- Built on a Thrift Service architecture.
- Comprises multiple sessions with drivers, compilers, and executors.
- The metastore remains a crucial component, ensuring seamless data management.

- HiveServer2 provides enhanced security features.
- Supports various authentication methods, including:
 - Kerberos
 - Custom authentication
 - Pass-through LDAP authentication
- These methods ensure secure client connections.

- HiveServer2 offers flexibility in connection modes.
- All connection components—JDBC, ODBC, and Beeline—can use any supported authentication method.
- Additionally, HiveServer2 can operate in either HTTP mode or TCP (Binary) mode, catering to diverse connectivity needs.

Hive Services | Hive Driver

- The Hive Driver is a critical component responsible for query execution.
- It consists of several key components:
 - Query Compiler.
 - Optimizer.
 - Execution
- Together, these components ensure efficient and effective query processing in Hive.

- Query Compiler
 - The Query Compiler takes HiveQL queries and translates them into executable jobs.
 - It's responsible for the logical and physical query planning, ensuring that the queries are optimized for efficient execution.

- Query Optimizer
 - It applies optimization techniques, including predicate pushdown and join optimization, to enhance query performance.
 - This ensures that queries are executed as efficiently as possible.

- The Execution Engine is responsible for the actual execution of queries.
- It encompasses several key tasks, including:
 - **Plan Execution**: It executes the query plan generated by the Query Compiler.
 - Job(s) Generation: Depending on the chosen execution engine (e.g., MapReduce), it generates the necessary jobs to process data in parallel.
 - Submission to Hadoop: It submits these jobs to the Hadoop cluster or other compatible compute environments for execution.
 - Progress Monitoring: It continuously monitors the progress of the query execution, providing insights into job completion and overall performance.



Metadata Store (e.g., MySQL)

- The Metadata Store is a relational database, such as MySQL, that stores critical information about tables, columns, partitions, and their relationships.
- This database acts as a catalog, enabling Hive to understand the data's structure and schema.

Data Storage

- Hive operates on data stored in HDFS or compatible storage systems.
- Instead of transforming the data, it interprets it using a schema on read approach.
- This allows users to work with data without the need for extensive data preparation.

Sub-Section: Job Execution Flow in Hive

Job Execution Flow in Hive

- Receive SQL Query.
 - Parse HiveQL.
 - Make optimization.
 - Plan execution.
 - Submit job(s) to the cluster.
 - Monitor the progress.
 - Process the data in MapReduce or Spark.
 - Store the data in HDFS.

Sub-Section: Hive Schema and Data Storage

Hive Schema and Data Storage

- Hive queries operate on tables, similar to RDBMS.
 - A table corresponds to a directory in storage (HDFS, S3, GCS, or Azure).
 - Each table comprises one or more files.
 - Every table is associated with a specific file format.
 - Hive stores table structure and location in the metadata store (RDBMS).
 - Hive supports various file formats, such as Parquet, ORC, and Text.

Hive Schema and Data Storage (Continued)

- Hive queries reference the metastore to access table location and structure.
- While queries interact with the file system, metadata is stored in the RDBMS.

Section: Performance Tuning

Sub-Section: Query Execution Plan

Query Execution Plan

- The Hive driver is responsible for translating SQL statements into an execution plan for the target execution engine.
- The process involves several key steps:
 - The parser parses the SQL statement and generates an Abstract Syntax Tree (AST) representing logical operations like SELECTS, JOINS, UNIONS, groupings, and more.
 - 2. The planner retrieves table metadata from the Hive Metastore, including HDFS file locations, storage formats, row counts, etc.
 - 3. The query optimizer utilizes the AST and table metadata to produce a physical operation tree known as the execution plan, defining the physical operations needed to retrieve data, such as nested loop joins, sort-merge joins, hash joins, index joins, and more.

Query Execution Plan

- The execution plan determines the tasks executed on the Hadoop cluster and significantly impacts performance in data analytics systems like Hive.
- The execution plan generated by the query optimizer has a substantial impact on performance.
- Differences in the execution plan can result in significant variations in execution time, ranging from seconds to hours.
- An optimal execution plan is crucial for efficient query processing in Hive.

Query Execution Plan

- The Cost-Based Optimization (CBO) plays a pivotal role in enhancing the execution plan.
- CBO leverages table statistics to make informed decisions regarding the performance costs associated with each potential execution plan.
- This intelligent optimization ensures that the Hive driver produces an optimal execution plan, improving query performance.

Sub-Section: Cost-Based Optimization

Section: Further Readings and Assignment

Thank you for watching!

See you in the next video ◎