


[Move to Variable Location]

Function

- Change the player's location based on values stored in variables.
- When used in conjunction with the event command “Move to remembered location”, the player can be sent to a place that was previously visited.

Settings

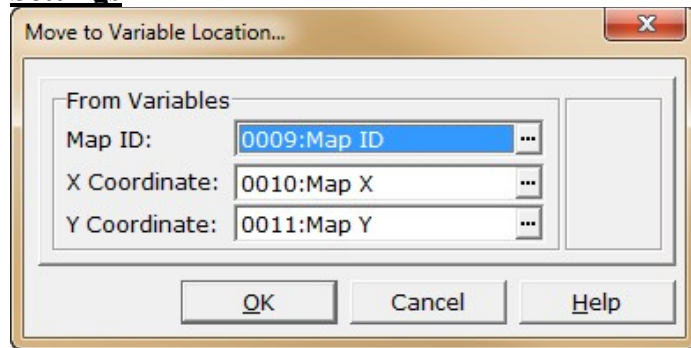

- Under [From Variables], specify variables from which to retrieve the Map ID, X coordinates and Y coordinates respectively.
- The variables can be chosen from the [Variables] window which can be opened by clicking [...].