


[Get Event ID]

Function

- Stores the event ID of a given location in a variable.

Settings

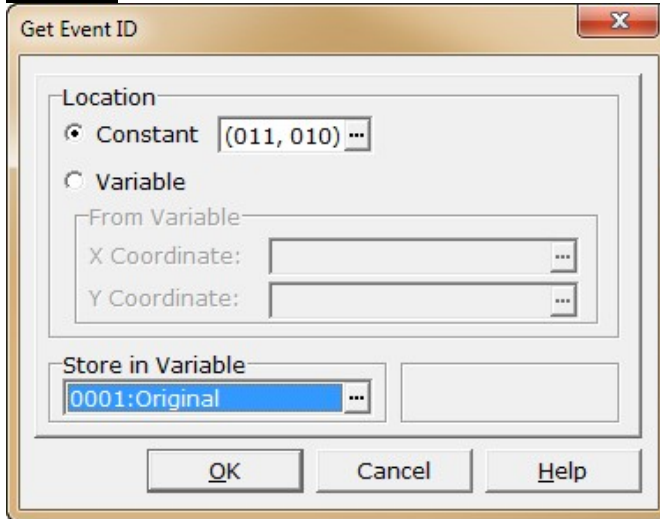

- From [Location], choose one of the following methods to specify the location to obtain the event ID of.
 - Constant
A specific location will be used. The location can be specified as follows.

1. Click the [...] button to open the [Location] window.



2. From the map displayed on the right side of the window, click the location to obtain the event ID of and click [OK].

- Variables

The position specified using variables will be used.

Under [From Variables], specify the variables that contain the X and Y coordinates of the target location. The variables can be chosen from the [Variables] window which can be opened by clicking the [...] button.

Under [Store in Variable], specify the variable that will receive the event ID. The variable can be chosen from the [Variables] window which can be opened by clicking the [...] button.

Notes

- The location to obtain the event ID of must be located on the same map as the event that contains this command.