

Algorithms Design

Chap04-Greedy Algorithms

College of Computer Science

Nankai University

Tianjin, P.R.China

Chap04-Greedy Algorithms Outline

4.1 Interval Scheduling and Interval Partitioning

4.2 Scheduling to Minimize Lateness

4.3 Optimal Caching


4.4 Shortest Paths in a Graph

4.5 Minimum Spanning Tree

4.8 Huffman Codes

4.1 Interval Scheduling

- Job j starts at s_j and finishes at f_j .
- Two jobs are **compatible** if they don't overlap.
- Goal: find **maximum** subset of mutually compatible jobs.

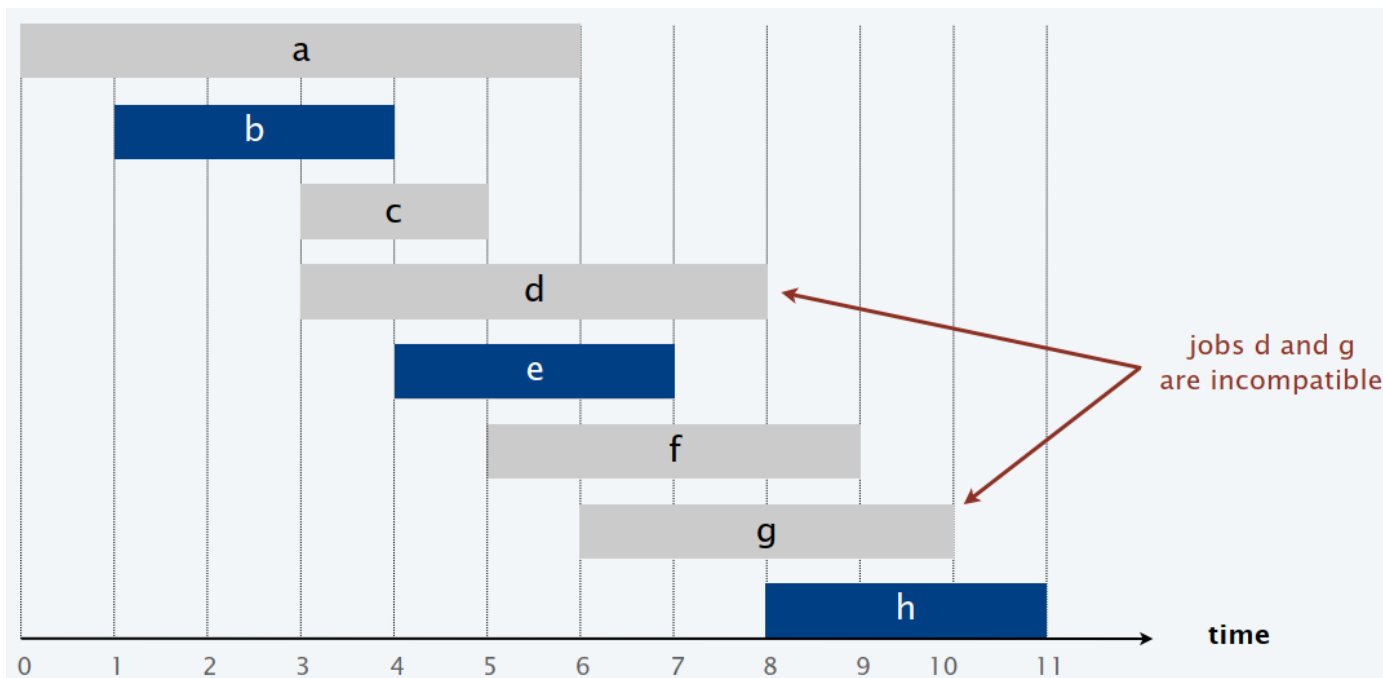

Quiz 4-1-1

Consider jobs in some order, taking each job provided it's compatible with the ones already taken. Which rule is optimal?

- A. [Earliest start time] Consider jobs in ascending order of s_j .
- B. [Earliest finish time] Consider jobs in ascending order of f_j .
- C. [Shortest interval] Consider jobs in ascending order of $f_j - s_j$.
- D. [Fewest conflicts] For each job j , count the number of conflicting jobs c_j . Schedule in ascending order of c_j .

4.1 Interval Scheduling

Greedy Choice.

- Consider jobs in some natural order.
Take each job provided it's compatible with the ones already taken.



counterexample for earliest start time



counterexample for shortest interval




counterexample for fewest conflicts

4.1 Interval Scheduling

Earliest-Finish-Time-First(EFTF) algorithm

EARLIEST-FINISH-TIME-FIRST ($n, s_1, s_2, \dots, s_n, f_1, f_2, \dots, f_n$)

SORT jobs by finish times and renumber so that $f_1 \leq f_2 \leq \dots \leq f_n$.

$S \leftarrow \emptyset$.  set of jobs selected


FOR $j = 1$ **TO** n

IF (job j is compatible with S)

$S \leftarrow S \cup \{ j \}$.

RETURN S .

4.1 Interval Scheduling

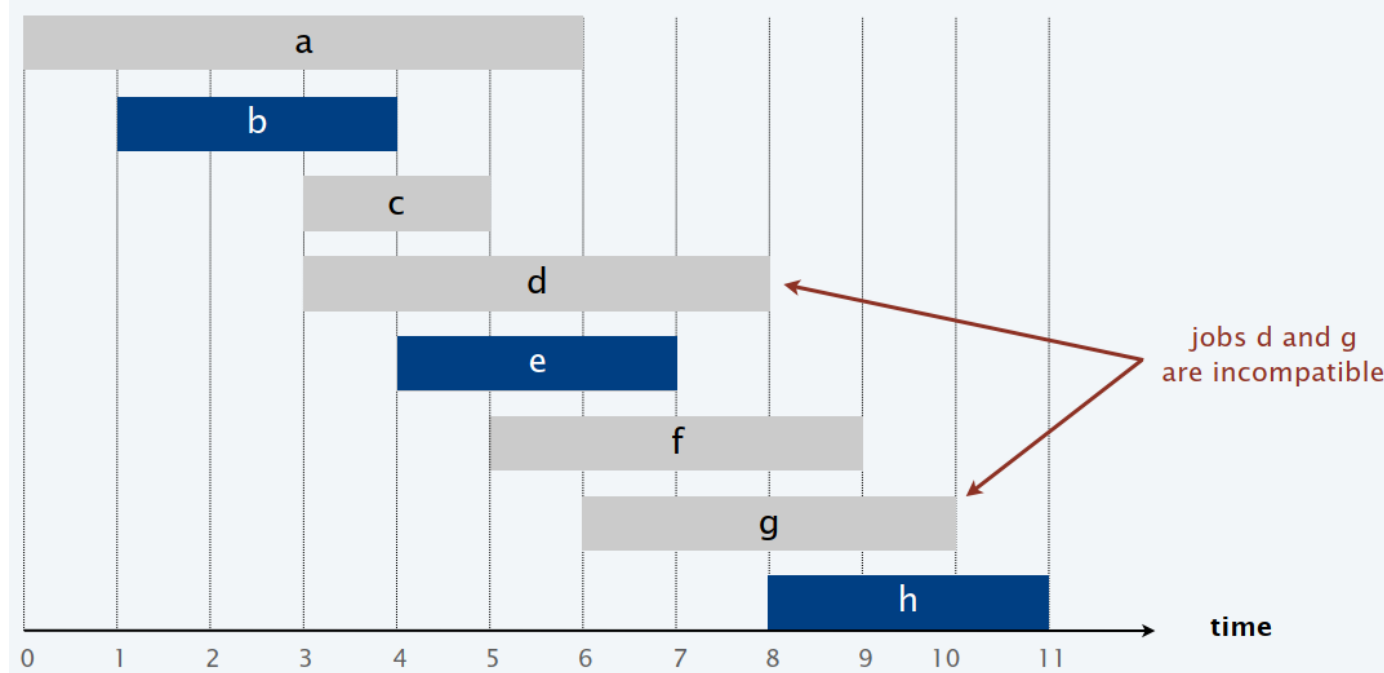

$b < c < a < e < d < f < g < h$

$S = \{b\}, S = \{b, e\}, S = \{b, e, h\}$

4.1 Interval Scheduling

Proposition. Can implement earliest-finish-time first in $O(n \log n)$ time.

- Keep track of job j^* that was added last to S .
- Job j is compatible with S iff $s_j \geq f_{j^*}$.
- Sorting by finish times takes $O(n \log n)$ time.

4.1 Interval Scheduling


Theorem. The earliest-finish-time-first algorithm is optimal.

Pf. [by contradiction]

- Assume greedy is not optimal, and let's see what happens.
- Let i_1, i_2, \dots, i_k denote set of jobs selected by greedy.
- Let j_1, j_2, \dots, j_m denote set of jobs in an optimal solution with $i_1 = j_1, i_2 = j_2, \dots, i_r = j_r$ for the largest possible value of r .


4.1 Interval Scheduling

E.g.

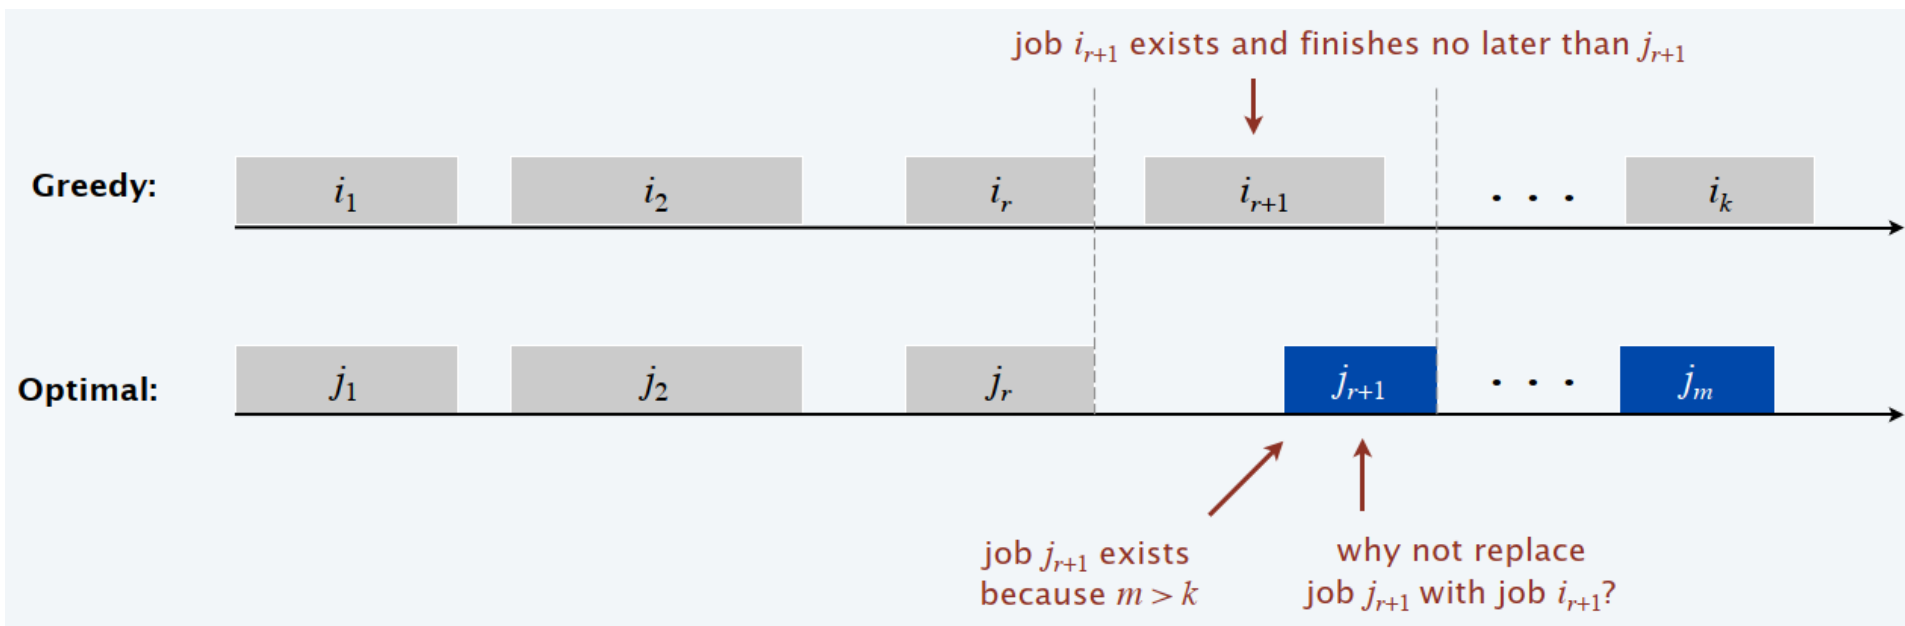

4.1 Interval Scheduling

E.g.

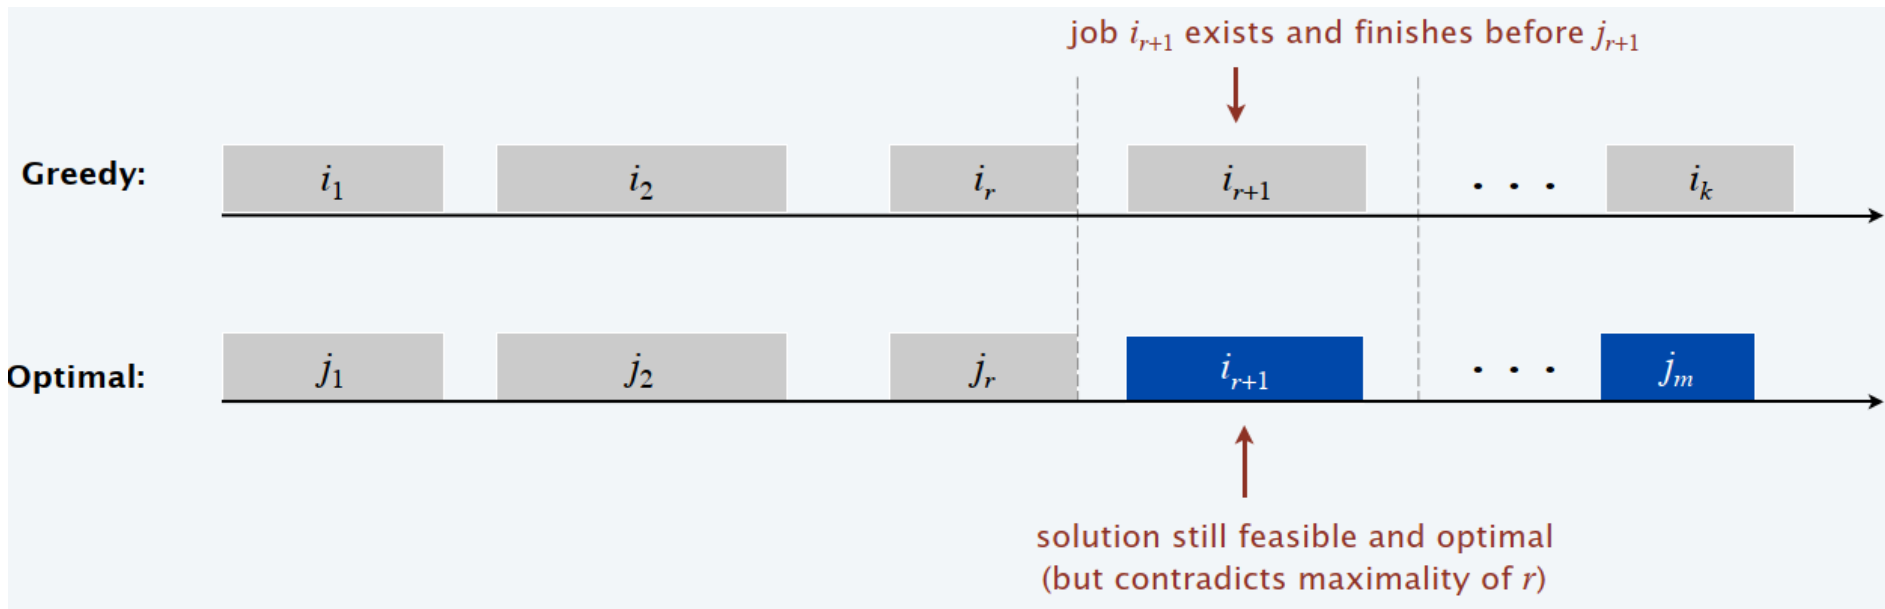

Quiz 4-1

Suppose that each job also has a positive weight and the goal is to find a maximum weight subset of mutually compatible intervals. Is the earliest-finish-time-first algorithm still optimal?

- A. Yes**, because greedy algorithms are always optimal.
- B. Yes**, because the same proof of correctness is valid.
- C. No**, because the same proof of correctness is no longer valid.
- D. No**, because you could assign a huge weight to a job that overlaps the job with the earliest finish time.


4.1 Interval Partitioning

Interval partitioning

- Lecture j starts at s_j and finishes at f_j .
- Goal: find **minimum** number of classrooms to schedule all lectures so that no two occur at the same time in the same room.


4.1 Interval Partitioning

E.g. This schedule uses **4** classrooms to schedule **10** lectures.

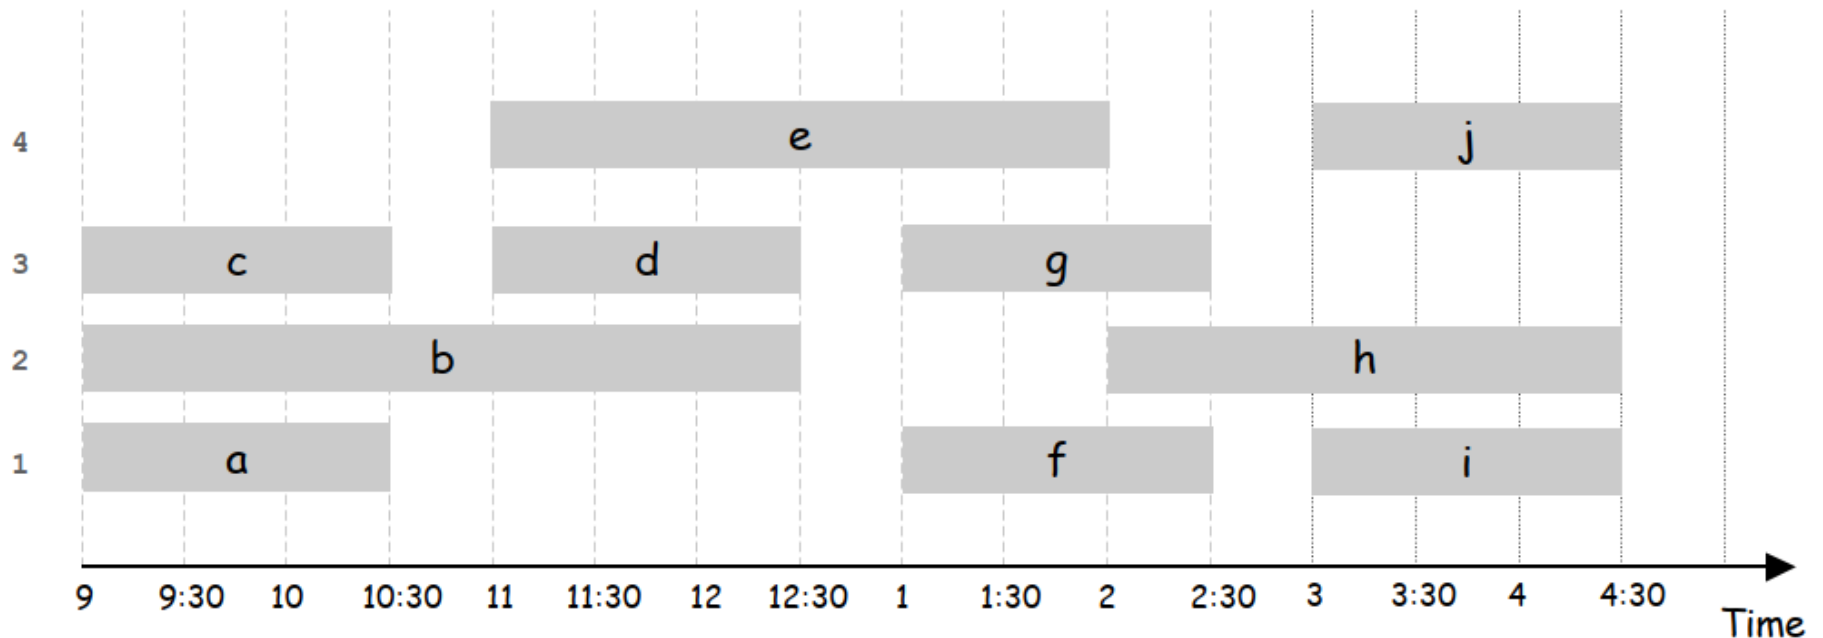

4.1 Interval Partitioning

E.g. This schedule uses **3** classrooms to schedule **10** lectures.

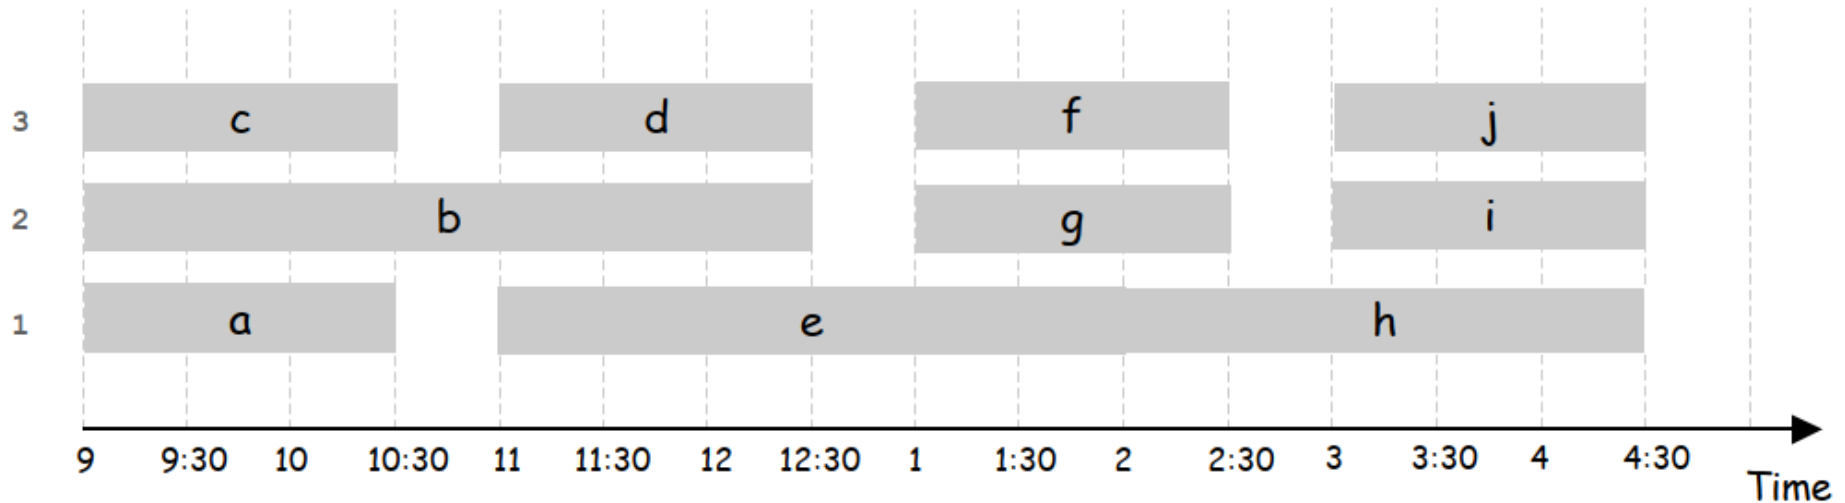

Quiz 4-2


Consider lectures in some order, assigning each lecture to first available classroom (opening a new classroom if none is available). Which rule is optimal?

- A. [Earliest start time] Consider lectures in ascending order of s_j .
- B. [Earliest finish time] Consider lectures in ascending order of f_j .
- C. [Shortest interval] Consider lectures in ascending order of $f_j - s_j$.
- D. [Fewest conflicts] For each lecture j , count the number of conflicting lectures c_j . Schedule in ascending order of c_j .

4.1 Interval Partitioning

EARLIEST-START-TIME-FIRST ($n, s_1, s_2, \dots, s_n, f_1, f_2, \dots, f_n$)

SORT lectures by start times and renumber so that $s_1 \leq s_2 \leq \dots \leq s_n$.

$d \leftarrow 0$.  number of allocated classrooms

FOR $j = 1$ **TO** n

IF (lecture j is compatible with some classroom)

 Schedule lecture j in any such classroom k .

ELSE

 Allocate a new classroom $d + 1$.


 Schedule lecture j in classroom $d + 1$.

$d \leftarrow d + 1$.

RETURN schedule.

4.1 Interval Partitioning

E.g.

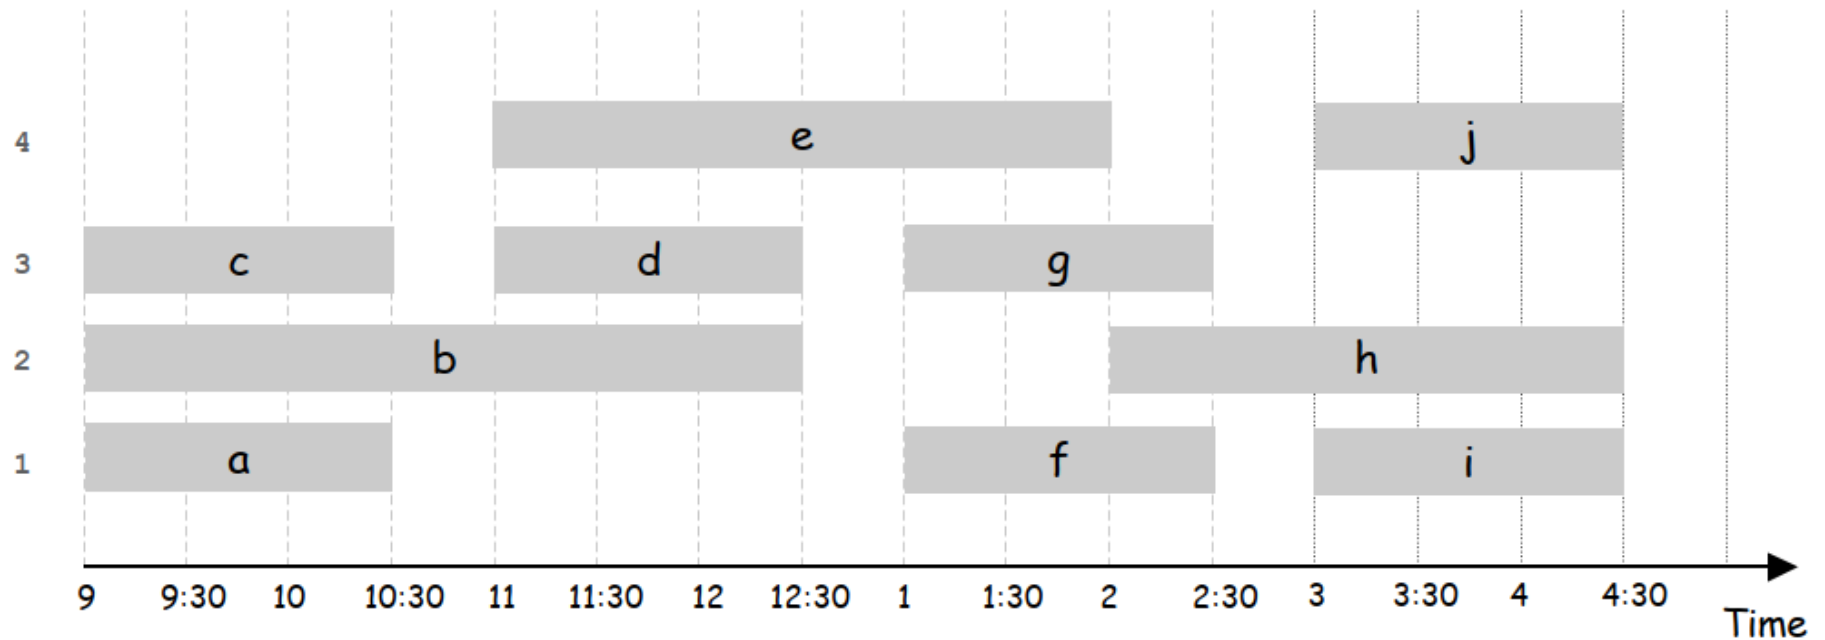

4.1 Interval Partitioning

Allocate new classroom 1

Schedule lecture $a(9)$ in classroom 1

Allocate new classroom 2

Schedule lecture $b(9)$ in classroom 2

Allocate new classroom 3

Schedule lecture $c(9)$ in classroom 3

4.1 Interval Partitioning

Schedule lecture d(11) in classroom 3/1

Schedule lecture e(11) in classroom 1/3

Schedule lecture f(13) in classroom 3/2

Schedule lecture g(13) in classroom 2/3

Schedule lecture h(14) in classroom 1

Schedule lecture i(15) in classroom 2/3

Schedule lecture j(15) in classroom 3/2

4.1 Interval Partitioning

Greedy Choice.

- Consider lectures in increasing order of start time: assign lecture to any compatible classroom.

Implementation. $O(n \log n)$.

- For each classroom k , maintain the finish time of the last job added.
- Keep the classrooms in a priority queue.

4.1 Interval Partitioning

Proposition. The earliest-start-time-first algorithm can be implemented in $O(n \log n)$ time.

Pf.

- Sorting by start times takes $O(n \log n)$ time.
- Store classrooms in a **priority queue** (key = finish time of its last lecture).
 - to allocate a new classroom, INSERT classroom onto priority queue.
 - to schedule lecture j in classroom k , INCREASE-KEY of classroom k to f_j .
 - to determine whether lecture j is compatible with any classroom, compare s_j to FIND-MIN
- Total # of priority queue operations is $O(n)$; each takes $O(\log n)$ time.


4.1 Interval Partitioning

Def. The **depth** of a set of open intervals is the maximum number that contain any given time.

Observation. Number of classrooms needed \geq depth.

4.1 Interval Partitioning

E.g. Depth of schedule below = 3 \Rightarrow schedule below is optimal.

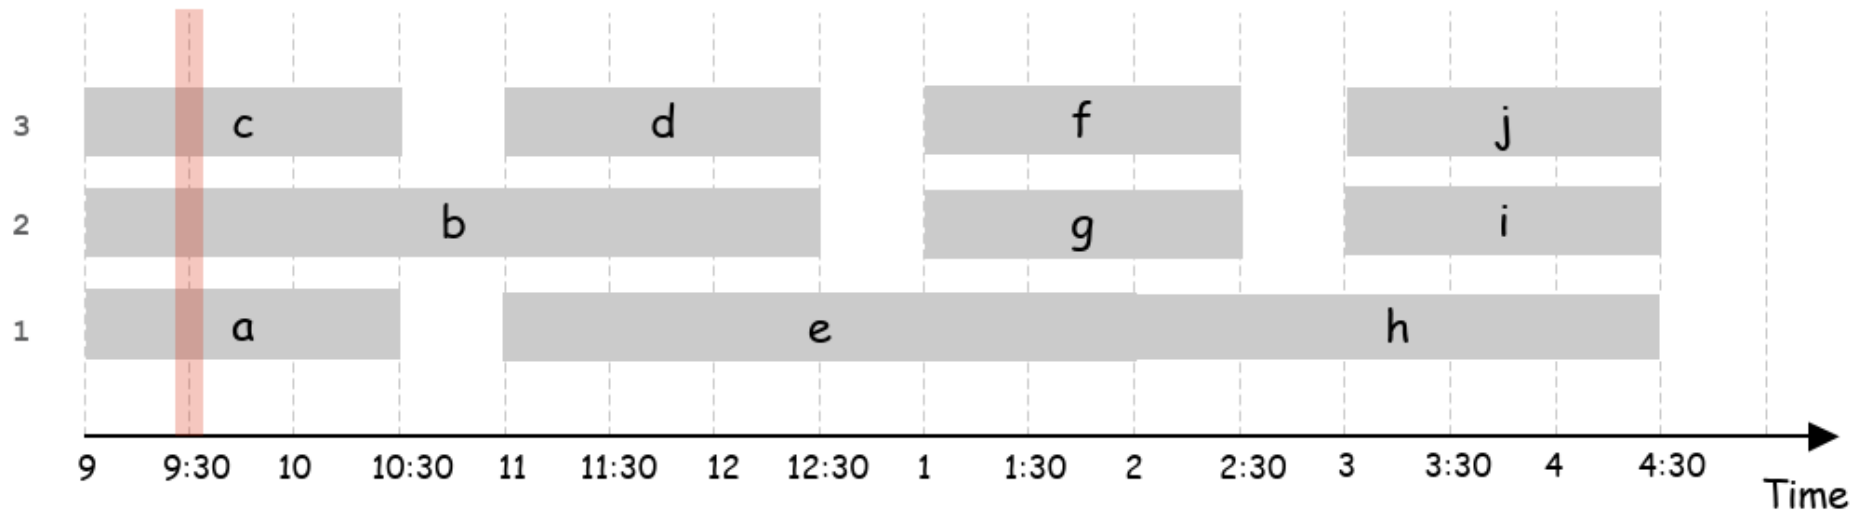

4.1 Interval Partitioning

Q. Does minimum number of classrooms needed always equal depth?

A. Yes! Moreover, earliest-start-time-first algorithm finds a schedule whose number of classrooms equals the depth.

4.1 Interval Partitioning

Observation. The Earliest-Start-Time First(ESTF) algorithm never schedules two incompatible lectures in the same classroom.

4.1 Interval Partitioning

Theorem. Earliest-start-time-first algorithm is optimal.

Pf.

- Let d = number of classrooms that the algorithm allocates.
- Classroom d is opened because we needed to schedule a lecture, say j , that is incompatible with a lecture in each of $d-1$ other classrooms.
- Thus, these d lectures each end after s_j . $s_j < f_{i \leq d}$
- Since we sorted by start time, each of these incompatible lectures start no later than s_j . $s_{i \leq d} < s_j$
- Thus, we have d lectures overlapping at time $s_j + \varepsilon$.
- Key observation \Rightarrow all schedules use $\geq d$ classrooms.

Chap04-Greedy Algorithms Outline

4.1 Interval Scheduling and Interval Partitioning

4.2 Scheduling to Minimize Lateness

4.3 Optimal Caching

4.4 Shortest Paths in a Graph

4.5 Minimum Spanning Tree

4.8 Huffman Codes


4.2 Scheduling to Minimize Lateness

- Single resource processes one job at a time.
- Job j requires t_j units of processing time and is due at time d_j .
- If j starts at time s_j , it finishes at time $f_j = s_j + t_j$.
- Lateness: $\ell_j = \max\{0, f_j - d_j\}$.
- Goal: schedule all jobs to **minimize maximum** lateness $L = \max_j \ell_j$.

4.2 Scheduling to Minimize Lateness

E.g.

	1	2	3	4	5	6
t_j	3	2	1	4	3	2
d_j	6	8	9	9	14	15

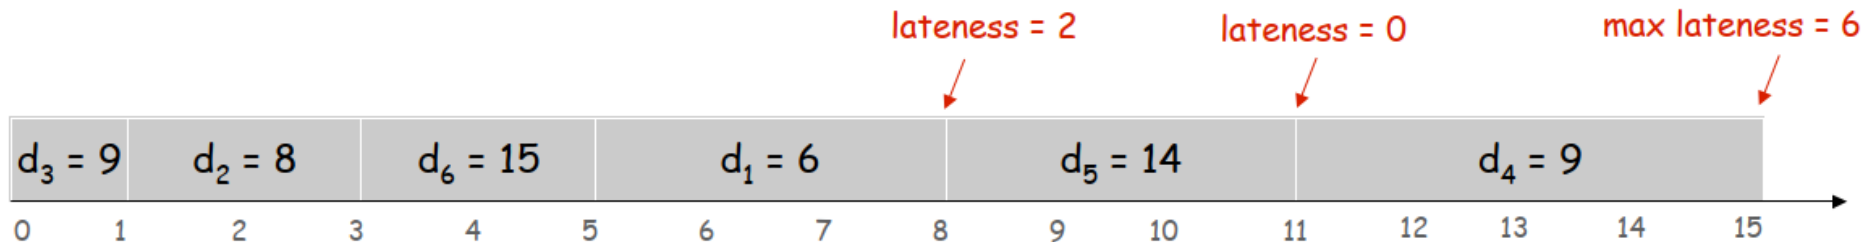

Quiz 4-3

Schedule jobs according to some natural order. Which order minimizes the maximum lateness?

A. [shortest processing time] Ascending order of processing time t_j .

B. [earliest deadline first] Ascending order of deadline d_j .

C. [smallest slack] Ascending order of slack: $d_j - t_j$.

D. None of the above.

4.2 Scheduling to Minimize Lateness

Greedy Choice. Consider jobs in some order.

- [Shortest processing time] Consider jobs in ascending order of processing time t_j .

	1	2
t_j	1	10
d_j	100	10

- [Smallest slack] Consider jobs in ascending order of slack: $d_j - t_j$

	1	2
t_j	1	10
d_j	2	10

4.2 Scheduling to Minimize Lateness

EARLIEST-DEADLINE-FIRST ($n, t_1, t_2, \dots, t_n, d_1, d_2, \dots, d_n$)

SORT jobs by due times and renumber so that $d_1 \leq d_2 \leq \dots \leq d_n$.

$t \leftarrow 0$.

FOR $j = 1$ **TO** n

 Assign job j to interval $[t, t + t_j]$.


$s_j \leftarrow t$; $f_j \leftarrow t + t_j$.

$t \leftarrow t + t_j$.

RETURN intervals $[s_1, f_1], [s_2, f_2], \dots, [s_n, f_n]$.

4.2 Scheduling to Minimize Lateness

	1	2	3	4	5	6
t_j	3	2	1	4	3	2
d_j	6	8	9	9	14	15

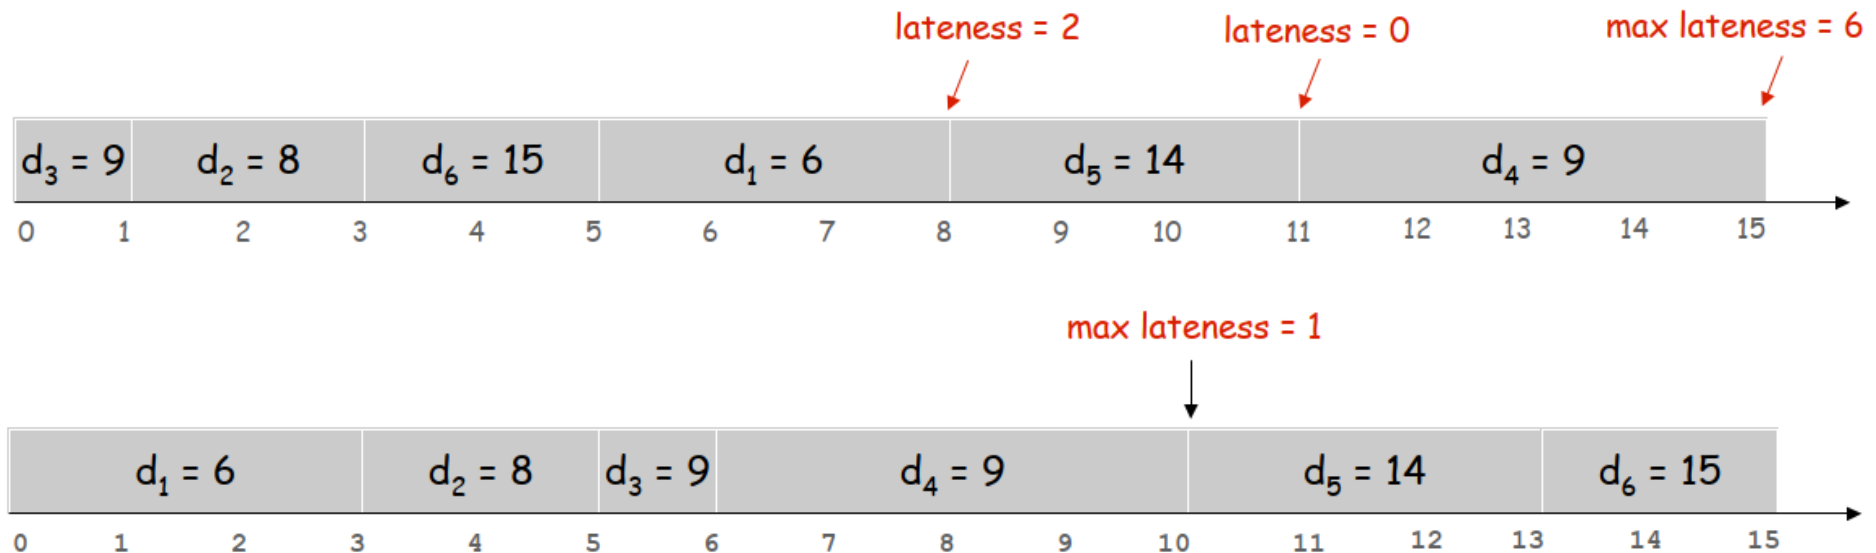

4.2 Scheduling to Minimize Lateness

Earliest-Deadline-First(EDF) Algorithms

Assign job 1(6) to $[0, 0 + 3]$. ($t_1 = 3$)

Assign job 2(8) to $[3, 3 + 2]$. ($t_2 = 2$)

Assign job 3(9) to $[5, 5 + 1]$. ($t_3 = 1$)

Assign job 4(9) to $[6, 6 + 4]$. ($t_4 = 4$)


Assign job 5(14) to $[10, 10 + 3]$. ($t_4 = 3$)

Assign job 6(15) to $[13, 13 + 2]$. ($t_4 = 2$)

4.2 Scheduling to Minimize Lateness

Minimizing lateness: **no idle time**


Observation 1. There exists an optimal schedule with no idle time.

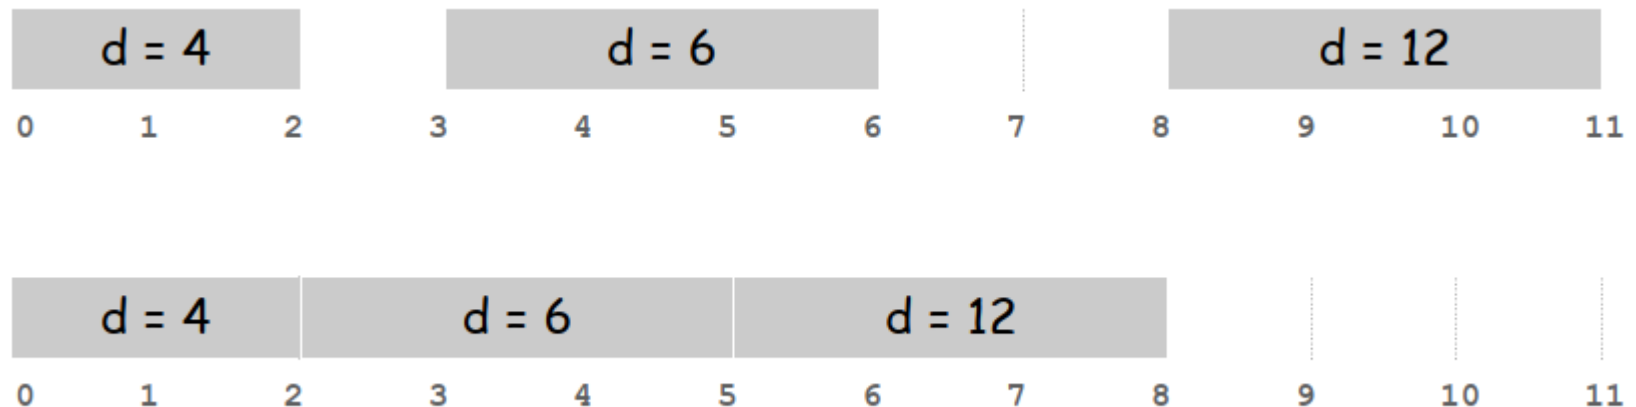

Observation 2. The earliest-deadline-first schedule has no idle time.

4.2 Scheduling to Minimize Lateness

Def. Given a schedule S , an **inversion** is a pair of jobs i and j such that: $i < j$ but j is scheduled before i .

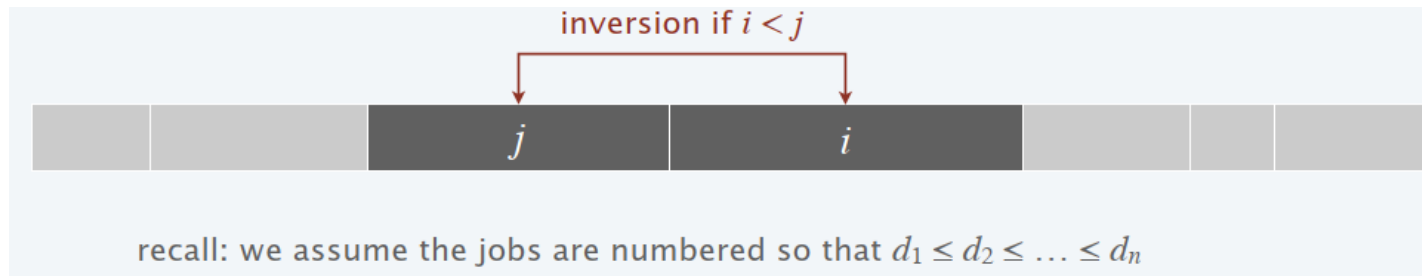

Observation 3. The earliest-deadline-first schedule is the unique idle-free schedule with no inversions.




4.2 Scheduling to Minimize Lateness

Observation 4. If an idle-free schedule has an inversion, then it has an adjacent inversion.

Pf.

- Let $i-j$ be a closest inversion. $i < j$
- Let k be element immediately to the right of j .
- Case 1. $[j > k]$ Then $j-k$ is an adjacent inversion.
- Case 2. $[j < k]$ Then $i-k$ is a closer inversion since $i < j < k$.

4.2 Scheduling to Minimize Lateness

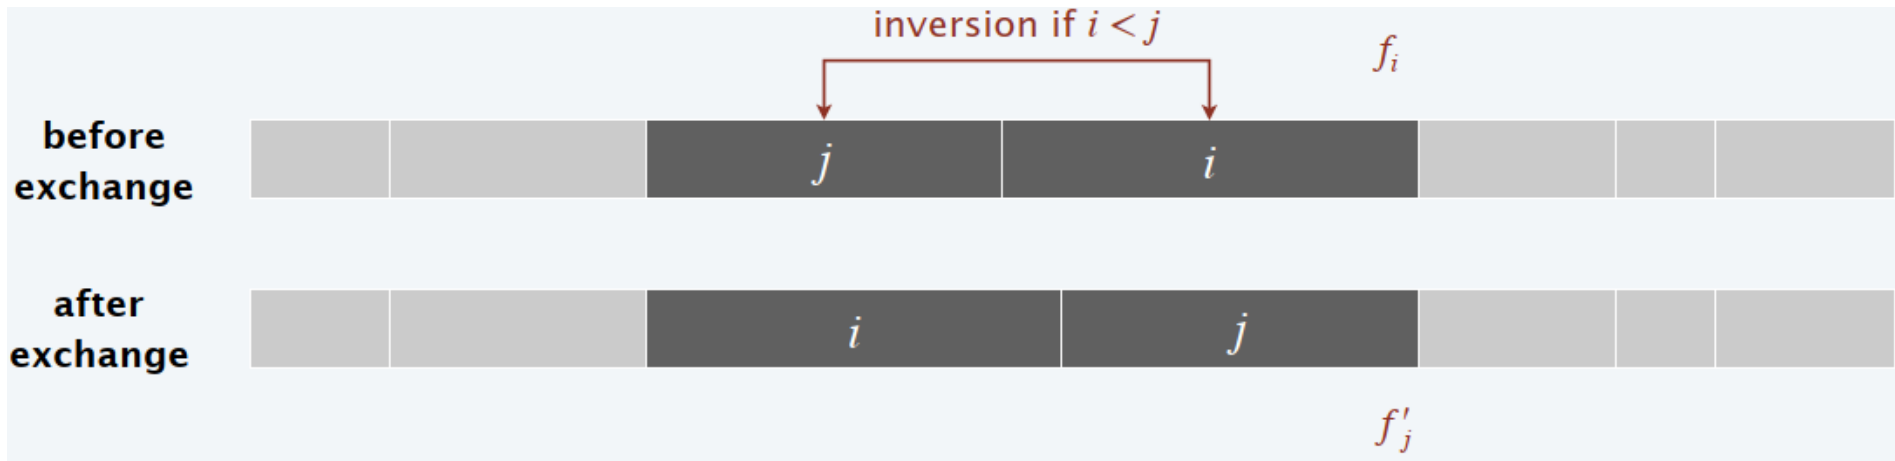

4.2 Scheduling to Minimize Lateness

Claim 4-1. Exchanging two adjacent, inverted jobs i and j reduces the number of inversions by 1 and does not increase the max lateness.

Pf. Let l be the lateness before the swap, and let l' be it afterwards.

- $l'_k = l_k$ for all $k \neq i, j$

- $l'_i \leq l_i$

- If job j is late:

$$\begin{aligned} \ell'_j &= f'_j - d_j && \text{(definition)} \\ &= f_i - d_j && (j \text{ finishes at time } f_i) \\ &\leq f_i - d_i && (i < j) \\ &\leq \ell_i && \text{(definition)} \end{aligned}$$

4.2 Scheduling to Minimize Lateness

Theorem. The earliest-deadline-first schedule S is optimal.

Pf. [by contradiction]

Define S^* to be an optimal schedule with the fewest inversions.

- Can assume S^* has no idle time. Observation 1
- Case 1. [S^* has no inversions] Then $S = S^*$. Observation 3
- Case 2. [S^* has an inversion]
 - let $i-j$ be an adjacent inversion Observation 4
 - exchanging jobs i and j decreases the number of inversions by 1 without increasing the max lateness Claim(4-1)
 - contradicts “fewest inversions” part of the definition of S^*

4.2 Scheduling to Minimize Lateness

Greedy analysis strategies

- Greedy algorithm stays ahead.
 - Show that after each step of the greedy algorithm, its solution is at least as good as any other algorithm's.
- Structural.
 - Discover a simple “structural” bound asserting that every possible solution must have a certain value. Then show that your algorithm always achieves this bound.
- Exchange argument.
 - Gradually transform any solution to the one found by the greedy algorithm without hurting its quality.
- Other greedy algorithms.
 - Gale–Shapley, Kruskal, Prim, Dijkstra, Huffman, ...

Chap04-Greedy Algorithms Outline

4.1 Interval Scheduling and Interval Partitioning

4.2 Scheduling to Minimize Lateness

4.3 Optimal Caching

4.4 Shortest Paths in a Graph

4.5 Minimum Spanning Tree

4.8 Huffman Codes

Thanks for Listening

College of Computer Science
Nankai University
Tianjin, P.R.China