

```
HP EliteDesk@Mr-Wolf MINGW64 ~ (Albert)
$ mkdir Albert

HP EliteDesk@Mr-Wolf MINGW64 ~ (Albert)
$ cd Albert

HP EliteDesk@Mr-Wolf MINGW64 ~/Albert (Albert)
$ git init
Initialized empty Git repository in C:/Users/Hp EliteDesk/Albert/.git/

HP EliteDesk@Mr-Wolf MINGW64 ~/Albert (master)
$ git clone https://github.com/Mr-Wolf09/Ejercicio1.git
Cloning into 'Ejercicio1'...
remote: Enumerating objects: 20, done.
remote: Counting objects: 100% (20/20), done.
remote: Compressing objects: 100% (18/18), done.
remote: Total 20 (delta 0), reused 0 (delta 0), pack-reused 0
Receiving objects: 100% (20/20), 4.48 KiB | 4.48 MiB/s, done.

HP EliteDesk@Mr-Wolf MINGW64 ~/Albert (master)
$ nano Fichero.txt

HP EliteDesk@Mr-Wolf MINGW64 ~/Albert (master)
$ nano Fichero.txt

HP EliteDesk@Mr-Wolf MINGW64 ~/Albert (master)
$ git add Fichero.txt
warning: in the working copy of 'Fichero.txt', LF will be replaced by CRLF the next time Git touches it

HP EliteDesk@Mr-Wolf MINGW64 ~/Albert (master)
$ git
```

```
HP EliteDesk@Mr-Wolf MINGW64 ~/Albert (master)
$ git commit -m "Alerta Veneno"
Author identity unknown

*** Please tell me who you are.

Run


  git config --global user.email "you@example.com"
  git config --global user.name "Your Name"

to set your account's default identity.
Omit --global to set the identity only in this repository.

fatal: unable to auto-detect email address (got 'Hp EliteDesk@Mr-Wolf.(none)')

HP EliteDesk@Mr-Wolf MINGW64 ~/Albert (master)
$
```

6.

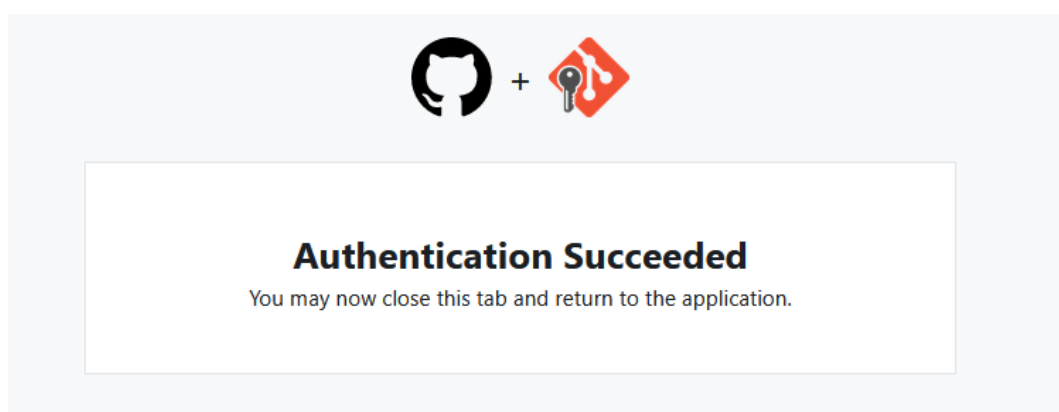

```
$ cd Ejercicio1/
Hp EliteDesk@Mr-Wolf MINGW64 ~/proyect/Ejercicio1 (main)
$ git push origin main
Everything up-to-date
Hp EliteDesk@Mr-Wolf MINGW64 ~/proyect/Ejercicio1 (main)
$
```

7.8.9

```
$ Hp EliteDesk@Mr-Wolf MINGW64 ~/proyect/Ejercicio1 (ALBERT)
$ git merge ALBERT
Already up to date.
y Hp EliteDesk@Mr-Wolf MINGW64 ~/proyect/Ejercicio1 (ALBERT)
$ git push origin main
Everything up-to-date
r Hp EliteDesk@Mr-Wolf MINGW64 ~/proyect/Ejercicio1 (ALBERT)
$
```