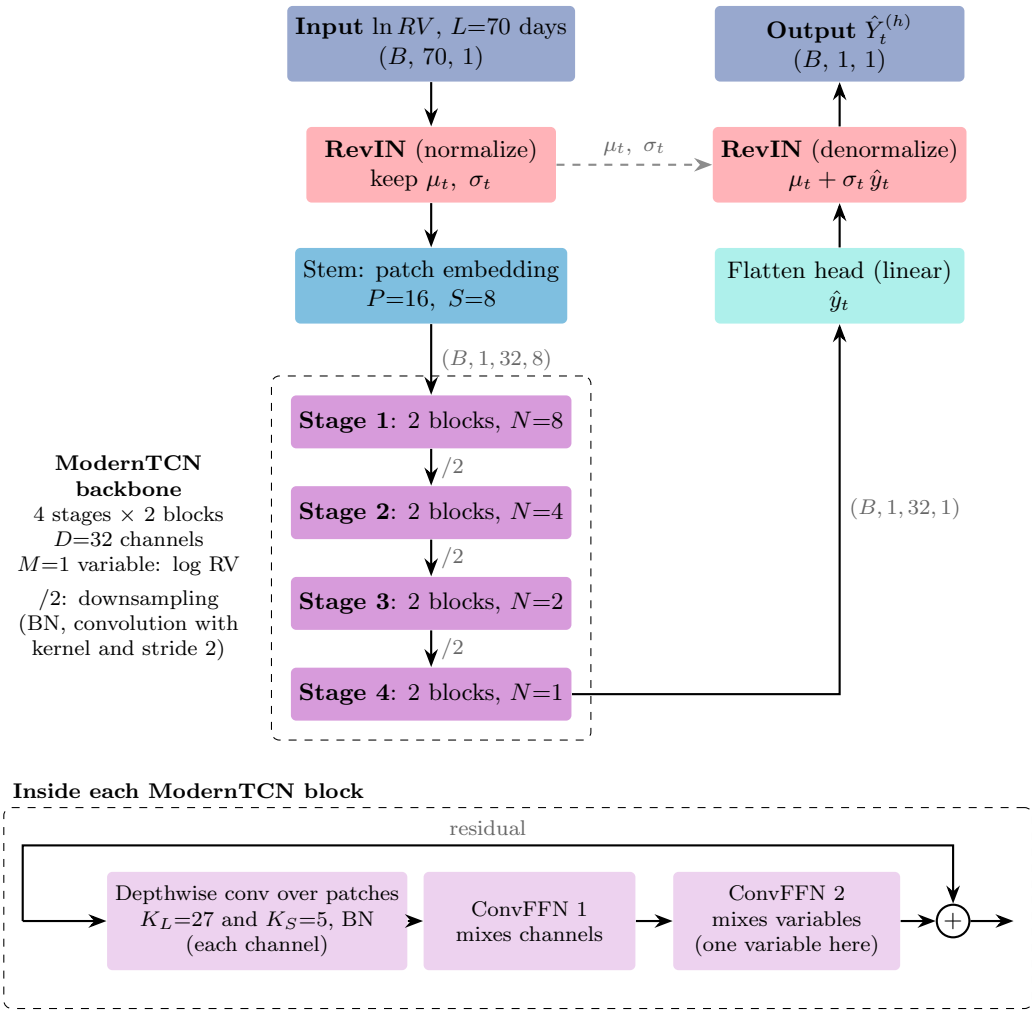

Input ln RV, L=70 days
(B, 70, 1)
RevIN (normalize)
keep μt, σt
μt, σt
Stem: patch embedding
P=16, S=8
(B, 1, 32, 8)
Stage 1: 2 blocks, N=8
/2
Stage 2: 2 blocks, N=4
/2
Stage 3: 2 blocks, N=2
/2
Stage 4: 2 blocks, N=1
ModernTCN backbone
4 stages × 2 blocks
D=32 channels
M=1 variable: log RV
/2: downsampling
(BN, convolution with kernel and stride 2)
(B, 1, 32, 1)
Flatten head (linear)
ŷt
RevIN (denormalize)
μt + σt ŷt
Output Ŷt(h)
(B, 1, 1)
Inside each ModernTCN block
residual
Depthwise conv over patches
KL=27 and KS=5, BN
(each channel)
ConvFFN 1
mixes channels
ConvFFN 2
mixes variables
(one variable here)