

Guide of POS_PC library (.NET)

POS_PC Library Info:

File Name : POS_PC.dll
Version : 01.05.0.0
Date : 1396/04/24

Dependency:

To use POS_PC library in your application, you must have Microsoft .NET Framework 2.0 or higher, installed on your Windows system.

What's new?

New features are:

- Protocol changed to version 3
- PC starts transaction by sending data to POS

Compatibility:

Current version support following functions and connection type of pos-pc that exists in previous versions.

Functions:

Result **Debits_Goods_And_Service** (string PcId, string Amount, string PayerID, string MerchantMsg, string MerchantadditionalData)
Result **Bill_Payment_Service** (string PcId, string BillID, string PayID, string Amount, string MerchantMsg, string MerchantadditionalData)
Result **Payment** (string PcId, string Amount, string PayerID, string AccountID, string MerchantadditionalData)
Result **MultiPayment** (string PcId, string TotalAmount, MultiPaymentReqDataSet[] RequestList, byte PrintDetail, string MerchantadditionalData)
Result **EsfahanCitizenCharge** (string PcID, string Amount, string MerchantMsg, string MerchantadditionalData)
Result **EsfahanResellerCharge** (string PcID, string CardType, string Amount, string PayerID, string AccountID, string MerchantMsg, string MerchantadditionalData)

Connection type :

Serial port connection (RS232 / USB plug)
TCP/IP connection

Dll Class Names:

- **Global**
General information of dll:
 - DllReleaseDate
 - dllVersion
 - dllType
- **Transaction**

Transaction information:

- **class : Connection**
 - CommunicationType
 - SerialInfo
 - TcpIpInfo
- **struct: MultiPaymentReqDataSet**

For requestList of multiPayment method. The fields of structure are:

 - string AccountID
 - string Amount
 - string PayerID
- **method:**
 - Debits_Goods_And_Service
 - Bill_Payment_Service
 - Payment
 - MultiPayment

- Result

Transaction's result:

- **Enum: return_codes**
- **Method:**
 - **ReqID** : The request number sent by POS.
 - **SerialTransaction** : The local transaction number generated by POS for each transaction request.
 - **TraceNumber** : The unique transaction number which is get from switch for the approved transactions.
 - **TerminalNo** : Terminal identity number.
 - **TransactionDate** : The date of transaction in shamsi format (yyyy/mm/dd)
 - **TransactionTime** : The time of transaction
 - **PAN** : The bank identity number (the first 6 digit of card number) + **** + The permanent account number (the last 4 digit of card number).
 - **AccountNo** : The merchant account number.
 - **ReasonCode** : If the transaction failed because of error number 109 (ERR_POS_FAILED_TRANSACTION OR RET_NOK), the reason of error will be accessible via this public properties. See **Appendix B** for more information.
 - **ReturnCode** : Refer to Appendix "A"
 - **PcID** : Return PcId from PC.

Function Details

❖ Result Debits_Goods_And_Service (string PcId , String Amount , String PayerID , String strMsg, string MerchantadditionalData)

Function is used to perform a debit (goods and service) transaction.

Parameters [in]:

Name	Format	Length (byte)	Existence	explain
PcId	string ASCII numeric	Variable MIN:1 MAX:12	optional	Pc Id if necessary for tracing transaction
Amount	string ASCII numeric	Variable MIN:1 MAX:12	mandatory	amount of transaction
PayerID	string ASCII numeric	Variable MIN:3 MAX:17	optional	payer id of transaction if necessary
strMsg	Hex string numeric /alphabetic	Variable MAX:160	optional	Merchant message if necessary for print on client receipt.
MerchantadditionalData	string ASCII numeric	Variable MAX:100	optional	merchant data if necessary for sending to switch

Detailed description:

For performing a debit (Goods and service) transaction this function opens a serial or tcp/ip port (depending on connection type) at first, write a specific data (a message for pos which include the amount, Id Code and merchant custom message of transaction) on the port and then wait for receiving data (a message receive from pos) on it, then close the port and finally return a result for showing that if the transaction has done successfully or not.

Return Values:

Refer to Appendix “A”

- If the transaction is approved successfully, the return value is “RET_OK” and the return parameters are accessible via the public properties.

❖ Result Bill_Payment_Service (string PcId , string BillID, string PayID, string strMsg, string MerchantadditionalData)

Function is used to perform a Bill Payment transaction.

Parameters [in]:

Name	Format	Length (byte)	Existence	explain
PcId	string ASCII numeric	Variable MIN:1 MAX:12	optional	Pc Id if necessary for tracing transaction
BillID	string ASCII numeric	Variable MIN:6 MAX:18	mandatory	bill identity of transaction
PayID	string ASCII numeric	Variable MIN:6 MAX:18	mandatory	payment identity of transaction
strMsg	Hex string numeric /alphabetic	Variable MAX:160	optional	Merchant message if necessary for print on client receipt.
MerchantadditionalData	string ASCII numeric	Variable MAX:100	optional	merchant data if necessary for sending to switch

Detailed description:

For performing a bill payment transaction this function opens a serial or tcp/ip port (depending on connection type) at first, write a specific data (a message for pos which include the Bill ID, Payment ID, Amount and merchant custom message of transaction) on the port and then wait for receiving data (a message receive from pos) on it, then close the port and finally return a result for showing that if the transaction has done successfully or not.

Return Values:

Refer to Appendix “A”

- If the transaction is approved successfully, the return value is “**RET_OK**” and the return parameters are accessible via the public properties.

❖ Result Payment (string PcId , String Amount , String PayerID , String AccountID, string MerchantadditionalData)

Function is used to perform a payment transaction.

Parameters [in]:

Name	Format	Length (byte)	Existence	explain
PcId	string ASCII numeric	Variable MIN:1 MAX:12	optional	Pc Id if necessary for tracing transaction
Amount	string ASCII numeric	Variable MIN:1 MAX:12	mandatory	amount of transaction
PayerID	string ASCII numeric	Variable MIN:3 MAX:17	optional	payer id of transaction if necessary
AccountID	English string numeric /alphabetic	Variable MAX:24	optional	account number id of payment transaction.
MerchantadditionalData	string ASCII numeric	Variable MAX:100	optional	merchant data if necessary for sending to switch

Detailed description:

For performing a payment transaction this function opens a serial or tcp/ip port (depending on connection type) at first, write a specific data (a message for pos which include the amount, payer id and account id of transaction) on the port and then wait for receiving data (a message receive from pos) on it, then close the port and finally return a result for showing that if the transaction has done successfully or not.

Note:

After successful transaction,

- The amount of the payment transaction will be transferred to the merchant account. Merchant account number determines from account id.

Return Values:

Refer to Appendix “A”

- If the transaction is approved successfully, the return value is “**RET_OK**” and the return parameters are accessible via the following public properties.

❖ **Result MultiPayment (string PcId , String TotalAmount , MultiPaymentReqDataSet[] RequestList, byte PrintDetail, string MerchantadditionalData)**

Function is used to perform a multiPayment transaction.

Parameters [in]:

Name	Format	Length	Existence	explain
PcId	string ASCII numeric	Variable MIN:1 MAX:12	optional	Pc Id if necessary for tracing transaction
Amount	string ASCII numeric	Variable(byte)MIN:1 MAX:12	mandatory	Total amount of multipayment transaction
RequestList	Array of MultiPaymentReqDataSet structure	Variable(index)MIN:1 MAX:10	mandatory	Request list of multipayment data set
PrintDetail	numeric	Fixed (1byte)	mandatory	Print Details of multipayment on receipt <u>Value = 0 :</u> Print on both receipt <u>Value = 1:</u> Print on customer receipt <u>Value = 2:</u> Print on merchant receipt <u>Value = 3:</u> Not printed on the receipt
MerchantadditionalData	string ASCII numeric	Variable MAX:100	optional	merchant data if necessary for sending to switch

MultiPaymentReqDataSet structure fields:

Name	Format	Length (byte)	Existence	explain
AccountID	string ASCII numeric	Variable MIN:1 MAX:10	mandatory	account number of request data set
Amount	string ASCII numeric	Variable MIN:1 MAX:10	mandatory	amount of request data set
PayerID	string ASCII numeric	Variable MIN:3 MAX:17	optional	payer id of request data set

Detailed description:

For performing a multiPayment transaction this function opens a serial or tcp/ip port (depending on connection type) at first, write a specific data (a message for pos which include the total amount and list of request data set (max 10 records) on the port and then wait for receiving data (a message receive from pos) on it, then close the port and finally return a result for showing that if the transaction has done successfully or not.

Return Values:

Refer to Appendix “A”

- If the transaction is approved successfully, the return value is “**RET_OK**” and the return parameters are accessible via the public properties.

❖ **Result EsfahanResellerCharge (string PcId ,string CardType, String Amount , String PayerID , String AccountID, String MerchantMsg,string MerchantadditionalData)**

Function is used to perform a payment transaction.

Parameters [in]:

Name	Format	Length (byte)	Existence	explain
PcId	string ASCII numeric	Variable MIN:1 MAX:12	optional	Pc Id if necessary for tracing transaction
CardType	string ASCII numeric	Fixed 1	mandatory	
Amount	string ASCII numeric	Variable MIN:1 MAX:12	mandatory	amount of transaction
PayerID	string ASCII numeric	Variable MIN:3 MAX:17	optional	payer id of transaction if necessary
AccountID	English string numeric /alphabetic	Variable MAX:24	optional	account number id of payment transaction.
strMsg	Hex string numeric /alphabetic	Variable MAX:160	optional	Merchant message if necessary for print on client receipt.
MerchantadditionalData	string ASCII numeric	Variable MAX:100	optional	merchant data if necessary for sending to switch

Detailed description:

For performing a Charge of Reseller Citizen Card, this function opens a serial or tcp/ip port (depending on connection type) at first, write a specific data (a message for pos which include the amount, payer id and account id of transaction) on the port and then wait for receiving data (a message receive from pos) on it, then close the port and finally return a result for showing that if the transaction has done successfully or not.

Return Values:

Refer to Appendix “A”

- If the transaction is approved successfully, the return value is “**RET_OK**” and the return parameters are accessible via the following public properties.

❖ **Result EsfahanCitizenCharge (string PcId , String Amount , String MerchantMsg,string MerchantadditionalData)**

Function is used to perform a sale transaction.

Parameters [in]:

Name	Format	Length (byte)	Existence	explain
PcId	string ASCII numeric	Variable MIN:1 MAX:12	optional	Pc Id if necessary for tracing transaction
Amount	string ASCII numeric	Variable MIN:1 MAX:12	mandatory	amount of transaction
strMsg	Hex string numeric /alphabetic	Variable MAX:160	optional	Merchant message if necessary for print on client receipt.
MerchantadditionalData	string ASCII numeric	Variable MAX:100	optional	merchant data if necessary for sending to switch

Detailed description:


For performing a Charge of Esfehan Citizen Card, this function opens a serial or tcp/ip port (depending on connection type) at first, write a specific data (a message for pos which include the amount, payer id and account id of transaction) on the port and then wait for receiving data (a

message receive from pos) on it, then close the port and finally return a result for showing that if the transaction has done successfully or not.

Return Values:

Refer to Appendix “A”

- If the transaction is approved successfully, the return value is “**RET_OK**” and the return parameters are accessible via the following public properties.

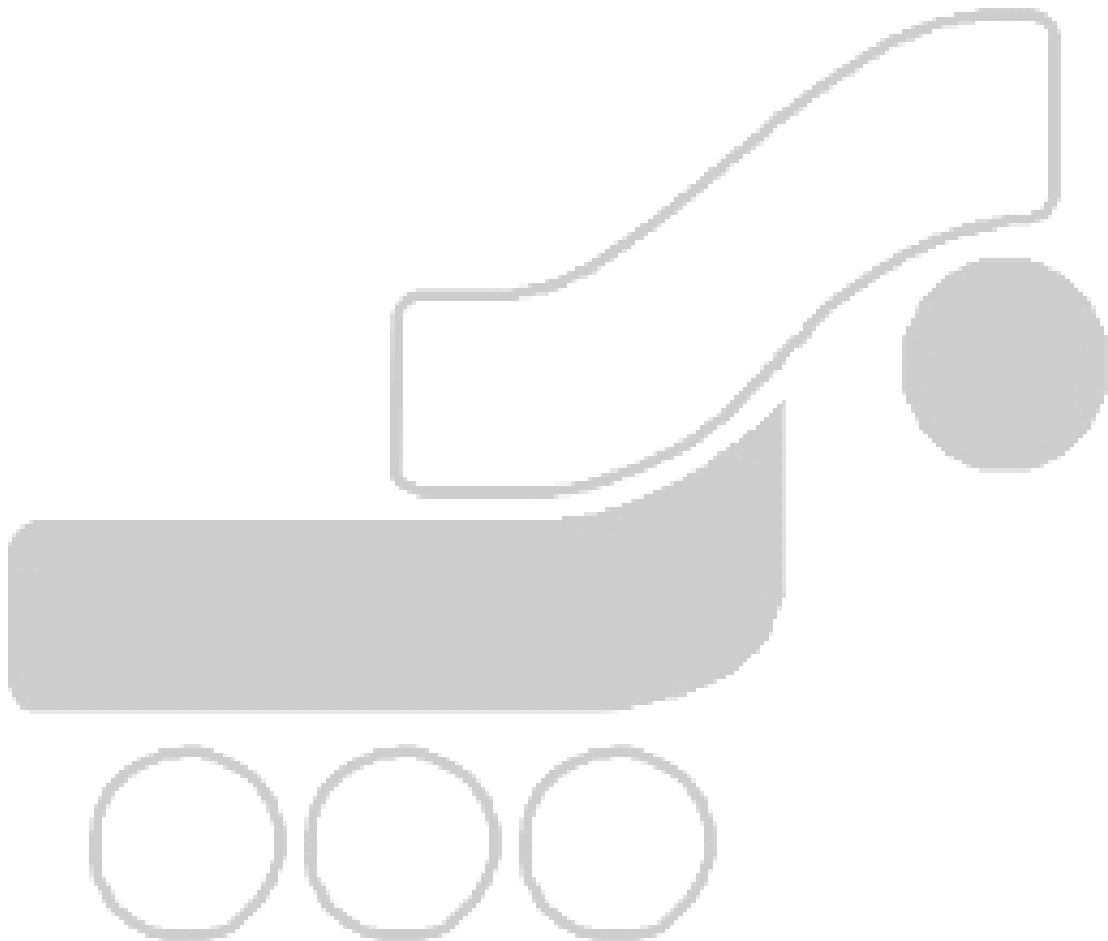

Sample Code

```
/* pos-pc via Serial port */
```

```
Transaction.Connection Connect = new Transaction.Connection();
Result retCode = new Result();
If(Connect.CommunicationType == "serial")
{
    Connect.PC_PORT_Name = "COM1";
    Connect.PC_PORT_BaudRate = 115200;
    Connect.PC_PORT_DataBits = 8;
    Connect.PC_PORT_Parity = Parity.None;
    Connect.PC_PORT_StopBits = StopBits.One;
}
Else
{
    /* pos-pc via tcp/ip */
    Connect.CommunicationType = "TCP/IP";
    Connect.POSPC_TCPCOMMU_SocketListenTimeout = 60000;
    Connect.POSPC_TCPCOMMU_SocketRecTimeout = 60000;
    Connect.POS_PORTtcp = 1028;
    Connect.POS_IP = "172.20.122.132"; // your POS ip
}
Transaction TXN = new Transaction(Connect);
    /* Debit */
retCode = TXN.Debits_Goods_And_Service(PcID, strAmount, strPayerId, strMerchantMsg, strMerchantAddit);
OR    /* BillPayment */
retCode = TXN.Bill_Payment_Service(PcID, strBillId, strPayCode, strMerchantMsg, strMerchantAddit);
OR    /* Payment */
retCode = TXN.Payment(PcID, strAmount, strPayerId, strAccountID, strMerchantAddit);
OR    /* MultiPayment */
Transaction.MultiPaymentReqDataSet[] RequesttList = new Transaction.MultiPaymentReqDataSet[10];

RequestList[0].AccountID = strAccountID;
RequestList[0].Amount = strAmount;
RequestList[0].PayerID = strPayerId;
....;
/* with 3 input parameters */
byte PrintDetail = 0;
retCode = TXN.MultiPayment(PcID, strTotalAmount, RequesttList, PrintDetail);

if (retCode == Transaction.return_codes.RET_OK)
{
    /* the transaction has been done */
}
else
{
    /* If the transaction failed because of error number 109
    (ERR_POS_FAILED_TRANSACTION), the reason of error will be accessible via TXN.ReasonCode */
}
```


Appendix A

Return Values:

Transaction Status	Description	Error Define	Return Code
OK	The process for send and receive data performs successfully	RET_OK	100
Failed	invalid message size received from pos	ERR_PC_INVALID_REC_SIZE	101
Failed	invalid message received from pc (message size, process code)	ERR_POS_INVALID_DATA	102
Failed	invalid process code received from pos in response	ERR_PC_INVALID_REC_PROCESS_CODE	103
Failed	invalid input amount or invalid received amount from pos in response	ERR_PC_INVALID_AMOUNT	104
Failed	invalid input payer id	ERR_PC_INVALID_INPUT_PAYER ID	105
Failed	invalid input timeout for waiting to receive data from pos on serial port (the value of it must be : Min = 2000 ms Max = 600000 ms)	ERR_PC_INVALID_INPUT_TIMEOUT	106
Failed	timeout occurred while waiting for receive data from pos on serial port	ERR_PC_PORT_TIMEOUT_FOR_RECEC	107
Failed	transaction failed: not receive response from server because of timeout or connection failed	ERR_POS_RESPONSE_RECEIVED_TOO_LATE	108
Failed	transaction failed: credit is not sufficient, server is down or ...	ERR_POS_FAILED_TRANSACTION	109
Failed	transaction failed because of printer error	ERR_POS_PRINTER	110
Failed	transaction failed because of connection error	ERR_POS_COMMUNICATION	111
Failed	transaction failed because of error in send settlement, send reversal or	ERR_POS_TO_SEND_TRANSACTION	112

	generate transaction		
Failed	invalid input serial port name	ERR_PC_INVALID_INPUT_PORTNAME	113
Failed	transaction failed because of aborting by user	ERR_POS_USER_ABORT	114
Failed	invalid input bill id for bill payment transaction	ERR_PC_INVALID_INPUT_BILLID	115
Failed	invalid input payment id for bill payment transaction	ERR_PC_INVALID_INPUT_PAYID	116
Failed	error occurred while opening selected serial port	ERR_PC_PORT_OPEN_FAILED	117
Failed	I/O error or a specific type of security error : the serial port can't write data	ERR_PC_PORT_ACCESS_FAILED	118
Failed	I/O error occurs: the selected port isn't serial port	ERR_PC_INVALID_PORT_STATE	119
Failed	argument out of range exception: one or more of the properties for this instance are invalid(on serial port)	ERR_PC_INVALID_PORT_PARAMETERS	120
Failed	arguments provided to a method is not valid: the serial port name is invalid	ERR_PC_INVALID_PORT_NAME	121
Failed	Argument Null Exception on serial port	ERR_PC_NULL_STR_TO_WRITE_IN_PORT	122
Failed	timeout occurred while send data on serial port	ERR_PC_PORT_TIMEOUT_FOR_SEND	123
Failed	the card has not been swiped on pos	ERR_POS_CARD_SWIPE_FAILED	124
Failed	invalid input account id for payment transaction	ERR_PC_INVALID_INPUT_ACCOUNT_ID	125
Failed	invalid received account id from pc	ERR_POS_INVALID_INPUT_ACCOUNT_ID	126
Failed	invalid received payer id from pc	ERR_POS_INVALID_INPUT_PAYER_ID	127
Failed	invalid received amount from pc	ERR_POS_INVALID_INPUT_AMOUNT	128
Failed	invalid received reference number from pc	ERR_POS_INVALID_INPUT_REFERENCE_NUMBER	129

Failed	invalid received bill id from pc	ERR_POS_INVALID_INPUT_BILL_ID	130
Failed	invalid received payment id from pc	ERR_POS_INVALID_INPUT_PAYMENT_ID	131
Failed	invalid received additional data from pc	ERR_POS_INVALID_INPUT_ADDITIONALDATA	132
Failed	invalid received multi payment total amount from pc	ERR_POS_INVALID_INPUT_MULTI_PAYMENT_AMOUNT	133
Failed	unconfirmed received data from pc by user	ERR_POS_UNCONFIRM_REC_DATA	134
Failed	Invalid input multi payment request data set list(max 10 records)	ERR_PC_INVALID_INPUT_MULTI_PAYMENT_REQUEST_LIST	161
Failed	invalid input multi payment amount	ERR_PC_INVALID_INPUT_MULTI_PAYMENT_AMOUNT	162
Failed	invalid input reference number	ERR_PC_INVALID_INPUT_REFERENCE_NUMBER	163
Failed	Invalid received data on pos or pc (crc error)	ERR_POS_PC_CRCERROR_INVALID_DATA	164
Failed	invalid input connection type of pos-pc(the value of it must be :Serial or tcp/ip)	ERR_PC_INVALID_POSPC_COMMUNICATION_TYPE	165
Failed	invalid input tcp/ip connection port number(the value of it must be :MIN : 1024 MAX: 65535)	ERR_PC_INVALID_INPUT_TCP_SOCKET_PORT	166
Failed	invalid input timeout for waiting to receive data from pos on tcp/ip connection(the value of it must be : Min = 2000 ms Max = 600000 ms)	ERR_PC_INVALID_INPUT_TCP_SOCKET_RECEIVED_TIMEOUT	167
Failed	error occurred while creating socket on pc in tcp/ip communication	ERR_PC_TCP_SOCKET_FAILED	168
Failed	error occurred while send data to pos in tcp/ip communication	ERR_PC_TCP_SOCKET_SEND_MSG_FAILED	169
Failed	error occurred while receiving data from pos on tcp/ip communication because of timeout or ...	ERR_PC_TCP_SOCKET_RECEIVED_MSG_FAILED	170

Failed	invalid format of input merchant message	ERR_PC_INVALID_INPUT_MERCHANT_MESSAGE	171
Failed	error occurred while prepare TLV message for send	ERR_PC_PREPARE_TLV_MSG_FAILED	172
Failed	Serial port exception for receiving data from pos	ERR_PC_PORT_EXCEPTION_FOR_REC	173
Failed	Serial port exception for receiving data from pos	ERR_PC_NULL_STR_IN_READ_PORT	174
Failed	error occurred while calculate crc of message	ERR_PC_CALCULATE_CRC_ERROR	175
Failed	invalid input additional data of merchant	ERR_PC_INVALID_INPUT_MERCHANT_FIELD	176
Failed	Other exception	ERR_POS_PC_OTHER	200

Appendix B

Reason Values:

کد پاسخ (ReasonCode)	شرح خطا	کد پاسخ (ReasonCode)	شرح خطا
0	تراکنش با موفقیت انجام شد	50	تاریخ تراکنش اصلاحیه باتاریخ تراکنش اصلی متفاوت است
1	به صادر کننده کارت ارجاع گردد	51	موجودی حساب کافی نیست
2	تراکنش اصلاحیه قبلی با موفقیت انجام شد	52	فرمت تاریخ تسویه اشتباه می باشد
3	پذیرنده کارت نامعتبر است	53	مشتری تراکنش اصلاحیه با مشتری تراکنش اصلی یکسان نمی باشد
4	شماره مرجع تراکنش تکراری است	54	مبلغ واریز از مینیمم مبلغ افتتاح حساب کمتر است
5	تراکنش نامعتبر است	55	رمز نادرست است
6	خطای داخلی سویچ صادر کننده کارت	56	امکان حذف اطلاعات مشتری وجود ندارد
7	شناسه قبض نادرست است	57	دارنده کارت مجاز به انجام این تراکنش نیست
8	شناسه پرداخت نادرست است	58	پایانه مجاز به انجام این تراکنش نیست
9	درخواست قبلی در حال انجام است	59	رمز شارژ با مبلغ مورد نظر موجود نیست
10	تراکنش اصلی در سیستم موجود نمی باشد	60	خطای داخلی در استخراج رمز شارژ
11	کد پردازش تراکنش اصلی معتبر نمی باشد	61	مبلغ برداشت وجه بیش از حد مجاز است
12	رمز مورد نیاز است	62	کد کالا نامعتبر است
13	مبلغ نامعتبر است	63	خطای داخلی
14	شماره کارت نامعتبر است	64	اطلاعات تماس مشتری تعریف نشده است
15	سرویس درخواستی موجود نمی باشد	65	دفعات برداشت وجه بیش از حد مجاز است
16	شماره کارت با شماره کارت تراکنش اصلی یکسان نمی باشد	66	شعبه مشتری تعریف نشده است
17	انجام تراکنش توسط کاربر لغو شد	67	حواله ای موجود نمی باشد

18	در حال حاضر ارائه سرویس امکان پذیر نمی باشد	68	پاسخی از صادر کننده کارت دریافت نشد
19	تراکنش را دوباره انجام دهید	69	شماره حساب/کارت مقصد نامعتبر است
20	سیستم دچار اشکال شده است	70	کد کاربری یا رمز عبور نامعتبر است.
21	عملی انجام نشد	71	فرمت پیام اشتباه می باشد.
22	خطای امنیتی رخ داده است	72	مبلغ تراکنش از مبلغ کارمزد کوچکتر است
23	مبلغ کارمزد نامعتبر است	73	نوع مشتری حقیقی یا حقوقی نمی باشد
24	امکان اجرای تراکنش برگشت وجود ندارد تراکنش اصلی به صورت سیستمی برگشت خورده است	74	شرایط حساب فروشنده معتبر نمی باشد
25	تراکنش مرجع موجود نیست	75	کد رزرو تکراری است
26	جمع مبلغ تراکنش های برگشتی از تراکنش اصلی بیشتر می باشد	76	شمار پیگیری تکراری است
27	مبلغ تراکنش اصلاحیه با تراکنش اصلی یکسان نمی باشد	77	تاریخ روز کاری نامعتبر است
28	تراکنش اصلی قبلاً به صورت سیستمی برگشت خورده است	78	شماره حساب/کارت مبداء با مقصد یکسان است
29	امکان انجام تراکنش اصلاحیه وجود ندارد	79	کارت غیر فعال است
30	زمان درخواست خارج از بازه زمانی اجرای عملیات می باشد	80	حساب پذیرنده تعریف نشده است
31	صادر کننده کارت نامعتبر است	81	اصلاحیه انتقال وجه قابل انجام نمی باشد
32	تراکنشی با این شماره تسویه و شماره مشتری پیدا نشد	82	حساب اصلی کارت، حساب متصل به پایانه نمی باشد
33	تاریخ انقضای کارت گذشته است	83	صادر کننده کارت غیر فعال است
34	مشتری تراکنش برگشت با مشتری تراکنش اصلی یکسان نمی باشد	84	شناسه واریز صحیح نمی باشد
35	پذیرنده با بانک تماس بگیرد	85	تراکنش صادر کننده نامعتبر است
36	کارت محدود شده است	86	سازمان صادر کننده قبض نامعتبر است
37	نیازی به شناسه واریز نمی باشد	87	با بانک صادر کننده تماس بگیرد

تعداد دفعات وارد کردن رمز بیش از حد مجاز است	38	پایانه نامعتبر است	88
حساب نامعتبر است	39	بانک پذیرنده نامعتبر است	89
شناسه واریز تراکنش اصلی موجود نمی باشد	40	سیستم در حال انجام عملیات پایان روز کاری است ، بعدا سعی نمایید.	90
کارت نامعتبر است	41	صادر کننده کارت در وضعیت عملیاتی نمی باشد	91
برای این hash code از طرف دارنده کارت تراکنش صورت نگرفت	42	MAC نادرست است	92
زمان ارسال تراکنش از سمت پذیرنده همگون نیست	43	خطا در تطابق MAC	93
مشتری در سامانه متمرکز معتبر نمی باشد	44	تراکنش تکراری است	94
شناسه واریز اجباری است و مقدار ندارد	45	خطا در تطابق اطلاعات	95
حساب فروشنده مجوز برداشت غیر حضوری ندارد	46	کلیدهای ارتباطی موجود نمی باشد	96
نوع حساب مجوز واریز و یا برداشت ندارد	47	خطا در تطابق کلیدهای رمزگذاری	97
حساب مجوز واریز و یا برداشت ندارد	48	خطای سیستمی ، دوباره سعی کنید	98
حساب فروشنده معتبر نمی باشد	49	با پشتیبانی تماس بگیرید	99