


راهنمای تست وب سرویس از طریق مرورگر فایرفاکس

*پیش نیاز: نصب پلاگ این RESTClient برای مرورگر فایرفاکس


گام اول: تنظیم متد

در این قسمت مقدار متد را POST قرار دهید.

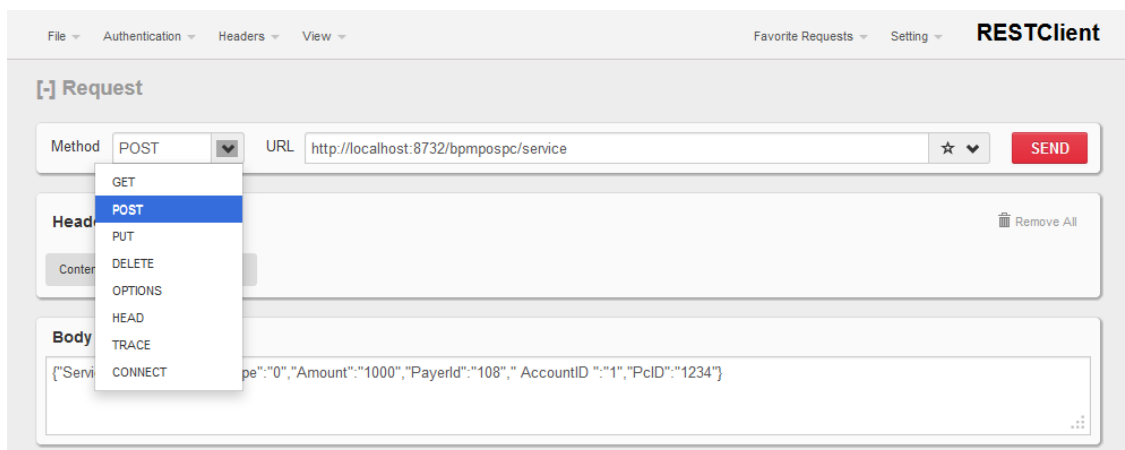

گام دوم: تنظیم URL

URL را با مقدار <http://localhost:8732/bpmpospc/service> جایگزین نمایید.

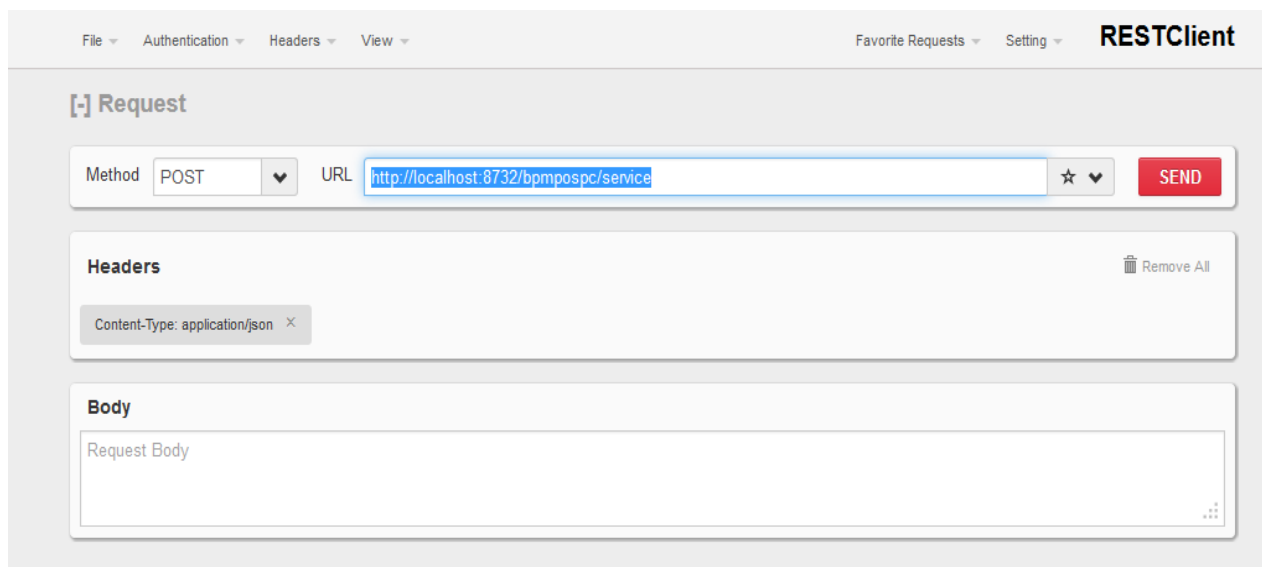

گام سوم: تنظیم Header


روی Header کلیک کرده و سپس مقادیر آن را مطابق شکل زیر تنظیم نمایید.



The image shows a 'Request Header' dialog box. It has a title bar with a close button (X). Inside, there are two text input fields. The first is labeled 'Name' and contains the text 'Content-Type'. The second is labeled 'Value' and contains the text 'application/json'. At the bottom, there is a checkbox labeled 'Save to favorite' which is unchecked. To the right of the checkbox are two buttons: 'Okay' and 'Cancel'.

گام چهارم: مقداردهی Body

در این قسمت فرمت JSON پیام درخواستی را ارسال نمایید.

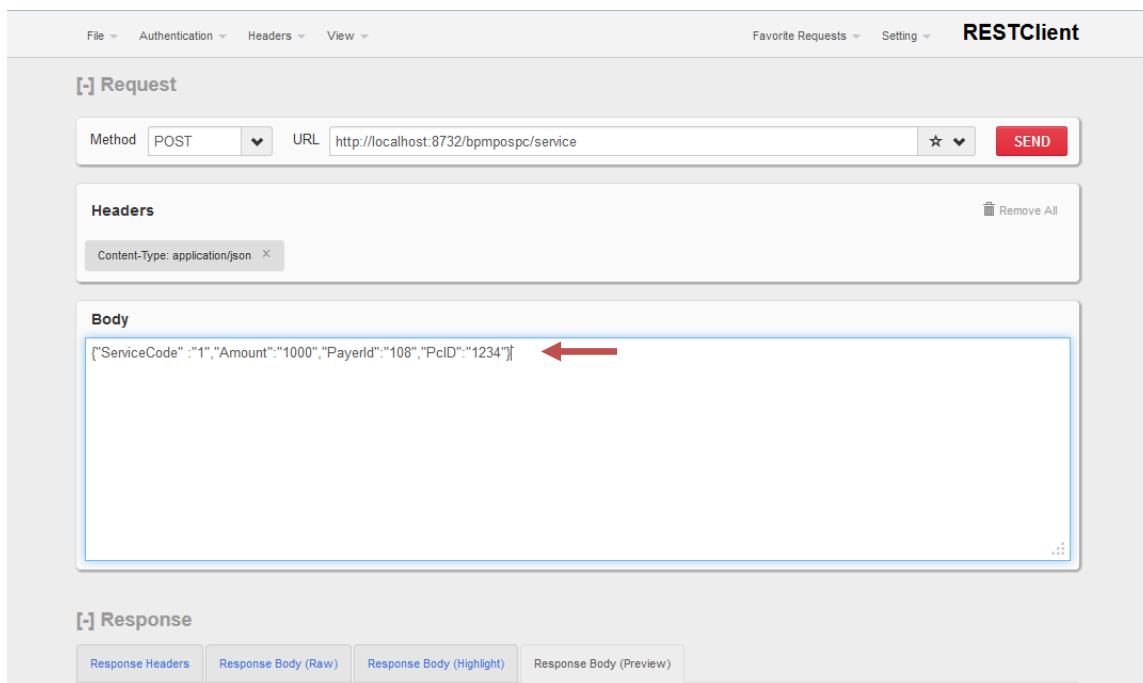

The image shows the RESTClient application interface. At the top, there is a menu bar with 'File', 'Authentication', 'Headers', and 'View'. On the right, there are 'Favorite Requests' and 'Setting' buttons, and the title 'RESTClient'. Below the menu bar, there is a section titled '[-] Request'. It contains a 'Method' dropdown set to 'POST' and a 'URL' text field with the value 'http://localhost:8732/bpmpospc/service'. To the right of the URL field are a star icon and a 'SEND' button. Below the request section is a 'Headers' section with a 'Remove All' button. It contains one header: 'Content-Type: application/json'. Below the headers is a 'Body' section with a text area containing a JSON object:

```
{ "ServiceCode": "1", "Amount": "1000", "PayerId": "108", "PcId": "1234" }
```

. A red arrow points to the closing bracket of the JSON object. At the bottom, there is a '[-] Response' section with four tabs: 'Response Headers', 'Response Body (Raw)', 'Response Body (Highlight)', and 'Response Body (Preview)'.

گام پنجم: پاسخ

جواب دریافتی از پوز در این قسمت نمایش داده می شود.

The screenshot displays the RESTClient interface. At the top, there's a menu bar with 'File', 'Authentication', 'Headers', and 'View'. On the right, there are links for 'Favorite Requests' and 'Setting', and the title 'RESTClient'. Below the menu, a tab shows 'Content-Type: application/json'. The main area is divided into two sections. The top section, labeled 'Body', contains a JSON object: `{ "ServiceCode": "1", "Amount": "1000", "PayerId": "108", "PciID": "1234" }`. The bottom section, titled '[-] Response', has four tabs: 'Response Headers', 'Response Body (Raw)', 'Response Body (Highlight)', and 'Response Body (Preview)'. The 'Response Body (Highlight)' tab is selected, showing a JSON response with various transaction details. A red arrow points to the opening curly brace of this response object.

```
{
  "AccountNo": "12404580",
  "PAN": "610433***8507",
  "PciID": "1234",
  "ReasonCode": "",
  "ReqID": "",
  "ReturnCode": 100,
  "SerialTransaction": "130",
  "TerminalNo": "21009524",
  "TraceNumber": "127917506888",
  "TransactionDate": "1396/04/24",
  "TransactionTime": "16:03"
}
```