


NOPE

The Test Document

Mrlwan

2026-05-20



Abstract

Lorem ipsum dolor sit amet, consetetur sadipscing elitr, sed diam nonumy eirmod tempor invidunt ut labore et dolore magna aliquyam erat, sed diam voluptua. At vero eos et accusam et justo duo dolores et ea rebum. Stet clita kasd gubergren, no sea takimata sanctus est Lorem ipsum dolor sit amet. Lorem ipsum dolor sit amet, consetetur sadipscing elitr, sed diam nonumy eirmod tempor invidunt ut labore et dolore magna aliquyam erat, sed diam voluptua. At vero eos et accusam et justo duo dolores et ea rebum. Stet clita kasd gubergren, no sea takimata sanctus est Lorem ipsum dolor sit amet.

Table of Contents

1	Slice-Embed	1
1.1	Heading-Slice	1
	Middle Section	1
1.2	Block-ID-Slice	1
1.3	Fallback for Broken Anchor	1
1.4	Full Embed	2
	First Fill Section	2
2	Wikilinks	2
3	Obsidian Markup	3
3.1	Comments (%% . . . %%)	3
3.2	Highlights (== . . . ==)	3
3.3	Lists	3
	Callouts	5
	Figures	6
	Image Width Tests	7
3.4	Mermaid	10
	Glossary	10
	Footnotes	11
	LaTeX Environments	11
3.5	Tables	12
	Table Numbering Test	12
	First Table	12
	Second Table	12
	Equations	15
	Citations	15
4	Unsupported Characters	16
	Abkürzungen	18
	Glossar	18

1 Slice-Embed

This document tests slice embeds **and** wikilink resolution against the target map. The source note is `slice-source.md`.

1.1 Heading-Slice

Expected behavior: only the “Middle Section” including sub-headings A and B will be embedded. The first and third sections must not appear. Additionally, the middle section is an H1 in its own note, but should be rendered as an H2 in the PDF. Embedded notes are shifted by N heading levels, where N is always > 0 .

Middle Section

This is the content of the middle section. If the slice test works correctly, **exactly this section including the sub-headings** should land in the export — the first and third sections must not appear.

Sub-Heading A Content under sub-heading A. Belongs to the middle section (level 2 under level 1), so it will be embedded with it.

Sub-Heading B Content under sub-heading B. Here too: belongs to the middle section.

1.2 Block-ID-Slice

Expected behavior: only the single paragraph from the first section marked with `^para-first` will be embedded. The `^para-first` suffix itself should not be visible in the PDF.

This is the Paragraph with the `para-first`Block in the end.

This is another paragraph referenced by `para` suffix.

1.3 Fallback for Broken Anchor

Expected behavior: a plain-text notice in the style `[Section not found: slice-source#Does-Not-Exist]`, not the entire note content.

`[Heading not found: slice-source#Does-Not-Exist]`

And for block IDs:

[Block ID not found: slice-source#^block-does-not-exist]

1.4 Full Embed

For verification: a source note without an anchor, embedded completely once.

First Fill Section

Lorem ipsum dolor sit amet, consetetur sadipscing elitr, sed diam nonumy eirmod tempor invidunt ut labore et dolore magna aliquyam erat, sed diam voluptua. At vero eos et accusam et justo duo dolores et ea rebum. Stet clita kasd gubergren, no sea takimata sanctus est Lorem ipsum dolor sit amet. Lorem ipsum dolor sit amet, consetetur sadipscing elitr, sed diam nonumy eirmod tempor invidunt ut labore et dolore magna aliquyam erat, sed diam voluptua. At vero eos et accusam et justo duo dolores et ea rebum. Stet clita kasd gubergren, no sea takimata sanctus est Lorem ipsum dolor sit amet.

Second Heading LVL Lorem ipsum dolor sit amet, consetetur sadipscing elitr, sed diam nonumy eirmod tempor invidunt ut labore et dolore magna aliquyam erat, sed diam voluptua. At vero eos et accusam et justo duo dolores et ea rebum. Stet clita kasd gubergren, no sea takimata sanctus est Lorem ipsum dolor sit amet. Lorem ipsum dolor sit amet, consetetur sadipscing elitr, sed diam nonumy eirmod tempor invidunt ut labore et dolore magna aliquyam erat, sed diam voluptua. At vero eos et accusam et justo duo dolores et ea rebum. Stet clita kasd gubergren, no sea takimata sanctus est Lorem ipsum dolor sit amet.

2 Wikilinks

Expected behavior: each of these links should be clickable in the PDF and jump to the correct anchor. In the LaTeX output, `\hyperref{...}` is used with the registered label.

Note link without anchor: Subsubsection 1.1 — jumps to the beginning of the first embed.

Note link with display alias: alternative display — same jump, different visible text.

Heading link to embedded heading: Subsubsection 1.1 — jumps to the “Middle Section”.

Block-ID link: slice-para#^para-first — jumps to the block-ID paragraph from the first section.

Link to non-embedded block: slice-para#^does-not-exist — the block ID was not part of any slice embed, so no anchor exists. The link text remains visible, but as plain text instead of a hyperref.

Link to non-embedded note: A-Note-We-Did-Not-Embed — because the note is never embedded in this document with `![[...]]`, no anchor exists. Thus plain text.

Link to non-existent heading of an embedded note: slice-source#Does-Not-Exist — the note is embedded, but this heading does not appear in it.

3 Obsidian Markup

Tests for `obsidian-inline.lua`. Expectations are described in the comment above each test — only what remains after transformation should be visible in the PDF.

3.1 Comments (%%...%%)

Expected behavior: a single inline comment disappears, the rest remains visible.

Before the comment, and after the comment.

Visible paragraph before block comment.

After the hidden region.

3.2 Highlights (==...==)

Expected behavior: a single-token highlight becomes LaTeX `\hl{}` and is coloured in the PDF (yellow with the `soul` default).

First **highlight**, second **also marked**, third **end**.

This `==` has no closer and should appear as plain text with double equals signs.

This is **important and central word** **plus rest** in the sentence.

3.3 Lists

Expected behavior: plain Markdown lists render as normal LaTeX `itemize/enumerate` blocks — no NOPE-specific syntax needed. Nested items indent one level, ordered items keep their numbering.

Unordered, with a nested level:

- Write the atomic note in Obsidian as usual
- Embed it with `![[Note]]` to pull its content into the document
- Reference it with `[[Note]]` for an auto-numbered cross-reference

- Works at any nesting depth
- Bullets stay bullets and the order is preserved

Ordered, describing the export flow:

1. Add the matching `\latex-env` frontmatter to the note
2. Provide a `caption:` wherever the environment requires one
3. Export the document to PDF through the Docker pipeline
4. Open the live preview to check the rendered result

And what happens with Checkboxes?

- ☐ a
- ☒ b
 - [c] c

Callouts

Obsidian callouts (> [!note] ...) render as coloured awesomebox blocks.

This section tests every callout type the Lua filter supports. Each block should render as a coloured box with an icon — not as a grey blockquote.



Important Notice This is a simple note callout with a title.

The second line belongs to the same block.



TLDR



Caution `\latexmkrc` matters

What happens here on the second line



Beware Never `rm -rf *`



Critical Back up before a major TeX Live update.



Multi-line

- First point - Second point - Third point
Another sentence here



Code

```
makeglossaries central_document
```

Then run `latexmk -pdf` again.



simple info box for an unknown type!

Normal blockquote without a callout marker

Figures

Image embeds register as numbered figures; wikilinks to embedded images resolve to figure references.

This document tests how image embeds are registered as numbered figures and how wikilinks are resolved to them.

Case 1 — Embed with Caption Becomes Numbered Figure Expected behavior: the image appears as a framed figure with caption below. The header “Figure 1: ...” is automatically generated by LaTeX with Babel-English.

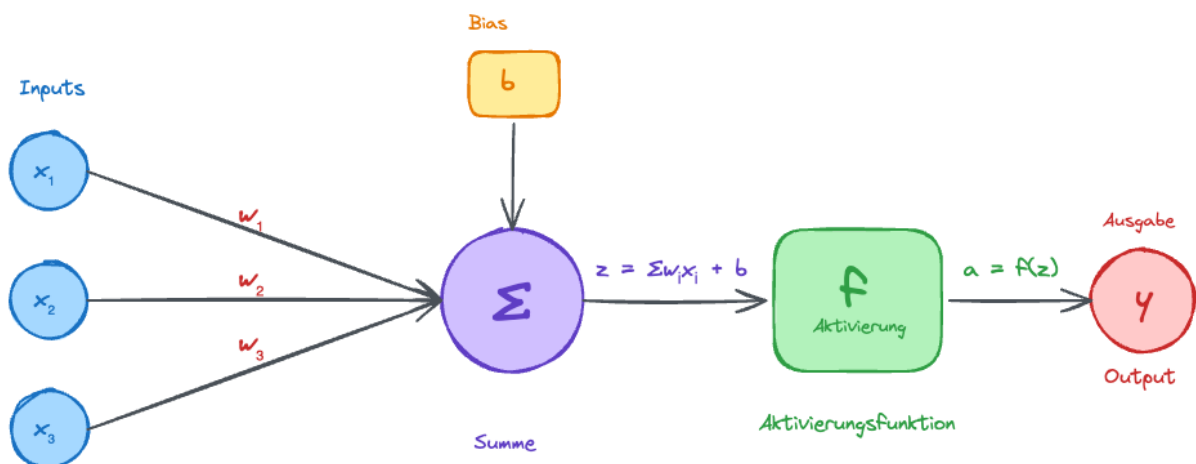


Figure 1: Diagram of a Neuron

As seen in Figure 1, the model has the typical structure.

The reference can also have its own text; see here.

Case 2 — Embed Without Caption Uses the Filename Expected behavior: the image is also rendered as a numbered figure; since no caption is specified, the filename serves as the caption. The anchor is registered on the source path.

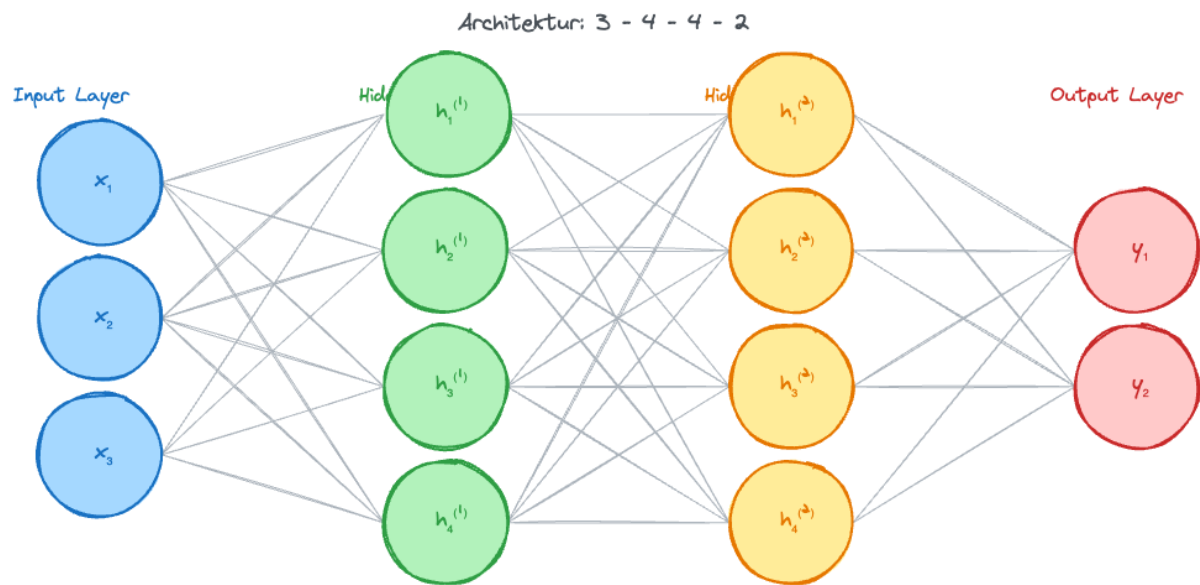


Figure 2: neuronales_netz.excalidraw.png

Here is a reference: Figure 2.

Convention: Wikilink Fallback Wikilinks to non-embedded images are — like note wikilinks — passed through as plain text (this is intentionally not a crash, so that references to non-embedded targets remain possible as pure conceptual references).

- `[[neuron.excalidraw]]` (without `.png`) → plain-text fallback, because the map key strictly requires the full spelling including extension.
- `[[does-not-exist.png]]` → also plain-text fallback.

neuron.excalidraw

does-not-exist.png

Image Width Tests

One embed per `|w=` value type — each should render at the labelled size with no parse error.

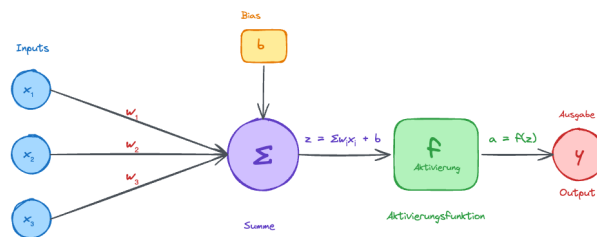


Figure 3: Percent ($w=50\%$)

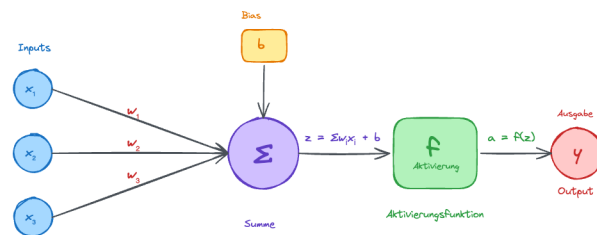


Figure 4: Pixels ($w=300\text{px}$)

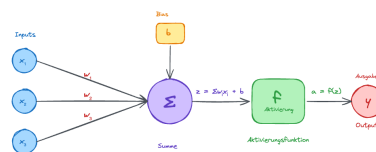


Figure 5: Centimeters ($w=5\text{cm}$)

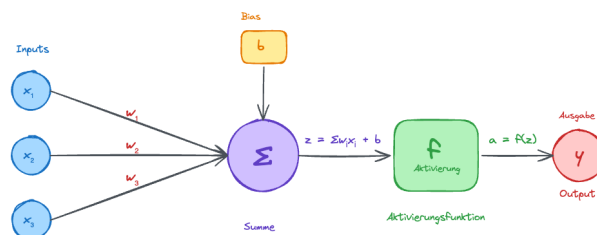


Figure 6: Millimeters ($w=80\text{mm}$)

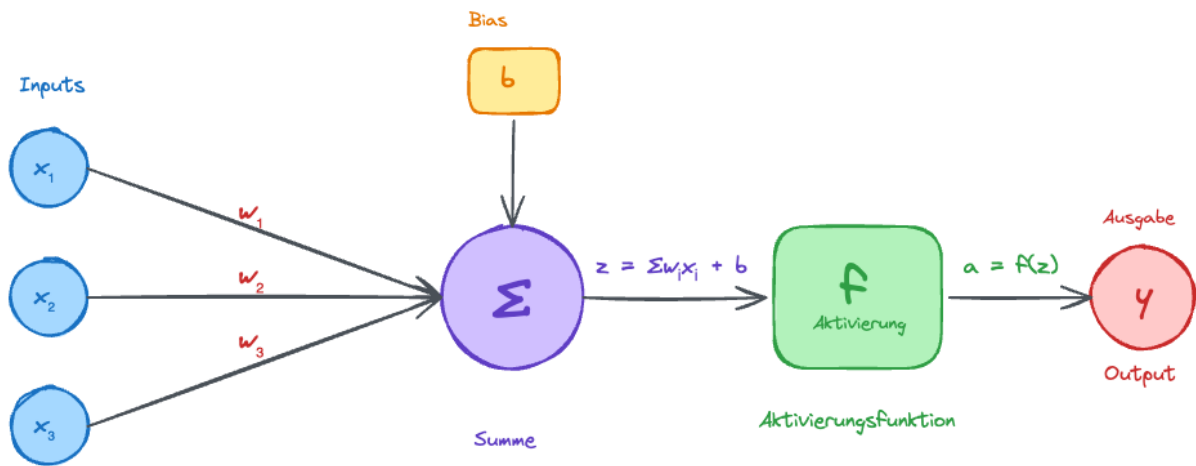


Figure 7: No width hint (natural size)

3.4 Mermaid

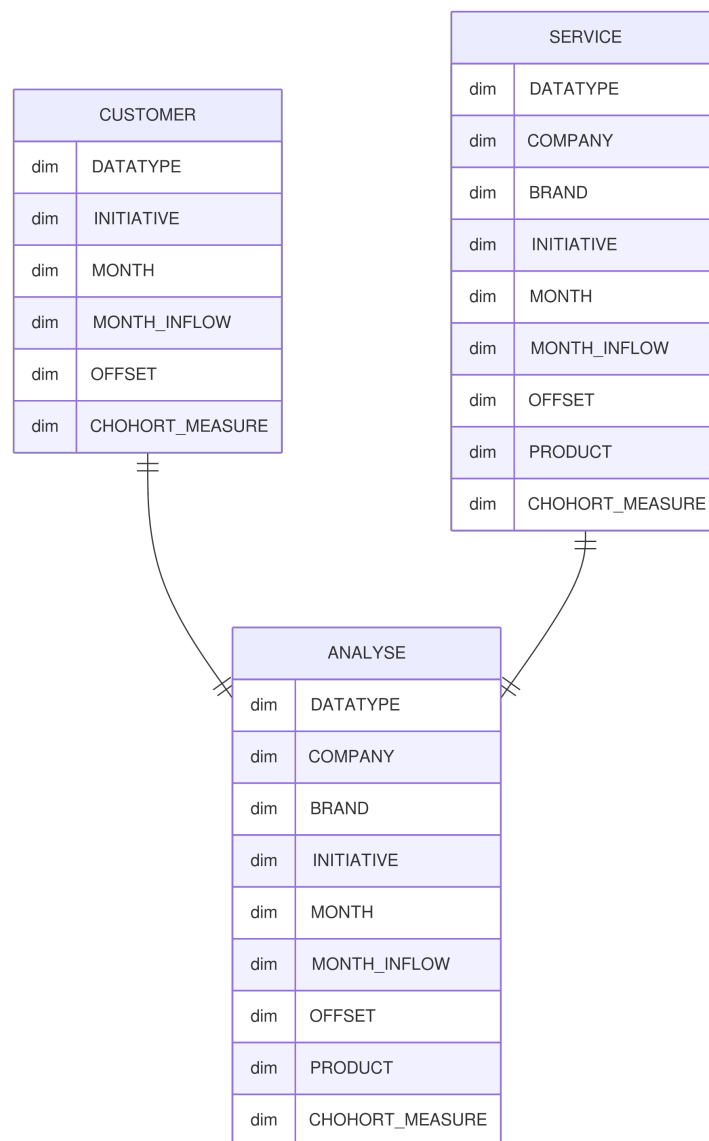


Figure 8: The example representation from the Mermaid documentation

As shown in Figure 8, you can also refer to Mermaid environments!

Glossary

Wikilinks to notes with `gls-*` frontmatter render as glossary/acronym references; the entries are collected automatically and printed at the end of the document.

Neural networks rank among the most influential algorithms in Artificial Intelligence (AI). They drive breakthroughs in Computer Vision, Natural Language Processing (NLP), Speech Recognition and countless applications, from forecasting to facial recognition. While today's Deep Neural Network (DNN) power complex systems such as Transformer and Convolutional Neural Network (CNN), the roots of neural networks trace back to simple models like linear regression and to the way the human brain processes, transforms and decides on incoming information.

Footnotes

Standard Markdown footnotes — numbered automatically, inline footnotes supported.

Standard Markdown footnote — marker in running text¹, definition somewhere in the document.

Multiple footnotes — Pandoc numbers automatically², order in body irrelevant³.

The same footnote referenced twice⁴ — has the same number in the PDF but a separate one in Obsidian.

Inline footnote for short ad-hoc remarks⁵.

LaTeX Environments

Notes with `\latex-env` frontmatter (theorem, lemma, definition, proof, ...) render as the corresponding LaTeX environment; wikilinks to them become typed, numbered references.

This document tests the `\latex-env` frontmatter feature. The source note is `Pythagorean-Theorem.md` with `\latex-env: theorem` and `\latex-short: Pythagoras` in the frontmatter.

Template prerequisite: `\usepackage{amsthm}` plus a `\newtheorem{theorem}{Theorem}` must be defined in `eisvogel.tex`, otherwise `pdflatex` fails with “Environment theorem undefined”.

Theorem 3.1 (Pythagoras). *In any right triangle with legs a and b and hypotenuse c :*

$$a^2 + b^2 = c^2$$

It is one of the oldest known theorems in mathematics.

¹A simple numeric footnote.

²Schmidt, J. (2020): *Title of the Source*, Publisher, p. 42.

³Machine Learning is understood here as a collective term — see glossary.

⁴Schmidt, J. (2020): *Title of the Source*, Publisher, p. 42.

⁵directly at the sentence, no separate definition needed

The environment can then be referenced. From Theorem 3.1 the statement follows directly.

The displayed text is easy to override. By the Pythagorean theorem, the statement follows directly — the link points to the same theorem.

The .md is wrapped in an environment only when the whole node is linked. Otherwise everything is embedded following the logic in example-document#Slice-Embed.

3.5 Tables

Table Numbering Test

This document tests how tables from atomic notes are embedded as numbered floats. Convention: a single-source caption — the caption lives in the table note's frontmatter as `caption: "..."`. There is no pipe override in the embed tag and no Pandoc native-caption fallback.

First Table

Source note `Table-Comparison.md` has `latex-env: table` and `caption: "Comparison of implementation variants"` in the frontmatter.

Table 1: Comparison of implementation variants

Criterion	Variant A	Variant B
Cost	low	high
Maintenance effort	medium	low
Scalability	limited	excellent

As Table 1 shows, variant B is superior on several dimensions. The reference also works with custom text — for example here — and stays clickable as a `hyperref`.

Second Table

Demonstrates the counter increment (should become “Table 2”):

Table 2: Project phases overview

Phase	Duration	Status
Analysis	2 weeks	done
Implementation	6 weeks	in progress
Acceptance	1 week	open

See Table 2 for the rough timeline.

Table-Does-Not-Exist

Table 3: Example table (longtable off)

No.	Component	Owner	Status	Priority	Effort	Risk	Description
1	Requirements	A. Meier	open	high	2 d	low	Capture the functional requirements.
2	Architecture	B. Schulz	in progress	medium	5 d	medium	Align with the stakeholders.
3	Data model	C. Roth	done	low	8 d	high	Assess potential technical risks.
4	Backend	D. Kern	blocked	high	13 d	low	Implementation including unit tests.
5	Frontend	E. Lang	in review	medium	3 d	medium	Reviewed by two developers.
6	Interface	F. Vogt	open	low	2 d	high	Integrate against third-party systems.
7	Test	A. Meier	in progress	high	5 d	low	Capture the functional requirements.
8	Deployment	B. Schulz	done	medium	8 d	medium	Align with the stakeholders.
9	Monitoring	C. Roth	blocked	low	13 d	high	Assess potential technical risks.
10	Documentation	D. Kern	in review	high	3 d	low	Implementation including unit tests.
11	Security	E. Lang	open	medium	2 d	medium	Reviewed by two developers.
12	Release	F. Vogt	in progress	low	5 d	high	Integrate against third-party systems.

As shown in Table 3.

Table 4: Example table (longtable on)

No.	Component	Owner	Status	Priority	Effort	Risk	Description
1	Requirements	A. Meier	open	high	2 d	low	Capture the functional requirements.
2	Architecture	B. Schulz	in progress	medium	5 d	medium	Align with the stakeholders.
3	Data model	C. Roth	done	low	8 d	high	Assess potential technical risks.
4	Backend	D. Kern	blocked	high	13 d	low	Implementation including unit tests.
5	Frontend	E. Lang	in review	medium	3 d	medium	Reviewed by two developers.
6	Interface	F. Vogt	open	low	2 d	high	Integrate against third-party systems.
7	Test	A. Meier	in progress	high	5 d	low	Capture the functional requirements.
8	Deployment	B. Schulz	done	medium	8 d	medium	Align with the stakeholders.
9	Monitoring	C. Roth	blocked	low	13 d	high	Assess potential technical risks.
10	Documentation	D. Kern	in review	high	3 d	low	Implementation including unit tests.
11	Security	E. Lang	open	medium	2 d	medium	Reviewed by two developers.
12	Release	F. Vogt	in progress	low	5 d	high	Integrate against third-party systems.

As shown in Table 4.

Equations

Atomic equation notes (`latex-env: equation`) embedded as numbered equations with working cross-references.

This document tests how equations from atomic notes are embedded as numbered equations. Convention: the note's frontmatter carries `latex-env: equation` and its body contains exactly one `$$...$$` display-math block. The filter wraps that block in `\begin{equation}\label{eq:X}...\end{equation}`. The caption frontmatter is optional and for documentation only — it does not render in the PDF.

Source note `Navier-Stokes.md` has `latex-env: equation` and a `$$...$$` block with `\begin{aligned}...\end{aligned}` inside. Expected: a single equation number for the whole block.

$$\begin{aligned}\rho \left(\frac{\partial \vec{u}}{\partial t} + (\vec{u} \cdot \nabla) \vec{u} \right) &= -\nabla p + \mu \nabla^2 \vec{u} + \vec{f} \\ \nabla \cdot \vec{u} &= 0\end{aligned}\tag{1}$$

As described in Equation 1, conservation of momentum couples the pressure gradient to friction. The reference also works with custom text — see the conservation law — and stays clickable as a hyperref.

Source note `Euler-Identity.md` has a simple `$$...$$` block. Expected: “Equation 2”.

$$e^{i\pi} + 1 = 0\tag{2}$$

From Equation 2 the link between the fundamental constants follows directly.

$$\begin{aligned}\rho \left(\frac{\partial \vec{u}}{\partial t} + (\vec{u} \cdot \nabla) \vec{u} \right) &= -\nabla p + \mu \nabla^2 \vec{u} + \vec{f} \\ \nabla \cdot \vec{u} &= 0\end{aligned}\tag{3}$$

If the same equation is embedded again, the reference points to the first embed. See Equation 1.

As with tables and figures, wikilinks to non-embedded equation notes pass through as plain text (no crash), so conceptual references to non-rendered notes still work:

Equation-Does-Not-Exist

Citations

Two sources feed the same reference list: a `.bib` file referenced via the `bibliography` frontmatter key and citation notes carrying a `citekey` in their frontmatter.

Pandoc citeproc resolves `[@key]` against the `.bib` file referenced in the `bibliography` frontmatter. The build locates the file by basename match in the vault — path quotation is therefore irrelevant.

It can look like this: The Transformer replaces recurrence and convolution with pure attention mechanism (Vaswani et al. 2023).

When the author is already named in the running text, `[-@key]` suppresses the author in the citation block: Vaswani et al. demonstrate (2023) that attention alone suffices for sequence transduction.

`[@key, p. 42]` appends a page reference: The attention formula is defined in (Vaswani et al. 2023, 4).

Separate multiple citations with semicolon: the concept has multiple roots (Vaswani et al. 2023, 1; 2023, 2).

Citation notes (`citekey`) A note that carries a `citekey` in its frontmatter is itself a source — no `.bib` entry needed. A `[[Note]]` link to it resolves to a citation and the matching BibTeX is generated automatically, alongside the `.bib` above: tracing JITs specialize dynamic-language code at runtime (Gal et al. 2009). The generated entry joins the same reference list as the `.bib` keys.

A citation note can be minimal — `citekey`, `author`, `title` and `year` are enough, as in the back-propagation paper (Rumelhart et al. 1986).

Bibliography

Gal, Andreas, Brendan Eich, Mike Shaver, et al. 2009. “Trace-Based Just-in-Time Type Specialization for Dynamic Languages.” *PLDI '09: Proceedings of the 2009 ACM SIGPLAN Conference on Programming Language Design and Implementation*, 465–78. <https://doi.org/10.1145/1542476.1542528>.

Rumelhart, David E., Geoffrey E. Hinton, and Ronald J. Williams. 1986. *Learning Representations by Back-Propagating Errors*.

Vaswani, Ashish, Noam Shazeer, Niki Parmar, et al. 2023. *Attention Is All You Need*. arXiv:1706.03762. arXiv. <https://doi.org/10.48550/arXiv.1706.03762>.

4 Unsupported Characters

One symbol per stripped category — after export each symbol disappears (pdf_latex can't render it) and a notice reports how many were removed. The labels stay.

- Emoji & pictographs (U+1F000–1FFFF):

- Misc symbols & dingbats (U+2600–27BF):
- Misc symbols & arrows (U+2B00–2BFF):
- Regional indicator / flag (U+1F1E6–1F1FF):
- Variation selector (U+FE00–FE0F):
- Zero-width joiner (U+200D):
- Combining enclosing keycap (U+20E3): 1

Abkürzungen

AI Artificial Intelligence.

CNN Convolutional Neural Network.

DNN Deep Neural Network.

NLP Natural Language Processing.

Glossar

Computer Vision Field of AI that lets machines capture, interpret and act on visual information from images and video..

Speech Recognition Technology that converts spoken language into machine-readable text, often as a first step toward further language analysis..

Transformer Neural network architecture based on self-attention, now the standard for language processing and modern language models..