

# **Configuring a Connector to use a proxy** server

**Cloud Manager** 

Ben Cammett July 19, 2021

This PDF was generated from https://docs.netapp.com/us-en/occm/task\_configuring\_proxy.html on October 11, 2021. Always check docs.netapp.com for the latest.

# **Table of Contents**

Configuring a Connector to use a proxy server	 . 1
Enable a proxy on a Connector	 . 1
Enable direct API traffic	 . 2

## Configuring a Connector to use a proxy server

If your corporate policies dictate that you use a proxy server for all HTTP communication to the internet, then you must configure your Connectors to use that proxy server. The proxy server can be in the cloud or in your network.

### **Enable a proxy on a Connector**

When you configure a Connector to use a proxy server, that Connector and the Cloud Volumes ONTAP systems that it manages (including any HA mediators), all use the proxy server.


Note that this operation restarts the Connector. Ensure that the Connector isn't performing any operations before you proceed.

#### Steps

1. Log in to the Cloud Manager SaaS interface from a machine that has a network connection to the Connector instance.


If the Connector doesn't have a public IP address, you'll need a VPN connection or you'll need to connect from a jump host that's in the same network as the Connector.

2. Click the Connector drop-down and then click Go to local UI for a specific Connector.

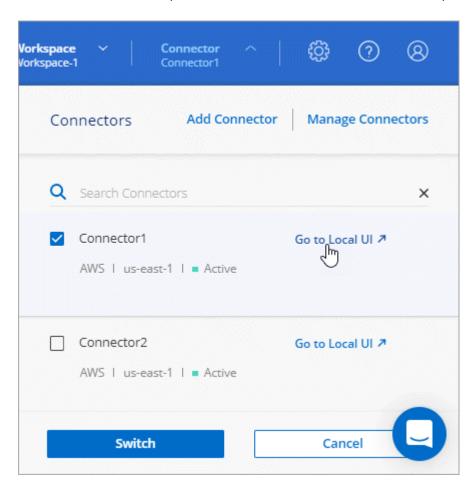

The Cloud Manager interface running on the Connector loads in a new browser tab.

3. In the upper right of the Cloud Manager console, click the Settings icon, and select Connector Settings.



- 4. Under General, click HTTP Proxy Configuration.
- 5. Set up the proxy:
  - a. Click Enable Proxy.
  - b. Specify the server using the syntax http://address:port
  - c. Specify a user name and password if basic authentication is required for the server
  - d. Click Save.



Cloud Manager doesn't support passwords that include the @ character.

#### Result

After you specify the proxy server, new Cloud Volumes ONTAP systems are automatically configured to use the proxy server when sending AutoSupport messages. If you didn't specify the proxy server before users create Cloud Volumes ONTAP systems, then they must use System Manager to manually set the proxy server in the AutoSupport options for each system.

### **Enable direct API traffic**

If you configured a proxy server, you can send API calls directly to Cloud Manager without going through the proxy. This option is supported with Connectors that are running in AWS, in Azure, or in Google Cloud.

#### Steps

1. In the upper right of the Cloud Manager console, click the Settings icon, and select Connector Settings.



- 2. Under General, click Support Direct API Traffic.
- 3. Click the checkbox to enable the option and then click **Save**.

#### **Copyright Information**

Copyright © 2021 NetApp, Inc. All rights reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means-graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system-without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

RESTRICTED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.277-7103 (October 1988) and FAR 52-227-19 (June 1987).

#### **Trademark Information**

NETAPP, the NETAPP logo, and the marks listed at <a href="http://www.netapp.com/TM">http://www.netapp.com/TM</a> are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.