

# Secure Classification as a Service

Levelled Homomorphic, Post-Quantum Secure Machine Learning Inference  
based on the CKKS Encryption Scheme

Peter Waldert

Bachelor Thesis Presentation, 01.08.2022


## Outline


- 1 Introduction
- 2 Lattice Cryptography, LWE and RLWE
- 3 The CKKS Scheme
- 4 Implementation Goal and Methods
- 5 Live Demo of the WebApp
- 6 Results: Network Analysis and Performance Benchmarks

## Privacy for Medical Applications

- Development of new applications and solutions 'of numerical nature' in health care, but: highly sensitive medical data.
- For instance, RNA sequences, images of skin, lab data, medical records, etc.
- The results are even more volatile: disease predictions
- ⇒ Demand for privacy-preserving solutions in Machine Learning (ML) applications.

# Post-Quantum Security

  $\psi(\mathbf{r})$

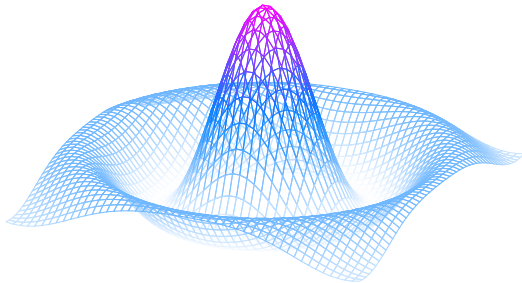

**Figure:** Illustration of a wave function  $\psi$  as commonly used in quantum mechanics.

## The RSA Scheme

From the integers  $\mathbb{Z}$ , define the quotient ring  $(\mathbb{Z}/q\mathbb{Z}, +, \cdot)$  for some modulus  $q \in \mathbb{N}$ .

With unpadded Rivest-Shamir-Adleman (RSA) [5], some arithmetic can be performed on the ciphertext - looking at the encrypted ciphertext  $\mathcal{E} : \mathbb{Z}/q\mathbb{Z} \mapsto \mathbb{Z}/q\mathbb{Z}$ ,  $\mathcal{E}(m) := m^r \bmod q$  ( $r, q \in \mathbb{N}$ ) of the message  $m_1, m_2 \in \mathbb{Z}/q\mathbb{Z}$  respectively, the following holds:

$$\begin{aligned}\mathcal{E}(m_1) \cdot \mathcal{E}(m_2) &\equiv (m_1)^r (m_2)^r \bmod q \\ &\equiv (m_1 m_2)^r \bmod q \\ &\equiv \mathcal{E}(m_1 \cdot m_2) \bmod q\end{aligned}$$


# Lattices

## Definition (Lattice)

A lattice  $(\mathcal{L}, +, \cdot)$  is a vector field over the integers  $(\mathbb{Z}, +, \cdot)$ , defined using a set of  $n$  basis vectors  $\mathbf{b}_1, \mathbf{b}_2, \dots, \mathbf{b}_n \in \mathbb{R}^n$ , that can be introduced as a set

$$\mathcal{L} := \left\{ \sum_{i=1}^n c_i \mathbf{b}_i \mid c_i \in \mathbb{Z} \right\} \subseteq \mathbb{R}^n$$

equipped with at least vector addition  
 $+: \mathcal{L} \times \mathcal{L} \mapsto \mathcal{L}$  and scalar multiplication  
 $\cdot: \mathbb{Z} \times \mathcal{L} \mapsto \mathcal{L}$ .

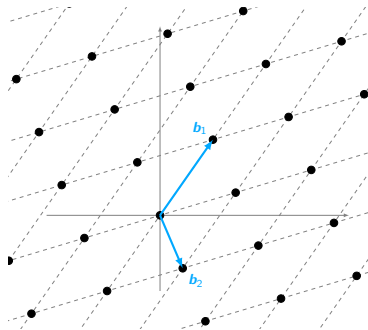

**Figure:** Illustration of a standard lattice  $\mathcal{L}$  with two basis vectors  $\mathbf{b}_1$  and  $\mathbf{b}_2$ .

## The Learning With Errors (LWE) Problem

### Definition (LWE-Distribution $A_{\mathbf{s}, \chi_{\text{error}}}$ )

Given a prime  $q \in \mathbb{N}$  and  $n \in \mathbb{N}$ , we choose some secret  $\mathbf{s} \in (\mathbb{Z}/q\mathbb{Z})^n$ . In order to sample a value from the LWE distribution  $A_{\mathbf{s}, \chi_{\text{error}}}$ :

- Draw a random vector  $\mathbf{a} \in (\mathbb{Z}/q\mathbb{Z})^n$  from the multivariate uniform distribution with its domain in the integers up to  $q$ .
- Given another probability distribution  $\chi_{\text{error}}$  over the integers modulo  $q$ , sample a scalar 'error term'  $\mu \in \mathbb{Z}/q\mathbb{Z}$  from it, often also referred to as noise.
- Set  $b = \mathbf{s} \cdot \mathbf{a} + \mu$ , with  $\cdot$  denoting the standard vector product.
- Output the pair  $(\mathbf{a}, b) \in (\mathbb{Z}/q\mathbb{Z})^n \times (\mathbb{Z}/q\mathbb{Z})$ .

Search-LWE-Problem: Given  $m$  independent samples  $(\mathbf{a}_i, b_i)_{0 < i \leq m}$  from  $A_{\mathbf{s}, \chi_{\text{error}}}$ , find  $\mathbf{s}$ .

# Polynomial Rings

## Definition (Cyclotomic Polynomial)

Given the  $n^{\text{th}}$  roots of unity  $\{\xi_k\}$ , define  $\Phi_n \in \mathbb{Z}[X]$  as

$$\Phi_n(x) := \prod_{\substack{k=1 \\ \xi_k \text{ primitive}}}^n (x - \xi_k).$$

It is unique for each given  $n \in \mathbb{N}$ .

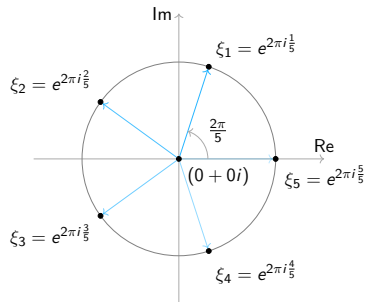


Figure: The 5<sup>th</sup> roots of unity



## Some Notation

- $\mathbb{Z}[X] := \{p : \mathbb{C} \mapsto \mathbb{C}, p(x) = \sum_{k=0}^{\infty} a_k x^k, a_k \in \mathbb{Z} \forall k \geq 0\}$ 
  - Complex-valued Polynomials with integer coefficients.
- $\mathbb{Z}_q[X] := (\mathbb{Z}/q\mathbb{Z})[X]$
- $\mathbb{Z}_q[X]/\Phi_M(X)$  using the  $M^{\text{th}}$  cyclotomic polynomial
- $\mathbb{Z}_q[X]/(X^N + 1)$  for  $N$  a power of 2.
  - Its elements are polynomials of degree  $N - 1$  with integer coefficients mod  $q$ .

## The Learning With Errors on Rings (RLWE) Problem


### Corollary (RLWE-Distribution $B_{s, \chi_{\text{error}}}$ )

*Given a quotient  $(R/qR, +, \cdot)$ , we choose some secret  $s \in R/qR$ . In order to sample a value from the RLWE distribution  $B_{s, \chi_{\text{error}}}$ :*

- *Uniformly randomly draw an element  $a \in R/qR$*
- *Given another probability distribution  $\chi_{\text{error}}$  over the ring elements, sample an 'error term'  $\mu \in R/qR$  from it, also referred to as noise.*
- *Set  $b = s \cdot a + \mu$ , with  $\cdot$  denoting the ring multiplication operation.*
- *Output the pair  $(a, b) \in R/qR \times R/qR$ .*

Use it to construct a cryptosystem... Idea: Attacker needs to solve LWE given the ciphertext and public key.

# Overview of Cheon-Kim-Kim-Song (CKKS)

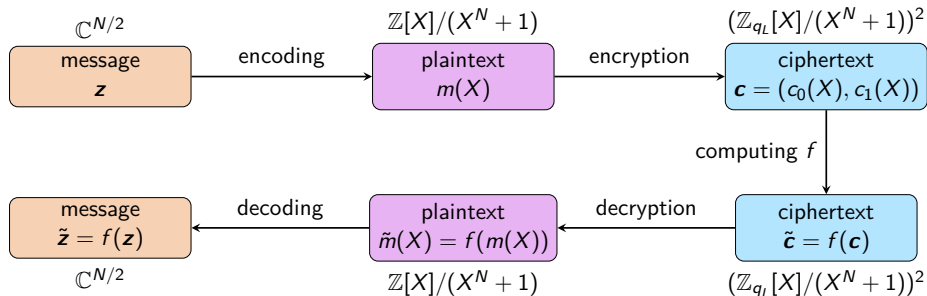

**Figure:** Schematic overview of CKKS [1], adapted from [2]. A plain vector  $\mathbf{z} \in \mathbb{C}^{N/2}$  is encoded to  $m = \text{CKKS.Encode}(\mathbf{z})$ , encrypted to  $\mathbf{c} = \text{CKKS.Encrypt}(\mathbf{p}, m)$ , decrypted and decoded to a new  $\tilde{\mathbf{z}} = \text{CKKS.Decode}(\text{CKKS.Decrypt}(\mathbf{s}, \tilde{\mathbf{c}}))$ .

## Encoding and Decoding

### CKKS.

**Encode**( $\mathbf{z}$ ) For a given input vector  $\mathbf{z}$ , output  

$$m = (\underline{\sigma}^{-1} \circ \underline{\rho}_{\delta}^{-1} \circ \underline{\pi}^{-1})(\mathbf{z}) = \underline{\sigma}^{-1}(\lfloor \delta \cdot \underline{\pi}^{-1}(\mathbf{z}) \rfloor_{\underline{\sigma}(R)}) \rightarrow m$$

**Decode**( $m$ ) Decode plaintext  $m$  as  $\mathbf{z} = (\underline{\pi} \circ \underline{\rho}_{\delta} \circ \underline{\sigma})(m) = (\underline{\pi} \circ \underline{\sigma})(\delta^{-1}m) \rightarrow \mathbf{z}$

- Three transformations:  $\underline{\sigma}^{-1}$ ,  $\underline{\rho}_{\delta}^{-1}$  and  $\underline{\pi}^{-1}$ .
- Key idea: Homomorphic property, they preserve additivity and multiplicativity.
- Allows for homomorphic Single Instruction Multiple Data (SIMD) operations.

## Encryption and Decryption

### CKKS.

**Encrypt**( $\mathbf{p}, m$ ) Let  $(b, a) = \mathbf{p}$ ,  $u \leftarrow \chi_{enc}$ ,  $\mu_1, \mu_2 \leftarrow \chi_{error}$ , then the ciphertext is  
 $\mathbf{c} = u \cdot \mathbf{p} + (m + \mu_1, \mu_2) = (m + bu + \mu_1, au + \mu_2) \rightarrow \mathbf{c}$

**Decrypt**( $s, \mathbf{c}$ ) Decrypt the ciphertext  $\mathbf{c} = (c_0, c_1)$  as  $m = [c_0 + c_1 s]_{q_L} \rightarrow m$

- A public-key cryptosystem! Encrypt with  $\mathbf{p}$ , decrypt with  $s$ .
- Leaves the attacker with the RLWE problem.
- Decrypts correctly under certain conditions...

## Homomorphic Addition

**CKKS.Add**( $\mathbf{c}_1, \mathbf{c}_2$ )    Output  $\mathbf{c}_3 = \mathbf{c}_1 + \mathbf{c}_2 \quad \rightarrow \mathbf{c}_3$

Decrypts correctly?

$$\begin{aligned}
 \text{CKKS.Decrypt}(s, \bar{\mathbf{c}}) &= \lfloor \delta^{-1} [\bar{c}_0 + \bar{c}_1 s]_t \rfloor \\
 &= \lfloor \delta^{-1} [\delta \bar{m} + b\bar{u} + \bar{\mu}_1 + (a\bar{u} + \bar{\mu}_2)s]_t \rfloor \\
 &= \lfloor [(\delta^{-1}\delta)\bar{m} + \delta^{-1}b\bar{u} + \delta^{-1}\bar{\mu}_1 + \delta^{-1}a\bar{u} + \delta^{-1}\bar{\mu}_2s]_t \rfloor \\
 &= \lfloor [\bar{m} - \cancel{\delta^{-1}a\bar{u}} - \delta^{-1}\tilde{\mu}\bar{u} + \delta^{-1}\bar{\mu}_1 + \cancel{\delta^{-1}a\bar{u}} + \delta^{-1}\bar{\mu}_2s]_t \rfloor \\
 &= \lfloor [\bar{m} + \underbrace{\delta^{-1}(\bar{\mu}_1 + \bar{\mu}_2s - \tilde{\mu}\bar{u})}_{:=\epsilon, ||\epsilon|| \ll 1}]_t \rfloor \approx \lfloor [\bar{m}]_t \rfloor = \lfloor \bar{m} \rfloor \approx \bar{m}
 \end{aligned}$$


## Goal: Classify MNIST

- Two main types of ML: Supervised and Unsupervised Learning
- Popular dataset: Modified National Institute of Standards and Technology (MNIST). Encode as vector of 784 entries.



**Figure:** Sample images of the MNIST dataset of handwritten digits [4]. The dataset contains 70,000 images of  $28 \times 28$  greyscale pixels valued from 0 to 255 as well as associated labels (as required for supervised learning).


## Feedforward Neural Networks

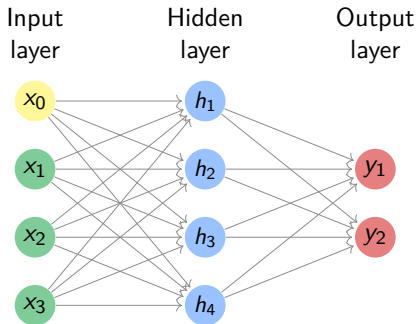

**Figure:** A simple neural network resembling the structure we use in our demonstrator with  $\mathbf{h} = \text{relu}(\mathbf{M}_1 \mathbf{x} + \mathbf{b}_1)$  and the output  $\mathbf{y} = \text{softmax}(\mathbf{M}_2 \mathbf{h} + \mathbf{b}_2)$ .




# Matrix Multiplication: The Naïve Method

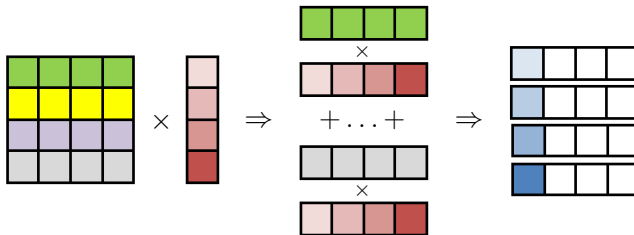

**Figure:** The naïve method to multiply a matrix  $M \in \mathbb{R}^{s \times t}$  with a vector  $\mathbf{x} \in \mathbb{R}^t$  (adapted from [3]).

$$\{M\mathbf{x}\}_i = \sum_{j=1}^t M_{ij}x_j.$$


## Matrix Multiplication: The Diagonal Method

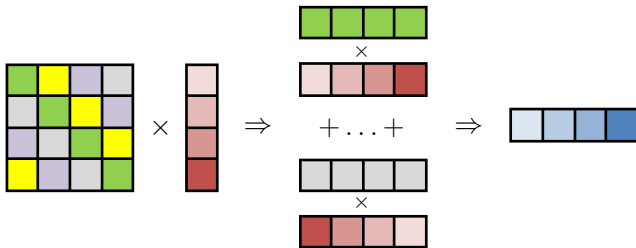

**Figure:** The diagonal method to multiply a square matrix with a vector (adapted from [3]).

$$M\mathbf{x} = \sum_{j=0}^{t-1} \text{diag}_j(M) \cdot \text{rot}_j(\mathbf{x}).$$

# Matrix Multiplication: The Hybrid Method

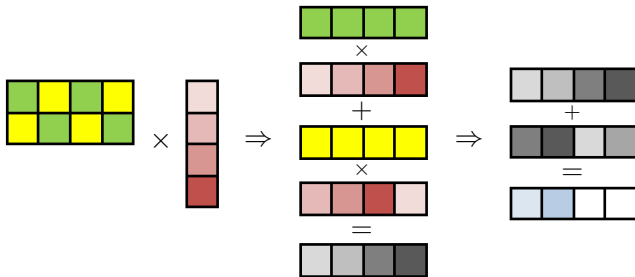

**Figure:** The hybrid method to multiply an arbitrarily sized matrix with a vector (adapted from [3]).

$$M\mathbf{x} = (y_i)_{i \in \mathbb{Z}/s\mathbb{Z}} \text{ with } \mathbf{y} = \sum_{k=1}^{t/s} \text{rot}_{ks} \left( \sum_{j=1}^s \text{diag}_j(M) \cdot \text{rot}_j(\mathbf{x}) \right).$$

## Polynomial Evaluation

- Fourth Method: The Babystep-Giantstep (BSGS) Method, which has similar performance as the hybrid method.
- In between the dense layers, we need to evaluate the **relu** function.
  - Approximate it by a series expansion...

$$\text{relu\_taylor}(x) = -0.006137x^3 + 0.090189x^2 + 0.59579x + 0.54738.$$


- The **softmax** activation at the end can be done by the client.

# Demo: Secure Handwritten Digit Classification as a Service

FHE Classifier

## Classify your Secret Data

Using state-of-the-art Fully Homomorphic Encryption, directly from within the browser, based on Web Assembly.




CLEAR

CLASSIFY

Each grid cell represents one pixel in the 28x28 image.

By clicking on one of the following test images, you can load it to the canvas directly:



The 28x28 downscaled version will be classified using the

PlainCommunicator



SEALCommunicator

This will take up browser resources for a few seconds.

Prediction: 6

Probabilities


0 1 2 3 4 5 6 7 8 9

Scan the QR-Code:



Figure: <https://secure-classification.peter.waldert.at/>.

## Chaos everywhere: The Confusion Matrix

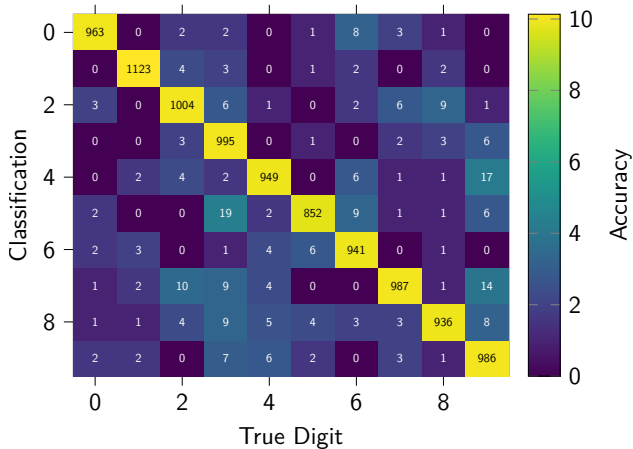


## Runtime Benchmarks

**Table:** Performance benchmarks and communication overhead of the classification procedure on an Intel® i7-5600U CPU, including the encoding and decoding steps.

Mode	SecLevel	$B_1$	$B_2$	$N$	MatMul	$T / s$	$M / \text{MiB}$	$\Delta / 1$
Release	tc128	34	25	8192	Diagonal	8.39	132.72	0.0364
					Hybrid	1.35	132.72	0.0362
					BSGS	1.66	132.72	0.1433
	tc128	60	40	16384	Diagonal	17.24	286.51	0.0363
					Hybrid	3.05	286.51	0.0364
					BSGS	3.66	286.51	0.1399
	tc256	60	40	32768	Diagonal	35.24	615.16	0.0363
					Hybrid	5.99	615.16	0.0364
					BSGS	7.34	615.16	0.1399

## Ciphertext Visualisations

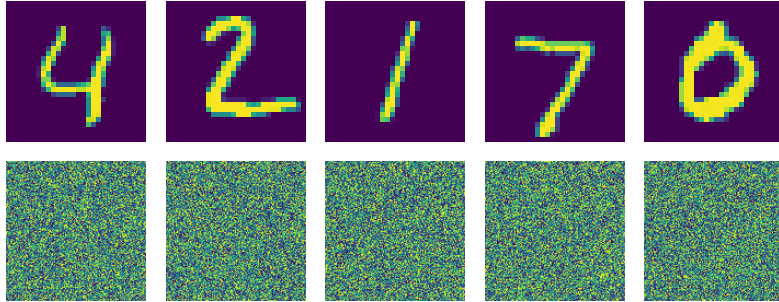

**Figure:** Ciphertext Visualisation: The first row corresponds to the images in plain, the second row depicts an encrypted version, namely the reconstructed polynomial coefficients  $a_k$  of the ciphertext polynomial.



## Conclusion

- Schemes like RSA become problematic due to SHOR's Algorithm  $\Rightarrow$  Lattice Crypto.
- New Cryptosystems constructed based on REGEV's LWE-problem, e.g. CKKS.
- Encryption is homomorphic with respect to addition (and multiplication).
- The Encoding and Decoding procedures of CKKS allow for SIMD operations needed for efficient computations.
- Image Classification of the handwritten digits can be done using a neural network.
- The required operations can be translated to Homomorphic Encryption (HE).
- For better performance, improved matrix multiplication methods are utilised.
- Our Demonstrator: <https://secure-classification.peter.waldert.at/>.

Questions?

## Glossary I

BSGS	Babystep-Giantstep	20
CKKS	Cheon-Kim-Kim-Song	11
HE	Homomorphic Encryption	25
LWE	Learning With Errors	7
ML	Machine Learning	3
MNIST	Modified National Institute of Standards and Technology	15
RLWE	Learning With Errors on Rings	10
RSA	Rivest-Shamir-Adleman	5
SIMD	Single Instruction Multiple Data	12

## Bibliography I

- [1] Jung Hee Cheon, Andrey Kim, Miran Kim and Yongsoo Song. **Homomorphic Encryption for Arithmetic of Approximate Numbers**. ASIACRYPT. 2017.
- [2] Daniel Huynh. **Cryptotree: fast and accurate predictions on encrypted structured data**. (2020). DOI: [10.48550/ARXIV.2006.08299](https://doi.org/10.48550/ARXIV.2006.08299). URL: <https://arxiv.org/abs/2006.08299>.
- [3] Chiraag Juvekar, Vinod Vaikuntanathan and Anantha P. Chandrakasan. **Gazelle: A Low Latency Framework for Secure Neural Network Inference**. *CoRR* abs/1801.05507 (2018). arXiv: [1801.05507](https://arxiv.org/abs/1801.05507). URL: <http://arxiv.org/abs/1801.05507>.
- [4] Yann LeCun and Corinna Cortes. **The MNIST database of handwritten digits**. 1998. URL: <http://yann.lecun.com/exdb/mnist/>.
- [5] Ronald L Rivest, Adi Shamir and Leonard M Adleman. **Cryptographic communications system and method**. US Patent 4,405,829. Sept. 1983.

## Details...

Additional Material omitted in main talk.

- Proof Sketch of  $2^{k^{\text{th}}}$  cyclotomic polynomial
- Encoding and Decoding transformations
- The BabyStep-Giantstep method
- Proof of Diagonal, Hybrid method
- Shor's Algorithm