Adapt Without Losing the Reader: A Modular Two-Screen Platform for Gaze-Contingent Reading Experiments

Sachin Baral
Department of Applied Mathematics and Computer Science (DTU Compute)
Technical University of Denmark (DTU)
Kgs. Lyngby, Denmark
s243871@dtu.dk

Satish Gurung
Department of Applied Mathematics and Computer Science (DTU Compute)
Technical University of Denmark (DTU)
Kgs. Lyngby, Denmark
s243872@dtu.dk

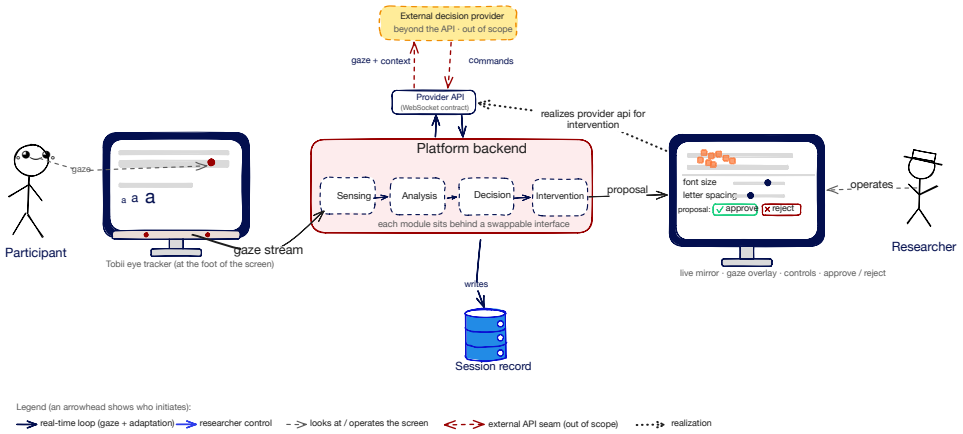


Figure 1: The platform as a researcher–participant adaptive loop. The participant reads on one screen while an eye tracker senses gaze; the backend passes the gaze stream through four replaceable modules (sensing, analysis, decision, intervention), adapts the text, mirrors gaze and derived analysis to the researcher's console with its approve-or-reject controls, writes everything to the session record, and exposes a provider contract through which an external decision or analysis provider can attach. The approve-or-reject gate shown is the advisory mode; in autonomous mode the loop commits proposals without it, so the operating role beside the second screen can equally be filled by an automated decision strategy.

Abstract

Gaze-driven text adaptation has been demonstrated repeatedly, but existing prototypes couple sensing, decision logic, and presentation, so comparing interventions remains expensive. We present a researcher-operated, two-screen platform whose sensing, eye-movement analysis, decision, and intervention stages are replaceable modules behind stable contracts. A participant reads reflowable text that adapts to their gaze while a researcher mirrors the reading live and applies or approves typographic changes; every sample, proposal, intervention, and restoration outcome enters one replayable record. Across eight Tobii 4C sessions, the platform sustained its designed 90 Hz with gaze validity above 92% and single-host round trips below 100 ms, and ran a collaborating study's reading-difficulty pipeline as its live analysis module.

CCS Concepts

• **Human-centered computing** → **Interactive systems and tools**; *Empirical studies in HCI*; *Accessibility systems and tools.*

Keywords

eye tracking, adaptive reading, gaze-contingent interfaces, typographic interventions, context preservation, research platforms

1 Introduction

Reading underpins participation in education, employment, and daily life, yet for many people it is far from effortless. The World Health Organization estimates that at least 2.2 billion people live with a near or distance vision impairment [43]; age-related macular degeneration (AMD) alone is projected to affect 288 million people by 2040 [42], and reading difficulties such as dyslexia [29] add to the population for whom text demands more than the visual or cognitive system can comfortably supply. Digital text offers something print cannot: its presentation can change while readers read. Font size, spacing, line length, and contrast are adjustable on screen and measurably affect reading [3, 4, 10, 33, 34], and an eye tracker supplies the moment-to-moment signal needed to apply an adjustment exactly when a reader needs it [31]. A system that couples the two can deliver individualised typographic micro-interventions [28] without the reader ever issuing a command.

The promise carries a structural risk. A typographic change that helps in principle also reflows the document, so the line a

participant was reading moves, and an ill-timed change costs the reader their place in the very flow the system is trying to protect. Prior work has begun to quantify this cost: interventions applied during reading differ in how much they disrupt it and how readily readers accept them [27], and highlighting the text read last before a change, combined with a gradual transition, gave the fastest resumption [15].

We argue that the bottleneck in this research area has shifted. Demonstrating that gaze can drive changes to the text being read no longer requires another prototype: such interfaces have been demonstrated repeatedly [5, 15, 20, 35], including three adaptive readers built within one research programme in 2024 [24, 27, 32]. What is missing is the instrument for studying it: the programme's prototypes each wove sensing, decision logic, and the reading interface into one codebase, so each new study extended the previous system by forking it, and none offered a researcher console for operating a controlled session or a session record from which an experiment could be reconstructed. On a coupled prototype, even a simple comparison such as fading in a font change gradually versus applying it abruptly means editing core code and maintaining two forks under identical sensing: an experiment that should be a configuration choice becomes a software project.

This paper presents a platform (Figure 1) built to remove that friction. A participant reads reflowable text on one screen while the text adapts to their gaze; on a second screen, a researcher follows the participant's gaze, fixations, and regressions live over a mirror of the same text, and applies typographic interventions or approves machine-proposed ones during the session. Behind this workflow, the adaptive loop decomposes into four independently replaceable modules (sensing, eye-movement analysis, decision strategy, and intervention execution) connected through stable contracts, and writes every gaze sample, decision, and intervention into a schema-versioned session record that can be exported, replayed, and re-analysed.

The contributions are:

- **A modular platform for gaze-contingent reading experiments**, in which sensing, analysis, decision, and intervention are separate modules behind stable contracts, extendable either inside the backend process by registering a module or from a separate process through the same contracts, carried over a WebSocket provider protocol.
- **A two-screen, researcher-in-the-loop workflow**, in which interventions are applied manually, proposed by a decision provider and gated by the researcher (advisory), or applied autonomously, without structural change between modes.
- **A context-preserving intervention mechanism that measures its own cost**: layout changes can be committed at controlled boundaries, a continuously captured anchor restores the reader's position across the reflow, and a graded positional outcome for every intervention is written into the session record.
- **A technical evaluation on real eye-tracking hardware** covering capture and transport, external-provider integration (including a collaborating study's reading-difficulty pipeline that analysed the evaluation sessions live), and context preservation, whose self-measurement exposed a defect in our original restore strategy that over-repositioned the reader on small reflows; we describe the revision and its geometric evidence.

We report the evaluation as an evaluation of the instrument: with four participants the behavioural observations are descriptive, and the paper makes no claim that any intervention improves reading. The platform, its documentation, and the audit script that regenerates every quantity in this paper from the exported records are openly available.

2 Related Work

2.1 Gaze-Contingent and Adaptive Reading

Using the reader's gaze to change the reading experience in real time has a long line of demonstrations. Throughout this paper, gaze-contingent is meant in this broad sense of a display that responds in real time to where the reader looks; the saccade-contingent display-change paradigms of reading research, such as the moving window of McConkie and Rayner [19], which mask changes within saccades, are out of scope. The line reaches back at least to gaze-aware aids that offered translation help [13] or spoken prompts [40] where reading faltered. The eyeBook coupled an eye tracker to a digital book to trigger in-situ effects as the reader progressed [5]. More recently, Medan and Pelman [20] scrolled a single line of text with the reader's gaze and, in a 13-participant pilot with a Tobii eye tracker, found no change in comprehension or speed but a preference for the interface, and Rummens and Beier [35] coloured the fixated word in real time for second graders and reported faster reading with fewer regressions although the children preferred the static text; that split between performance and preference is a useful reporting model for adaptive reading.

Within one research programme, three master's projects built successive adaptive readers: a flexible reading and gaze-collection application [32], an adaptive e-reader used to compare four intervention presentation forms applied by the experimenter, which were found to differ substantially in disruption and acceptance [27], and a reactive frontend designed to consume machine-learning output [24]. Jensen et al. [15] then added context preservation, highlighting the text read last before a change, and in a 22-participant within-subjects study found no significant difference between highlight modes, while the gradual design gave the fastest resumption and was the most preferred; against the same design without highlighting in the earlier study, its intervention time fell from 14.9 s to 4.0 s. Each of these systems, however, was built for its own study. Sensing, decision logic, and presentation were coupled in one application, so the next study copied and modified the previous system rather than reconfiguring a shared one. Our platform is a generalisation and an infrastructural complement to this line of work: it is built so that exactly such comparisons of intervention designs can be run, varied, and reconstructed without touching core code.

2.2 Real-Time Gaze Processing for Reading

Reducing a raw gaze stream to oculomotor events is the classical first step, with identification algorithms catalogued by velocity, dispersion, and area-of-interest families [2, 38] and reading behaviour

extensively characterised [31]. Real-time use sharpens the problem: vertical drift is usually corrected offline [7], whereas a live system must assign noisy vertical gaze to the most probable line while the reader is still reading. Kaltenberger et al. [16] address this with CONF-LA, a confidence-scored online fixation-to-line assignment that defers uncertain assignments. However, our contribution on this front is architectural rather than algorithmic. The platform's built-in analysis is a dwell-based, token-level area-of-interest method which first assigns each gaze point to a token by testing it against the tokens' live on-screen boxes (Section 3.2), so a typographic reflow cannot invalidate the mapping; and the whole analysis stage is a replaceable, logged strategy, so a stronger detector or a confidence-aware line-assignment method can be attached as a provider without modifying the platform.

2.3 Experiment Tooling

A researcher building a reading study today would more likely reach for general-purpose experiment software than for a research prototype. Tobii Pro Lab [41], PsychoPy [26], OpenSesame [18], and Psychtoolbox [6] are mature platforms for experiment design, stimulus delivery, and gaze capture; PsychoPy's ioHub [30] and the PyGaze toolbox [8] already offer a common interface across tracker vendors, and ioHub adds a simulated mouse-driven gaze source, so hardware abstraction and simulated gaze are not in themselves new. Two recent ETRA contributions show the same open-source tooling trend at both ends of the sensing chain. Salari et al. [37] provide PyeLink and SyeLink, Python tools that expose low-level control of EyeLink trackers to Pygame, PsychoPy, and Pyglet experiments, including recording during calibration and raw pupil and corneal-reflection data, and that parse the resulting files into structured data; Salari et al. [36] provide PyEtSimul, a simulator of video-based eye trackers that generates synthetic eye features from a geometric model so that gaze-estimation algorithms can be benchmarked reproducibly without hardware or participants. Both sit below the reading loop: they broaden what a sensing stage can be, and they are the kind of component our sensing port is designed to admit (Section 3.2). What these tools leave to study-specific programming is the reading-specific loop: mapping gaze onto reflowable text, proposing and gating typographic changes, committing them without losing the reader, and measuring what the change cost. Table 1 summarizes the authors' assessment of the most established tools against the capabilities a gaze-driven reading experiment requires; none maps gaze onto reflowable text, gives the researcher a live mirror with an approval gate, records what each intervention cost the reader, or exposes a pluggable decision boundary. Our platform occupies that region as a focused instrument for one family of experiments; it complements rather than replaces the general-purpose tools.

3 The Platform

3.1 Overview: One Loop, Four Modules, Two Screens

The platform decomposes the adaptive reading loop into four concerns chosen along the axis of replaceability: *sensing* produces a continuous stream of gaze samples; *analysis* projects that stream into oculomotor events (fixations, saccades, regressions); *decision* consumes the analysed state and returns at most a proposal to intervene; and *intervention* validates a proposal and commits a change to the text. Each concern sits behind a stable contract with a uniform shape: a module is identified by a stable provider identity and exposes a single operation that receives an immutable snapshot of the relevant session state and returns an optional result. Because a module is handed a copy of what it needs rather than a reference to live state, it can neither reach into nor mutate the core; and because the runtime resolves modules from a per-concern registry by identifier, never naming a concrete implementation, adding an in-process module is one registration and no existing code changes. A .NET backend owns all authoritative session state; within its application assembly the four boundaries are contracts and registries, not separately deployed units, and the build enforces the dependency rule (Section 4.3). The platform was implemented by the authors with generative AI coding assistance, as described in the disclosure at the end of the paper.

Two browser surfaces of a single web frontend face the participant and the researcher (Figures 1 and 2). The participant surface renders the reading material as reflowable, tokenised text. The researcher console mirrors the same text and overlays the participant's live gaze, a fixation heat map, and recent saccades, so the researcher sees not merely where the participant looks but how they read. The surfaces never communicate with each other; both render the same backend-owned snapshot, so they cannot disagree. Discrete commands (configure a session, change an intervention policy, start, stop) travel over a request-and-response channel, while the high-frequency gaze stream travels over a separate real-time channel (a single WebSocket per client), a split that keeps the per-sample path away from the lock that serialises session lifecycle commands. One cycle of the loop runs across these parts: a gaze sample is mirrored to both surfaces; the participant surface, which alone knows the rendered layout, maps it to a token and returns an enriched observation; analysis projects observations into oculomotor events; a decision (built-in, external, or the researcher acting manually) yields at most one proposal, which in advisory mode waits for approval; and the intervention commits at its configured boundary, after which the adapted text returns to both surfaces while persistence checkpoints are written throughout.

3.2 Sensing and Gaze-to-Word Mapping

Sensing is a port with interchangeable sources. The primary adapter subscribes to a Tobii eye tracker's native callback and republishes each sample (per-eye position on the display area normalised to the unit square, pupil data, validity flags, device timestamp) into the domain; an additional simulated source emits samples of exactly the same shape from the mouse cursor, so the full loop can also run without access to the eye tracker hardware for convenience, and the downstream stages cannot tell which source produced a sample. The port is deliberately narrow so that other sources fit behind it: an adapter over a low-level tracker interface such as PyeLink [37] would add EyeLink hardware, and a synthetic stream of the kind PyEtSimul [36] generates would let the loop be exercised under controlled, reproducible gaze without an eye tracker in the room; neither adapter has been implemented, and we claim only that the seam admits them. On the backend the

Table 1: What a gaze-driven reading experiment needs beyond established experiment software. Entries reflect the authors' assessment of documented capabilities; Partial means achievable with study-specific code [6, 18, 26, 41].

Capability	Tobii Pro Lab	PsychoPy	OpenSesame	Psychtoolbox	This platform
Real-time typographic change to the text being read	No	Partial	Partial	Partial	Yes
Gaze mapped onto reflowable text, robust to reflow	No	No	No	No	Yes
Researcher console with live mirror and approval gate	No	No	No	No	Yes
Positional cost of each intervention recorded	No	No	No	No	Yes
Decision and analysis modules behind a provider protocol	No	No	No	No	Yes

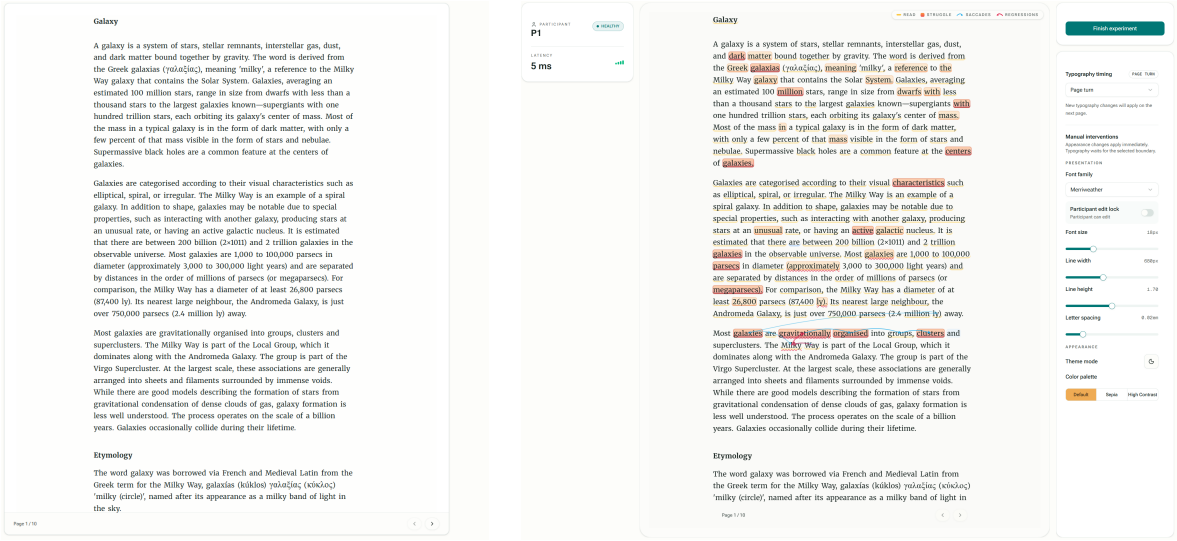


Figure 2: The two operated surfaces at the same scale: the participant reader (left) and the researcher console mirroring the same text with live gaze, fixation, and saccade overlays and the intervention controls (right).

per-sample path avoids the session lifecycle lock, and the heavier modular pipeline of analysis, decision, and intervention runs at the cadence of analysed-state changes rather than once per raw sample, so the indirection introduced for modularity stays off the per-sample path; the participant surface coalesces snapshot bursts to one render per animation frame.

The spatial half of the pipeline runs in the participant reader component, the only place the rendered layout is generated. Every token is a span whose on-screen box is generated from the live DOM and re-generated whenever the layout changes, prompted by mutation, resize, and scroll observers. An incoming gaze point is smoothed adaptively, mapped into the reading area, and hit-tested in two stages: first the line, scored by vertical distance with a fixed hysteresis bonus for the line currently being read, so that vertical jitter of the order of the line spacing does not flicker attribution between neighbours; then the nearest token on that line. The mapping has two properties that matter for an adaptive reader. It is resolution-independent, because the tracker reports gaze as a fraction of the display and the words are measured live rather than assumed. And it is reflow-proof by construction: a typographic intervention that moves every word to a new position cannot invalidate the mapping, because the next sample is always hit-tested against the currently rendered boxes, which is precisely the failure mode a coordinate-based scheme would suffer. The heuristic's thresholds are hand-tuned and its token-level accuracy has not been validated against ground truth; however like the analysis stage it is a replaceable component that can be adapted. The result of this stage is a token-level reading observation (token, line, and block identity) published back to the backend.

3.3 Eye-Movement Analysis as a Replaceable Strategy

The temporal half of the pipeline is an explicit analysis strategy behind its own contract. The built-in strategy realises the area-of-interest branch of the classical taxonomy [38]: since each observation is already bound to a word, the word itself is the area of interest, a fixation is confirmed from accumulated dwell against thresholds that are raised across a line change because cross-line movement is noisier, and per-word statistics separate read words from skimmed ones by dwell. Saccades are classified from token and line deltas, and a backward or line-change-backward saccade is counted as a regression, a common marker of processing difficulty [31]; the rule also counts the small corrective leftward saccade that often follows a line change [25]. The strategy depends only on the observation and the prior state, so replaying the same observations yields the same events; it is resolved from a registry, so an external analysis provider can replace it at runtime (Section 3.4).

3.4 The Decision Boundary and Execution Modes

Decisions about when and how to adapt the text can come from three sources: the researcher acting manually from the console, a built-in rule-based strategy, or an external provider. Two execution modes cover the supervision spectrum without structural change: in *advisory* mode every machine proposal is surfaced on the console and applied only when the researcher approves it, and in *autonomous* mode a permitted proposal is applied directly. Every proposal passes through an explicit lifecycle with exactly one terminal outcome (approved, rejected, applied, or superseded when a newer proposal or a mode change overtakes it), so the text never adapts on a decision that no longer holds, and every outcome is logged. In all modes the intervention runtime validates the requested change independently: it normalises the parameter against the current presentation, bounds the step, and applies cooldown rules to automated proposals.

External providers connect out of process over a documented WebSocket protocol: a handshake in which the provider declares its identity, modules, and capabilities and receives an accept-or-reject reply, followed by heartbeats and tunnelled traffic. What crosses the boundary is a fixed vocabulary: outward, an immutable session snapshot and the stream of analysed signals (the token currently read, per-token dwell statistics, and oculomotor events); inward, a proposal pairing an observed signal and a short human-readable rationale with the identity of an intervention module and the parameters to apply. The seam commits the platform to signals in and a proposal out, but not to any particular way of arriving at the proposal, which is what makes an AI-driven provider a configuration rather than a rewrite. An external decision is applied through exactly the same validation and logging path as a built-in one. When a provider disconnects, the platform marks it detached, records the transition as a lifecycle event, and the session continues; the current runtime does not switch the affected concern to its built-in strategy on its own, and although the handshake advertises a heartbeat timeout, heartbeats are recorded rather than enforced.

3.5 Context-Preserving Interventions

Typographic interventions are the platform's actuator: built-in modules cover font family, font size, line width, line height, letter spacing, theme, and palette, and appearance-only changes commit immediately. A layout-changing intervention is committed, that is, applied to the rendered text, either immediately or held until a chosen boundary (the end of the sentence or paragraph being read, or the page turn), so that a reflow can land at a natural break rather than mid-line.

To anchor the currently read token, line, and sentence spatially across a commit, the reader runs a capture-and-restore mechanism. An anchor is captured continuously (every 120 ms and on content changes), preferring the word the participant is currently reading, degrading to a visible fallback word or its enclosing block, and recording the element's identity together with its viewport offset; anchors older than 15 s are rejected as stale. When a layout change commits, the reader re-locates the anchor in the reflowed document (degrading sentence to token to block) and scrolls it back to the viewport offset it held before the change. The residual error between target and achieved offset is then measured, graded (preserved, degraded, or failed, with tolerances of 72 px for a full reflow and 48 px to 120 px otherwise), and written into the session record next to the intervention that caused it, together with the displacement the reflow itself induced. Optionally, the restored sentence is briefly highlighted and fades over about three seconds, drawing the eye back to the resume point; highlighting of this kind has been associated with faster resumption, with a non-significant trend towards the sentence level [15]. Because the sentence is re-located before the token, a small sentence-anchor residual does not by itself guarantee that the word being read stayed still; the evaluation therefore measures word displacement directly (Section 4.4).

Section 4.4 shows how these recorded outcomes exposed a defect in our original restore strategy. Because every intervention's graded outcome and residual are in the record, a later analysis can ask not only whether an intervention helped a reader but also what it cost them to recover gaze position on the same token.

3.6 Researcher Console, Session Record, and Replay

A session is operated end to end from the researcher console. Setup is gated: a session cannot start until participant data is saved, a tracker is selected, a calibration with the desired accuracy and precision validation has passed, and reading material is chosen, with the gates re-checked by the backend at start. During the run, the console shows the mirror with live analysis overlays, the gaze-validity rate, and the client round-trip time, and carries the intervention controls and the approval queue; an optional comprehension quiz can follow the reading.

Everything that happens flows into one authoritative, schema-versioned session record owned by the backend: run parameters, calibration metrics, screen geometry, the raw gaze stream, derived oculomotor events, proposals and their outcomes, interventions and their context-preservation outcomes, and quiz responses, each stamped with a sequence number and timestamp. The record is the same structure a background worker checkpoints throughout the session, so durability and export are one artifact and an interrupted session is recoverable from its latest checkpoint. A completed record exports to JSON and CSV, re-imports through a version-gated schema check, and replays in the reading interface; reproducing a study in the scientific sense additionally requires the code, provider, and configuration versions, which the export records only in part. A separate telemetry record (client round-trip times, achieved sampling rate, validity, and decision-path timings) against an explicit 100 ms budget is the instrumentation behind Section 4.2.

4 Evaluation

The evaluation asks three questions that mirror the platform's claims: whether the four components are genuinely replaceable without touching the core (Section 4.3), whether a real eye-tracking stream drives the loop with measurable quality and transport delay (Section 4.2), and whether interventions can adapt the text while preserving the reader's context (Section 4.4). The scope is architecture and runtime feasibility, not human efficacy: with four participants, the behavioural numbers below are descriptive, and we draw no statistical inference from them. Every quantity, table, and figure in

this section is derived from the exported session, telemetry, and sweep records by a dependency-free audit script committed with the paper; the script records the SHA-256 hash of each of its 19 input files and reproduces the summaries of the paper's analysis to numerical precision.

4.1 Setup

We recorded eight reading sessions on real hardware: four participants each read under two conditions, with the context-preserving restore enabled (ON) and disabled (OFF), as summarised in Table 2. Two expository Markdown formatted articles were used (*Metal Detectors* and *Nuclear Science*); each participant read a different article in each condition, and each article appears twice per condition. Condition order was not counterbalanced: one participant read the ON session first and three read the OFF session first (Table 2), so most ON sessions were second sessions and any practice effect favours ON, the same direction as the differences reported below. Sessions ran on a Tobii Eye Tracker 4C (reported by the SDK as `IS4_Large_Peripheral`) mounted below a 2560×1440 display, each gated by a passing nine-point calibration validation (average accuracy 0.30 to 0.69 degrees, precision 0.08 to 0.33 degrees). Validation passes when, over 30 samples at each of five targets, average accuracy is at most 1.0 degree, precision (root mean square angular distance between successive samples [12]) is at most 0.5 degrees, and at least four targets rate good or fair; accuracy was not rechecked at session end. The 4C's predecessor, the EyeX, suits fixation and saccade measures but its 55 Hz rate limits real-time gaze-contingent control [11]; the 4C samples at 90 Hz. Screen size and viewing distance were not recorded, so text sizes are given in pixels. The deployment was the intended single-operator setting shown in Figure 3: backend and both surfaces on one host, traffic over the local loopback. In total, 45 recorded interventions were applied manually from the researcher console with the immediate commit boundary, so the sessions exercise the manual path and the restore mechanism but not boundary scheduling or automated decisions; one export carries a rule-based advisory configuration in its final metadata although all of its interventions are manual, because condition metadata is taken from the final session snapshot. Eye-movement analysis in all eight sessions was served live by the collaborating study's external provider of Section 4.3. One additional session under an advisory decision strategy exercised the decision-path instrumentation and is reported separately in Section 4.2. Every session was operated end to end from the gated researcher console, and every quantity in this section was recomputed from the exported session and telemetry records alone by the audit script, with telemetry joined to exports by session identifier and every context-preservation outcome linked to its intervention.

4.2 Capture and Transport

In total, across the eight sessions the exports contain 175,860 gaze point samples. The tracker delivered a stable stream at its designed rate: the achieved sampling rate held at a mean of 89.89 Hz (SD 0.21 Hz; range 89.41 to 90.06 Hz), with the inter-sample interval concentrated at the nominal 11.1 ms period. The gaze-validity rate, the fraction of samples with at least one eye reported valid, ranged from 92.5% to 98.0% (mean 95.6%) under continuous, self-paced reading rather than a constrained fixation task.




Figure 3: The two-screen setup during an evaluation session. The participant reads on one display (left) while the researcher monitors the mirrored view and applies interventions from the console on the other (right); the eye tracker is mounted at the foot of the participant's display. Faces are blurred for anonymity.

We keep three timing quantities distinct (Table 3). *Client round-trip time* is measured by a ping every five seconds from each browser to the backend and back, so it characterises the transport of the single-host deployment, not the latency of every gaze sample. *Gaze freshness at decision dispatch* is the backend-clock interval between the freshest ingested gaze sample and the dispatch of a decision context to the strategy; it is recorded once per evaluation, and evaluations are triggered by several kinds of state change, so their count exceeds the number of gaze samples. *Decision-provider round trip* is the correlation-matched interval between a published context and the returned proposal. None of these measures the full path from a gaze sample to a visibly changed display, which would require direct measurement of the kind described by Saunders and Woods [39]. The budget the platform reports against is 100 ms, the threshold below which an interface response is perceived as instantaneous [21, 22] and within a single normal reading fixation [31].

In the eight sessions the participant client saw a median round trip of 1 ms with a 95th percentile of 3 ms, the researcher client a median of 1 ms with a 95th percentile of 8.4 ms, and none of the 780 recorded round trips exceeded the budget. The decision path is instrumented only when an automated strategy is active. In the additional advisory-mode session (91.2 s, 8,004 gaze samples, with the reference external decision provider running out of process and every proposal gated by the researcher), gaze freshness at dispatch had a median of 6 ms, a 95th percentile of 11 ms, and a maximum of 46 ms over 14,015 evaluations, and the eight provider round trips had a median of 4.5 ms and a maximum of 7 ms. The provider's eight proposals produced 16 lifecycle records (two approved, six superseded), which is why proposal history and applied interventions must be counted separately. The same run also contains one participant-client round trip of 315 ms among 17, so the budget claim holds for the eight sessions and for the decision path but not for every ping ever recorded.

4.3 Modularity and External Providers

The dependency rule that makes the modules replaceable is enforced twice: the backend's project references admit no reference

Table 2: The eight recorded sessions. Text M is *Metal Detectors* and N is *Nuclear Science*; ON bundles positional restoration with the highlight cue. Order is the participant's session order; duration covers the exported session including activities beyond reading; rate is computed from device timestamps; valid means at least one eye reported valid by the tracker; Regr. is the whole-session regression rate.

Participant	Preservation	Order	Text	Duration (s)	Gaze samples	Rate (Hz)	Valid (%)	Interventions	Regr. (%)
P1	ON	1st	M	185.5	16,664	89.98	96.2	5	22.2
P1	OFF	2nd	N	475.1	42,683	89.90	93.9	9	33.9
P2	ON	2nd	N	252.2	22,688	90.06	98.0	7	27.4
P2	OFF	1st	M	123.4	11,063	89.84	97.6	4	33.6
P3	ON	2nd	M	171.5	15,305	89.41	92.5	3	27.9
P3	OFF	1st	N	385.6	34,624	89.87	95.0	11	31.0
P4	ON	2nd	N	224.0	20,136	90.00	95.2	4	22.5
P4	OFF	1st	M	141.4	12,697	90.02	96.0	2	22.3

Table 3: Observed timing quantities in milliseconds. *n* counts recorded pings, evaluations, or matched exchanges, not participants; the advisory run is a separate recording; percentiles are linearly interpolated. Gaze freshness ends at decision dispatch; none of these rows measures complete gaze-to-display latency.

Recording	Quantity (ms)	n	Median	95th pct.	Max.
Eight sessions	Participant-client round trip	387	1	3	41
Eight sessions	Researcher-client round trip	393	1	8.4	28
Advisory run	Participant-client round trip	17	1	67.8	315
Advisory run	Researcher-client round trip	18	1	18.05	24
Advisory run	Gaze freshness at decision dispatch	14,015	6	11	46
Advisory run	Decision-provider round trip	8	4.5	6.3	7

from the core outward, and an executable boundary test inspects the loaded assemblies and fails if the domain or application core depends on infrastructure, transport, or host code. The backend test project (101 tests covering session lifecycle gating, the proposal lifecycle, intervention execution, export serialisation, and recovery storage) passes in full on the current checkout.

The stronger test is out of process. Three external providers connect to the running platform over the documented provider protocol: a reference decision provider and a reference analysis provider written by us, and a connector that bridges the reading-difficulty pipeline of a concurrent, independent study [17] to the analysis seam.[1] The reference providers, written by the contract's own authors, evidence only that the contract is sufficient; the third goes further, because we neither wrote its pipeline nor designed the contract around it, and its addition changed nothing in the backend, although we did write the connector and the collaborator's preprocessor carries small transport-related additions. Most tellingly, it served as the live analysis source for the eight evaluation sessions themselves: the fixation, saccade, and regression events analysed in this section were produced by that team's code running behind the platform's contract.

4.4 Context Preservation

The eight sessions form a with-and-without comparison of the context-preserving restore. In the ON condition the restore ran together with its highlight cue, so the conditions contrast a bundle (positional restore plus a brief highlight of the resume point) against neither; we return to this confound below. The ON sessions ran the original restore strategy; the revision described at the end of this section was made after these recordings, so the behavioural comparison characterises the original mechanism. Because preservation acts in the moments after a reflow, both behavioural measures are aligned to each intervention rather than averaged over sessions, which leaves the conditions with unequal counts: 19 interventions ON and 26 OFF.

Reading-resume time, the interval from an intervention to the start of the reader's next forward or line-change-forward saccade (capped at 30 s or the next intervention), is narrower than the intervention time reported by Jensen et al. [15], so the two differ in scale; it was observed for 19 of 19 interventions ON and 25 of 26 OFF; one OFF intervention had no qualifying saccade and is reported as missing rather than as zero. It was shorter ON (median 482 ms, mean 670 ms) than OFF (median 650 ms, mean 923 ms), as shown in Figure 4 (left), and the per-participant medians favour ON for three of the four participants. The regression rate, the share of backward and line-change-backward saccades among all saccades in a five-second window, averaged over non-empty windows per intervention, showed the same separation: 22.8% after an intervention ON, down from 29.3% before, against 33.0% OFF, essentially unchanged from its 32.0% baseline (Figure 4, right); the pattern held across three-, five-, and ten-second windows. Whole-session rates (Table 2, last column) lie between 22% and 34%, about double the share usual for skilled readers [31]; corrective saccades after line changes [25], gaze noise, and the repeated records discussed below

[1] Their pipeline derives reader-struggle signals (cognitive load, reading style, and a pupillary load index) from eye-tracking features.

are the likely causes, so the rates compare within this study but not with the literature. We state the direction of these numbers without inferring from them: four participants, an unbalanced condition order, two texts, researcher-chosen intervention timing, and an unevenly split sample do not support inference, and the bundled highlight means the difference cannot be attributed to the restore geometry alone, the more so as highlighting has been associated with much faster resumption [15]. Indeed, these sessions ran the restore that the sweep below shows over-repositioned the word, so any advantage seen here is more plausibly the highlight than the geometry.

Record integrity. Auditing the exports revealed that 280 of 9,311 fixation records (3.0%) and 652 of 3,225 saccade records (20.2%) repeat an earlier payload exactly, and a further 70 and 103 repeat an earlier event's identity with different layout-dependent fields; gaze samples and interventions contain no duplicates. The cause is a recording defect in the backend, which has since been fixed: the provider resends its window of recent events every two seconds with line and token indices re-derived from the current layout, and the backend, which matched the previously newest record in full to find where the new events began, no longer recognised it after a reflow and recorded the whole window again. Each repeat is thus the same eye movement written twice, which is why saccades, whose payload depends on two tokens, suffer more. Discarding records that repeat an earlier event's identity gives regression rates of 27.2% before and 22.9% after an intervention ON against 31.5% and 31.9% OFF, with resume-time medians unchanged, so the direction survives; exported event counts should nonetheless not be read as counts of distinct eye movements.

Self-measurement catches a defect. Within the four ON sessions, the reader recorded a graded outcome for every intervention: the displacement the reflow induced and the residual after the restore. 16 of the 19 outcomes were graded degraded and three preserved, and for the degraded ones the median residual was 389 px against a median induced displacement of only 38.7 px. The restore was moving the reader's viewport, and with it the anchor word, substantially further than the reflow it compensated. The cause was the original strategy's fixed target: it re-established the committed sentence near the top of the reading area regardless of how far the reader actually sat from it, so the smaller the reflow, the worse the compensation.

Browser sweep, and the revision. The live outcomes are observational, covering whatever interventions the participants happened to receive. To measure displacement under controlled conditions, a harness mounts the real participant reader outside a live session (1440×900 viewport, baseline typography, gaze disabled so the anchor falls back deterministically to a visible word) and drives the same restore hook over every built-in layout intervention from six page positions, recording the vertical displacement of the anchor word under three conditions: preservation OFF, ON with the original restore, and ON with the revised restore. The three conditions of a trial run in one browser session from the same page, position, and anchor word, with the restore strategy switched in the hook, so only the restore differs between them; the harness verifies that the anchor word is identical across the conditions of every trial. Eleven interventions crossed with six positions give 66 trials, of which 63 are complete; in the remaining line-width trials the anchor word left the rendered page in at least one condition. Table 4 reports the medians per intervention. Without preservation the bare reflow moves the word by about one line at the median (35.4 px; one line is 32.4 px), with a heavy tail for large font and line-width changes. With the original restore, preservation made displacement worse rather than better: the median rose to 112 px, 3.2 times the bare reflow, the restore moved the word further than the reflow (by more than 1 px) in 52 of 63 trials, and the effect was starkest for the smallest changes, such as a letter-spacing step that moves the word not at all being thrown 115 px. The revised restore returns the captured reading position to the viewport offset it held before the change (Section 3.5); it over-repositions in 0 of 63 trials, brings the median to 32.8 px, at or below the OFF baseline in every trial, and displaces the word less than the original restore in 53 of them, with the gains concentrated where reflows are large, while line-width changes repaginate and lie beyond what a within-page restore can compensate (Figure 5). The revision is verified geometrically by this sweep; its behavioural benefit to readers has not been re-measured.

5 Discussion

What the platform enables. The comparisons this research area needs are now configuration rather than reimplementation: contrasting intervention presentation forms, commit boundaries, or decision strategies under identical sensing is a matter of session templates and module selection, with the evidence supplied by the session record. The unbundled study that our own confound calls for, crossing the revised restore with and without the highlight cue, is exactly such a configuration. Beyond single studies, the exported records can form a corpus on which an external decision provider can be trained offline and then attached through the same seam.

Quantify quality attributes claimed. The over-repositioning result is the strongest argument for a design principle the platform embodies: a system should measure the property it claims to provide, so it can report its failures as readily as its successes. Context preservation was a headline feature, yet its original geometry made small reflows worse, and nothing in ordinary operation would have surfaced that; the per-intervention residual in the session record did. We suggest the principle transfers beyond reading platforms: any interface that changes state during a continuous user task can hold the change until a natural boundary, re-anchor the user's focus across it, and record what the change cost. The first step extends interruption research, where the cost of an interruption depends on when it arrives within a task [1] and deferring notifications to breakpoints reduces frustration and reaction time [14].

Limitations. The behavioural comparison rests on four participants drawn from the authors and acquaintances, reading two texts in an unbalanced order under researcher-timed manual interventions; the numbers are descriptive, and because the ON condition bundles the restore with the highlight cue, no causal attribution to the restore geometry is possible. The revised restore is verified geometrically, not yet with readers. The provider contract has one external integration, written by us around a collaborator's code, and the automated decision path was exercised in a single advisory run

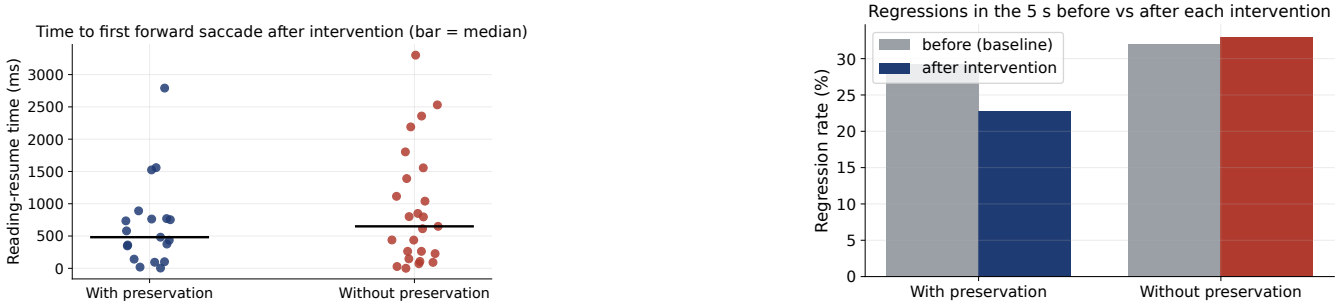


Figure 4: Left: reading-resume time per intervention by condition (19 interventions ON, 26 OFF, of which one has no observation; bars mark medians); points are interventions nested within four participants, not independent observations. Right: regression rate in the five seconds before and after each intervention, by condition; without preservation the rate is essentially unchanged after the intervention, with preservation (the original restore) it falls below its baseline. Both panels are descriptive only.

Table 4: Median vertical displacement (px) of the anchor word per intervention in the matched browser sweep, with preservation OFF, ON with the original restore, and ON with the revised restore, all three measured from the same anchor word in one browser session. Six positions per intervention; an asterisk marks cells with fewer than six complete trials because the anchor word left the rendered page. One reading line is 32.4 px; lower is better.

Intervention	OFF	ON, original restore	ON, revised restore
Font size +2 px (18 to 20)	24.5	168.3	24.5
Font size +6 px (18 to 24)	137.0	209.5	43.0
Font size −2 px (18 to 16)	66.6	98.6	66.6
Line height +0.3 (1.8 to 2.1)	35.4	134.9	35.4
Line height −0.3 (1.8 to 1.5)	34.3	66.3	34.3
Line width −120 px (680 to 560)	188.1*	156.1*	188.1*
Line width +80 px (680 to 760)	161.9*	161.9*	161.9*
Letter spacing +0.06 em	0.0	115.0	0.0
Letter spacing +0.12 em	32.4	162.1	16.3
Font family to Inter	1.0	49.0	1.0
Font family to Space Grotesk	0.0	81.0	0.0
All trials	**35.4**	**112.0**	**32.8**

on one host; the runtime neither falls back to the built-in strategy on provider detachment nor enforces heartbeat expiry. Timing figures are loopback figures that stop short of the display, the exports do not pin the full browser, font, and provider configuration, and our participants were general readers, so no claim here can extend to the vision-impaired or dyslexic readers who motivated the study.

6 Conclusion

We asked whether the gaze-adaptive reading loop can be cleanly separated into replaceable modules under real-time conditions, and answered with a built and measured platform: a two-screen, researcher-operated system whose four modules sit behind build-checked contracts, driven by a real 90 Hz eye tracker with single-host round trips within a 100 ms budget, analysed live by a collaborating study's pipeline attached through its provider contract, and recorded into replayable sessions, with every result in this paper recomputed from the exported records. Its self-measurement exposed, and its revision geometrically removed, an over-repositioning defect in our own context-preserving restore, and the same records exposed a duplicate-recording defect in provider event extraction, since fixed, which is precisely the kind of finding an instrument should produce about itself.

Privacy and Ethics Statement

The recorded sessions were a technical evaluation of the instrument by its developers: five adult volunteers (four in the eight sessions, one in the advisory session), two of them authors, were told what would be recorded and gave informed consent, no vulnerable participants or deception were involved, and the evaluation did not require approval by a research ethics committee under the rules of the authors' institution. Gaze reveals reading ability and attention, so the platform keeps all data on the researcher's machine, transmits nothing to external services, and leaves consent, pseudonymisation, and retention as explicit obligations of the deploying researcher; the released exports carry participant codes only, with names and the eye-condition field removed. The platform is meant to enable studies that may eventually benefit readers with vision impairment or reading difficulties, but nothing in this paper evaluates such readers, and gaze-adaptive text should not be deployed for them before studies with those groups have measured benefit and cost.

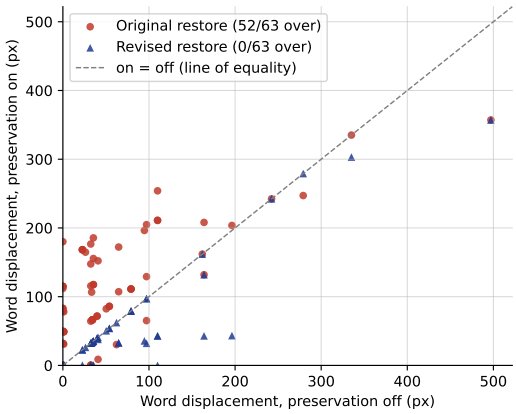


Figure 5: Displacement of the anchor word with preservation ON against its displacement OFF, one point per complete trial (63) and restore version, from the matched sweep. Points above the line of equality mean the restore moved the word further than the reflow alone (by more than 1 px in 52 trials with the original restore, circles, and 0 with the revised one, triangles).

Availability

The platform, its documentation, the browser displacement harness, the anonymised session exports, and the audit script that regenerates every quantity in this paper from them are open source under the MIT licence at https://github.com/MrSachin7/reading-the-reader-monorepo.

Generative AI Disclosure

Generative AI coding assistants (OpenAI Codex and Anthropic Claude Code) were used in implementing the platform, the harness, and the audit script, and in drafting this manuscript from the first authors' original thesis; the authors reviewed and tested all generated code, revised every passage, and alone designed the architecture, the evaluation, and its interpretation.

Acknowledgments

The authors would sincerely like to thank and acknowledge the Novo Nordisk Foundation for funding this research, carried out within the Reading the Reader project at DTU Compute [9, 23], through a "Data Science Collaborative Research Programme 2022" grant with agreement No. NNF22OC0076877. We thank Katarina Kraljević and Sree Keerthi Desu for making their reading-difficulty pipeline available as the external analysis provider in the evaluation, and the volunteers who took part in the recorded sessions.

References

[1] Piotr D. Adamczyk and Brian P. Bailey. 2004. If Not Now, When? The Effects of Interruption at Different Moments Within Task Execution. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems (CHI '04)*. Association for Computing Machinery, New York, NY, USA, 271–278. doi:10.1145/985692.985727

[2] Richard Andersson, Linnéa Larsson, Kenneth Holmqvist, Martin Stridh, and Marcus Nyström. 2017. One Algorithm to Rule Them All? An Evaluation and Discussion of Ten Eye Movement Event-Detection Algorithms. *Behavior Research Methods* 49, 2 (2017), 616–637. doi:10.3758/s13428-016-0738-9

[3] Sofie Beier, Chiron A. T. Oderkerk, Birte Bay, and Michael Larsen. 2021. Increased Letter Spacing and Greater Letter Width Improve Reading Acuity in Low Vision Readers. *Information Design Journal* 26, 1 (2021), 73–88. doi:10.1075/idj.19033.bei

[4] David Beymer, Daniel M. Russell, and Peter Orton. 2008. An Eye Tracking Study of How Font Size and Type Influence Online Reading. In *Proceedings of the 22nd British HCI Group Annual Conference (People and Computers XXII)*. BCS Learning & Development, Swindon, UK, 15–18. doi:10.14236/ewic/HCI2008.23

[5] Ralf Biedert, Georg Buscher, and Andreas Dengel. 2010. The eyeBook – Using Eye Tracking to Enhance the Reading Experience. *Informatik-Spektrum* 33, 3 (2010), 272–281. doi:10.1007/s00287-009-0381-2

[6] David H. Brainard. 1997. The Psychophysics Toolbox. *Spatial Vision* 10, 4 (1997), 433–436. doi:10.1163/156856897X00357

[7] Jon W. Carr, Valentina N. Pescuma, Michele Furlan, Maria Ktori, and Davide Crepaldi. 2022. Algorithms for the Automated Correction of Vertical Drift in Eye-Tracking Data. *Behavior Research Methods* 54, 1 (2022), 287–310. doi:10.3758/s13428-021-01554-0

[8] Edwin S. Dalmaijer, Sebastiaan Mathôt, and Stefan Van der Stigchel. 2014. PyGaze: An Open-Source, Cross-Platform Toolbox for Minimal-Effort Programming of Eyetracking Experiments. *Behavior Research Methods* 46, 4 (2014), 913–921. doi:10.3758/s13428-013-0422-2

[9] DTU Compute. 2025. Reading the Reader. https://people.compute.dtu.dk/pgba/research/reading-the-reader/ Project page. Accessed 2026-10-15.

[10] Mary C. Dyson. 2004. How Physical Text Layout Affects Reading from Screen. *Behaviour & Information Technology* 23, 6 (2004), 377–393. doi:10.1080/01449290410001715714

[11] Agostino Gibaldi, Mauricio Vanegas, Peter J. Bex, and Guido Maiello. 2017. Evaluation of the Tobii EyeX Eye Tracking Controller and Matlab Toolkit for Research. *Behavior Research Methods* 49, 3 (2017), 923–946. doi:10.3758/s13428-016-0762-9

[12] Kenneth Holmqvist, Marcus Nyström, and Fiona Mulvey. 2012. Eye Tracker Data Quality: What It Is and How to Measure It. In *Proceedings of the Symposium on Eye Tracking Research and Applications (ETRA '12)*. Association for Computing Machinery, New York, NY, USA, 45–52. doi:10.1145/2168556.2168563

[13] Aulikki Hyrskykari, Päivi Majaranta, Antti Aaltonen, and Kari-Jouko Räihä. 2000. Design Issues of iDICT: A Gaze-Assisted Translation Aid. In *Proceedings of the 2000 Symposium on Eye Tracking Research & Applications (ETRA '00)*. Association for Computing Machinery, New York, NY, USA, 9–14. doi:10.1145/355017.355019

[14] Shamsi T. Iqbal and Brian P. Bailey. 2008. Effects of Intelligent Notification Management on Users and Their Tasks. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems (CHI '08)*. Association for Computing Machinery, New York, NY, USA, 93–102. doi:10.1145/1357054.1357070

[15] Helena Eschricht Jensen, Chaudhary Muhammad Aqdus Ilyas, Ashkan Tashk, Bart Cooreman, Sofie Beier, and Per Bækgaard. 2025. Context Preservation Through Eye Tracking: Adaptive Reading Application Design for an Optimal Reading Experience. In *Proceedings of the 2025 Symposium on Eye Tracking Research and Applications (ETRA '25)*. Association for Computing Machinery, New York, NY, USA, Article 78, 8 pages. doi:10.1145/3715669.3725897

[16] Franziska Kaltenberger, Wei-Ling Chen, Enkeleda Thaqi, and Enkelejda Kasneci. 2026. Sure About That Line? Approaching Confidence-Based, Real-Time Line Assignment in Reading Gaze Data. *Proceedings of the ACM on Computer Graphics and Interactive Techniques* 9, 2, Article 19 (2026), 22 pages. doi:10.1145/3803540

[17] Katarina Kraljević and Sree Keerthi Desu. 2026. *Reading the Struggle: Using Machine Learning to Detect Reading Difficulty in Near Real-Time.* Master's thesis. Technical University of Denmark, DTU Compute. https://findit.dtu.dk/en/catalog/6a80ffb9b29e8a2151887cff Full text not publicly accessible; catalogue record in DTU Findit.

[18] Sebastiaan Mathôt, Daniël Schreij, and Jan Theeuwes. 2012. OpenSesame: An Open-Source, Graphical Experiment Builder for the Social Sciences. *Behavior Research Methods* 44, 2 (2012), 314–324. doi:10.3758/s13428-011-0168-7

[19] George W. McConkie and Keith Rayner. 1975. The Span of the Effective Stimulus During a Fixation in Reading. *Perception & Psychophysics* 17, 6 (1975), 578–586. doi:10.3758/BF03203972

[20] Elad Medan and Barak Pelman. 2024. New Line: A New Gaze-Contingent Digital Reading Interface. https://meitalconf.iucc.ac.il/wp-content/uploads/2024/08/MeitalConference_2024_paper_14.pdf Paper hosted by the MEITAL 2024 conference. Bezalel Academy of Arts and Design. Accessed 2026-08-16.

[21] Robert B. Miller. 1968. Response Time in Man-Computer Conversational Transactions. In *Proceedings of the December 9–11, 1968, Fall Joint Computer Conference, Part I (AFIPS '68)*. Association for Computing Machinery, New York, NY, USA, 267–277. doi:10.1145/1476589.1476628

[22] Jakob Nielsen. 1993. Response Times: The 3 Important Limits. https://www.nngroup.com/articles/response-times-3-important-limits/ Nielsen Norman Group. Accessed 2026-06-10.

[23] Novo Nordisk Foundation. 2023. Artificial Intelligence Will Help to Improve Reading Opportunities for Millions of People. https://novonordiskfonden.dk/en/news/artificial-intelligence-will-help-to-improve-reading-opportunities-for-millions-of-people/ News article. Accessed

2026-06-08.

[24] Marko Palinec. 2024. *Reactive Reading: Crafting an Adaptive Frontend Interface for Dynamic Machine Learning.* Master's thesis. Technical University of Denmark, DTU Compute. https://findit.dtu.dk/en/catalog/66bbf5cfdeca9be8f357d145 Full text not publicly accessible; catalogue record in DTU Findit.

[25] Adam J. Parker, Timothy J. Slattery, and Julie A. Kirkby. 2019. Return-Sweep Saccades During Reading in Adults and Children. *Vision Research* 155 (2019), 35–43. doi:10.1016/j.visres.2018.12.007

[26] Jonathan Peirce, Jeremy R. Gray, Sol Simpson, Michael MacAskill, Richard Höchenberger, Hiroyuki Sogo, Erik Kastman, and Jonas Kristoffer Lindeløv. 2019. PsychoPy2: Experiments in Behavior Made Easy. *Behavior Research Methods* 51, 1 (2019), 195–203. doi:10.3758/s13428-018-01193-y

[27] Luz Emma Pereira and Mihai-Valentin Andrei. 2024. *Designing a Typography-Adaptive Reading Interface for Individuals with Central Vision Loss.* Master's thesis. Technical University of Denmark, DTU Compute. https://findit.dtu.dk/en/catalog/669da34561fca2e8f32bfbd8 Full text not publicly accessible; catalogue record in DTU Findit.

[28] Dan Roland Persson, Mel Ramasawmy, Nushrat Khan, Amitava Banerjee, Ann Blandford, Jakob Eyvind Bardram, and Per Bækgaard. 2025. A Design Framework for Microintervention Software Technology in Digital Health: Critical Interpretive Synthesis. *Journal of Medical Internet Research* 27 (2025), e72658. doi:10.2196/72658

[29] Robin L. Peterson and Bruce F. Pennington. 2012. Developmental Dyslexia. *The Lancet* 379, 9830 (2012), 1997–2007. doi:10.1016/S0140-6736(12)60198-6

[30] PsychoPy contributors. 2026. ioHub Common Eye Tracker Interface. https://www.psychopy.org/api/iohub/device/eyetracker.html PsychoPy documentation. Accessed 2026-10-16.

[31] Keith Rayner. 1998. Eye Movements in Reading and Information Processing: 20 Years of Research. *Psychological Bulletin* 124, 3 (1998), 372–422. doi:10.1037/0033-2909.124.3.372

[32] Lars Kristian Burchard Refsgaard and Aamir Ahmad Farooq. 2024. *Reading the Reader: An Intelligent System for Optimizing Typography for Central Vision Loss Readers.* Master's thesis. Technical University of Denmark, DTU Compute. https://findit.dtu.dk/en/catalog/65fa375f2a83a81e2e536b41 Full text not publicly accessible; catalogue record in DTU Findit.

[33] Luz Rello, Martin Pielot, and Mari-Carmen Marcos. 2016. Make It Big! The Effect of Font Size and Line Spacing on Online Readability. In *Proceedings of the 2016 CHI Conference on Human Factors in Computing Systems (CHI '16).* Association for Computing Machinery, New York, NY, USA, 3637–3648. doi:10.1145/2858036.2858204

[34] Gary S. Rubin and Gordon E. Legge. 1989. Psychophysics of Reading. VI. The Role of Contrast in Low Vision. *Vision Research* 29, 1 (1989), 79–91. doi:10.1016/0042-6989(89)90175-2

[35] Koen Rummens and Sofie Beier. 2026. Gaze-Based Word Highlighting Boosts Reading Performance: An Eye Tracking Study in Second Graders. *Ergonomics* 69, 7 (2026), 1253–1265. doi:10.1080/00140139.2025.2514600 First published online 12 June 2025.

[36] Mohammadhossein Salari, Diederick C. Niehorster, Dan Witzner Hansen, and Roman Bednarik. 2026. PyEtSimul: An Open-Source Python Framework for Eye-Tracking Simulation. *Proceedings of the ACM on Human-Computer Interaction* 10, 3, Article ETRA009 (2026), 17 pages. doi:10.1145/3806023

[37] Mohammadhossein Salari, Marcus Nyström, Diederick C. Niehorster, and Roman Bednarik. 2026. PyeLink and SyeLink: Open-source Python Tools for Low-level EyeLink Experiment Control and Data Parsing. In *Proceedings of the 2026 Symposium on Eye Tracking Research and Applications (ETRA '26).* Association for Computing Machinery, New York, NY, USA, Article 50, 3 pages. doi:10.1145/3797246.3805844

[38] Dario D. Salvucci and Joseph H. Goldberg. 2000. Identifying Fixations and Saccades in Eye-Tracking Protocols. In *Proceedings of the 2000 Symposium on Eye Tracking Research & Applications (ETRA '00).* Association for Computing Machinery, New York, NY, USA, 71–78. doi:10.1145/355017.355028

[39] Daniel R. Saunders and Russell L. Woods. 2014. Direct Measurement of the System Latency of Gaze-Contingent Displays. *Behavior Research Methods* 46, 2 (2014), 439–447. doi:10.3758/s13428-013-0375-5

[40] John L. Sibert, Mehmet Göktürk, and Robert A. Lavine. 2000. The Reading Assistant: Eye Gaze Triggered Auditory Prompting for Reading Remediation. In *Proceedings of the 13th Annual ACM Symposium on User Interface Software and Technology (UIST '00).* Association for Computing Machinery, New York, NY, USA, 101–107. doi:10.1145/354401.354418

[41] Tobii Pro. 2025. Tobii Pro Lab. https://www.tobii.com/products/software/behavior-research-software/tobii-pro-lab Product page. Accessed 2026-06-03.

[42] Wan Ling Wong, Xinyi Su, Xiang Li, Chui Ming Gemmy Cheung, Ronald Klein, Ching-Yu Cheng, and Tien Yin Wong. 2014. Global Prevalence of Age-Related Macular Degeneration and Disease Burden Projection for 2020 and 2040: A Systematic Review and Meta-Analysis. *The Lancet Global Health* 2, 2 (2014), e106–e116. doi:10.1016/S2214-109X(13)70145-1

[43] World Health Organization. 2026. Blindness and Vision Impairment. https://www.who.int/news-room/fact-sheets/detail/blindness-and-visual-impairment Fact sheet. Accessed 2026-06-08.