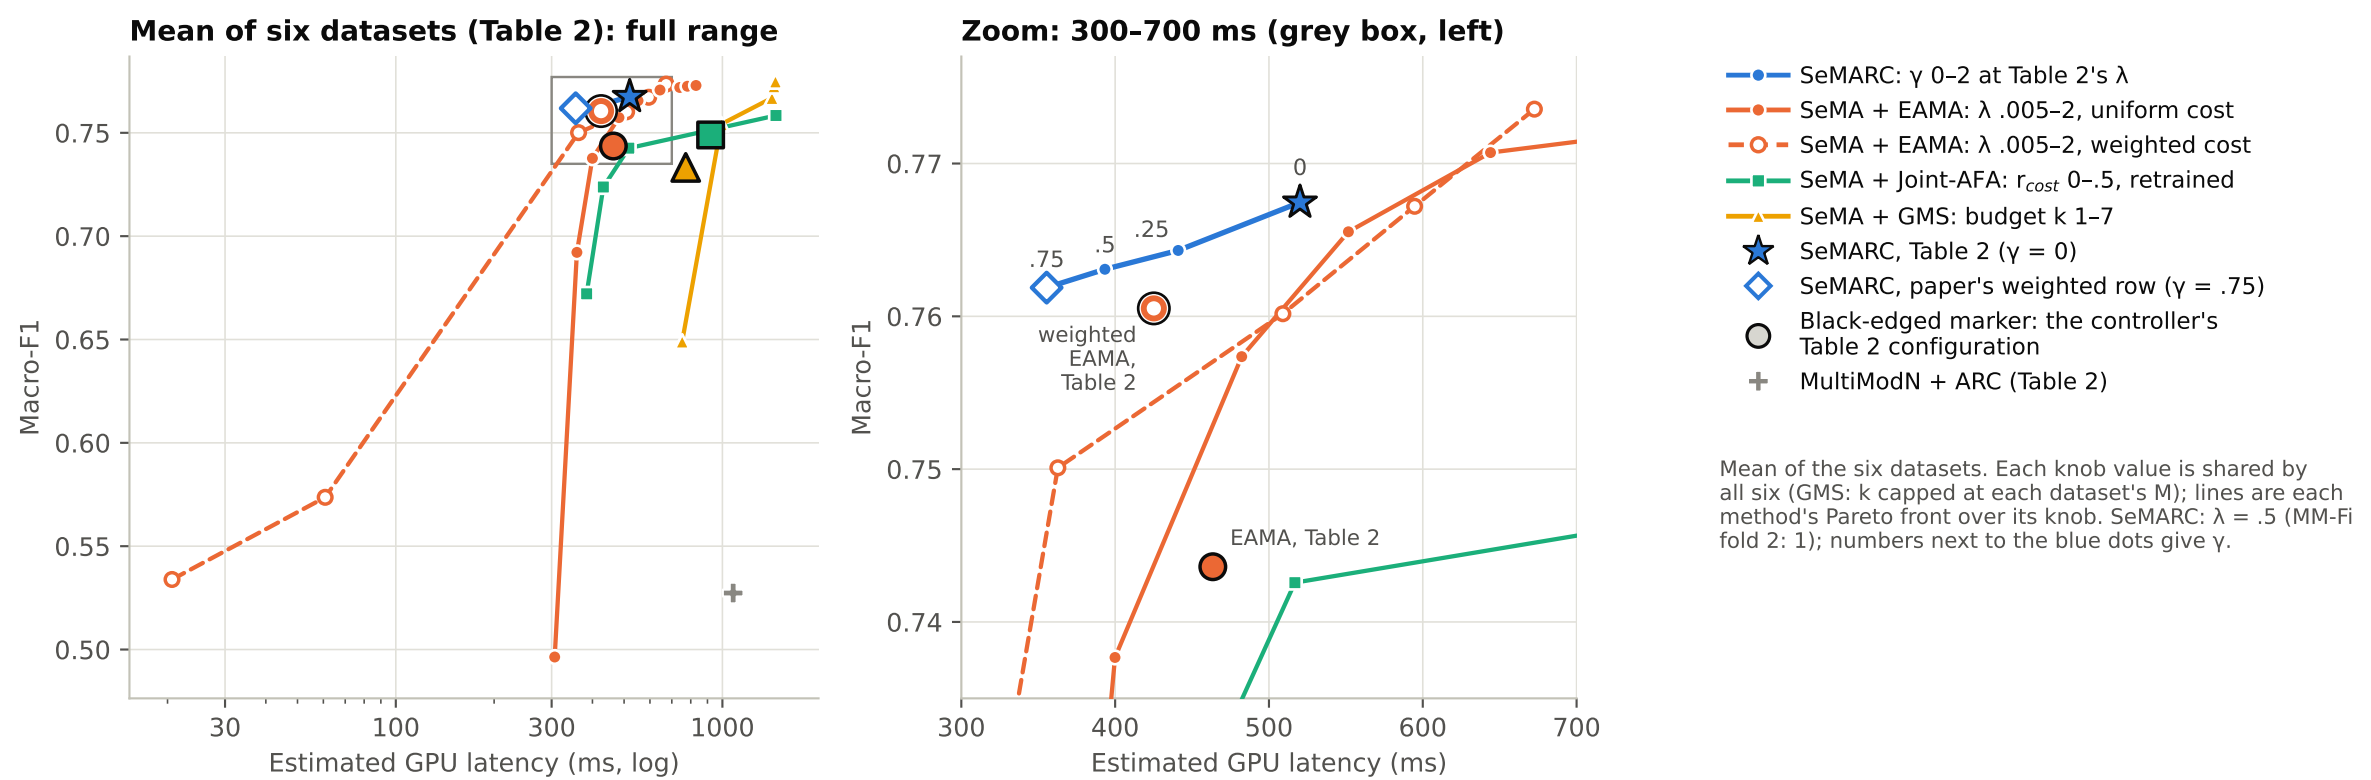
Mean of six datasets (Table 2): full range
Macro-F1
Estimated GPU latency (ms, log)
0.75
0.70
0.65
0.60
0.55
0.50
30
100
300
1000
Zoom: 300–700 ms (grey box, left)
Macro-F1
Estimated GPU latency (ms)
0.77
0.76
0.75
0.74
300
400
500
600
700
0
.25
.5
.75
weighted EAMA, Table 2
EAMA, Table 2
SeMARC: γ 0–2 at Table 2's λ
SeMA + EAMA: λ .005–2, uniform cost
SeMA + EAMA: λ .005–2, weighted cost
SeMA + Joint-AFA: r_cost 0–.5, retrained
SeMA + GMS: budget k 1–7
SeMARC, Table 2 (γ = 0)
SeMARC, paper's weighted row (γ = .75)
Black-edged marker: the controller's Table 2 configuration
MultiModN + ARC (Table 2)
Mean of the six datasets. Each knob value is shared by all six (GMS: k capped at each dataset's M); lines are each method's Pareto front over its knob. SeMARC: λ = .5 (MM-Fi fold 2: 1); numbers next to the blue dots give γ.