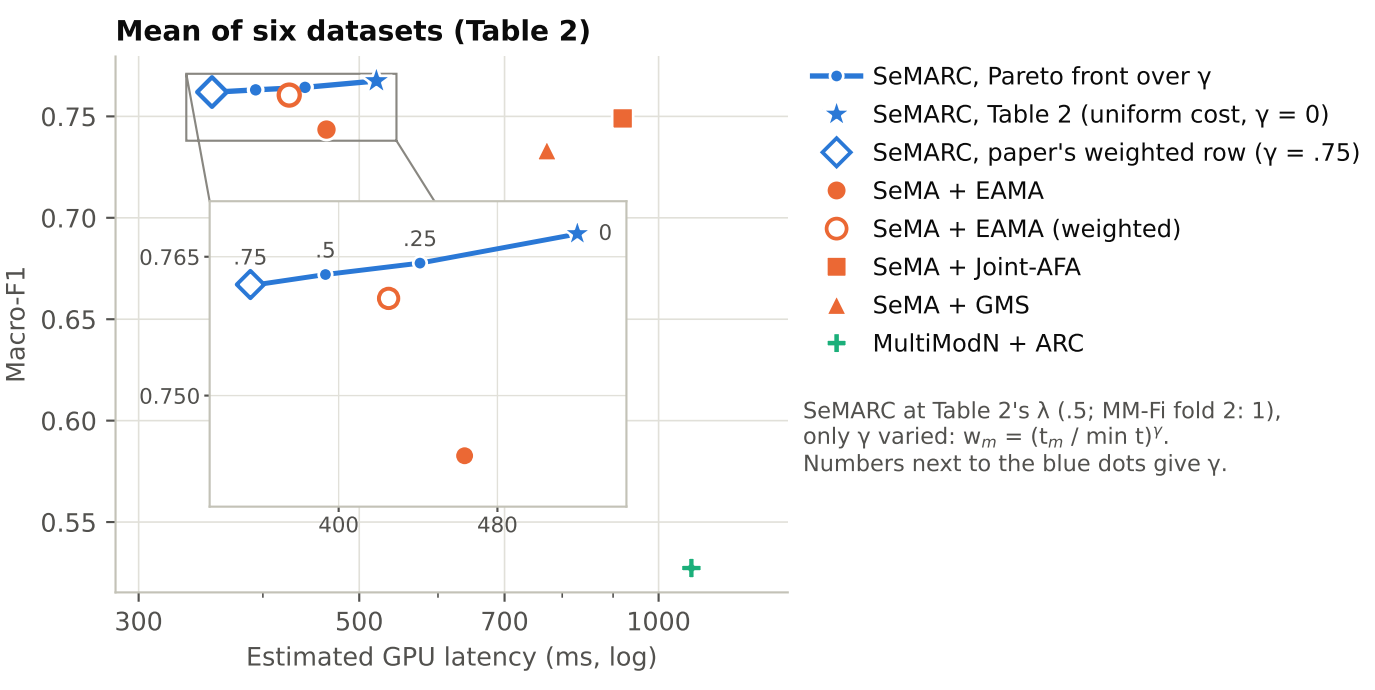
Mean of six datasets (Table 2)
Macro-F1
0.75
0.70
0.65
0.60
0.55
0.765
0.750
.75
.5
.25
0
400
480
300
500
700
1000
Estimated GPU latency (ms, log)
SeMARC, Pareto front over γ
SeMARC, Table 2 (uniform cost, γ = 0)
SeMARC, paper's weighted row (γ = .75)
SeMA + EAMA
SeMA + EAMA (weighted)
SeMA + Joint-AFA
SeMA + GMS
MultiModN + ARC
SeMARC at Table 2's λ (.5; MM-Fi fold 2: 1),
only γ varied: $w_m = (t_m / \min t)^{\gamma}$.
Numbers next to the blue dots give γ.