
```
reducts: storeProducts
   React.Fragment>
      <div className="py-5">
          <div className="container">
             <Title name="our" title= "product
             <div className="row">
                 <ProductConsumer>
                     {(value) ⇒> {
                         console.log(value)
                 </ProductConsumer>
                 </div>
             </div>
         </div>
 </reduct.Fragment>
```

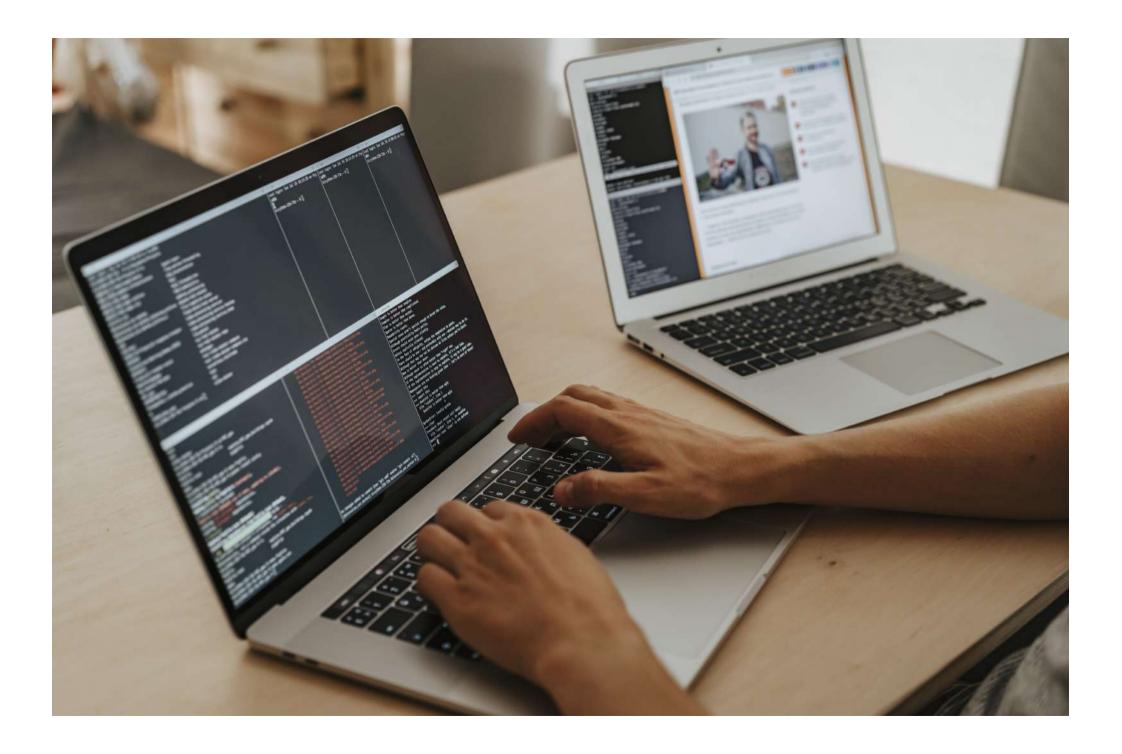

```
ger printing in the same
     # Use the json meeting to the same
     theJSON = json_lowestamen
10
11
     # now we can access the
12
      if "title" in the Parket
13
       print(the)SONE metallors 1
14
 15
      a output the number of events.
      count = theJSON["metadoro"]
      print (str(count) + *
        for each event, print the place whose a color
      for i in the JSON["features"]8
        print(i["properties"] ["place"])
       ###(f"----\n")
       grave the events that only have a magnificant
         # # "properties"] ["mag"] >= 4.0:
          i["properties"]
        suggests where at least 1 Person rec
                            fties"] ["felt"]
```