Bonus Exercise - Performance Analysis and Optimization of the Game of Life Code

8.1 Check the code with a linter, and in case, run an auto formatter. Produce HTML documentation running sphinx.

First we run the installation and activation part of the guide of the code and see below is still not the execution of the "update" function, for a mass number of iterations. Let's run point as time viz.

```
~ > luarocks install ldoc
```

```
environment Module_C_Library
ceneau-gol-23.rock: SCANS: Tracking workspace/library/stopwatch
ceneau-gol-24.rock: SCANS: Tracking workspace/library/stopwatch
ceneau-gol-25.rock: SCANS: Tracking workspace/library/stopwatch
ceneau-gol-26.rock: SCANS: Tracking workspace/library/stopwatch
ceneau-gol-27.rock: SCANS: Tracking workspace/library/stopwatch
ceneau-gol-28.rock: SCANS: Tracking workspace/library/stopwatch
ceneau-gol-29.rock: SCANS: Tracking workspace/library/stopwatch
ceneau-gol-30.rock: SCANS: Tracking workspace/library/stopwatch
ceneau-gol-31.rock: SCANS: Tracking workspace/library/stopwatch
ceneau-gol-32.rock: SCANS: Tracking workspace/library/stopwatch
```

```
1    0.000    0.000    0.000    0.000 backend_tools.py:622(ConfigureSubplotsBase)
1    0.000    0.000    0.000    0.000 patches.py:3529(CurveB)
1    0.000    0.000    0.000    0.000 parse.py:350(SplitResultBytes)
1    0.000    0.000    0.000    0.000 ipaddress.py:24(NetmaskValueError)
1    0.000    0.000    0.000    0.000 __init__.py:14(SubplotBase)
1    0.000    0.000    0.000    0.000 __init__.py:11(DeprecatedTzFormatWarning)
1    0.000    0.000    0.000    0.000 streamplot.py:434(InvalidIndexError)
1    0.000    0.000    0.000    0.000 <string>:1(<module>)
1    0.000    0.000    0.000    0.000 pickle.py:83(UnpicklingError)
1    0.000    0.000    0.000    0.000 __init__.py:178(c_long)
1    0.000    0.000    0.000    0.000 __init__.py:207(c_longdouble)
1    0.000    0.000    0.000    0.000 __init__.py:252(c_char)
1    0.000    0.000    0.000    0.000 _iotools.py:439(ConversionWarning)
1    0.000    0.000    0.000    0.000 warnings.py:5(PyparsingDeprecationWarning)
1    0.000    0.000    0.000    0.000 core.py:1454(__annotate__)
1    0.000    0.000    0.000    0.000 patches.py:3544(CurveFilledB)
1    0.000    0.000    0.000    0.000 streamplot.py:438(TerminateTrajectory)
1    0.000    0.000    0.000    0.000 {built-in method sys._getframe}
1    0.000    0.000    0.000    0.000 {built-in method _thread.get_native_id}
1    0.000    0.000    0.000    0.000 exceptions.py:199(DTypePromotionError)
1    0.000    0.000    0.000    0.000 __init__.py:174(c_ushort)
1    0.000    0.000    0.000    0.000 __init__.py:182(c_ulong)
1    0.000    0.000    0.000    0.000 __init__.py:195(c_uint)
1    0.000    0.000    0.000    0.000 __init__.py:213(c_double_complex)
1    0.000    0.000    0.000    0.000 __init__.py:216(c_float_complex)
1    0.000    0.000    0.000    0.000 __init__.py:219(c_longdouble_complex)
1    0.000    0.000    0.000    0.000 __init__.py:247(c_byte)
1    0.000    0.000    0.000    0.000 _nbit_base.py:65(_128Bit)
1    0.000    0.000    0.000    0.000 _nbit_base.py:71(_96Bit)
1    0.000    0.000    0.000    0.000 _iotools.py:431(ConverterLockError)
1    0.000    0.000    0.000    0.000 rcsetup.py:375(validate_fontsize_None)
1    0.000    0.000    0.000    0.000 exceptions.py:323(ParseFatalException)
1    0.000    0.000    0.000    0.000 exceptions.py:330(ParseSyntaxException)
1    0.000    0.000    0.000    0.000 actions.py:46(__annotate__)
1    0.000    0.000    0.000    0.000 core.py:666(__annotate__)
1    0.000    0.000    0.000    0.000 core.py:1150(__annotate__)
1    0.000    0.000    0.000    0.000 core.py:1032(__annotate__)
1    0.000    0.000    0.000    0.000 core.py:2057(__annotate__)
1    0.000    0.000    0.000    0.000 core.py:4338(__annotate__)
1    0.000    0.000    0.000    0.000 _mathtext.py:960(DejaVuSerifFontConstants)
1    0.000    0.000    0.000    0.000 six.py:382(Module_six_moves_urllib_error)
1    0.000    0.000    0.000    0.000 six.py:402(Module_six_moves_urllib_request)
1    0.000    0.000    0.000    0.000 six.py:459(Module_six_moves_urllib_response)
1    0.000    0.000    0.000    0.000 streamplot.py:510(OutOfBounds)
1    0.000    0.000    0.000    0.000 {method '__enter__' of 'posix.ScandirIterator' objects}
1    0.000    0.000    0.000    0.000 _py_warnings.py:24(_set_module)
1    0.000    0.000    0.000    0.000 fromnumeric.py:3282(_prod_dispatcher)
1    0.000    0.000    0.000    0.000 __init__.py:191(c_int)
1    0.000    0.000    0.000    0.000 _endian.py:35(_swapped_union_meta)
1    0.000    0.000    0.000    0.000 shutil.py:89(RegistryError)
1    0.000    0.000    0.000    0.000 Image.py:79(DecompressionBombError)
1    0.000    0.000    0.000    0.000 core.py:860(__annotate__)
1    0.000    0.000    0.000    0.000 core.py:1134(__annotate__)
1    0.000    0.000    0.000    0.000 core.py:1274(__annotate__)
1    0.000    0.000    0.000    0.000 core.py:5163(__annotate__)
1    0.000    0.000    0.000    0.000 core.py:6825(__annotate__)
1    0.000    0.000    0.000    0.000 case.py:39(_UnexpectedSuccess)
1    0.000    0.000    0.000    0.000 _mathtext.py:964(DejaVuSansFontConstants)
1    0.000    0.000    0.000    0.000 six.py:480(Module_six_moves_urllib_robotparser)
1    0.000    0.000    0.000    0.000 {method '__exit__' of '_thread.lock' objects}
1    0.000    0.000    0.000    0.000 exceptions.py:58(ModuleDeprecationWarning)
1    0.000    0.000    0.000    0.000 exceptions.py:75(VisibleDeprecationWarning)
1    0.000    0.000    0.000    0.000 exceptions.py:86(RankWarning)
1    0.000    0.000    0.000    0.000 __init__.py:199(c_float)
1    0.000    0.000    0.000    0.000 __init__.py:203(c_double)
1    0.000    0.000    0.000    0.000 _nbit_base.py:81(_32Bit)
1    0.000    0.000    0.000    0.000 {built-in method numpy._core._multiarray_umath._set_madvise_hugepage}
1    0.000    0.000    0.000    0.000 core.py:6326(__annotate__)
1    0.000    0.000    0.000    0.000 {method 'clear' of 'list' objects}
1    0.000    0.000    0.000    0.000 <frozen importlib._bootstrap_external>:1172(exec_module)
1    0.000    0.000    0.000    0.000 argparse.py:704(_get_help_string)
1    0.000    0.000    0.000    0.000 multiarray.py:748(dot)
1    0.000    0.000    0.000    0.000 _nbit_base.py:86(_16Bit)
1    0.000    0.000    0.000    0.000 _nbit_base.py:91(_8Bit)
1    0.000    0.000    0.000    0.000 _twodim_base_impl.py:555(_vander_dispatcher)
1    0.000    0.000    0.000    0.000 _polynomial_impl.py:454(_polyfit_dispatcher)
1    0.000    0.000    0.000    0.000 _polynomial_impl.py:707(_polyval_dispatcher)
1    0.000    0.000    0.000    0.000 random.py:915(seed)
1    0.000    0.000    0.000    0.000 core.py:1954(__annotate__)
1    0.000    0.000    0.000    0.000 core.py:1976(__annotate__)
1    0.000    0.000    0.000    0.000 core.py:5176(__annotate__)
1    0.000    0.000    0.000    0.000 core.py:6333(__annotate__)
1    0.000    0.000    0.000    0.000 six.py:239(exec_module)
1    0.000    0.000    0.000    0.000 _linalg.py:2413(_lstsq_dispatcher)
1    0.000    0.000    0.000    0.000 numeric.py:905(_outer_dispatcher)
1    0.000    0.000    0.000    0.000 _linalg.py:532(_unary_dispatcher)
```

The update functions takes a lot of time, which makes sense since all calculations are happening here. Lets use the line profiler to get the execution times for each row. Therefore we must add a @profile decorator to the code. Since the update function is most interesting, let's decorate this one.

In [29]:
```
!python -m kernprof -l conway.py
!python -m line_profiler conway.py.lprof
```

```
Wrote profile results to 'conway.py.lprof'
Inspect results with:
python -m line_profiler -rmt conway.py.lprof
Timer unit: 1e-06 s

Total time: 53.0133 s
File: conway.py
Function: update at line 59

Line #      Hits         Time  Per Hit   % Time  Line Contents
==============================================================
    59                                           @profile
    60                                           def update(frameNum, img, grid, N):
    61                                               # copy grid since we require 8 neighbors for calculation
    62                                               # and we go line by line
    63      1000      10466.0     10.5      0.0      newGrid = grid.copy()
    64    101000      17902.0      0.2      0.0      for i in range(N):
    65  10100000    1982642.0      0.2      3.7          for j in range(N):
    66                                                       # compute 8-neghbor sum
    67                                                       # using toroidal boundary conditions - x and y wrap around
    68                                                       # so that the simulaton takes place on a toroidal surface.
    69  20000000    4073418.0      0.2      7.7              total = int(
    70  10000000    2323623.0      0.2      4.4                  (
    71  80000000   18682920.0      0.2     35.2                      grid[i, (j - 1) % N]
    72  10000000    2568006.0      0.3      4.8                      + grid[i, (j + 1) % N]
    73  10000000    2718319.0      0.3      5.1                      + grid[(i - 1) % N, j]
    74  10000000    2628021.0      0.3      5.0                      + grid[(i + 1) % N, j]
    75  10000000    2795555.0      0.3      5.3                      + grid[(i - 1) % N, (j - 1) % N]
    76  10000000    2780276.0      0.3      5.2                      + grid[(i - 1) % N, (j + 1) % N]
    77  10000000    2779584.0      0.3      5.2                      + grid[(i + 1) % N, (j - 1) % N]
    78  10000000    2749458.0      0.3      5.2                      + grid[(i + 1) % N, (j + 1) % N]
    79                                                           )
    80  10000000    1869629.0      0.2      3.5                  / 255
    81                                               )
    82                                               # apply Conway's rules
    83  10000000    2981190.0      0.3      5.6              if grid[i, j] == ON:
    84    489573     104924.0      0.2      0.2                  if (total < 2) or (total > 3):
    85    151442      46503.0      0.3      0.1                      newGrid[i, j] = OFF
    86                                               else:
    87   9510427    1844498.0      0.2      3.5                  if total == 3:
    88    149702      45764.0      0.3      0.1                      newGrid[i, j] = ON
    89                                           # update data
    90                                           # img.set_data(newGrid)
    91      1000      10556.0     10.6      0.0      grid[:] = newGrid[:]
    92                                           # return (img,)
```

The line_profiler shows that the most time is used in line 71. The other lines calculation the number of neighbors of each cell (line 71-78) are also taking quite some time. Thats because the numpy arrays are accessed in a python loop which takes a lot more time and therefore should be vectorized. Lets create a new file "conway_optimized.py" in order to optimize the code and compare it to the old one afterwards.

Task B.4 Implement an optimization, report the new profiling results, and show the performance improvement.

As presented in python to numpy article it is possible to vectorize this part to get better performance.

Looking at the different execution times for different grid sizes in comparison with the old unoptimized code we can see that we were able to reduce the execution time by quite a lot. So vectorizing the update function made a huge difference in terms of performance.

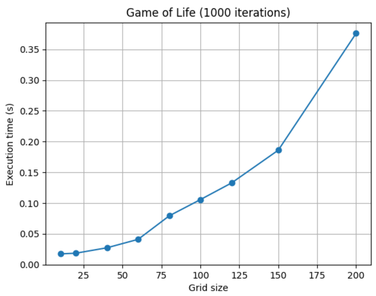

Let's also profile the update function again:

In [30]:
```
!python -m kernprof -l conway_optimized.py
!python -m line_profiler conway_optimized.py.lprof
```

```
Wrote profile results to 'conway_optimized.py.lprof'
Inspect results with:
python -m line_profiler -rmt conway_optimized.py.lprof
Timer unit: 1e-06 s

Total time: 0.108663 s
File: conway_optimized.py
Function: update at line 59

Line #      Hits         Time  Per Hit   % Time  Line Contents
==============================================================
    59                                           @profile
    60                                           def update(frameNum, img, grid, N):
    61      1000       1959.0      2.0      1.8      neighbors = np.zeros(grid.shape, dtype=int)
    62      2000      23161.0     11.6     21.3      neighbors[1:-1, 1:-1] += (
    63      6000      45473.0      7.6     41.8          grid[:-2, :-2] + grid[:-2, 1:-1] + grid[:-2, 2:] +
    64      2000        800.0      0.4      0.7          grid[1:-1, :-2]                  + grid[1:-1, 2:] +
    65      3000        973.0      0.3      0.9          grid[2:, :-2] + grid[2:, 1:-1] + grid[2:, 2:]
    66      1000        215.0      0.2      0.2      ) // 255
    67      1000      10349.0     10.3      9.5      birth = (grid[1:-1, 1:-1] == OFF) & (neighbors[1:-1, 1:-1] == 3)
    68      1000      15401.0     15.4     14.2      survive = (grid[1:-1, 1:-1] == ON) & ((neighbors[1:-1, 1:-1] == 2) | (neighbors[1:-1, 1:-1] == 3))
    69      1000      10332.0     10.3      9.5      grid[1:-1, 1:-1] = np.where(birth | survive, ON, OFF)
```

Counting the neighbors still takes the most time but was reduced from 18682920.0 to 45473.0 which is >400 times faster.

The update function has been vectorized and now looks like this:

```
def update(frameNum, img, grid, N):
    neighbors = np.zeros(grid.shape, dtype=int)
    neighbors[1:-1, 1:-1] += (
        grid[:-2, :-2] + grid[:-2, 1:-1] + grid[:-2, 2:] +
        grid[1:-1, :-2]                  + grid[1:-1, 2:] +
        grid[2:, :-2] + grid[2:, 1:-1] + grid[2:, 2:]
    ) // 255
    birth = (grid[1:-1, 1:-1] == OFF) & (neighbors[1:-1, 1:-1] == 3)
    survive = (grid[1:-1, 1:-1] == ON) & ((neighbors[1:-1, 1:-1] == 2) | (neighbors[1:-1, 1:-1] == 3))
    grid[1:-1, 1:-1] = np.where(birth | survive, ON, OFF)
```

In [ ]: