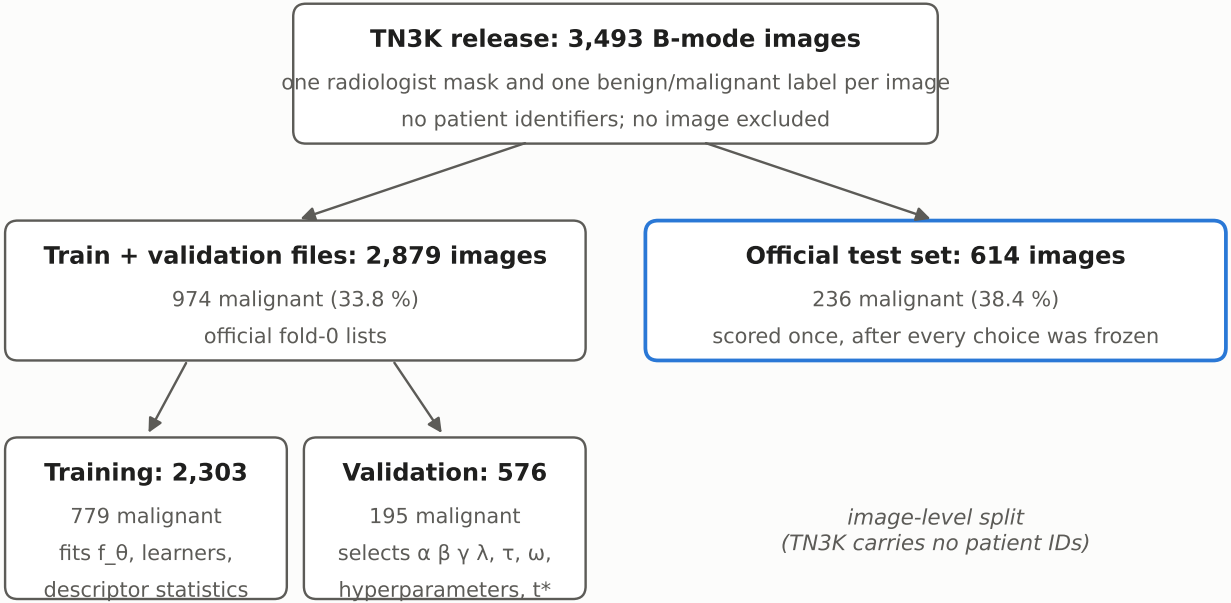
TN3K release: 3,493 B-mode images
one radiologist mask and one benign/malignant label per image
no patient identifiers; no image excluded
Train + validation files: 2,879 images
974 malignant (33.8 %)
official fold-0 lists
Official test set: 614 images
236 malignant (38.4 %)
scored once, after every choice was frozen
Training: 2,303
779 malignant
fits f_θ, learners,
descriptor statistics
Validation: 576
195 malignant
selects α β γ λ, τ, ω,
hyperparameters, t*
image-level split
(TN3K carries no patient IDs)