

# Compare Results

Old File:

**2024.emnlp-main.635.pdf**

**16 pages (270 KB)**

10/31/2024 10:32:55 PM

versus

New File:

**2024\_emnlp-main\_635.pdf**

**15 pages (153 KB)**

2/9/2026 2:13:53 PM

Total Changes

1498

Content

111 Replacements

312 Insertions

422 Deletions

Styling and Annotations

354 Styling

299 Annotations

Go to First Change (page 2)



# Revisiting Supertagging for Faster HPSG Parsing

Olga Zamaraeva and Carlos Gómez-Rodríguez

Universidade da Coruña, CITIC

Departamento de Ciencias de la Computación y Tecnologías de la Información

Campus de Elviña s/n, 15071, A Coruña, Spain

{olga.zamaraeva, carlos.gomez}@udc.es

## Abstract

We present new supertaggers trained on English grammar-based treebanks and test the effects of the best tagger on parsing speed and accuracy. The treebanks are produced automatically by large manually built grammars and feature high-quality annotation based on a well-developed linguistic theory (HPSG). The English Resource Grammar treebanks include diverse and challenging test datasets, beyond the usual WSJ section 23 and Wikipedia data. HPSG supertagging has previously relied on MaxEnt-based models. We use SVM and neural CRF- and BERT-based methods and show that both SVM and neural supertaggers achieve considerably higher accuracy compared to the baseline and lead to an increase not only in the parsing speed but also the parser accuracy with respect to gold dependency structures. Our fine-tuned BERT-based tagger achieves 97.26% accuracy on 950 sentences from WSJ23 and 93.88% on the out-of-domain technical essay *The Cathedral and the Bazaar* (cb). We present experiments with integrating the best supertagger into an HPSG parser and observe a speedup of a factor of 3 with respect to the system which uses no tagging at all, as well as large recall gains and an overall precision gain. We also compare our system to an existing integrated tagger and show that although the well-integrated tagger remains the fastest, our experimental system can be more accurate. Finally, we hope that the diverse and difficult datasets we used for evaluation will gain more popularity in the field: we show that results can differ depending on the dataset, even if it is an in-domain one. We contribute the complete datasets reformatted for Hugging-face token classification.

## 1 Introduction

We present new supertaggers for English and use them to improve parsing efficiency for Head-driven Phrase Structure Grammars (HPSG). Grammars have been gaining relevance in the natural language processing (NLP) landscape [?], since it is hard to interpret and evaluate the output of NLP systems without robust theories.

Head-Driven Phrase Structure Grammar (HPSG) [3] is a theory of syntax that has been applied in computational linguistic research (see [3-4]). At the core of such research are precision grammars which encode a strict notion of grammaticality—their purpose is to cover and generate only grammatical structures. They include a relatively small set of phrase-structure rules and a large lexicon where lexical entries contain information about the word’s syntactic behavior. HPSG treebanks (and the grammars that produce them) encode not only constituency but also dependency and semantic relations and have proven useful in natural language processing, e.g. in grammar coaching [?], natural language generation [?], and as training data for high precision semantic parsing [?]. Being a good parse ranking model, a treebank is produced automatically by parsing text with the grammar, and any updates are encoded systematically in the grammar, with no need of manual treebank annotation.<sup>1</sup>

HPSG parsing, which is typically bottom-up chart parsing, is both relatively slow and RAM-hungry. Often, more than a second is required to parse a sentence (see Ta-

<sup>1</sup>For a good parse ranking model, it is necessary to select “gold” parses from a potentially large parse forest at least once. This can be done semi-automatically [?].

ble ??), and sometimes the performance is prohibitively bad for long sentences, with a typical user machine requiring unreasonable amounts of RAM to finish parsing with a large parse chart [1, 2]. It is important to emphasize that this is the state of the art in HPSG parsing, and its speed is one of the reasons why the true potential of HPSG parsing in NLP remains not fully realized despite the evidence that it helps create highly precise training data automatically. Approaches to speed up HPSG parsing include local ambiguity packing [3, 4], on the one hand, and forgoing exact search and reducing the parser search space, on the other [5, 6].

Here we contribute to the second line of research, aka supertagging, a technique to discard unlikely interpretations of tokens. [7] and [8, 9] used maximum entropy-based models trained on a combination of gold and automatically labeled data from English, requiring large-scale computation. They report an efficiency improvement of a factor of 3 for the parser they worked with [9], and accuracy improvements with respect to the baseline [8].

We present new models for HPSG supertagging, an SVM-based one, a neural CRF-based one, and a fine-tuned-BERT one, and compare their tagging accuracy with a MaxEnt baseline. We now have more English gold training data thanks to the HPSG grammar engineering consortium’s treebanking efforts [10, 11]. This makes sense to train modern models on this wealth of gold data. Then we use the supertags to filter the parse chart at the lexical analysis stage, so that the parser has fewer possibilities to consider. We report the results of parsing all of the test data associated with the English HPSG treebanks [12] in comparison with parsing the same data with the same parsing algorithm but with no tagging at all, as well as with the integrated MEMM-based tagger. If we use the tagger with some exceptions, our system is the most accurate (using the partial dependency match metric). It is not faster than the MEMM-based tagger integrated into the parser for production mode, although it is of course much faster than parsing without tagging (by a factor of 3).

The paper is organized as follows. In §??, we give the background necessary for understanding the provenance of our training data. §?? presents the methodology, start-

ing from previous work (§??). We then describe our training and evaluation data (§??), and finally how we trained the new supertaggers (§??). In §??, we present the results: first for the accuracy of the supertagger (§??) and then for the parsing experiments, including parsing speed and parsing accuracy (§??).

We trained the neural models with NVIDIA GeForce RTX 2080 GPU, CUDA version 11.2. The SVM model and the MaxEnt baseline were trained using Intel Core i7-9700K 3.60GHz CPU. The parser was run on the same CPU. The code and configurations for the reported results as well as the dataset are online<sup>3</sup>. The original data we used is publicly available<sup>4</sup>. Details can be found in the Appendix.

## 2 Background

Below we explain HPSG lexical types (§??), which serve as the basis for what we predict, and in §??, we give the background on the English treebanks which served as our training and evaluation data. §?? is a summary for HPSG parsing and the specific parser that we are using for the experiments.

### 2.1 Lexical types

Any HPSG grammar consists of a hierarchy of types, including phrasal and lexical types, and of a large lexicon which can be used to map surface tokens to lexical types. Each token in the text is recognized by the parser as belonging to one or more of the lexical entries in the lexicon (assuming such an orthographic form is present at all). Lexical entries, in turn, belong to lexical types (Figure ??). Lexical types are similar to POS tags but are more fine grained (e.g. a precision grammar may distinguish between multiple types of proper nouns or multiple types of wh-words, etc). Figure ?? shows the ancestry of two senses of the English word *bark*, a verb (*to bark*) and a noun (*tree bark*). The types differ from each other in features and their values. For example, the HEAD feature value is different for nouns and verbs; one of the characteristics of the main verb type is that it is not a

<sup>2</sup>The data is available as part of the 2023 release of the English Resource Grammar (the ERG): <https://github.com/delph-in/docs/wiki/RedwoodsTop>.

<sup>3</sup><https://github.com/olzama/neural-supertagging>

<sup>4</sup>See footnote 2.

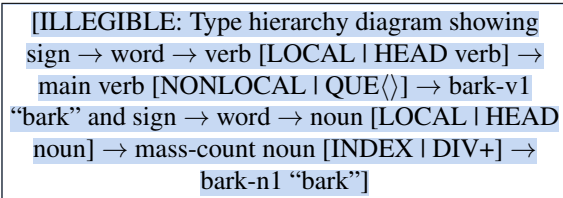


Figure 1: Part of the HPSG type hierarchy (simplified; adapted from ERG). NB: This is not a derivation.

question word; the noun subtype denotes divisible entities, etc. The token *bark* will be interpreted as either a verb or a noun during lexical analysis parsing stage. After the lexical analysis, the bottom-up parser runs a constraint unification-based algorithm [?] to return a (possibly empty) set of parses. To emphasize, a parser in this context is a separate program implementing a parsing algorithm. The grammar is the type hierarchy which the parser takes as input along with the sentence to parse.

## 2.2 The ERG treebanks

The English Resource Grammar (ERG [?]) is a broad-coverage precision grammar of English implemented in the HPSG formalism. The latest release is from 2023.<sup>5</sup> Its intrinsic evaluation relies on a set of English text corpora. Each release of the ERG includes a treebank of those texts parsed by the current version. The parses are created automatically and the gold structure is verified manually. Treebanking in the ERG context is the process of choosing linguistically (semantically) correct structures from the multiple trees corresponding to one string that the grammar may produce. Fast treebanking is made possible by automatically comparing parse forests and by discriminant-based bulk elimination of unwanted trees. The treebanks are stored as databases that can be processed with specialized software e.g. Pydelphin.<sup>6</sup>

The 2023 ERG release comes with 30 treebanked corpora containing over 1.5 million tokens and 105,155 sentences. In principle, there are 43,505 different lexical types in the ERG (cf. 48 tags in the Penn Treebank POS tagset (PTB [?]), however only 1,299 of them are found

in the training portion of the treebank. The genres include well-edited text (news, Wikipedia articles, fiction, travel brochures, and technical essays) as well as customer service emails and transcribed phone conversations. There are also constructed test suites illustrating linguistic phenomena such as raising and control. The ERG treebanks present more challenging test data compared to the conventional WSJ23 (which is also included). The ERG 2023’s average accuracy (correct structure) over all the corpora is 93.77%; the raw coverage (some structure) is 96.96%. The ERG uses PTB-style punctuation tokens and includes PTB POS tags in all tokens, along with a lexical type [?].

## 2.3 HPSG parsing

Several parsers for different variations of the HPSG formalism exist. We work with the DELPH-IN formalism [?] which is deliberately restricted for theoretical and performance considerations; it only encodes the unification operation natively (and not e.g. relational constraints). Still, the parsing algorithms’ worst-case complexity is intractable [?]. [?] (§3.2.3, cited in [?, §109]) states that the worst-case parsing time for HPSG feature structures is proportional to  $C^{2n\rho+1}$  where  $\rho$  is the maximum number of children in a phrase structure rule and  $C$  is the (potentially large) maximum number of feature structures. The unification operator takes two feature structures as input and outputs one feature structure which satisfies the constraints encoded in both inputs. Given the complex nature of such structures, implementing a fast unification parser is a hard problem. As it is, the existing parsers may take prohibitively long to parse a long sentence (see e.g. [?] as well as §? of this paper).

## 3 Methodology

Supertagging [?] reduces the parser search space by discarding the less likely interpretations of an orthography. For example, the word *bark* in English can be a verb or a noun, and in *The dog barks* it is a lot less likely to be a noun than a verb (see also Fig. [?]). In principle, there are at least two possible interpretations of the sentence *The dog barks*, as can be seen in Fig. [?]. With supertagging, the pragmatically unlikely second interpre-

<sup>5</sup><https://github.com/delph-in/docs/wiki/ERGTop>

<sup>6</sup><https://pydelphin.readthedocs.io/>

[ILLEGIBLE: Two parse trees for “The dog barks” showing (1) a sentence with verb “barks” and (2) an unlikely noun phrase fragment with noun “barks”]

Figure 2: Two interpretations of the sentence *The dog barks*. The second one is an unlikely noun phrase fragment, which would be discarded with the supertagging technique. (Trees provided by the English Resource Grammar Delphin-viz online demo.)

tation would be discarded by discarding the noun lexical type (mass-count noun in Figure 2). In HPSG, there are fine-grained lexical types within the POS class (e.g. subtypes of common nouns or wh-words), so the search space can be reduced further.

In precision grammars, supertagging comes at a cost to coverage and accuracy; selecting a wrong lexical type even for one word means the entire sentence will likely not be parsed correctly. Thus the accuracy of the tagger is crucial. Related to this is the matter of how many possibilities to consider for supertags: the more are considered, the slower the parsing, but the higher the accuracy. In this paper, we experiment with a single, highest-scored tag for each token. However, we combine this strategy (which prioritizes parsing speed) with a list of tokens exempt from supertagging (which increases accuracy).

### 3.1 Previous and related work

[?] introduced the concept of supertagging. [?] showed mathematically that supertagging improves parsing efficiency for a lexicalized formalism (CCG). They used a maximum entropy model. [?] introduced a neural supertagger for CCG and [?] further improved the accuracy of neural-based CCG supertagging achieving an accuracy of 96.25% on WSJ. [?] use finer categories within the CCG tagset and report 95.5% accuracy on in-domain test data and 81% and 92.4% accuracy on two out-of-domain datasets (Bioinfer and Wikipedia). [?] have started exploring the long-tail phenomena related to supertagging and strategies to not discard rare tags. [?] have shown how supertagging, through its relation to underlying grammar principles, improves neural networks’ ability

Table 1: Supertagging effects on HPSG parsing speed.

| model      | grammar        | training tok | tagset size | speed-up factor |
|------------|----------------|--------------|-------------|-----------------|
| N-gram [?] | Alpino (Dutch) | 24 mln       | 1,365       |                 |
| HMM [?]    | ERG (English)  | 113K         | 615         |                 |
| MEMM [?]   | ERG (English)  | 158K         | 676         |                 |

ties to deal with rare (“out-of-vocabulary”) words.<sup>7</sup>

Supertagging experiments with HPSG parsing speed using hand-engineered grammars are summarized in Table ?? In addition, there were experiments on the use of HPSG-like grammars [?, ?, ?, ?, ?, ?, ?]. These statistically derived systems are principally different from the ERG as they do not represent HPSG theory as understood by syntacticians. In the context of the ERG, [?] presents our baseline SOTA for the tagger accuracy. [?] is a related work on “ubertagging”, which includes multi-word expressions. Specifically, an ubertagger considers various multi-word spans, whereas a supertagger relies on a standard tokenizer. We use the ubertagger that was implemented for the ACE parser for the parsing speed experiments, as the baseline (§??). [?] parsing accuracy results, however, are not comparable to ours; she used a different dataset, a different parser, and a different accuracy metric.

### 3.2 Data

We train and evaluate our taggers, both for the baseline (§??) and for the experiment (§??), on gold lexical types from the ERG 2023 release (§??). We use the train-dev-test split recommended in the release.<sup>8</sup> There are 84,894 sentences in the training data, 2,045 in dev, and 7,918 in test. WSJ section 23 is used as test data, as is traditional, but so are a number of other corpora, notably *The Cathedral and the Bazaar* [?], a technical essay which serves as the out-of-domain test data. See Table ?? for the details about the test data. The column titled “training tokens” shows the number of tokens for the training dataset which

<sup>7</sup>These works do not report experiments on parsing speed; they are concerned with tagging accuracy issues only.

<sup>8</sup>Download redwoods.xls from the ERG repository for details and see <https://github.com/delphin-in/docs/wiki/RedwoodsTop>. This split is different than in [?].



is from the same domain as the test dataset in the row. For example, WSJ23 has 23K tokens and WSJ1-22 have 960K tokens in the ERG treebanks.

### 3.3 SVM, LSTM+CRF, and fine-tuned BERT

We train a liblinear SVM model with default parameters (L2 Squared Hinge loss,  $C=1$ , one-vs-rest, up to 1,000 training iterations) using the scikit-learn library [21]. To train an LSTM sequence labeling model, we use the NCRF++ library [22]. We choose the model by training and validating 31 models up to 100 iterations with the starting learning rate of 0.009 and the batch size of 3 (the latter parameters are the largest that are feasible for the combination of our data and the library code). The best NCRF++ model is described in the Appendix in Table ???. To fine-tune BERT, we use the Huggingface transformers library [23] and Pytorch [24]. We try both ‘base-bert-cased’ and ‘base-bert-uncased’ pretrained models which we fine-tune for up to 50 epochs (stopping once there is no improvement for 5 epochs) with weight decay=0.01. The ‘cased’ model with learning rate  $2e-5$  achieves the best dev accuracy (Tab. ??).

We construct feature vectors similarly to what is described [25] and ultimately [26]. The training vector consists of the word orthography itself, the two previous and the two subsequent words, the word’s POS tag, and, for autoregressive models, the two gold lexical type labels for the two previous words. Nonautoregressive models simply do not have the previous tag features. The test vector is the same except, for autoregressive models, instead of the gold labels for the two previous tokens, it has labels assigned to the two previous tokens by the model itself in the previous evaluation steps (an autoregressive model). The word orthographic forms come from the treebank derivation terminals obtained using the Pydelphin library.<sup>9</sup> The PTB-style POS tags come from the treebanks and they were automatically assigned by an HMM-based tagger that is part of the ACE parser code. The POS tags provided by the parser are per token, not per terminal, so for terminals which consist of more than one token, we map the combination of more than one tag to a single PTB-style tag using a mapping constructed manually

<sup>9</sup><https://pydelphin.readthedocs.io/>

by the first author for the training data. Any combination of tags not in the training data are at test time mapped to the first tag based on that being the most frequently correct prediction in the training data.<sup>10</sup> We only saw 15 unknown combinations of tags in the entire dev and test data.

### 3.4 The ACE HPSG Parser

We work with ACE [27], which has seen regular releases since the publication of [28] and remains the state-of-the-art HPSG parser. It is intended for settings which include individual use, including with limited RAM. This parser has default RAM settings<sup>11</sup> which can be modified, and also an in-built ‘ubertagger’. While the ubertagger is based [29], it is not the same thing and its performance has never been published before. In particular, its tagging accuracy is unknown and we did not seek to evaluate it (evaluating a different MaxEnt model instead). The ubertagger was integrated into the ACE parser code with great care, optimizing for performance. We also do not seek to compete with such optimizations in our experiments. For our experiments, we provide ACE with the tags predicted by the best supertagger (the BERT-based supertagger) along with the character spans corresponding to the token for which the tag was predicted.<sup>12</sup> We then prune all lexical chart edges which correspond to this token span but do not have the predicted lexical type. As such, we follow the general idea of using supertagging for reducing the lexical chart size but we do not use the same code that the integrated ubertagger uses for this procedure. We assume that our code could be further optimized for production.

### 3.5 Exceptions for supertagging

As already mentioned, mistakes in supertagging are very costly for precision grammar parsing; one wrongly predicted lexical type means the entire sentence will not be parsed correctly. After the maxent-based supertaggers were trained [30, 31] and [32], the developer of the English

<sup>10</sup>The first tag is the correct tag in about 1/3 of the cases.

<sup>11</sup>1.2GB for chart building plus 1.5 for ‘unpacking’, which is a lexical disambiguation procedure.

<sup>12</sup>The speed of the tagging itself is negligible because the tagger tags 346 sentences per second (0.003 sec/sen) while HPSG parsing is an order of magnitude slower.

Resource Grammar Flickinger experimented with them and has come up with a list of lexical types which the supertagger tended to predict wrong. The list included fine-grained lexical types representing words such as *do*, *many*, *less*, *hard* (among many others).<sup>13</sup> Using such exception lists counteracts the effects of supertagging and slows down the parsing, while increasing accuracy. We include this exception list methodology into our experiments, but we compile our own list based on the top mistakes our supertaggers made on the dev data.

## 4 Results

### 4.1 Tagger accuracy and tagging speed

#### 4.1.1 Tagging accuracy baseline

For our baseline, we use a MaxEnt model similar to [?]. While [?] used off-the-shelf TnT [?] and C&E [?] taggers, we use the off-the-shelf logistic regression library from scikit-learn [?] which is a popular off-the-shelf tool for classic machine learning algorithms. The baseline tagger accuracy is included in Table [?]. The details on how the best baseline model was chosen are in Appendix A. The results are presented in Table [?].

#### 4.1.2 Tagger accuracy results

Table [?] shows that the baseline models achieve similar performance to [?] D2009 in Table [?] on in-domain data and are better on out-of-domain data. This may indicate that these models are close to their maximum performance on in-domain data on this task but adding more training data still helps for out-of-domain data. [?]'s models were trained on a subset of our data. [?] (p.84) reports getting 91.47% accuracy on the in-domain data (which loosely corresponds to row 'jh\*', 'tg\*', 'ps\*') using the TnT tagger [?].

The SVM and the neural models are better than the baseline models on all test datasets, and fine-tuned BERT is the best overall. On the portion of WSJ23 for which we have gold data, fine-tuned BERT achieves 97.26%. The neural models are slower than the baseline models (using

<sup>13</sup>The full list can be found in the release of the ERG in the folder titled 'ut' (ubertagging).

[ILLEGIBLE: Pareto frontier plot showing speed vs F-score for No tagging, Ubertagging, and BERT-based supertags with and without exceptions]

Figure 3: Pareto Frontier (Speed and F-score)

GPU for decoding); on the other hand, SVM is remarkably fast (at over 7000 sen/sec).

All models make roughly the same mistakes (Table [?]), with prepositions, pronouns, and auxiliary verbs being the most misclassified tokens, and the proper noun being the least accurate tag.<sup>14</sup>

### 4.2 Results: Parsing Speed and Accuracy

We measure the effect of supertagging on parsing speed and accuracy using the ACE parser (§?). Recall that HPSG parsing is chart parsing, and for a large grammar, the charts can be huge. The [?] supertagging is to reduce the size of the lexical chart. This can make parsing faster, however if a good lexical analysis is thrown out by mistake (due to a wrong tag), the entire sentence is likely to be lost (not parsed or parsed in a meaningless way). The parser speed and the parser accuracy are therefore in tension: the more time we give the parser the more chances it will have to build the correct structure in a bigger chart. For accuracy, we report two metrics: exact match with the gold semantic structure (MRS) and partial match Elementary Dependency Match metric (EDM [?]). The exact match is less important because it usually can only be achieved on short, easy sentences. The EDM (and similar) is the usual practice.

The results are presented in Table [?], which are also summarized in Figure [?].

<sup>14</sup>In Table [?], the "not closely related" column represents mistakes where the true label and the predicted label differ in their general subcategory; in this column, we did not count nouns mistaken for other types of nouns, etc. We use the ERG lexical type naming convention to filter the errors. The "n-c" type is a subtype of common noun; the "n-pn" and "n-pn-gen" types are subtypes of proper nouns; "v-np\*" is a subtype of verbs that take clausal complements; "adj-i" is a subtype of intersective adjectives, "d-poss" is a possessive determiner.



Table 2: Baseline (MaxEnt) and experimental supertaggers’ accuracy and speed on test data; tagset size is 1,299.

| dataset          | description          | sent  | tok     | train tok | MaxEnt | SVM          | NCRF++ | BERT         | D2009 |
|------------------|----------------------|-------|---------|-----------|--------|--------------|--------|--------------|-------|
| cb               | technical essay      | 713   | 17,244  | 0         | 88.96  | 89.53        | 91.94  | <b>93.88</b> | 74.61 |
| ecpr             | e-commerce           | 1,088 | 11,550  | 24,934    | 91.80  | 91.99        | 95.09  | <b>96.09</b> | 91.47 |
| jh*,tg*,ps*,ron* | travel brochures     | 2,116 | 34,098  | 147,166   | 90.45  | 91.21        | 95.44  | <b>96.11</b> |       |
| petet            | textual entailment   | 581   | 7,135   | 1,578     | 92.88  | 95.31        | 96.93  | <b>97.71</b> |       |
| vm32             | phone conv.          | 1,000 | 8,730   | 86,630    | 93.57  | 94.29        | 95.62  | <b>96.64</b> |       |
| ws213-214        | Wikipedia            | 1,470 | 29,697  | 161,623   | 91.31  | 92.02        | 93.66  | <b>95.59</b> |       |
| wsj23            | Wall Street J.       | 950   | 22,987  | 959,709   | 94.27  | 94.72        | 96.05  | <b>97.26</b> |       |
| all              | all test sets as one | 7,918 | 131,441 | 1,381,645 | 91.57  | 92.28        | 94.46  | <b>96.02</b> |       |
| all              | average              | 7,918 | 131,441 | 1,381,645 | 91.89  | 92.72        | 94.96  | <b>96.18</b> |       |
| speed            | (sen/sec)            | 7,918 | 131,441 | 1,381,645 | 1,024  | <b>7,414</b> | 125    | 346          |       |

Table 3: A summary of taggers’ errors

| model  | top mistaken token | top underpredicted | top of the ubertagger |
|--------|--------------------|--------------------|-----------------------|
| BERT   | i                  | n-pn<br>n-pn-gen   | adj-1<br>d-poss-my    |
| NCRF++ | to                 | n-c<br>v-np        | adj-1<br>adj-1        |
| SVM    | to                 | n-pn<br>n-pn-gen   | v-np*<br>adj-1        |
| MaxEnt | have               | n-pn<br>n-pn-gen   | v-np*<br>adj-1        |

#### 4.2.1 Baseline

We compare our system with two systems: ACE with no tagging at all and ACE with the in-built “ubertagger”. The system with no tagging at all is the baseline for parsing speed and, theoretically, the upper boundary for the parsing accuracy (as the parser could have access to the full lexical chart). However, in practice it is difficult to obtain this upper bound because it requires at least 54GB of RAM (see §A.5) and the parsing takes unreasonably long (up to several minutes per sentence). With realistic settings, the system with no tagging fails to parse some of the longer sentences because the lexical chart exceeds the RAM limit. It is precisely the problem that ubertagging/supertagging is supposed to solve: reduce the size

of the lexical chart so that the parsing can be done with realistic RAM allocation and in reasonable time. The ubertagger is a MEMM tagger based on [?]. It was trained on millions of sentences using large computational resources (the Titan system at University of Oslo) and as such is not easily reproducible. In contrast, our BERT-based model is fairly easy to fine-tune and reproduce on an individual machine. For the purposes of parsing accuracy and speed, rather than comparing our system to other experimental taggers presented in §??, we compare it to the ubertagger because the ubertagger is integrated into the ACE parser for production and as such is a more challenging baseline.

Below we present the results in two settings: (1) default settings, and (2) default RAM with tag exceptions. In Tables ?? and ??, the best result is bolded, and the experimental result is italicized in the cases where it is not the best but much closer to the ubertagger than to the no-tagging baseline.

#### 4.2.2 Default parsing

Tables ??, ??, and ?? present the results for the ACE parser default RAM limit setting (1200MB). On the ubertagger and the supertagger side, we use all the predictions and do not exclude any tags from the pruning process.

The results show that while we can parse faster with tagging (the ubertagger being the fastest), both the

Table 4: Effects of supertagging on DEFAULT parsing speed (ACE Parser)

| dataset              | description        | sent  |
|----------------------|--------------------|-------|
| BERT-based supertags |                    |       |
| cb                   | technical essay    | 713   |
| 0.76                 |                    |       |
| ecpr                 | e-commerce         | 1,088 |
| 0.52                 |                    |       |
| jh*,tg*,ps*,ron*     | travel brochures   | 2,116 |
| 0.32                 |                    |       |
| petet                | textual entailment | 581   |
| 0.23                 |                    |       |
| vm32                 | phone conv.        | 1,000 |
| 0.06                 |                    |       |
| ws214                | Wikipedia          | 598   |
| 1.24                 |                    |       |
| wsj23                | Wall Street J.     | 950   |
| 3.60                 |                    |       |
| all                  | average            | 7,918 |
| 0.97                 |                    |       |

ubertagger and the supertagger suffer from the high cost of each tagging mistake: while the new BERT-based supertagger is more accurate, its accuracy is still not 100%, and even at 99% tagger accuracy, the likelihood of losing an entire sentence due to one incorrect tag is high. [?] comments on this, too, and suggests taking into account the top mistakes that the tagger makes to achieve higher recall. This is what we do below.

#### 4.2.3 Parsing with exceptions lists

Tables ??-?? present the results for parsing with ubertagging and supertagging with exceptions. The no-tagging system’s results are the same as before; we repeat them for convenience.

We have looked at the most common mistakes in the supertags in the training data and have compiled a list of 15 tags which BERT tends to predict wrong.<sup>15</sup> On the

<sup>15</sup>The list includes: some punctuation/quotation marks, the tags for out-of-vocabulary proper names, the verb *is*, the pronouns *my* and *me*,

ubertagger side, there was already a list of exceptions. The ubertagger’s exception list is a list of 1715 lexical entries (words, e.g. “my”), whereas ours is a list of 15 lexical types (e.g. “my”). The ubertagger’s list includes some of the words that we expect would be tagged with some of our excluded types, although in principle, the two models may of course make different mistakes. We did not modify the existing ubertagger nor consulted its exceptions for our list. From the speeds that we are seeing, we conclude that our supertagger is less aggressive than the ubertagger and excludes more words from pruning, losing more in speed but winning considerably in accuracy as a result. This is what we would expect since we exclude entire lexical types and not just individual lexical items. The goal is a balanced tradeoff between accuracy and speed. We want the supertagger to be noticeably faster than the baseline and much more accurate than the ubertagger. This is what we observe in Table ??-??. Because pruning the lexical chart may and often will result in wrongly sacrificing the correct lexical type for a word, we expect the recall for the tagging systems to be lower compared to the no-tagging system. On the other hand, the no-tagging system will often run out of resources and so its overall accuracy may be lower for that reason. What we see in Table ?? is that our supertagging system is the most precise one on most datasets and shows large recall gains on Wikipedia, Wall Street Journal Section 23, and the technical essay data. It is strictly better than the no-tagging system on WSJ23 as well as on Wikipedia and *The Cathedral and the Bazaar*, and it is strictly better than the ubertagger across the board on the partial match EDM metric. While the recall difference is partially explained by the supertagger being less aggressive in pruning, the precision has to be due to the higher accuracy of the tagging model (BERT). On the exact match metric, the ubertagger wins on two datasets: e-commerce and Wikipedia. The supertagger wins on the rest.





Our system is strictly faster than the baseline, by a factor of 3, although on two datasets (e-commerce and WSJ) it fails to achieve a speedup factor of 2. The ubertagger is still the fastest overall, remarkably by a factor of 12, on

and types for denoting times and dates. Cf. Table ?? which shows similar findings on the test data, which we did not take into account.

Table 5: Effects of supertagging on DEFAULT parsing accuracy (EDM metric)

| dataset                      | description        | sent  | tok     | No tagging |      |      | Ubertagging |      |      |             |      |
|------------------------------|--------------------|-------|---------|------------|------|------|-------------|------|------|-------------|------|
| BERT-based supertags         |                    |       |         | Prec       | Rec  | F1   | Prec        | Rec  | F1   | Prec        | Rec  |
| F1                           |                    |       |         |            |      |      |             |      |      |             |      |
| cb<br>0.41                   | technical essay    | 713   | 17,244  | 0.89       | 0.40 | 0.55 | 0.86        | 0.39 | 0.53 | <b>0.91</b> | 0.27 |
| ecpr<br><b>0.91</b>          | e-commerce         | 1,088 | 11,550  | 0.95       | 0.93 | 0.94 | 0.93        | 0.67 | 0.78 | <b>0.94</b> | 0.88 |
| jh*,tg*,ps*,<br>0.78<br>ron* | travel brochures   | 2,116 | 34,098  | 0.91       | 0.74 | 0.81 | 0.89        | 0.61 | 0.71 | <b>0.91</b> | 0.69 |
| petet<br>0.63                | textual entailment | 581   | 7,135   | 0.93       | 0.78 | 0.85 | 0.93        | 0.67 | 0.78 | <b>0.94</b> | 0.47 |
| vm32<br>0.67                 | phone conv.        | 1,000 | 8,730   | 0.92       | 0.88 | 0.90 | 0.93        | 0.75 | 0.83 | <b>0.94</b> | 0.52 |
| ws214<br>0.58                | Wikipedia          | 598   | 12,395  | 0.89       | 0.45 | 0.60 | 0.88        | 0.54 | 0.66 | <b>0.92</b> | 0.42 |
| wsj23<br>0.60                | Wall Street J.     | 950   | 22,987  | 0.92       | 0.38 | 0.54 | 0.90        | 0.49 | 0.64 | <b>0.91</b> | 0.44 |
| all<br>0.65                  | average            | 7,918 | 131,441 | 0.92       | 0.65 | 0.74 | 0.90        | 0.59 | 0.71 | <b>0.93</b> | 0.53 |

average across all datasets. This is not too surprising because the supertagger is experimental and it is hard for it to compete with the ubertagger which was integrated into the parser for production, with the focus on performance. We believe that the supertagger could be integrated better into the parser’s C code in the future. In other words, its current speed is in part a purely C engineering problem. On the other hand, clearly the exceptions list would have an effect. Since we are excluding 15 types of words from pruning, the supertagger’s lexical chart is likely to be bigger than the ubertagger’s. This is the expected tension between speed and accuracy that we expected to see, and our supertagger system shows overall benefits in both speed and accuracy. The only dataset on which our system is not the best in accuracy is the e-commerce (ecpr). It appears that for this type of data, tagging is the least effective; we gain a 6% speed increase with the supertagger at the cost of 3% F-score, while the more aggressive

ubertagger parses this data very fast but at the cost of 16% F-score. We note particularly large recall gains on the WSJ data, but this may be related to the fact that statistical systems have been overtrained on WSJ so much that the effects are seen throughout the    .

## 5 Conclusion and future work


We used the advancements in HPSG treebanking to train more accurate supertaggers. The ERG is a major project in syntactic theory and an important resource for creating high quality semantic treebanks. It has the potential to contribute to NLP tasks that require high precision and/or interpretability including probing of the LLMs, and thus making HPSG parsing faster is strategic for NLP. We tested the new supertagging models with the state-of-the-art HPSG parser and saw improvements in parsing speed as well as accuracy. We consider the results on multi-.

Table 6: Effects of supertagging on DEFAULT parsing accuracy (exact match over MRS)

| dataset          | description        | sent  | tok     |
|------------------|--------------------|-------|---------|
| cb               | technical essay    | 713   | 17,244  |
| ecpr             | e-commerce         | 1,088 | 11,550  |
| jh*,tg*,ps*,ron* | travel brochures   | 2,116 | 34,098  |
| petet            | textual entailment | 581   | 7,135   |
| vm32             | phone conv.        | 1,000 | 8,730   |
| ws214            | Wikipedia          | 598   | 12,395  |
| wsj23            | Wall Street J.     | 950   | 22,987  |
| all              | average            | 7,918 | 131,441 |

Table 7: Effects of supertagging WITH EXCEPTIONS on parsing speed (ACE Parser)

| dataset          | description        | sent  | tok     |
|------------------|--------------------|-------|---------|
| cb               | technical essay    | 713   | 17,244  |
| ecpr             | e-commerce         | 1,088 | 11,550  |
| jh*,tg*,ps*,ron* | travel brochures   | 2,116 | 34,098  |
| petet            | textual entailment | 581   | 7,135   |
| vm32             | phone conv.        | 1,000 | 8,730   |
| ws214            | Wikipedia          | 598   | 12,395  |
| wsj23            | Wall Street J.     | 950   | 22,987  |
| all              | average            | 7,918 | 131,441 |

ple domains, well beyond the WSJ Section 23. We show promising results but also confirm that domain remains important, and purely statistical systems are brittle and often require rule-based additions in real-life scenarios. We contribute the ERG datasets converted to hugging-face transformers format intended for token classification, along with the code which can be adapted for other purposes.

## 6 Limitations

Our paper is concerned with training supertagging models on an English HPSG treebank. The limitations therefore are associated mainly with the training of the mod-

els including neural networks, and with the building of broad-coverage grammars such as the English Resource Grammar. Crucially, while our method does not require inducing a broad-coverage grammar, supertagging a neural classifier such as ours still requires a certain amount of training data, and this means that our method assumes that a large HPSG treebank is available for training. The availability of such a treebank, in turn, depends directly on the availability of a broad-coverage grammar. While choosing the gold trees for the treebank can be done relatively fast using treebanking tools once the grammar parsed the corpus, building a broad-coverage grammar itself requires an investment of years of expert work. At the moment, such an investment was made only for a few languages (English, Spanish, Japanese, Chinese), English being the largest one. Furthermore, the coverage of a precision grammar is never perfect and regular grammar updates are needed. A limitation related to using neural networks is that while the NCRFX++ library can in principle be very efficient on some tasks (e.g. POS tagging), with our data and large label set it proved relatively slow, and so ideally a more efficient neural architecture may be required for future work in this direction.

## Acknowledgments

We acknowledge the European Union’s Horizon Europe Framework Programme which funded this research under the Marie Skłodowska-Curie postdoctoral fellowship grant HORIZON-MSCA-2021-PF-01 (GAUSS, grant agreement No 101063104); and the European Research Council (ERC), which has funded this research under the Horizon Europe research and innovation programme (SALSA, grant agreement No 101100615).

We also acknowledge grants SCANNER-UDC (PID2020-113230RB-C21) funded by MICIU/AEI/10.13039/501100011033; GAP (PID2022-139308OA-I00) funded by MICIU/AEI/10.13039/501100011033/ and ERDF, EU; LATCHING (PID2023-147129OB-C21) funded by MICIU/AEI/10.13039/501100011033 and ERDF, EU; and TSI-100925-2023-1 funded by Ministry for Digital Transformation and Civil Service and “NextGenerationEU” PRTR; as well as funding by Xunta de Galicia (ED431C 2024/02), and Centro de Investigación de

Table 8: Effects of supertagging WITH EXCEPTIONS on parsing accuracy (EDM metric)

| dataset              | description        | sent  | tok     | No tagging |      |      | Ubertagging |      |      |             |             |
|----------------------|--------------------|-------|---------|------------|------|------|-------------|------|------|-------------|-------------|
| BERT-based supertags |                    |       |         | Prec       | Rec  | F1   | Prec        | Rec  | F1   | Prec        | Rec         |
| F1                   |                    |       |         |            |      |      |             |      |      |             |             |
| cb                   | technical essay    | 713   | 17,244  | 0.89       | 0.40 | 0.55 | 0.87        | 0.43 | 0.58 | <b>0.92</b> | <b>0.49</b> |
| <b>0.65</b>          |                    |       |         |            |      |      |             |      |      |             |             |
| ecpr                 | e-commerce         | 1,088 | 11,550  | 0.95       | 0.93 | 0.94 | 0.93        | 0.81 | 0.87 | <b>0.95</b> | 0.90        |
| <b>0.92</b>          |                    |       |         |            |      |      |             |      |      |             |             |
| jh*,tg*,ps*,ron*     | travel brochures   | 2,116 | 34,098  | 0.91       | 0.74 | 0.81 | 0.89        | 0.65 | 0.75 | <b>0.93</b> | <b>0.80</b> |
| <b>0.86</b>          |                    |       |         |            |      |      |             |      |      |             |             |
| petet                | textual entailment | 581   | 7,135   | 0.93       | 0.78 | 0.85 | 0.92        | 0.69 | 0.79 | <b>0.97</b> | <b>0.69</b> |
| <b>0.81</b>          |                    |       |         |            |      |      |             |      |      |             |             |
| vm32                 | phone conv.        | 1,000 | 8,730   | 0.92       | 0.88 | 0.90 | 0.93        | 0.79 | 0.86 | <b>0.94</b> | <b>0.85</b> |
| <b>0.89</b>          |                    |       |         |            |      |      |             |      |      |             |             |
| ws214                | Wikipedia          | 598   | 12,395  | 0.89       | 0.45 | 0.60 | 0.88        | 0.54 | 0.67 | <b>0.93</b> | <b>0.56</b> |
| <b>0.70</b>          |                    |       |         |            |      |      |             |      |      |             |             |
| wsj23                | Wall Street J.     | 950   | 22,987  | 0.92       | 0.38 | 0.54 | 0.89        | 0.53 | 0.67 | <b>0.94</b> | <b>0.69</b> |
| <b>0.80</b>          |                    |       |         |            |      |      |             |      |      |             |             |
| all                  | average            | 7,918 | 131,441 | 0.92       | 0.65 | 0.74 | 0.90        | 0.63 | 0.74 | <b>0.94</b> | <b>0.71</b> |
| <b>0.80</b>          |                    |       |         |            |      |      |             |      |      |             |             |

Galicia “CITIC”, funded by the Xunta de Galicia through the collaboration agreement between the Consellería de Cultura, Educación, Formación Profesional e Universidades and the Galician universities for the reinforcement of the research centres of the Galician University System (CIGUS).

## Appendix A

### A.1 Tuning ranges

BERT was fine-tuned using transformers and pytorch using 4 learning rates, 1e-5, 3e-5, and 5e-6. Cased and uncased pretrained BERT models were tried.

### A.2 Computational resources

We trained the neural models with a single NVIDIA GeForce RTX 2080 GPU, CUDA version 11.2. The SVM model and the MaxEnt baseline were trained using Intel Core i7-9700K 3.60GHz CPU (using single core processing for each model). We have experimented with Stochastic Gradient Descent (SGD) optimizer along with AdaGrad, Adam, and AdaDelta. The ranges for parameter values can be found in Table ???. The decoding time (sentences per second) for the models can be found in Table ???. The training times are presented in this Appendix in Table ???. The energy costs as estimated by the Python library carbontracker [?] are in Table ??.

<sup>16</sup><https://pypi.org/project/carbontracker/>

Table 9: Effects of supertagging WITH EXCEPTIONS on parsing accuracy (exact match over MRS)

| dataset          | description        | sent  | tok     |
|------------------|--------------------|-------|---------|
| cb               | technical essay    | 713   | 17,244  |
| ecpr             | e-commerce         | 1,088 | 11,550  |
| jh*,tg*,ps*,ron* | travel brochures   | 2,116 | 34,098  |
| petet            | textual entailment | 581   | 7,135   |
| vm32             | phone conv.        | 1,000 | 8,730   |
| ws214            | Wikipedia          | 598   | 12,395  |
| wsj23            | Wall Street J.     | 950   | 22,987  |
| all              | average            | 7,918 | 131,441 |

Table 10: NCRF++ model parameters

| Parameter       | value     | default/tuned range |
|-----------------|-----------|---------------------|
| lstm layers     | 2         | tuned 1–4           |
| hidden dim.     | 800       | tuned 100–1200      |
| word embeddings | glove840B | pretrained          |
| word emb. dim.  | 300       | N/A                 |
| char emb. dim.  | 50        | tuned 30–50         |
| momentum        | 0         | default             |
| dropout         | 0.5       | default             |
| l2              | 1e-8      | default             |

### A.3 Development accuracies

The development (validation set) accuracies are presented in Tables ??, ??, and ?. The best models are bolded. NCRF++ has nondeterministic components, and the average dev accuracy of the best (bolded) model in Table ??, the average accuracy is 95.15%; standard deviation 0.07088.

### A.4 MaxEnt model

Below we describe in detail how we trained the baseline MaxEnt models.

Table 11: Training times for models used to choose the best baseline and best experimental models

| Model type   | Supertagging            | total time for all models |
|--|-------------------------|---------------------------|
| SVMS   | 0.17                    | <b>0.21</b>               |
| MaxEnt Scikit-learn  | 0.56                    | 0.48                      |
| NCRF++   | 0.32                    | <b>0.38</b>               |
| BERT   | 5                       |                           |
| Table 12: Energy cost estimate for training the final NCRF++ model in 38 epochs (31 were trained in total, number of epochs varied) and for BERT 50 epochs | 0.61                    | <b>0.67</b>               |
|  | 0.26                    | 0.22                      |
|  | 0.13                    | 0.27                      |
|  | 0.33                    | <b>0.42</b>               |
| Measurement  | NCRF++ Value            | BERT Value                |
| Process used   | 5.55 kWh                | 3.5 kWh                   |
| Carbon emissions   | 1.63 kg CO <sub>2</sub> | 5.5 kg CO <sub>2</sub>    |
| Equivalent km driven   | 13 km                   | 5.5 km                    |

#### A.4.1 MaxEnt model selection

Rather than comparing our experimental numbers with numbers obtained by [?],<sup>17</sup> we create our own baseline because we want to be able to compare classic models with neural models with the same amount of training data.

We experimented with autoregressive and non-autoregressive MaxEnt models and in the end chose one MaxEnt as the baseline.

#### A.4.2 MaxEnt classifiers

We use scikit learn Python library [?] to train the baseline MaxEnt classifiers.<sup>18</sup> The scikit learn classifiers are optimized for processing a large number of observations. For that reason, we organized our evaluation data (dev and test) so as to maximize the number of observations

<sup>17</sup>[?] (p.84) reports getting 91.47% accuracy on in-domain data using the TnT off-the-shelf tagger [?]; as a sanity check, we obtain 91.94% using an autoregressive one-versus-rest L1 SAGA MaxEnt model trained with the scikit-learn library. On training and test datasets very similar to the ones used in *The Cathedral and the Bazaar* with the same setup, we obtain 73.85% compared to 74.61%. We attribute light differences to the differences between TnT and scikit-learn.

<sup>18</sup>[https://scikit-learn.org/stable/modules/generated/sklearn.linear\\_model.LogisticRegression.html](https://scikit-learn.org/stable/modules/generated/sklearn.linear_model.LogisticRegression.html)



Table 13: Development (validation) set accuracies for MaxEnt and SVM

| Model                       | dev accuracy (%) |
|-----------------------------|------------------|
| multinomial L2 SAG          | 91.59            |
| multinomial L2 SAG autoreg  | 91.41            |
| OVR L2 SAG                  | 91.18            |
| OVR L2 SAG autoreg          | 91.27            |
| multinomial L2 SAGA         | 91.53            |
| multinomial L2 SAGA autoreg | 88.56            |
| OVR L2 SAGA                 | 91.17            |
| OVR L2 SAGA autoreg         | 91.26            |
| OVR L1 SAGA                 | <b>92.17</b>     |
| OVR L1 SAGA autoreg         | 92.12            |
| multinomial L1 SAGA         | 92.12            |
| multinomial L1 SAGA autoreg | 91.17            |
| liblinear SVM               | 92.88            |

passed to the classifier at each step. [?]'s models were autoregressive; we also implemented autoregressive baseline models, and in order to make them faster at test time, we organized the evaluation data by the word's position in the sentence. So the classifier would first process all the first words in all sentences, then all the second words, etc. For nonautoregressive models, which we also tried in order to find the best-performing baseline model, we just pass the classifier the entire list of observations in their original order.

We choose the single baseline MaxEnt model from the following types of models, by validation on the dev set: (1) MaxEnt autoregressive models which at test time, if more than one sentence is passed to the classifier, first classify all first tokens in all sentences, then all second tokens, etc; (2) MaxEnt nonautoregressive models where the observation tokens are organized in the same way as in (1); (3) MaxEnt nonautoregressive models where tokens are not reordered in any way and are stored consecutively. The best model happens to be of type (3).

All models achieve above 91% accuracy on the dev set. The validation (dev) data consists of one Wikipedia section and one e-commerce corpus (2,267 sentences and 25,076 tokens total), with both domains represented also in the training data. Our best performing MaxEnt baseline model is a nonautoregressive 'One-versus-rest'

(OVR) model with L1 regularization and SAGA optimizer (92.21% accuracy on the dev set).

## A.5 Parsing with more RAM

To give the baseline system an opportunity to build the full lexical chart, more than 50GB RAM is required (24+30), according to our experiments with a subset of the WSJ training data that includes 25 sentences some of which are very long and ambiguous [?], presented below in Table ???. On this dataset, even with 54GB RAM, 100% coverage is not achieved, and the parsing speed becomes intractable (77 sec/sen).

Since spending 77 sec/sen is not viable, we did not run the full experiments with 54GB RAM. We present below a subset of experiments, showing the baseline F-score gain due to higher recall. The ubertagger and the supertagger do not end up with such large lexical charts and thus do not benefit from more RAM, so we do not repeat the results from §?? Table??.

The 'Verbmobil' (phone conversations) and the 'ecpr' (e-commerce) datasets are easy to parse fast (as we see from Table???) and on such data, using more RAM may be justified with the baseline system, however other types of data lead to the parsing time increasing noticeably. On the travel brochures data ('jkh'), the baseline system achieves an F-score of 87% at the cost of spending 8.68 seconds per sentence, while our supertagger achieves 86% with only 0.78 seconds/sentence and with only 2.7GB of RAM. Figure?? summarizes the results presented in Table??, showing that if we optimize for both speed and F-score, the best models include our model and the ubertagger models.

<sup>19</sup>We tried multinomial and OVR models, L1 and L2 regularization, and SAG and SAGA solvers on the dev set. The autoregressive models were not strictly better than the nonautoregressive ones, achieving very similar accuracies on the dev set. They were also much slower, being able to process only 2 sentences per second.

Table 14: Development (validation) set accuracies for neural models

| optimizer        | lstm layers | char embed | hid dim | embed               | dev accuracy (%)              |
|------------------|-------------|------------|---------|---------------------|-------------------------------|
| SGD              | 1           | 30         | 200     | pretrained (NCRF++) | 92.15                         |
| SGD              | 4           | 30         | 200     | pretrained (NCRF++) | 93.20                         |
| SGD              | 1           | 30         | 200     | random              | 92.82                         |
| SGD              | 1           | 30         | 200     | glove840            | 93.69                         |
| SGD              | 4           | 30         | 200     | glove840            | 94.27                         |
| SGD              | 1           | 30         | 250     | glove840            | 93.86                         |
| SGD              | 4           | 30         | 400     | glove840            | 94.68                         |
| SGD              | 4           | 30         | 100     | glove840            | 93.07                         |
| SGD              | 2           | 30         | 200     | glove840            | 94.04                         |
| SGD              | 4           | 30         | 1200    | glove840            | 94.74                         |
| SGD              | 4           | 30         | 600     | glove840            | 94.63                         |
| SGD              | 2           | 30         | 400     | glove840            | 94.56                         |
| SGD              | 4           | 30         | 1400    | glove840            | 94.68                         |
| SGD              | 5           | 30         | 1200    | ecpr glove840       | 0.99 0.94 0.54 0.99 0.95 0.68 |
| SGD              | 4           | 50         | 1200    | jhk glove840        | 0.87 0.78 2.61 0.98 0.87 8.68 |
| SGD              | 3           | 30         | 1200    | petet glove840      | 0.92 0.85 1.96 0.99 0.92 4.34 |
| SGD              | 2           | 30         | 1200    | vm32 glove840       | 0.98 0.90 0.74 0.99 0.92 0.99 |
| SGD              | 1           | 30         | 1200    | glove840            | 94.60                         |
| SGD              | 3           | 30         | 1400    | glove840            | 94.65                         |
| SGD              | 3           | 30         | 600     | glove840            | 94.86                         |
| SGD              | 2           | 50         | 1200    | glove840            | 95.00                         |
| SGD              | 2           | 30         | 1400    | glove840            | 94.57                         |
| SGD+0.3 momentum | 3           | 30         | 1200    | glove840            | 94.67                         |
| SGD              | 2           | 30         | 1200    | glove840            | 94.69                         |
| SGD              | 2           | 30         | 1000    | glove840            | 94.95                         |
| SGD              | 2           | 30         | 800     | glove840            | 95.12                         |
| adagrad          | 1           | 30         | 200     | cb glove840         | 0.86 0.77 0.58 0.98 0.63 0.64 |
| adagrad          | 4           | 30         | 200     | ecpr glove840       | 0.99 0.95 0.96 0.97 0.97 0.93 |
| adam             | 1           | 30         | 200     | jhk glove840        | 0.98 0.88 0.81 0.75 0.91 0.87 |
| adadelat         | 4           | 30         | 200     | petet glove840      | 0.99 0.92 0.79 0.79 0.85 0.85 |
|                  |             |            |         | vm32                | 0.99 0.92 0.87 0.86 0.94 0.90 |
|                  |             |            |         | wsj23               | 0.85 0.79 0.64 0.69 — —       |

Table 15: Development (validation) set accuracies fine-tuned BERT models

| Model                | dev accuracy (%) |
|----------------------|------------------|
| BERT cased LR 2e-5   | 96.46            |
| BERT cased LR 1e-5   | 96.37            |
| BERT cased LR 3e-5   | 96.31            |
| BERT cased LR 5e-6   | 96.34            |
| BERT uncased LR 2e-5 | 95.97            |

Table 16: Baseline (no tagging) coverage gain with more RAM on the PETE dataset (ERG version)

| optimizer        | lstm layers | char embed | hid dim | embed               | dev accuracy (%)              |
|------------------|-------------|------------|---------|---------------------|-------------------------------|
| SGD              | 1           | 30         | 200     | pretrained (NCRF++) | 92.15                         |
| SGD              | 4           | 30         | 200     | pretrained (NCRF++) | 93.20                         |
| SGD              | 1           | 30         | 200     | random              | 92.82                         |
| SGD              | 1           | 30         | 200     | glove840            | 93.69                         |
| SGD              | 4           | 30         | 200     | glove840            | 94.27                         |
| SGD              | 1           | 30         | 250     | glove840            | 93.86                         |
| SGD              | 4           | 30         | 400     | glove840            | 94.68                         |
| SGD              | 4           | 30         | 100     | glove840            | 93.07                         |
| SGD              | 2           | 30         | 200     | glove840            | 94.04                         |
| SGD              | 4           | 30         | 1200    | glove840            | 94.74                         |
| SGD              | 4           | 30         | 600     | glove840            | 94.63                         |
| SGD              | 2           | 30         | 400     | glove840            | 94.56                         |
| SGD              | 4           | 30         | 1400    | glove840            | 94.68                         |
| SGD              | 5           | 30         | 1200    | ecpr glove840       | 0.99 0.94 0.54 0.99 0.95 0.68 |
| SGD              | 4           | 50         | 1200    | jhk glove840        | 0.87 0.78 2.61 0.98 0.87 8.68 |
| SGD              | 3           | 30         | 1200    | petet glove840      | 0.92 0.85 1.96 0.99 0.92 4.34 |
| SGD              | 2           | 30         | 1200    | vm32 glove840       | 0.98 0.90 0.74 0.99 0.92 0.99 |
| SGD              | 1           | 30         | 1200    | glove840            | 94.60                         |
| SGD              | 3           | 30         | 1400    | glove840            | 94.65                         |
| SGD              | 3           | 30         | 600     | glove840            | 94.86                         |
| SGD              | 2           | 50         | 1200    | glove840            | 95.00                         |
| SGD              | 2           | 30         | 1400    | glove840            | 94.57                         |
| SGD+0.3 momentum | 3           | 30         | 1200    | glove840            | 94.67                         |
| SGD              | 2           | 30         | 1200    | glove840            | 94.69                         |
| SGD              | 2           | 30         | 1000    | glove840            | 94.95                         |
| SGD              | 2           | 30         | 800     | glove840            | 95.12                         |
| adagrad          | 1           | 30         | 200     | cb glove840         | 0.86 0.77 0.58 0.98 0.63 0.64 |
| adagrad          | 4           | 30         | 200     | ecpr glove840       | 0.99 0.95 0.96 0.97 0.97 0.93 |
| adam             | 1           | 30         | 200     | jhk glove840        | 0.98 0.88 0.81 0.75 0.91 0.87 |
| adadelat         | 4           | 30         | 200     | petet glove840      | 0.99 0.92 0.79 0.79 0.85 0.85 |
|                  |             |            |         | vm32                | 0.99 0.92 0.87 0.86 0.94 0.90 |
|                  |             |            |         | wsj23               | 0.85 0.79 0.64 0.69 — —       |

Table 17: Baseline (no tagging) recall gains and speed loss with generous RAM

| dataset | coverage | F-score | speed | coverage | F-score | speed |
|---------|----------|---------|-------|----------|---------|-------|
| ecpr    | 0.99     | 0.94    | 0.54  | 0.99     | 0.95    | 0.68  |
| jhk     | 0.87     | 0.78    | 2.61  | 0.98     | 0.87    | 8.68  |
| petet   | 0.92     | 0.85    | 1.96  | 0.99     | 0.92    | 4.34  |
| vm32    | 0.98     | 0.90    | 0.74  | 0.99     | 0.92    | 0.99  |

Table 18: Parsing with 54GB RAM

| dataset | No tagging | Ubertagging | BERT supertagging |
|---------|------------|-------------|-------------------|
| ecpr    | 0.99       | 0.94        | 0.95              |
| jhk     | 0.87       | 0.78        | 0.98              |
| petet   | 0.92       | 0.85        | 0.99              |
| vm32    | 0.98       | 0.90        | 0.99              |

Table 19: Parsing with 54GB RAM

| dataset | No tagging | Ubertagging | BERT supertagging |
|---------|------------|-------------|-------------------|
| ecpr    | 0.99       | 0.94        | 0.95              |
| jhk     | 0.87       | 0.78        | 0.98              |
| petet   | 0.92       | 0.85        | 0.99              |
| vm32    | 0.98       | 0.90        | 0.99              |