

Static analysis and software verification

Lecture 7 - Introduction to abstract interpretation (Galois Connections)

Vincenzo Arceri - University of Parma - vincenzo.arceri@unipr.it

Concrete domain

Concrete domain

- $\langle \wp(\mathbb{Z}), \subseteq, \cap, \cup, \mathbb{Z}, \emptyset \rangle$ forms a complete lattice

Concrete domain

- $\langle \wp(\mathbb{Z}), \subseteq, \cap, \cup, \mathbb{Z}, \emptyset \rangle$ forms a complete lattice
 - $S_1 \subset S_2$: S_1 is “more precise” than S_2

Concrete domain

- $\langle \wp(\mathbb{Z}), \subseteq, \cap, \cup, \mathbb{Z}, \emptyset \rangle$ forms a complete lattice
 - $S_1 \subset S_2$: S_1 is “more precise” than S_2
 - $S_1 \not\subseteq S_2 \wedge S_2 \not\subseteq S_1$: they are not comparable

Concrete domain

- $\langle \wp(\mathbb{Z}), \subseteq, \cap, \cup, \mathbb{Z}, \emptyset \rangle$ forms a complete lattice
 - $S_1 \subset S_2$: S_1 is “more precise” than S_2
 - $S_1 \not\subseteq S_2 \wedge S_2 \not\subseteq S_1$: they are not comparable
 - $S_1 \cup S_2$: x must be in S_1 or S_2

Concrete domain

- $\langle \wp(\mathbb{Z}), \subseteq, \cap, \cup, \mathbb{Z}, \emptyset \rangle$ forms a complete lattice
 - $S_1 \subset S_2$: S_1 is “more precise” than S_2
 - $S_1 \not\subseteq S_2 \wedge S_2 \not\subseteq S_1$: they are not comparable
 - $S_1 \cup S_2$: x must be in S_1 or S_2
 - $S_1 \cap S_2$: x must be in S_1 and S_2

Concrete domain

- $\langle \wp(\mathbb{Z}), \subseteq, \cap, \cup, \mathbb{Z}, \emptyset \rangle$ forms a complete lattice
 - $S_1 \subset S_2$: S_1 is “more precise” than S_2
 - $S_1 \not\subseteq S_2 \wedge S_2 \not\subseteq S_1$: they are not comparable
 - $S_1 \cup S_2$: x must be in S_1 or S_2
 - $S_1 \cap S_2$: x must be in S_1 and S_2
 - $\mathbb{Z}$ (the top element): x may be any value (*“I don’t know”*)

Concrete domain


- $\langle \wp(\mathbb{Z}), \subseteq, \cap, \cup, \mathbb{Z}, \emptyset \rangle$ forms a complete lattice
 - $S_1 \subset S_2$: S_1 is “more precise” than S_2
 - $S_1 \not\subseteq S_2 \wedge S_2 \not\subseteq S_1$: they are not comparable
 - $S_1 \cup S_2$: x must be in S_1 or S_2
 - $S_1 \cap S_2$: x must be in S_1 and S_2
 - $\mathbb{Z}$ (the top element): x may be any value (*“I don’t know”*)
 - $\emptyset$ (the bottom element): no possible value

Concrete domain

- $\langle \wp(\mathbb{Z}), \subseteq, \cap, \cup, \mathbb{Z}, \emptyset \rangle$ forms a complete lattice
 - $S_1 \subset S_2$: S_1 is “more precise” than S_2
 - $S_1 \not\subseteq S_2 \wedge S_2 \not\subseteq S_1$: they are not comparable
 - $S_1 \cup S_2$: x must be in S_1 or S_2
 - $S_1 \cap S_2$: x must be in S_1 and S_2
 - $\mathbb{Z}$ (the top element): x may be any value
 - $\emptyset$ (the bottom element): no possible value


Concrete domain

- $\langle \wp(\mathbb{Z}), \subseteq, \cap, \cup, \mathbb{Z}, \emptyset \rangle$ forms a complete lattice
 - $S_1 \subset S_2$: S_1 is “more precise” than S_2
 - $S_1 \not\subseteq S_2 \wedge S_2 \not\subseteq S_1$: they are not comparable
 - $S_1 \cup S_2$: x must be in S_1 or S_2
 - $S_1 \cap S_2$: x must be in S_1 and S_2
 - $\mathbb{Z}$ (the top element): x may be any value
 - $\emptyset$ (the bottom element): no possible value

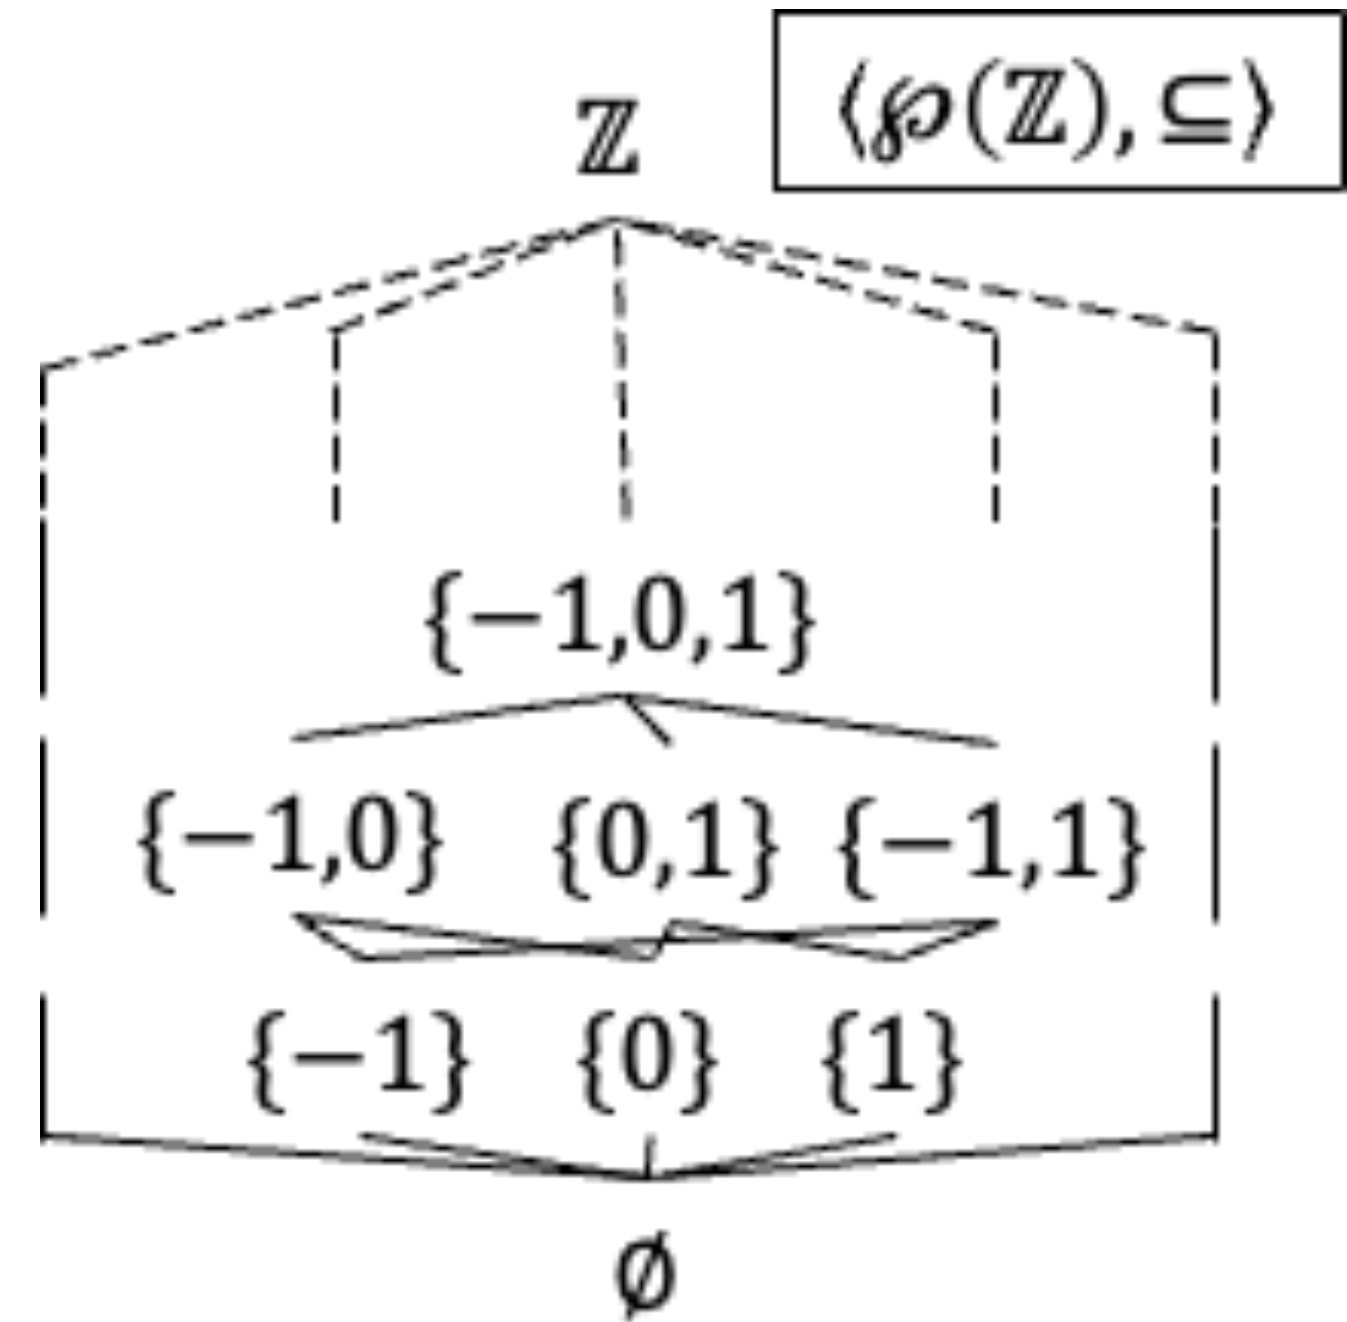

Concrete domain

- $\langle \wp(\mathbb{Z}), \subseteq, \cap, \cup, \mathbb{Z}, \emptyset \rangle$ forms a complete lattice
 - $S_1 \subset S_2$: S_1 is “more precise” than S_2
 - $S_1 \not\subseteq S_2 \wedge S_2 \not\subseteq S_1$: they are not comparable
 - $S_1 \cup S_2$: x must be in S_1 or S_2
 - $S_1 \cap S_2$: x must be in S_1 and S_2
 - $\mathbb{Z}$ (the top element): x may be any value
 - $\emptyset$ (the bottom element): no possible value

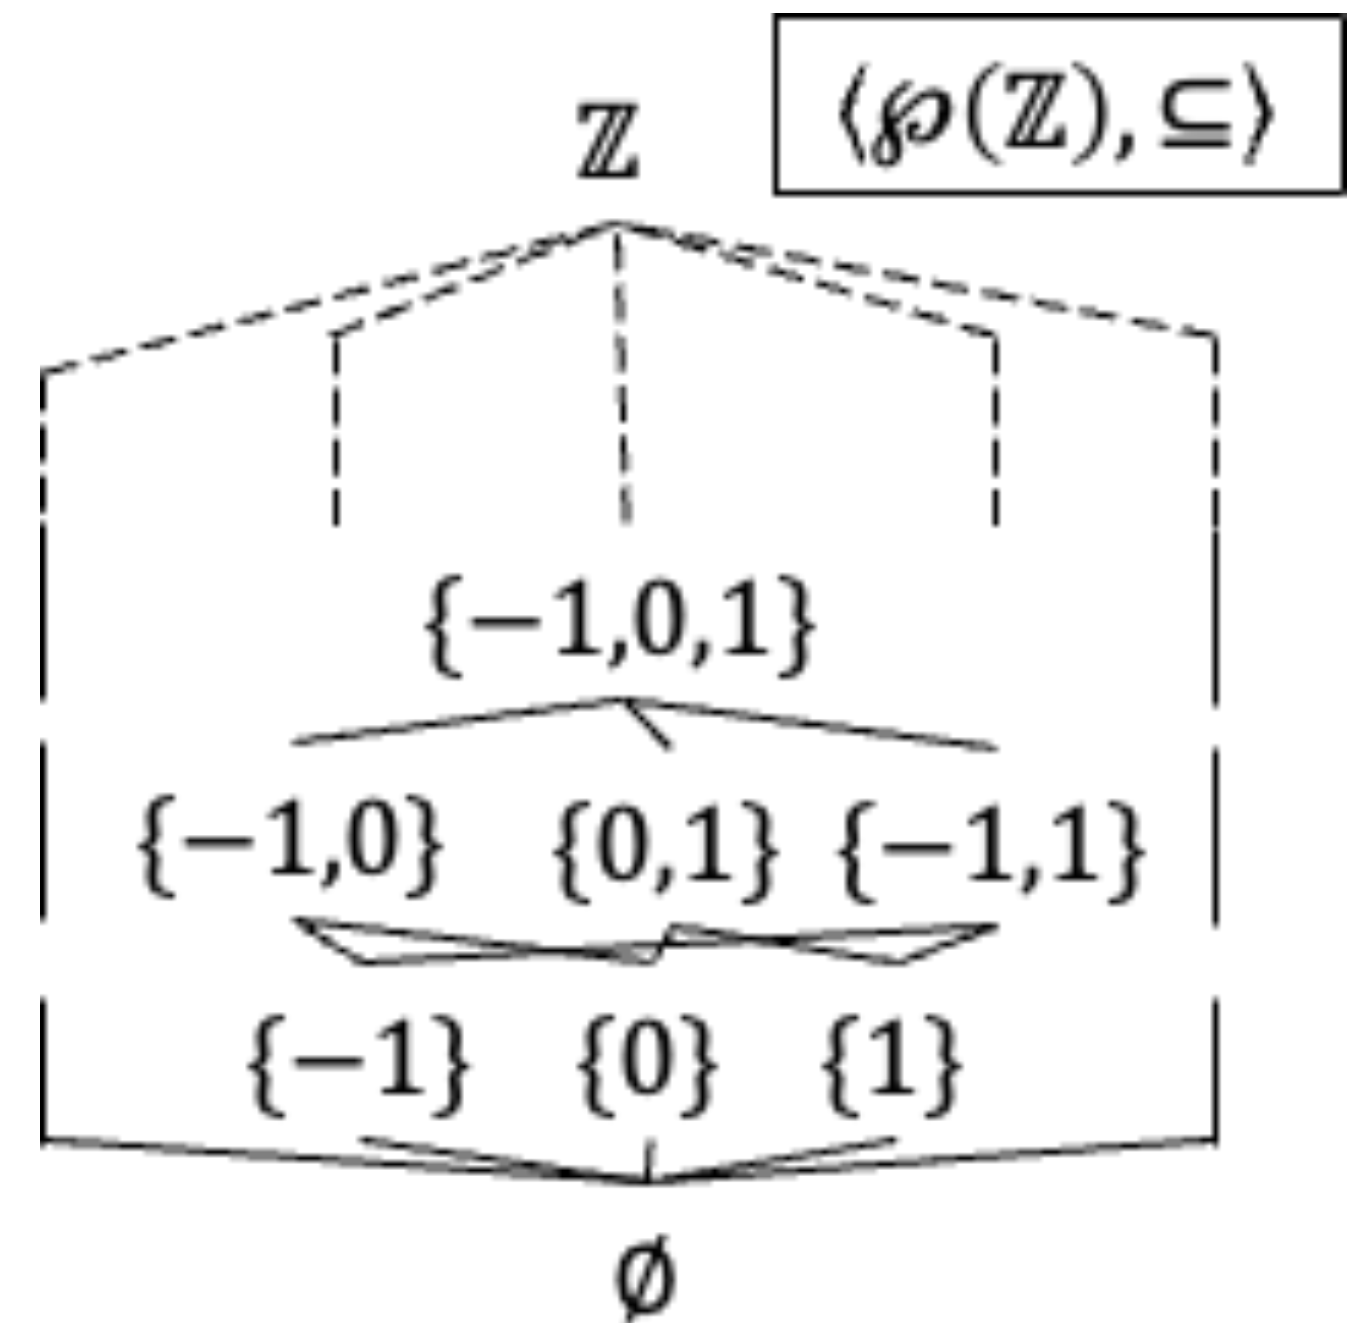

- Join point: union
- $b_1 \wedge b_2$: intersection
- input of the user: top
- unreachable point: bottom

Abstract domain

Abstract domain

- There exist many abstract domain, each domain track a different type of information (the sign, the interval, the linear inequalities, ...)

Abstract domain

- There exist many abstract domain, each domain track a different type of information (the sign, the interval, the linear inequalities, ...)
- Hierarchy between domains (the lattice of abstractions, later in this course)

Abstract domain

- There exist many abstract domain, each domain track a different type of information (the sign, the interval, the linear inequalities, ...)
- Hierarchy between domains (the lattice of abstractions, later in this course)
- We can combined them (cartesian product, reduced product)

Abstract domain

- There exist many abstract domain, each domain track a different type of information (the sign, the interval, the linear inequalities, ...)
- Hierarchy between domains (the lattice of abstractions, later in this course)
- We can combined them (cartesian product, reduced product)
- There is a formal relation between the concrete domain C and an abstract domain A , by means of

Abstract domain

- There exist many abstract domain, each domain track a different type of information (the sign, the interval, the linear inequalities, ...)
- Hierarchy between domains (the lattice of abstractions, later in this course)
- We can combined them (cartesian product, reduced product)
- There is a formal relation between the concrete domain C and an abstract domain A , by means of
 - Abstraction function: $\alpha : C \rightarrow A$

Abstract domain

- There exist many abstract domain, each domain track a different type of information (the sign, the interval, the linear inequalities, ...)
- Hierarchy between domains (the lattice of abstractions, later in this course)
- We can combined them (cartesian product, reduced product)
- There is a formal relation between the concrete domain C and an abstract domain A , by means of
 - Abstraction function: $\alpha : C \rightarrow A$
 - Concretization function: $\gamma : A \rightarrow C$

Constant propagation

From previous lectures

“For each program point, whether or not a variable has a constant value whenever an execution reaches that point”

Soundness

Soundness

- Sound abstract domain (via abstraction and concretization)

Soundness

- Sound abstract domain (via abstraction and concretization)
- Intuition

Soundness

- Sound abstract domain (via abstraction and concretization)
- Intuition
 - Start from a concrete value

Soundness

- Sound abstract domain (via abstraction and concretization)
- Intuition
 - Start from a concrete value
 - Abstract it (via α)

Soundness

- Sound abstract domain (via abstraction and concretization)
- Intuition
 - Start from a concrete value
 - Abstract it (via α)
 - Go back to the concrete (via γ)

Soundness

- Sound abstract domain (via abstraction and concretization)
- Intuition
 - Start from a concrete value
 - Abstract it (via α)
 - Go back to the concrete (via γ)
 - Sound iff the result is $\supseteq$

Sign abstract domain

Example

Soundness

The other direction

Soundness

The other direction

- Sound abstract domain (via abstraction and concretization)
- Intuition
 - Start from an abstract value
 - Concretize it (via γ)
 - Go back to the abstract (via α)
 - Sound iff the result is $\sqsupseteq_A$ (in general, =)

Sign abstract domain

Example

Monotonicity

Monotonicity

- α is monotone

Monotonicity

- α is monotone
 - $I_1 \subseteq I_2 \implies \alpha(I_1) \sqsubseteq_A \alpha(I_2)$

Monotonicity

- α is monotone
 - $I_1 \subseteq I_2 \implies \alpha(I_1) \sqsubseteq_A \alpha(I_2)$
 - If we abstract something that represents less information than something else, we obtain something with less or the same information

Monotonicity

- α is monotone
 - $I_1 \subseteq I_2 \implies \alpha(I_1) \sqsubseteq_A \alpha(I_2)$
 - If we abstract something that represents less information than something else, we obtain something with less or the same information
- γ is monotone

Monotonicity

- α is monotone
 - $I_1 \subseteq I_2 \implies \alpha(I_1) \sqsubseteq_A \alpha(I_2)$
 - If we abstract something that represents less information than something else, we obtain something with less or the same information
- γ is monotone
 - $a_1 \sqsubseteq_A a_2 \implies \gamma(a_1) \subseteq \gamma(a_2)$

Monotonicity

- α is monotone
 - $I_1 \subseteq I_2 \implies \alpha(I_1) \sqsubseteq_A \alpha(I_2)$
 - If we abstract something that represents less information than something else, we obtain something with less or the same information
- γ is monotone
 - $a_1 \sqsubseteq_A a_2 \implies \gamma(a_1) \subseteq \gamma(a_2)$
 - If we concretize something that represents less information than something else, we obtain something with less or the same information

Sign abstract domain

Example

Galois Connection (GC)

- Let $\langle C, \sqsubseteq_C \rangle$ and $\langle A, \sqsubseteq_A \rangle$ two posets, $\alpha : C \rightarrow A$ and $\gamma : A \rightarrow C$ two monotone functions. They form a Galois Connection if

$$\forall c \in C, \forall a \in A. \alpha(c) \sqsubseteq_A a \iff c \sqsubseteq_C \gamma(a)$$

Galois Connection (GC)

- Let $\langle C, \sqsubseteq_C \rangle$ and $\langle A, \sqsubseteq_A \rangle$ two posets, $\alpha : C \rightarrow A$ and $\gamma : A \rightarrow C$ two monotone functions. They form a Galois Connection if

$$\forall c \in C, \forall a \in A. \alpha(c) \sqsubseteq_A a \iff c \sqsubseteq_C \gamma(a)$$

- $\alpha(c) \sqsubseteq_A a \implies c \sqsubseteq_C \gamma(a)$: this ensures **soundness**
- $c \sqsubseteq_C \gamma(a) \implies \alpha(c) \sqsubseteq_A a$: this ensures the **best abstraction**

Galois Connection (GC)

Alternative characterization of GC

- Let $\langle C, \sqsubseteq_C \rangle$ and $\langle A, \sqsubseteq_A \rangle$ two posets, $\alpha : C \rightarrow A$ and $\gamma : A \rightarrow C$, we have a GC if α and γ satisfies all the following properties
 - α and γ are monotone
 - $\gamma \circ \alpha$ is extensive, i.e., $\forall c \in C . c \sqsubseteq_C \gamma(\alpha(c))$
 - $\alpha \circ \gamma$ is reductive, i.e., $\forall a \in A . \alpha(\gamma(a)) \sqsubseteq_A a$

Galois Connection (GC)

Alternative characterization of GC

- Let $\langle C, \sqsubseteq_C \rangle$ and $\langle A, \sqsubseteq_A \rangle$ two posets, $\alpha : C \rightarrow A$ and $\gamma : A \rightarrow C$, we have a GC if α and γ satisfies all the following properties
 - α and γ are monotone
 - $\gamma \circ \alpha$ is extensive, i.e., $\forall c \in C . c \sqsubseteq_C \gamma(\alpha(c))$ (*when we abstract, we lose info*)
 - $\alpha \circ \gamma$ is reductive, i.e., $\forall a \in A . \alpha(\gamma(a)) \sqsubseteq_A a$ (*when we concretize, we don't lose info*)

Galois Connection (GC)

Alternative characterization of GC

- Let $\langle C, \sqsubseteq_C \rangle$ and $\langle A, \sqsubseteq_A \rangle$ two posets, $\alpha : C \rightarrow A$ and $\gamma : A \rightarrow C$, we have a GC if α and γ satisfies all the following properties
 - α and γ are monotone
 - $\gamma \circ \alpha$ is extensive, i.e., $\forall c \in C . c \sqsubseteq_C \gamma(\alpha(c))$ (*when we abstract, we lose info*)
 - $\alpha \circ \gamma$ is reductive, i.e., $\forall a \in A . \alpha(\gamma(a)) \sqsubseteq_A a$ (*when we concretize, we don't lose info*)
 - Often =

Constant propagation

Proofs

- α and γ are monotone
- $\gamma \circ \alpha$ is extensive, i.e., $\forall c \in C . c \sqsubseteq_C \gamma(\alpha(c))$
- $\alpha \circ \gamma$ is reductive, i.e., $\forall a \in A . \alpha(\gamma(a)) \sqsubseteq_A a$

Galois Insertion (GI)

Galois Insertion (GI)

- Let $\langle C, \sqsubseteq_C \rangle$ and $\langle A, \sqsubseteq_A \rangle$ two posets, $\alpha : C \rightarrow A$ and $\gamma : A \rightarrow C$, and let us suppose that we have a GC between C and A via α and γ . if $\alpha \circ \gamma$ is the identity then it is called Galois Insertion

Galois Insertion (GI)

- Let $\langle C, \sqsubseteq_C \rangle$ and $\langle A, \sqsubseteq_A \rangle$ two posets, $\alpha : C \rightarrow A$ and $\gamma : A \rightarrow C$, and let us suppose that we have a GC between C and A via α and γ . if $\alpha \circ \gamma$ is the identity then it is called Galois Insertion
 - In this case the abstraction is surjective and the concretization is injective

Galois Insertion (GI)

- Let $\langle C, \sqsubseteq_C \rangle$ and $\langle A, \sqsubseteq_A \rangle$ two posets, $\alpha : C \rightarrow A$ and $\gamma : A \rightarrow C$, and let us suppose that we have a GC between C and A via α and γ . if $\alpha \circ \gamma$ is the identity then it is called Galois Insertion
 - In this case the abstraction is surjective and the concretization is injective
- Every GC can be reduced to a GI!

Galois Insertion (GI)

- Let $\langle C, \sqsubseteq_C \rangle$ and $\langle A, \sqsubseteq_A \rangle$ two posets, $\alpha : C \rightarrow A$ and $\gamma : A \rightarrow C$, and let us suppose that we have a GC between C and A via α and γ . if $\alpha \circ \gamma$ is the identity then it is called Galois Insertion
 - In this case the abstraction is surjective and the concretization is injective
- Every GC can be reduced to a GI!
- When we do not have a GI, we have at least two abstract elements that represent the same information (and thus the redundant elements can be removed by domain reduction)


Constant propagation

Formalization

- α and γ are monotone
- $\gamma \circ \alpha$ is extensive, i.e., $\forall c \in C . c \sqsubseteq_C \gamma(\alpha(c))$
- $\alpha \circ \gamma$ is reductive, i.e., $\forall a \in A . \alpha(\gamma(a)) \sqsubseteq_A a$

$$\gamma \circ \alpha = id?$$

- $\forall v \in C. \gamma(\alpha(v)) = v$
 - (almost) never true
- It means there is no abstraction (and the abstract domain is a isomorphism)
- and the computation on concrete and abstract is (presumably) the same
- NOT what we want

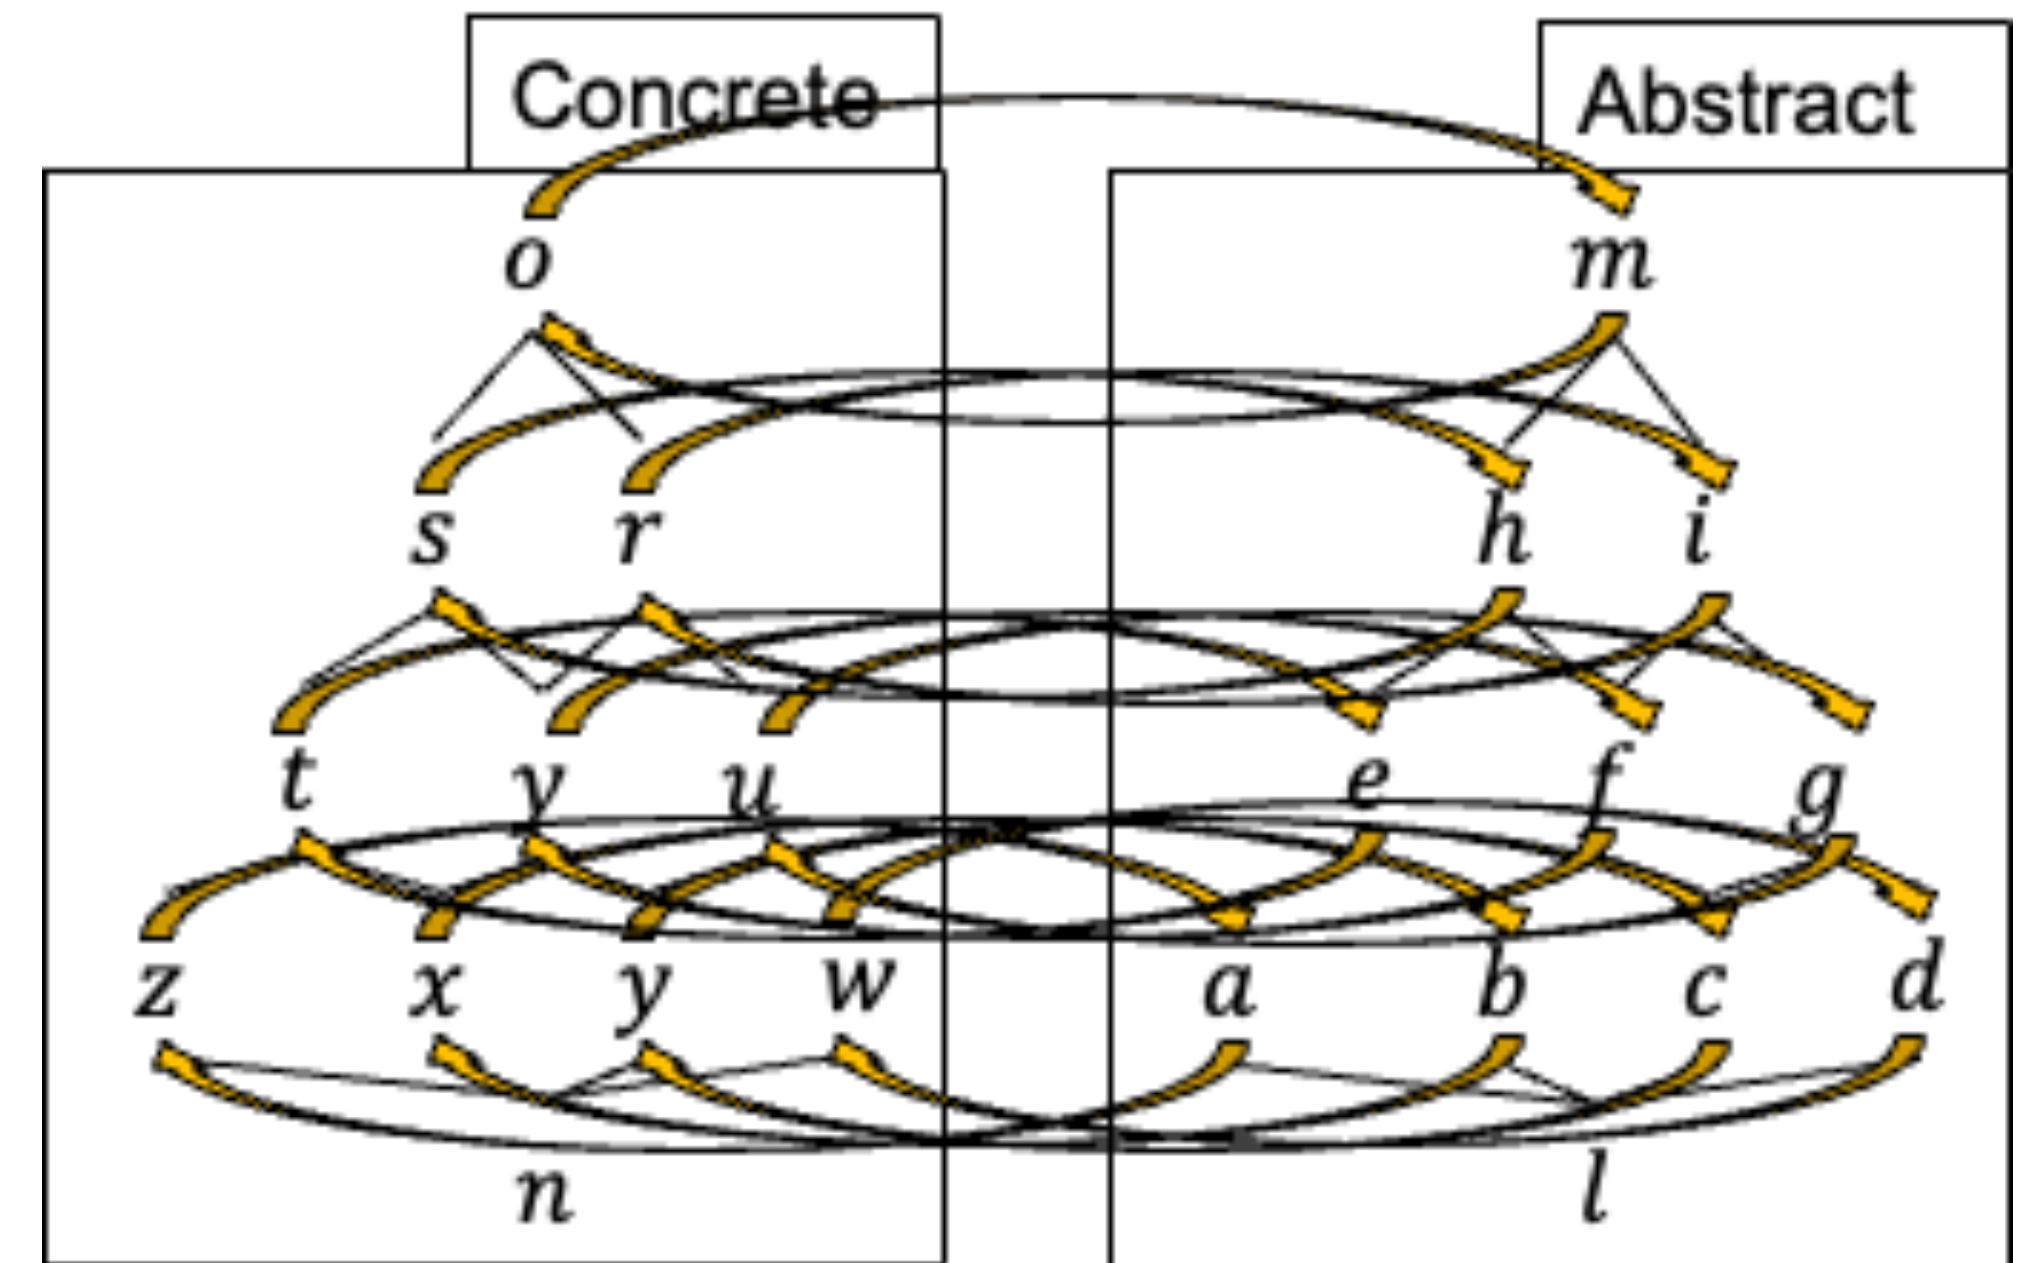

On the best abstraction

- Let $\langle C, \sqsubseteq_C \rangle$ and $\langle A, \sqsubseteq_A \rangle$ two posets, $\alpha : C \rightarrow A$ and $\gamma : A \rightarrow C$ two monotone functions. They form a Galois Connection if

$$\forall c \in C, \forall a \in A . \alpha(c) \sqsubseteq_A a \iff c \sqsubseteq_C \gamma(a)$$

- $\alpha(c) \sqsubseteq_A a \implies c \sqsubseteq_C \gamma(a)$: this ensures **soundness**
- $c \sqsubseteq_C \gamma(a) \implies \alpha(c) \sqsubseteq_A a$: this ensures the **best abstraction**

On the best abstraction

- Let $\langle C, \sqsubseteq_C \rangle$ and $\langle A, \sqsubseteq_A \rangle$ two posets, $\alpha : C \rightarrow A$ and $\gamma : A \rightarrow C$ two monotone functions. They form a Galois Connection if


$$\forall c \in C, \forall a \in A . \alpha(c) \sqsubseteq_A a \iff c \sqsubseteq_C \gamma(a)$$

- $\alpha(c) \sqsubseteq_A a \implies c \sqsubseteq_C \gamma(a)$: this ensures **soundness**
- $c \sqsubseteq_C \gamma(a) \implies \alpha(c) \sqsubseteq_A a$: this ensures the **best abstraction**
- It may happen that the GC between C and A does not exist, due to the non-existence of the best abstraction (e.g., convex polyhedra)

On the best abstraction

Example

- $P = \{(x, y) \mid x^2 + y^2 \leq 1\}$
- With a convex polyhedron:
 $a * x + b * y \leq c$
- but we can always find a better approximation

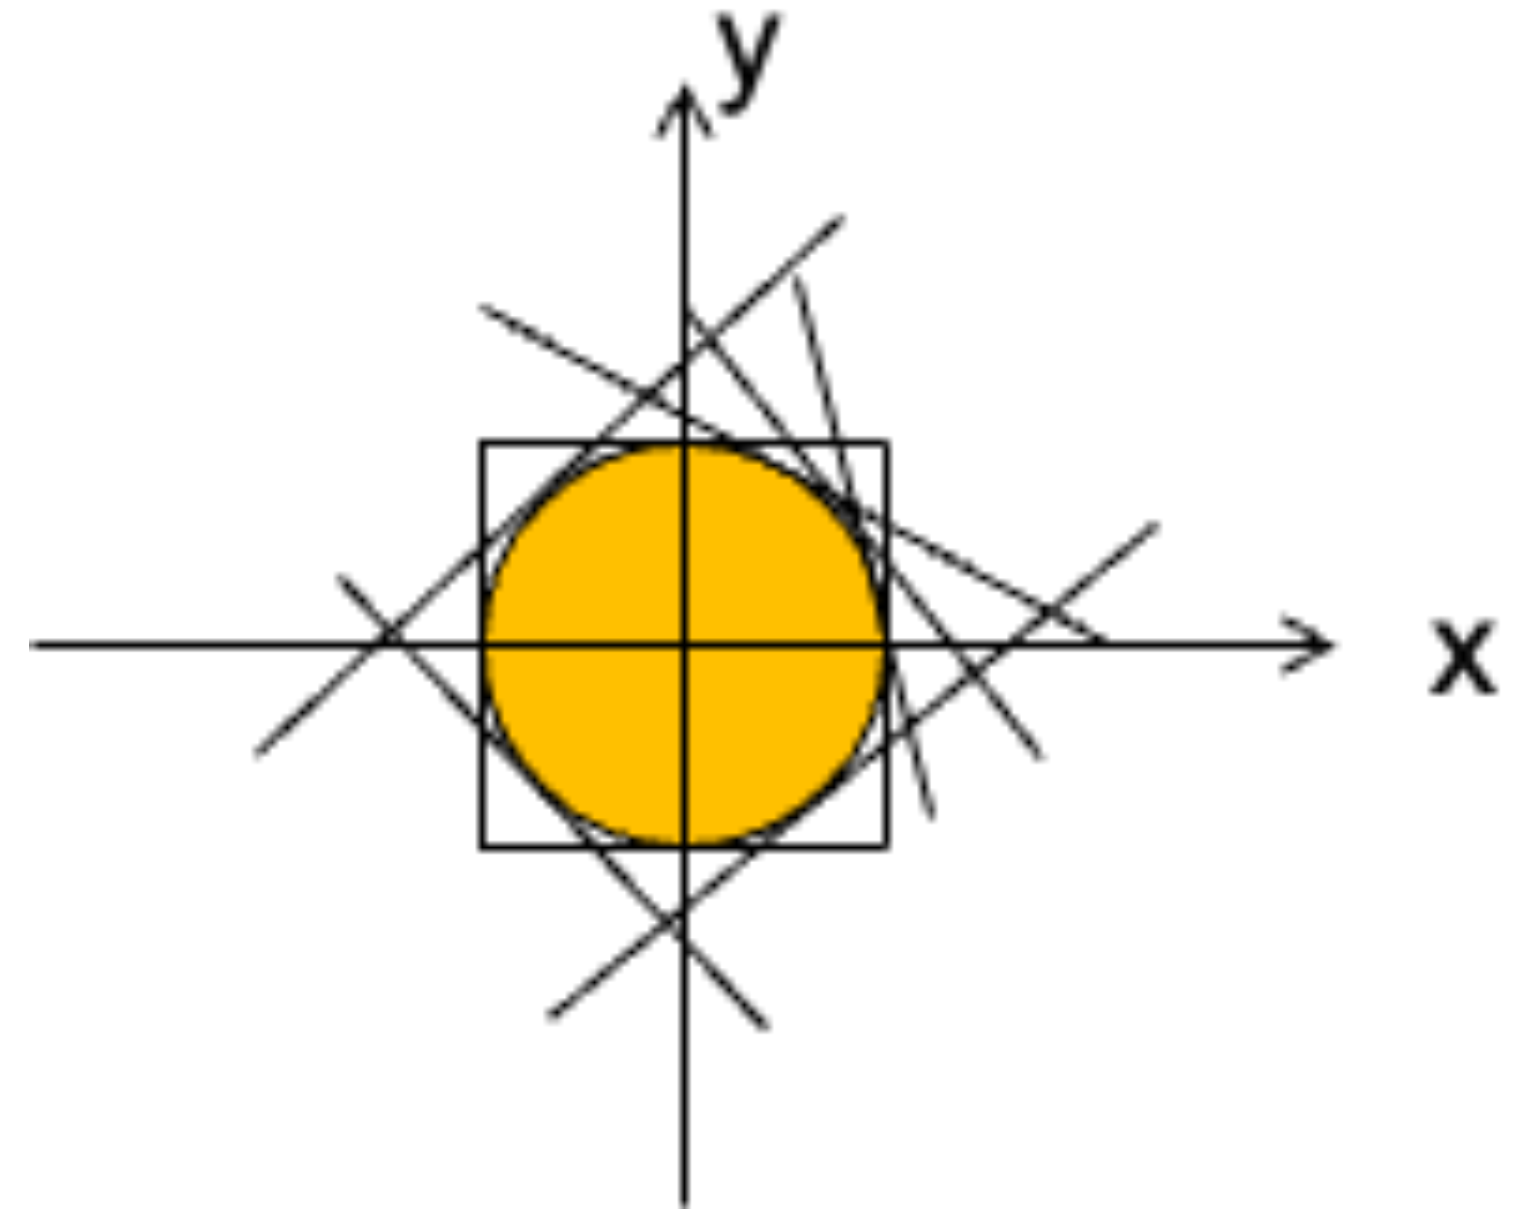

On the minimal abstraction

Example with finite state automata

State of constant propagation

- For now, we just talked about abstraction on values
- But the state of the analysis is $\mathbb{V} \mapsto CP$
 - Pointwise application of CP
- We proved that CP form a GC with $\wp(\mathbb{Z})$, but what about states?
- We can prove that given an abstraction of values forming a GC, its pointwise application is a GC as well

The sign abstract domain

Exercise