


Pizza Sales analysis



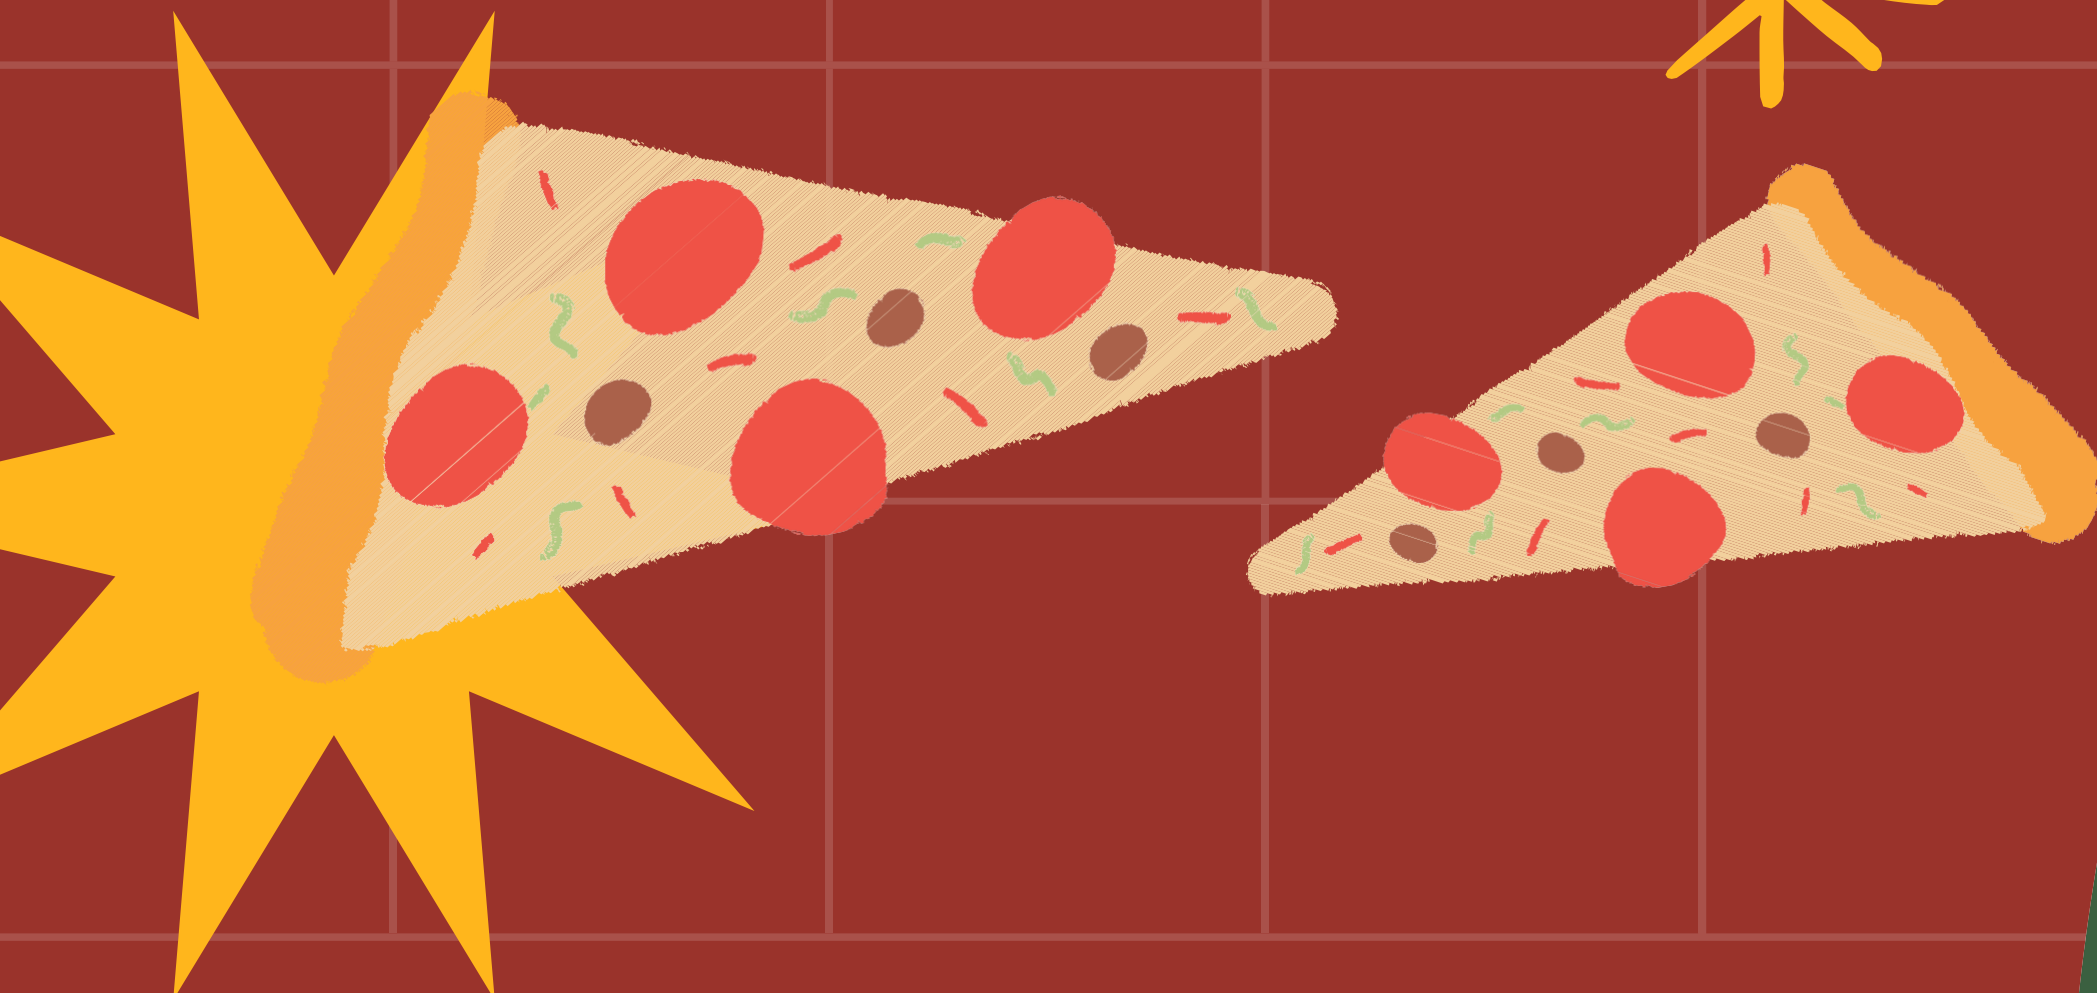

Tables

PIZZAS

PIZZAS_TYPES

ORDERDETAIL

ORDERS



Retrieve the total number of orders placed.

```
select count(order_id)as 'Total Number of orders Placed' from orders
```

	Total Number of orders Placed
1	21350



Calculate the total revenue generated from pizza sales

```
select round(sum(price * quantity),2) as 'Total Revenue'  
  from pizzas join order_details  
 on pizzas.pizza_id = order_details.pizza_id
```

	Total Revenue
1	817860.05



Identify the highest-priced pizza

```
select top 1 name,round(price,2),pizzas.pizza_id
  from pizzas join pizza_types
 on pizzas.pizza_type_id = pizza_types.pizza_type_id
 order by price desc
```

	name	(No column name)	pizza_id
1	The Greek Pizza	35.95	the_greek_xxl



Identify the most common pizza size ordered.

```
select pizzas.size,count(order_details_id) as 'order count'  
from pizzas join order_details  
on pizzas.pizza_id = order_details.pizza_id  
group by pizzas.size  
order by pizzas.size
```

	size	order count
1	L	18526
2	M	15385
3	S	14137
4	XL	544
5	XXL	28



--List the top 5 most ordered pizza types along with their quantities.

```
select top 5 pizza_types.name,sum(quantity) as  
            'Total Pizzas Ordered'  
from order_details join pizzas  
on pizzas.pizza_id = order_details.pizza_id  
join pizza_types  
on pizzas.pizza_type_id =  
pizza_types.pizza_type_id  
group by name  
order by sum(quantity) desc
```



	name	Total Pizzas Ordered
1	The Classic Deluxe Pizza	2453
2	The Barbecue Chicken Pizza	2432
3	The Hawaiian Pizza	2422
4	The Pepperoni Pizza	2418
5	The Thai Chicken Pizza	2371



--Join the necessary tables to find the total quantity of each pizza category ordered.

```
select pizza_types.category,sum(quantity) as 'Total  
Pizzas Ordered'  
from order_details join pizzas  
on pizzas.pizza_id = order_details.pizza_id  
join pizza_types  
on pizzas.pizza_type_id = pizza_types.pizza_type_id  
group by category  
order by sum(quantity) desc
```



	category	Total Pizzas Ordered
1	Classic	14888
2	Supreme	11987
3	Veggie	11649
4	Chicken	11050



Determine the distribution of orders by hour of the day.

```
select DATEPART(HOUR, orders.time) as  
'Time',count(orders.order_id) as 'orders'  
from orders  
group by DATEPART(HOUR, orders.time)  
order by DATEPART(HOUR, orders.time)
```

	Time	orders
1	9	1
2	10	8
3	11	1231
4	12	2520
5	13	2455
6	14	1472
7	15	1468
8	16	1920
9	17	2336
10	18	2399
11	19	2009
12	20	1010





Join relevant tables to find the category-wise distribution of pizzas.

```
/*select category,sum(price * quantity) as'Total sales in Dollar',sum(quantity) as 'Total Quantity'
    from pizza_types join pizzas
on pizza_types.pizza_type_id = pizzas.pizza_type_id
    join order_details
on pizzas.pizza_id =order_details.pizza_id
    group by category*/
```

```
select category,count(name) as 'Total pizza of this category' from
    pizza_types
    group by category
```

	category	Total pizza of this category
1	Chicken	6
2	Classic	8
3	Supreme	9
4	Veggie	9





Group the orders by date and calculate the total number of pizzas ordered per day.

```
select orders.date as 'Date Wise  
Orders',sum(order_details.quantity) as 'Total Pizza  
Ordered' from  
orders join order_details  
on orders.order_id = order_details.order_id  
group by orders.date  
order by orders.date)
```

	Date Wise Orders	Total Pizza Ordered
1	2015-01-01	162
2	2015-01-02	165
3	2015-01-03	158
4	2015-01-04	106
5	2015-01-05	125
6	2015-01-06	147
7	2015-01-07	138
8	2015-01-08	173
9	2015-01-09	127
10	2015-01-10	146
11	2015-01-11	116
12	2015-01-12	118

Query executed successfully





Group the orders by date and calculate the average number of pizzas ordered per day.

```
select sum(quantity)/count(distinct(date)) as  
      'avg_Pizzas_ordered_per_day'  
      from orders join order_details  
      on orders.order_id = order_details.order_id
```



	avg_Pizzas_ordered_per_day
1	138



Determine the top 3 most ordered pizza types based on revenue.

```
select top 3 sum(price*quantity) as 'Total Sales',name,pizzas.pizza_type_id
  from pizzas join order_details
on pizzas.pizza_id = order_details.pizza_id
  join pizza_types
on pizzas.pizza_type_id =pizza_types.pizza_type_id
 group by name,pizzas.pizza_type_id
 order by sum(price*quantity) desc
```

	Total Sales	name	pizza_type_id
1	43434.25	The Thai Chicken Pizza	thai_ckn
2	42768	The Barbecue Chicken Pizza	bbq_ckn
3	41409.5	The California Chicken Pizza	cali_ckn



Calculate the percentage contribution of each pizza type to total revenue.

```
select pizza_type_id as 'Types of Pizza',(sum(price *  
quantity)*100/(select(sum(price*quantity))  
from pizzas join order_details on pizzas.pizza_id =  
order_details.pizza_id)) as 'Percentage of total sales'  
from pizzas join order_details  
on pizzas.pizza_id = order_details.pizza_id  
group by pizzas.pizza_type_id  
order by sum(price * quantity) desc
```

	Types of Pizza	Percentage of total sales
1	thai_ckn	5.31071910841851
2	bbq_ckn	5.22925651597168
3	cali_ckn	5.06315230308009
4	classic_dlx	4.66834147979931
5	spicy_ital	4.25882765202812
6	southw_ckn	4.24348272842275
7	ital_supr	4.09321252036698
8	hawaiian	3.94606020515533
9	four_cheese	3.9451371870957
10	sicilian	3.78310445268476
11	pepperoni	3.68788645063152
12	hawaiian	3.478881588118

Query executed successfully



Analyze the cummulative revenue generated over time.

```
with sales as
(select DATEPART(HOUR, orders.time) as 'Time',sum(price*quantity) as
'revenue'
from order_details join orders
on order_details.order_id = orders.order_id
join pizzas
on pizzas.pizza_id = order_details.pizza_id
group by DATEPART(HOUR, orders.time))
SELECT Time ,SUM([Revenue]) OVER (ORDER BY Time) AS [Cumulative
Revenue]
FROM sales
```

	Time	Cumulative Revenue
1	9	83
2	10	386.650001525879
3	11	45322.4500484467
4	12	157200.350172043
5	13	263266.050279617
6	14	322467.450338364
7	15	375459.750394821
8	16	445515.150468826
9	17	531752.60055542
10	18	621049.450639725
11	19	693678.350709915
12	20	751688.750778884

✔ Query executed successfully.



```
-- Determine the top 3 most ordered pizza types based on revenue for each pizza category
with sales as
(select sum(price*quantity) as 'revenue',pizza_types.category as 'category',name as 'Name'
from
pizza_types join pizzas
on pizza_types.pizza_type_id = pizzas.pizza_type_id
join order_details
on pizzas.pizza_id = order_details.pizza_id
group by pizza_types.category,name)
SELECT revenue ,Name,category,rank() OVER (partition by category order by revenue desc ) as
'rn'
FROM sales
```

	revenue	Name	category	rn
1	43434.25	The Thai Chicken Pizza	Chicken	1
2	42768	The Barbecue Chicken Pizza	Chicken	2
3	41409.5	The California Chicken Pizza	Chicken	3
4	34705.75	The Southwest Chicken Pizza	Chicken	4
5	16900.25	The Chicken Alfredo Pizza	Chicken	5
6	16701.75	The Chicken Pesto Pizza	Chicken	6
7	38180.5	The Classic Deluxe Pizza	Classic	1
8	32273.25	The Hawaiian Pizza	Classic	2
9	30161.75	The Pepperoni Pizza	Classic	3
10	28454.1000213623	The Greek Pizza	Classic	4
11	25094	The Italian Capocollo Pizza	Classic	5



Thank You