DeviceSchedule(int startHour, int endHour, int targetTemperature)

1. if (startHour < 0 || startHour > 23 || endHour < 0 || endHour > 23)

2. throw new IllegalArgumentException("Hours must be between 0 and 23.");

3. if (targetTemperature < 16 || targetTemperature > 30)


4. throw new IllegalArgumentException("Target temperature must be between 16 and 30 degrees.");

5. this.startHour = startHour;

6. this.endHour = endHour;

7. this.targetTemperature = targetTemperature;

T = condition is true; F = condition is false.

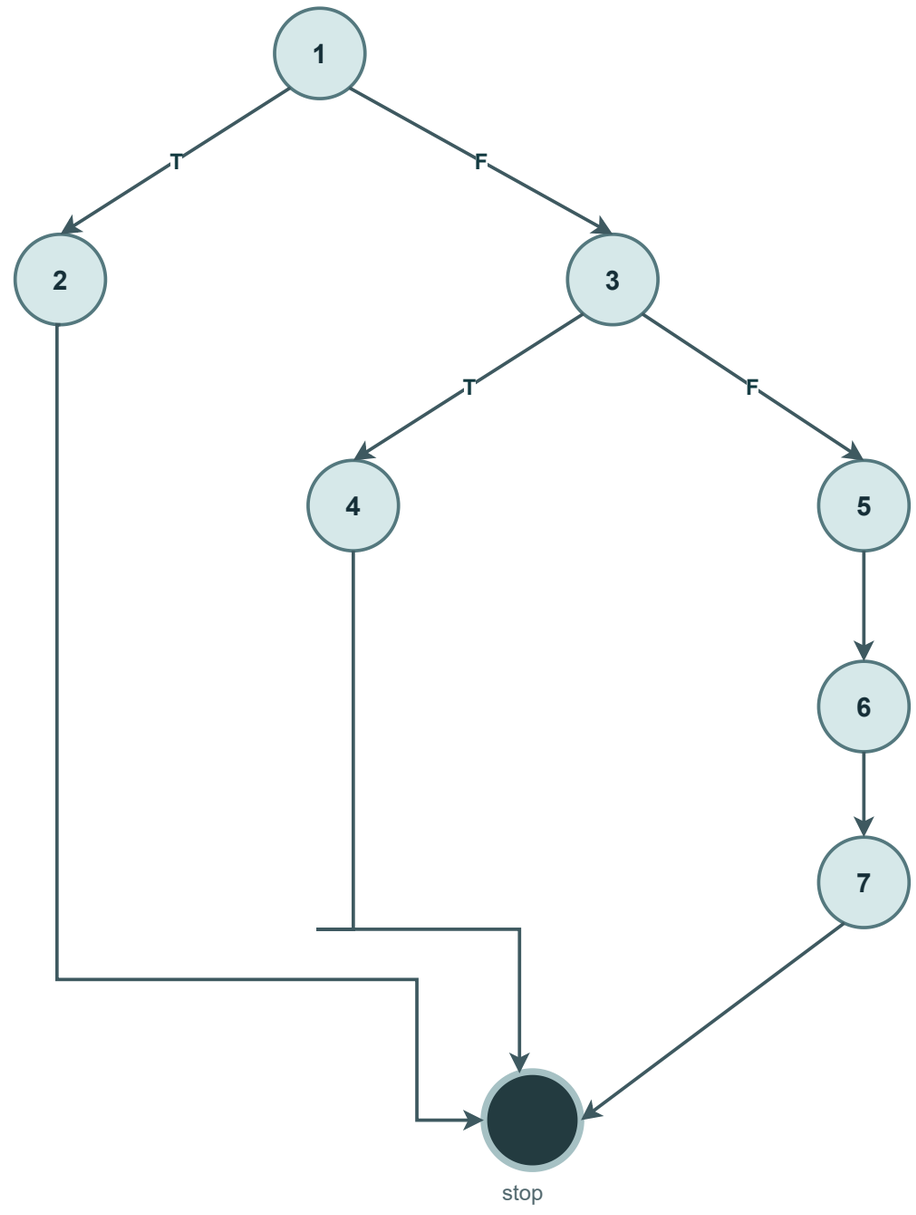

isWithinSchedule(int currentHour)

1. if (currentHour < 0 || currentHour > 23)


2. throw new IllegalArgumentException("Current hour must be between 0 and 23.");

3. if (startHour <= endHour)

4. return currentHour >= startHour && currentHour <= endHour;

5. return currentHour >= startHour || currentHour <= endHour;

Node 4: daytime schedule. Node 5: overnight schedule. The return values are booleans.

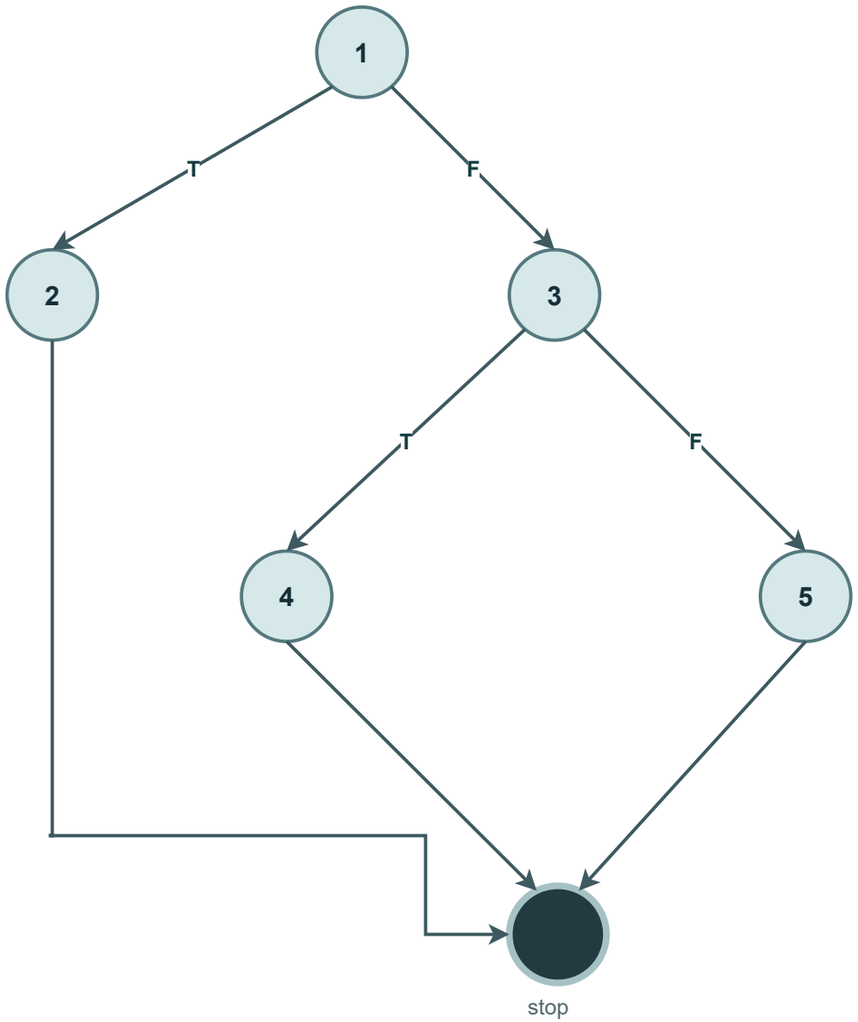

getTargetTemperature()

1. return targetTemperature;

One return statement; no conditions or loops.

