

getWindowHandles() & getWindowHandle()

VCS

Version
Control System

GitHub →

Git & GitHub



Remote Repository

Testers
Days

→ GitHub

→ Sub Version → SVN
Sub version
Control System

Project ^{6 Months} → 1 Month
2 months

→ 1.1 → 1.2
→ 2.1 → - - - -

- - - - -

SNN →


SVM:-

Local M/c

Testu / Dev.

Code

↓
Crash

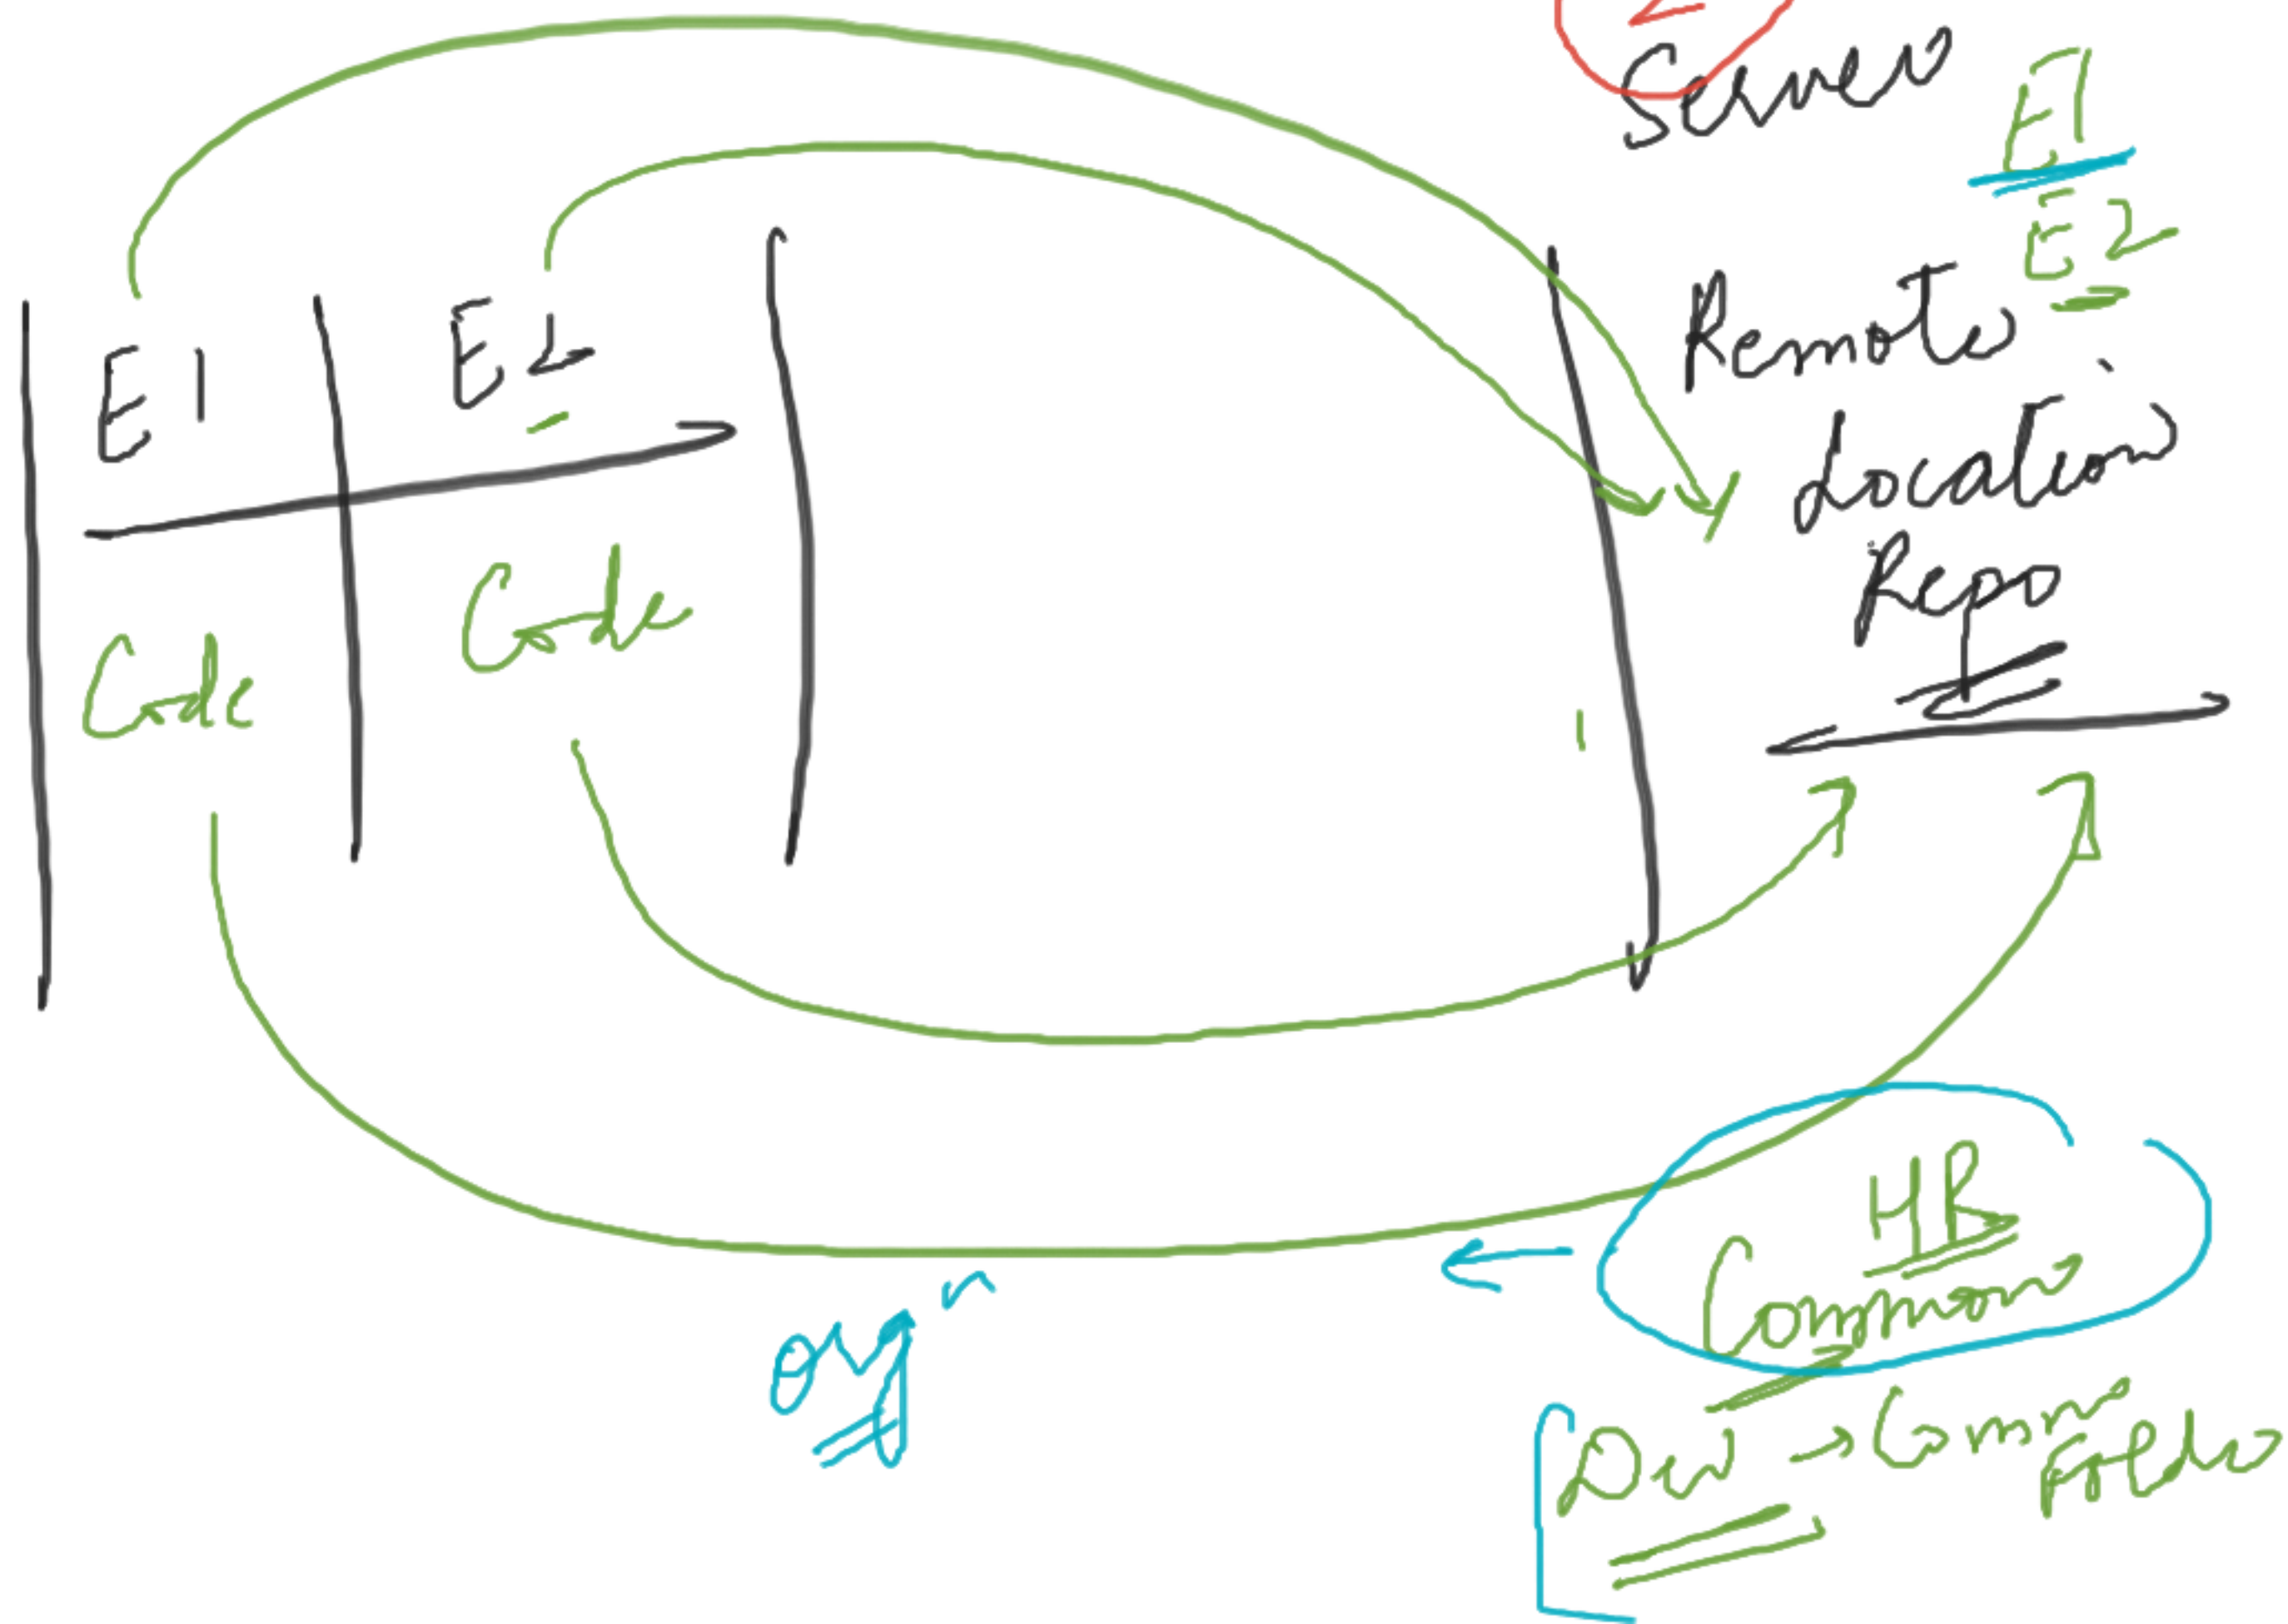

Git

①

Local
M/G

code }

Local ^{basket} M/G ②

Git Local Repo

.git

Add } Window Handlip → Push
remove }
commit →

Online ③
Server Repo
github

Case 1: if you want to create a new repo from scratch

git init - new repo create

git add README.md ----- To add newly created files into local repo (.git)

git commit -m "first commit" - To commit all the files into local repo

git remote add origin <https://github.com/Mshaveta/GithubDemoClass.git> --- to establish the connect with remote repo

git push -u origin master ----- To push the code into Remote repo (Github)

Case2: Cloning /copy the Remote Repo on Local ma/c and piush the code

git clone <repo url>

git add README.md ----- To add newly created files into local repo (.git)

git commit -m "first commit" - To commit all the files into

git push -u origin master ---- To push the code into Remote repo (Github)

