

Kubernetes objects:

1. Namespace
2. Pods
3. Replica set
4. Deployment
5. Services
6. Configmaps.
7. Secrets

Namespace: it's an isolated env.

When 2 persons working in same cluster.

kube-node-lease:

1. Heartbeats: info sent to control plane by kubelet.
2. Lease objects: heartbeats are stored as lease objects or collection of heart beats.

Kube-public:

Share common info between users.

apiVersion:

Tells which version is used by that object we gonna create.

Kind:


What kind of object we are creating.

Metadata:

Name of the object.

Spec:

Behaviour of the object.

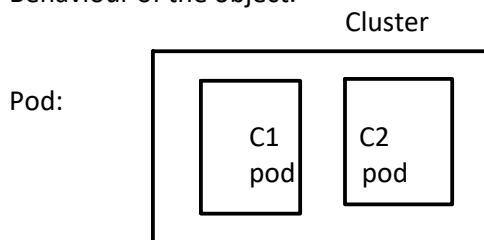

Replica sets:

Make sure pod copies are running in cluster.

When pod is crashed, it replaces that pod with it's replica.

3 pods --> p1, p2, p3 --> 5 --> p*1, p*2, p*3, p, p.

P1 --> crashed: p*1 will replace p1.

It will manages pods.

1. Selector: it decides which pod is managed by replicaset.
2. Count of replica set.
3. Pod template that defines how new pods should be created.

When to use:

1. When u want ur pods to be managed.




When to use:

1. When u want ur pods to be managed.
2. When u want to create replicas.

Labels: key value pair --> to identify pods.

a:29, p1:345242

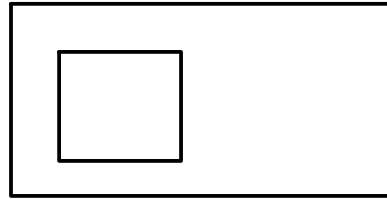

Organize objects.

Manage pods.

Valid labels:

Value 1-63 characters.

Hyphen(-), underscore(_), numbers(1), letters(a).

Begin with numbers(2), letters(a).