

AP



[SOUS-TITRE DU DOCUMENT]



Ravelosoa MSOILI-DAOUD

[NOM DE LA SOCIETE] | [ADRESSE DE LA SOCIETE]

I. Installation sur Windows Serveur 2025 et sur mon PC de dev

1. L'installation de PostgreSQL

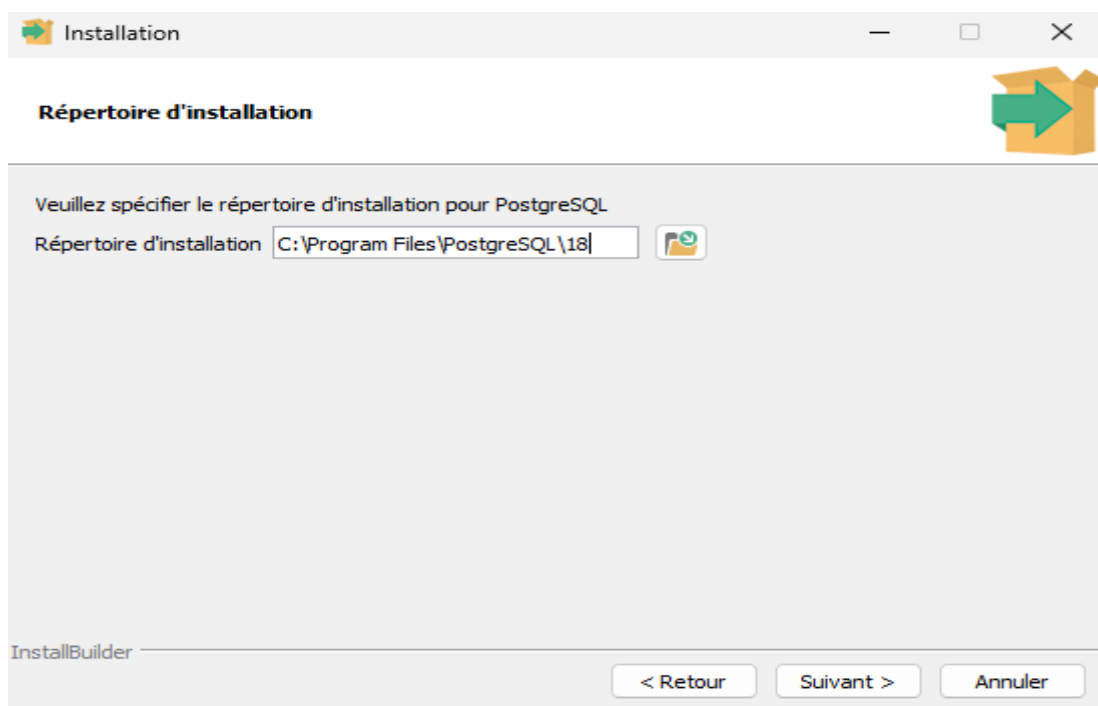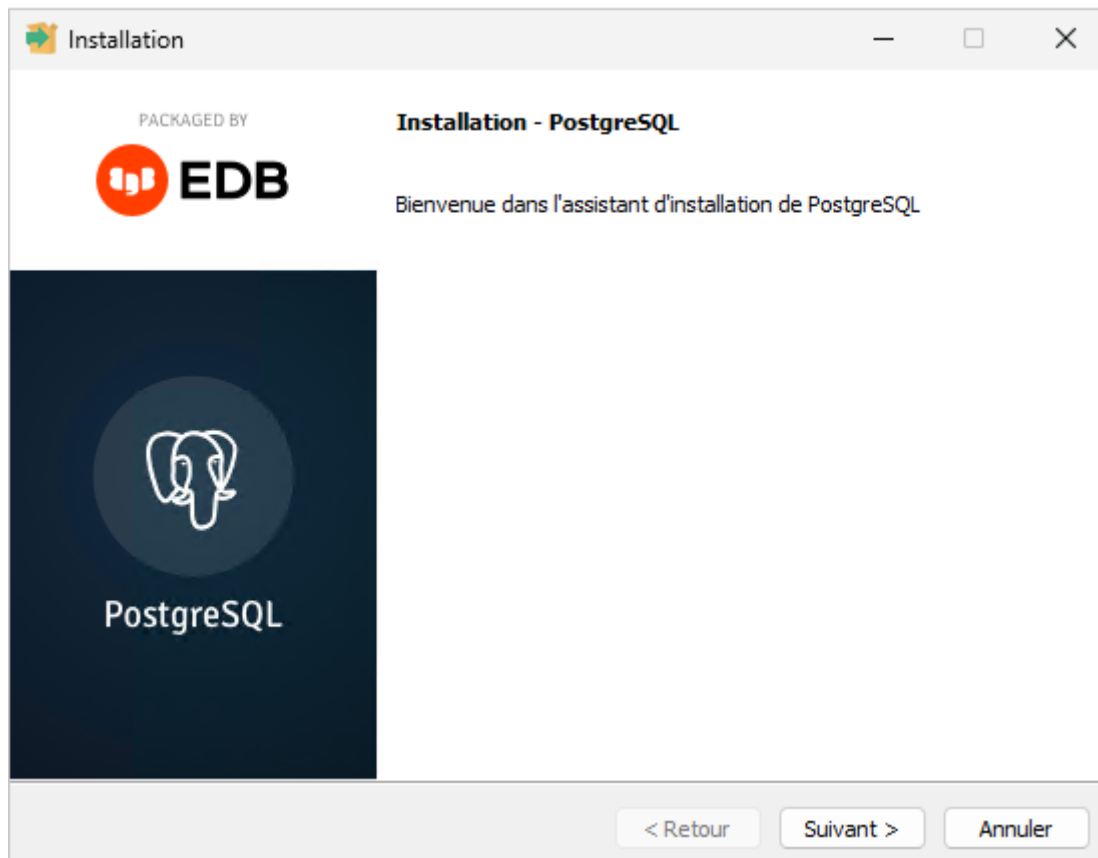

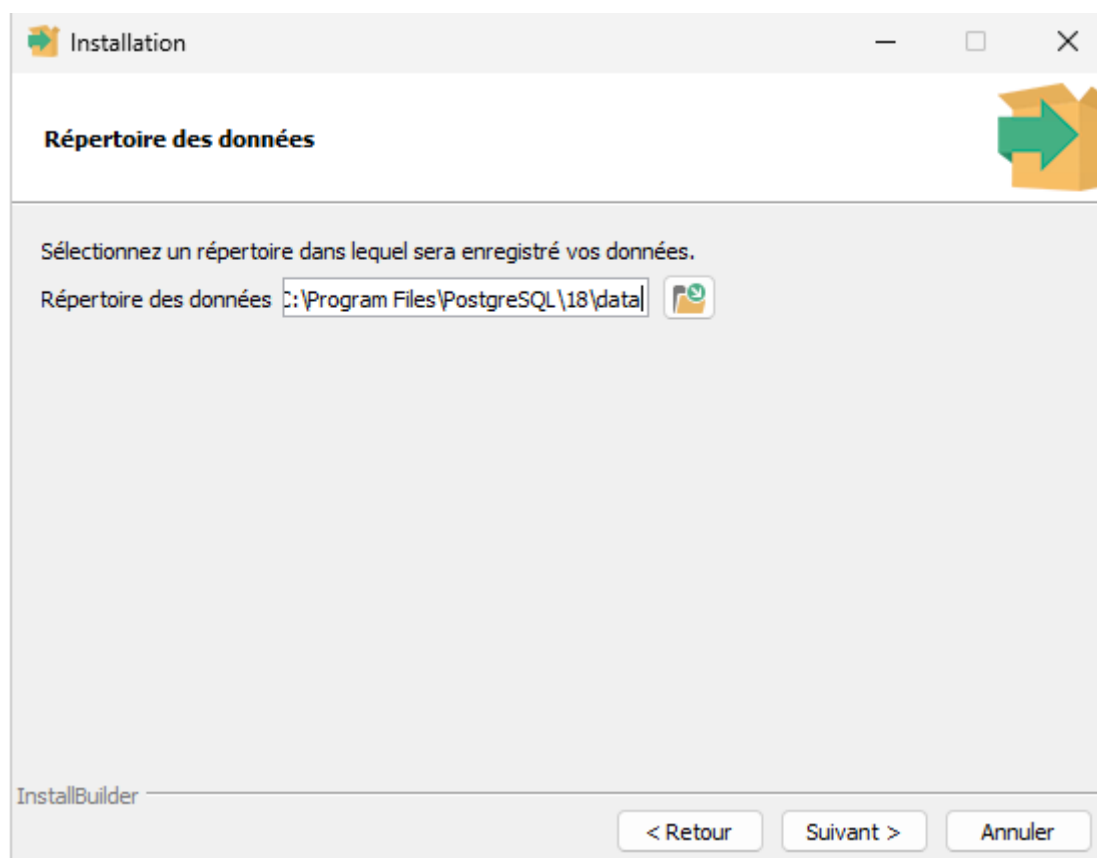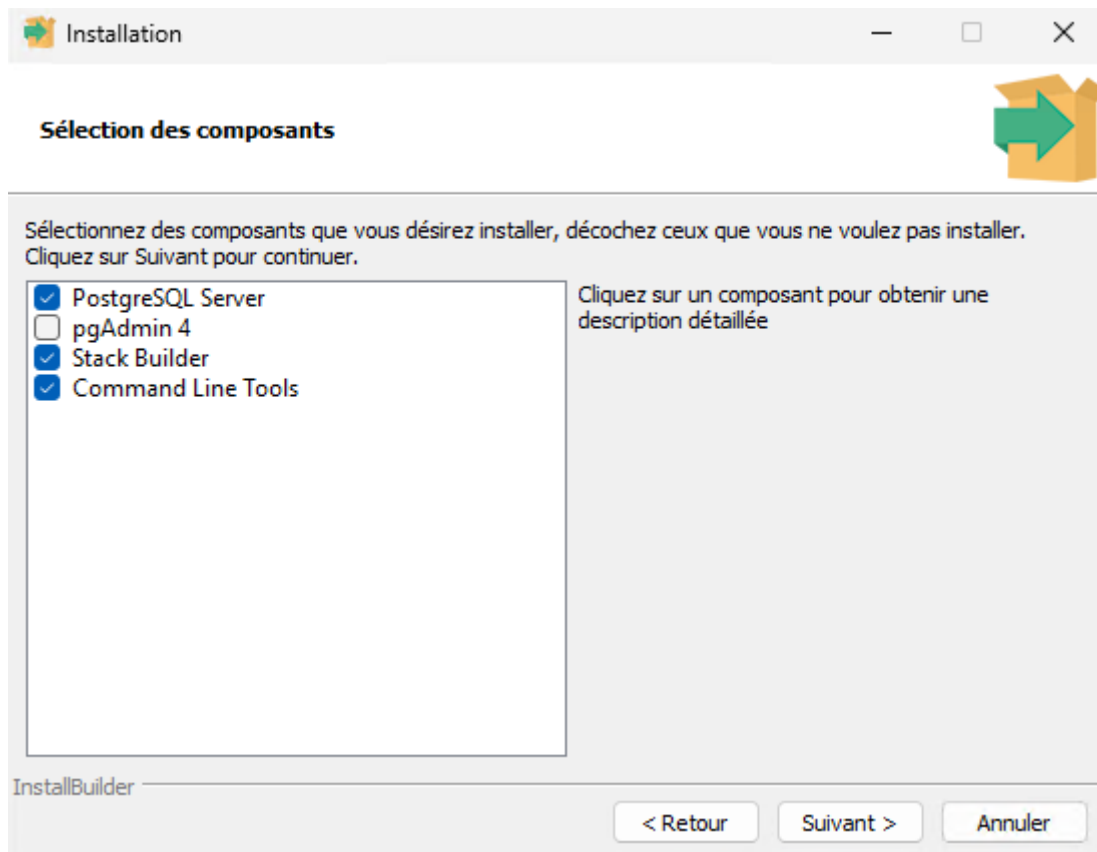

Installation



Mot de passe

S'il vous plaît fournir un mot de passe pour le superutilisateur `***unknown variable superaccoun***`).

Mot de passe

Confirmez le mot de passe.

InstallBuilder

< Retour

Suivant >

Annuler

Installation



Port

Sélectionnez le numéro du port sur lequel le serveur devra écouter



Port



InstallBuilder


< Retour

Suivant >


Annuler

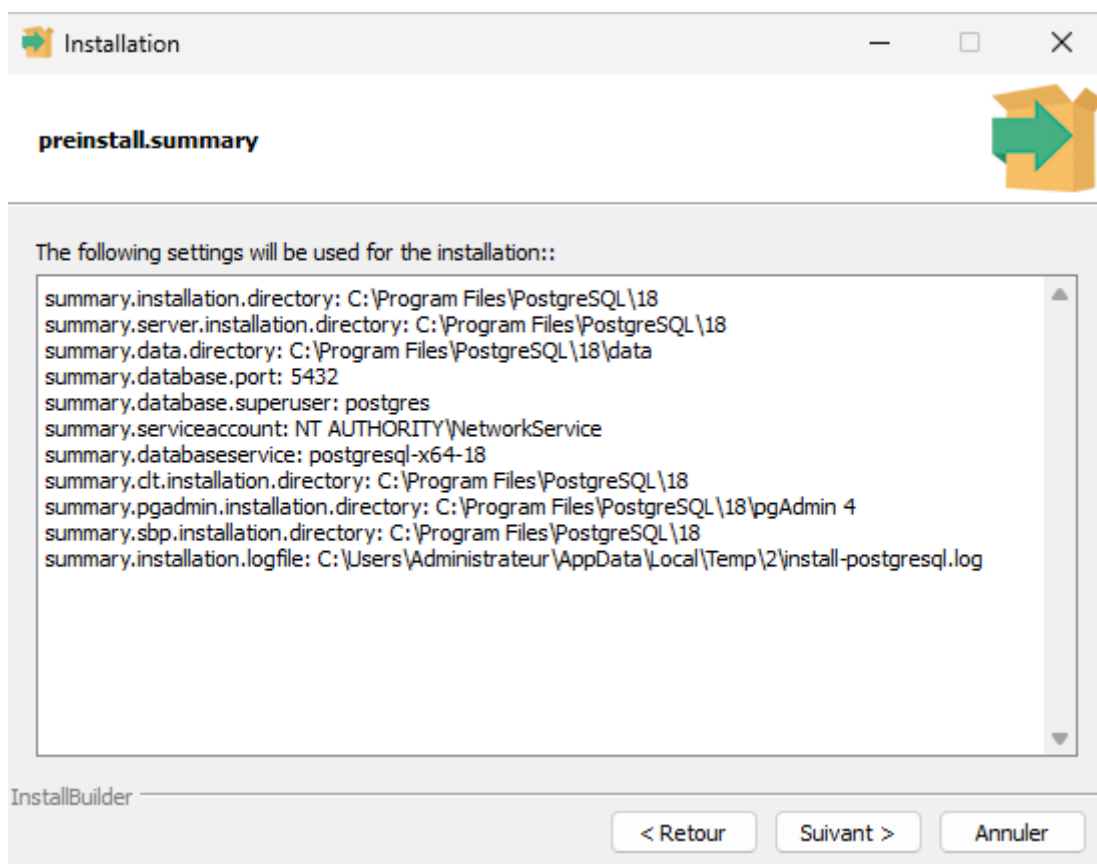
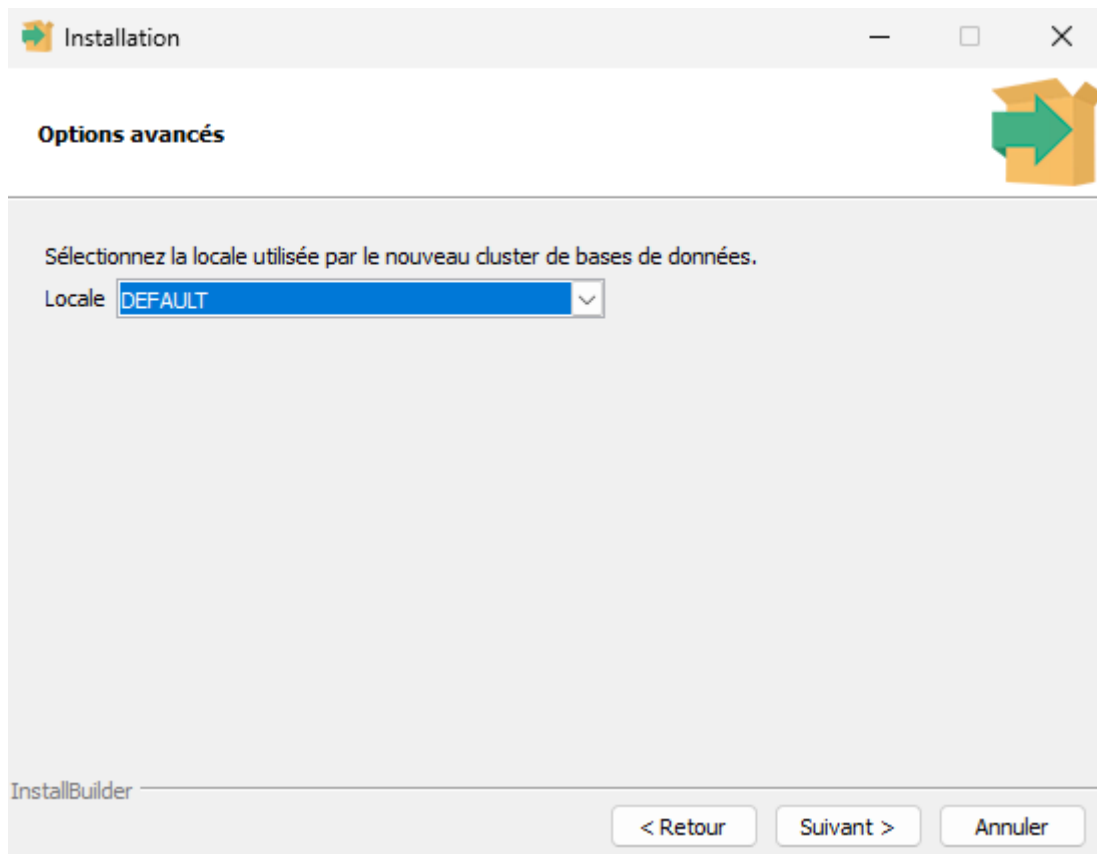


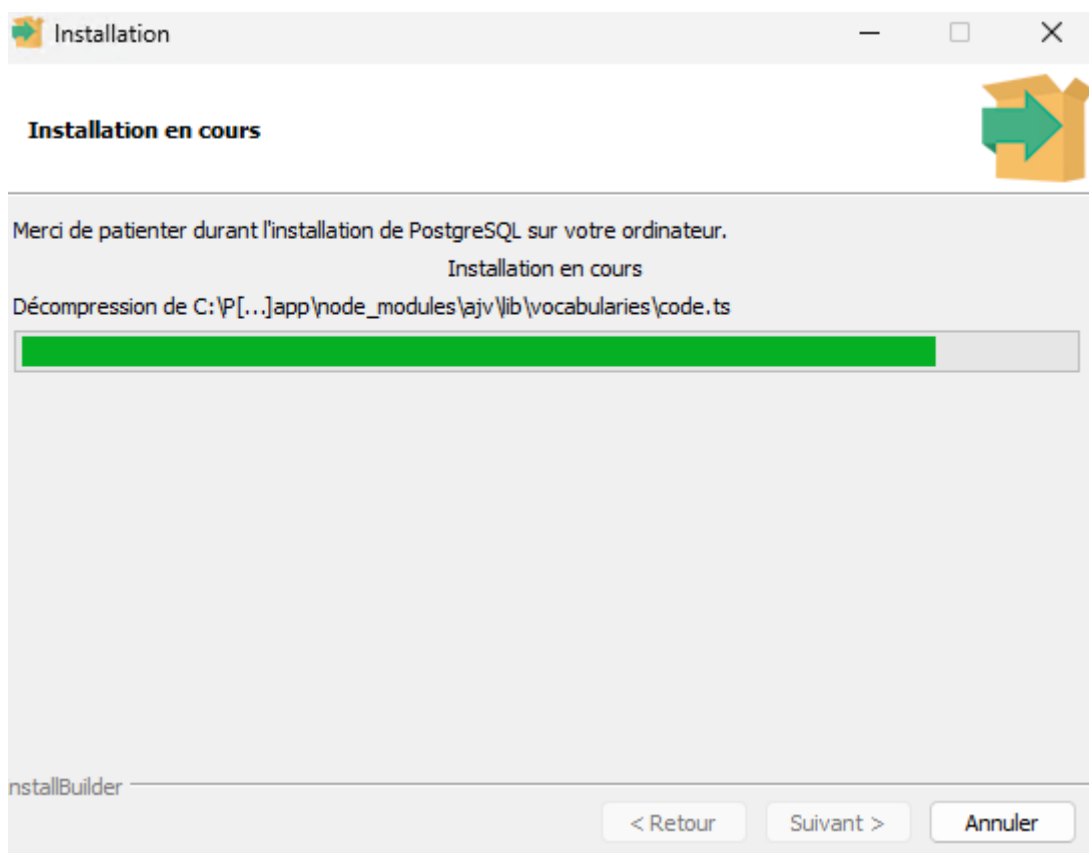
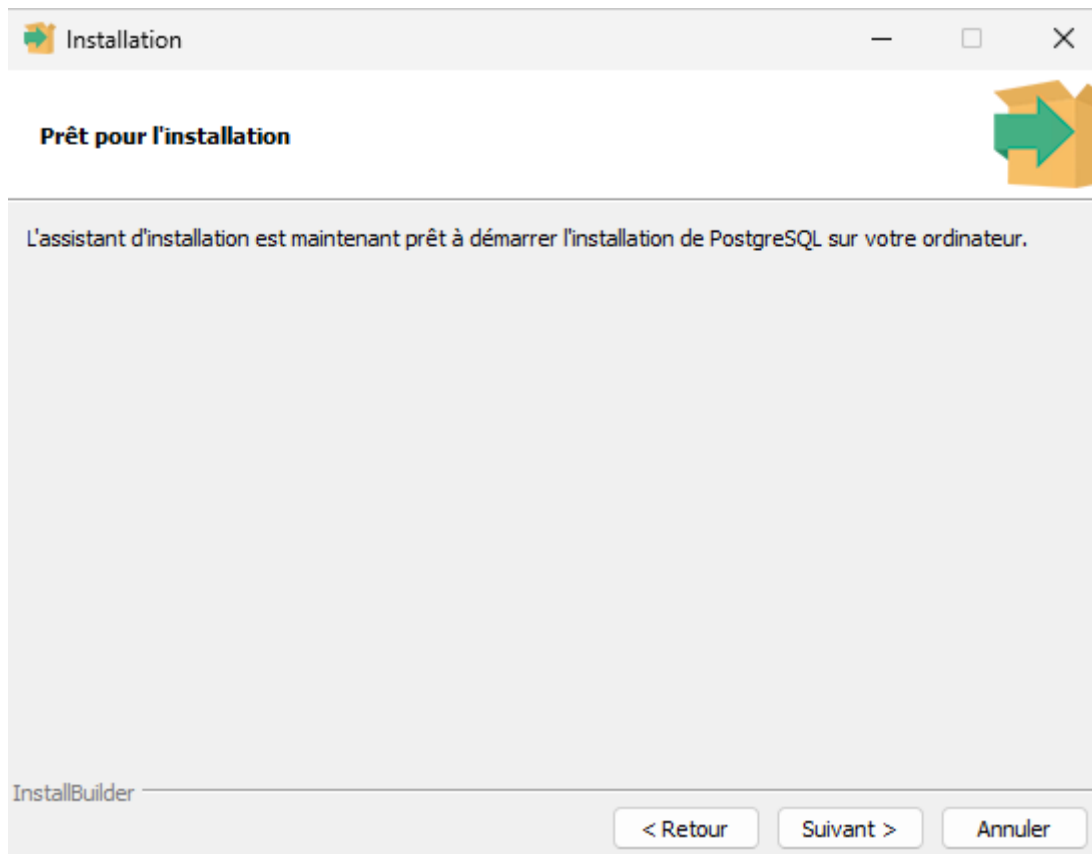



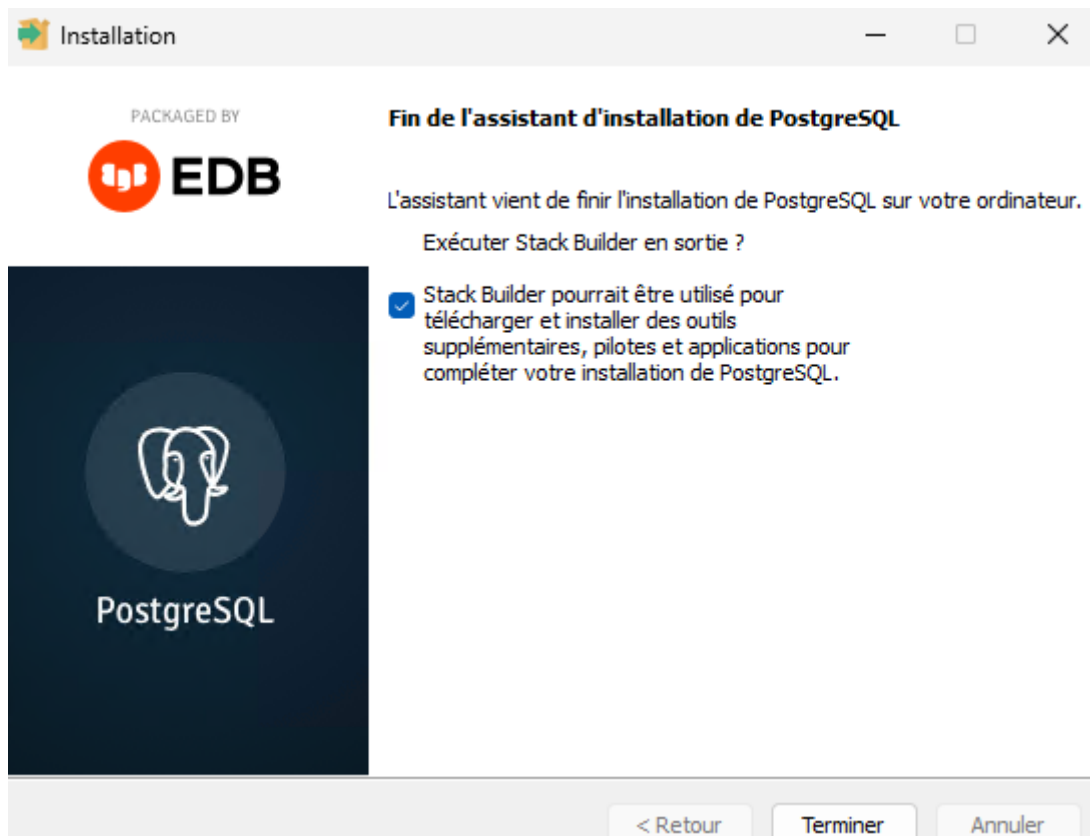


2. Installer pgadmin

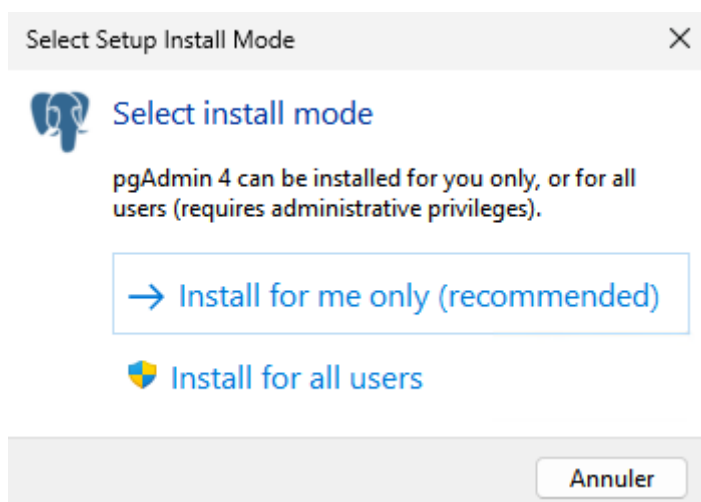

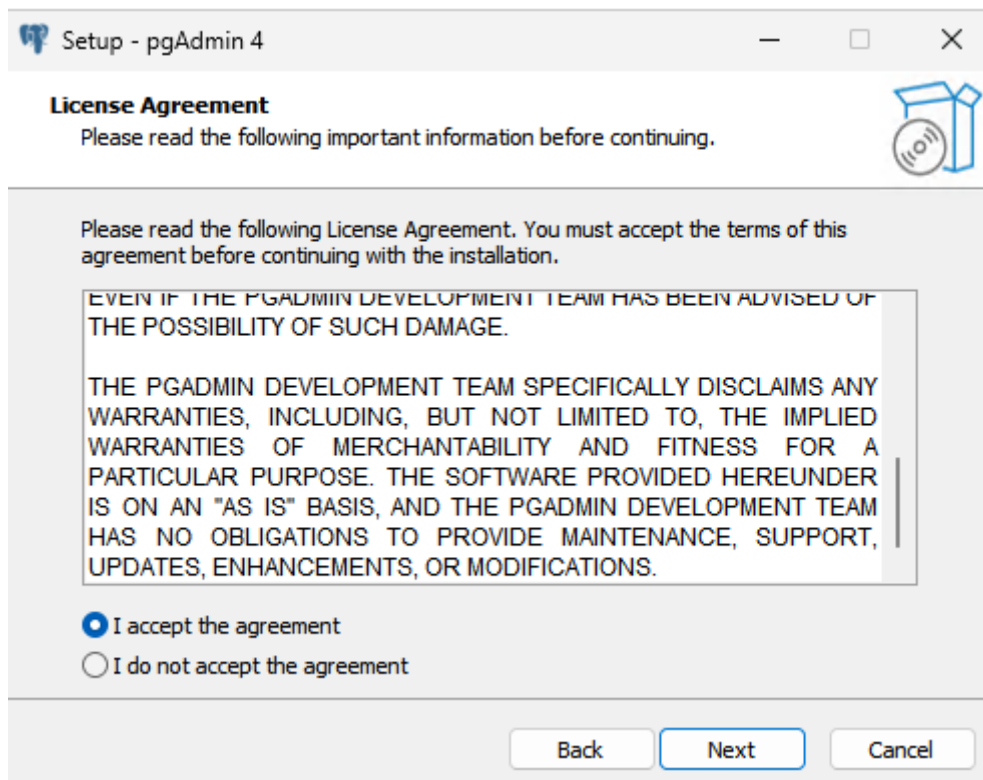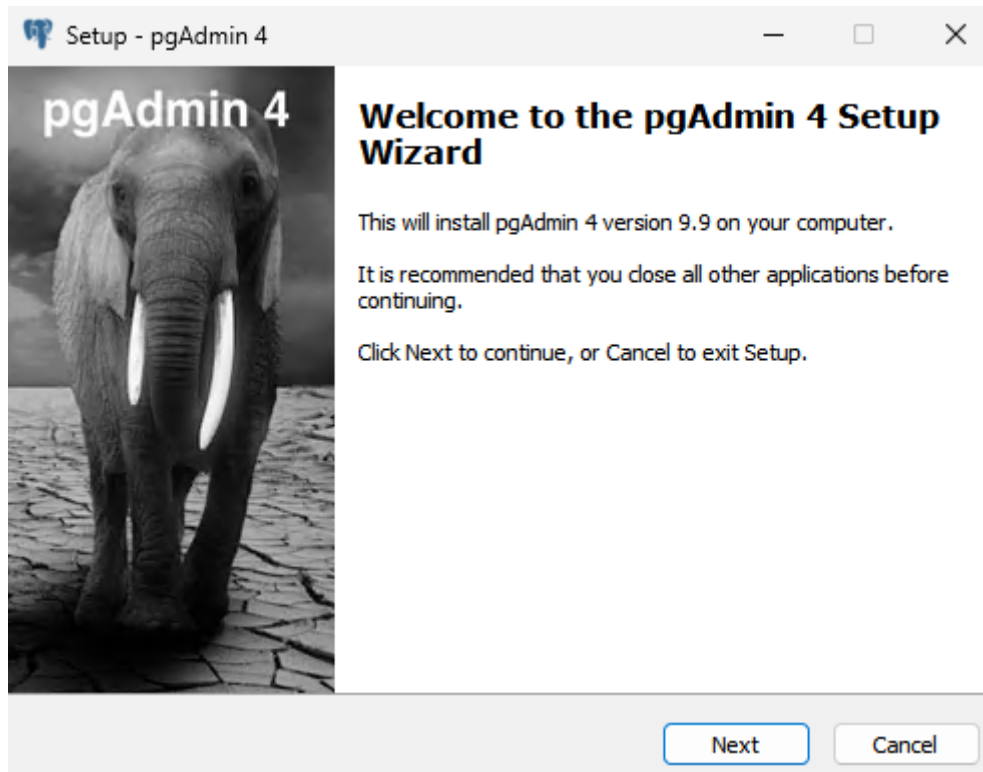

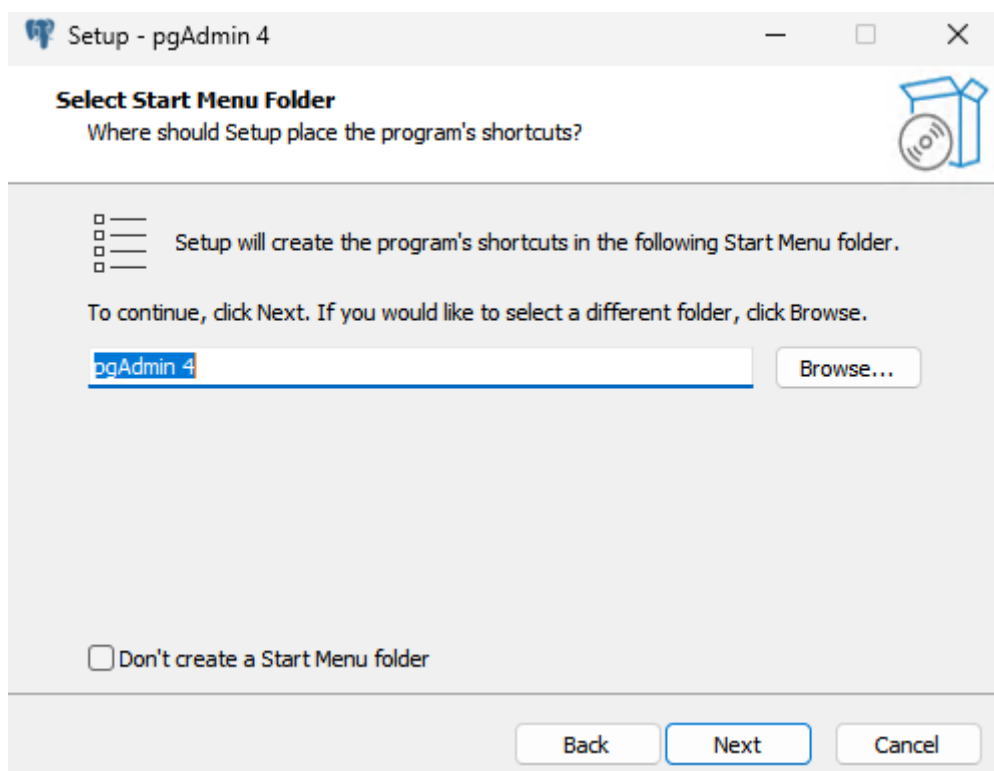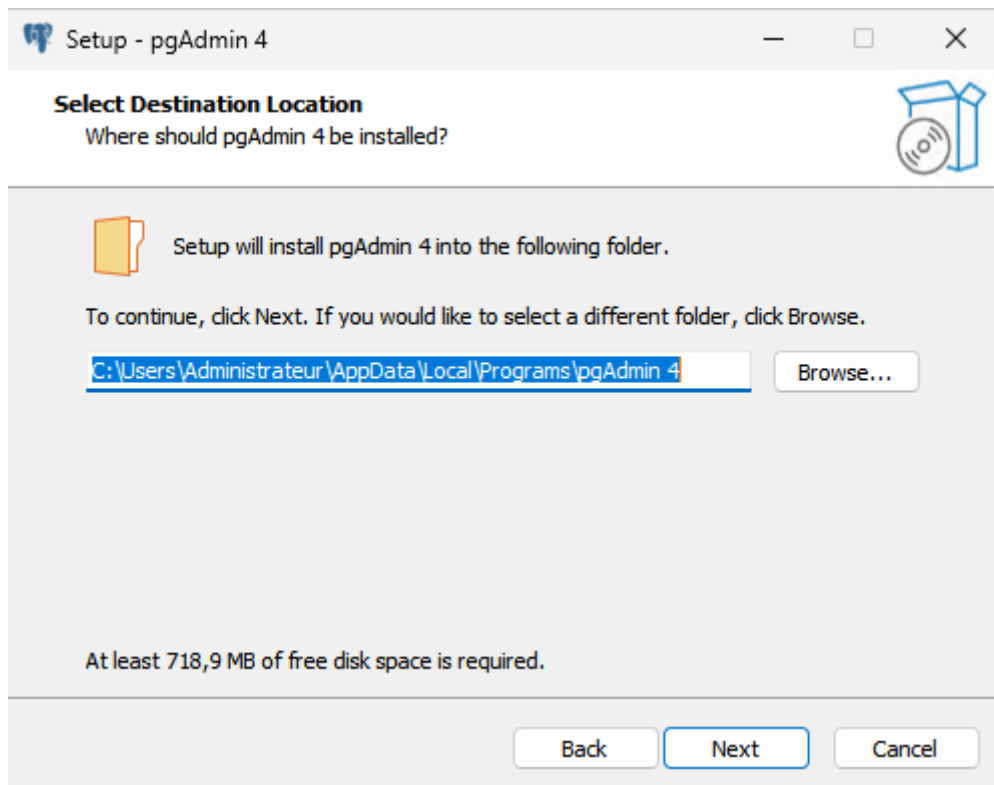

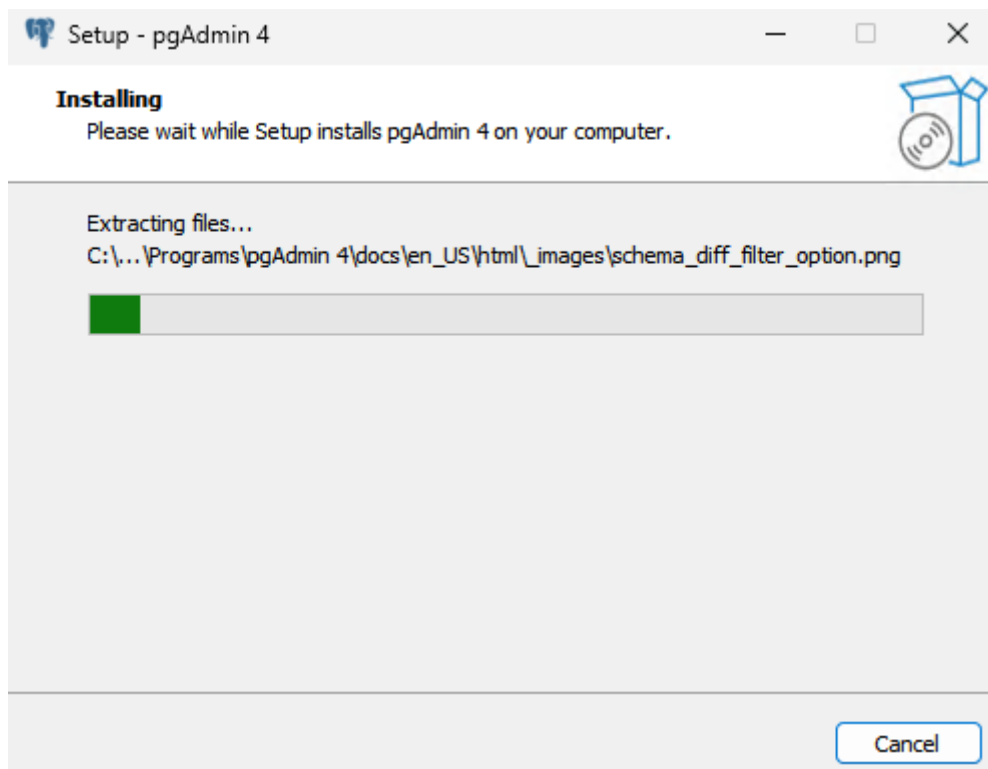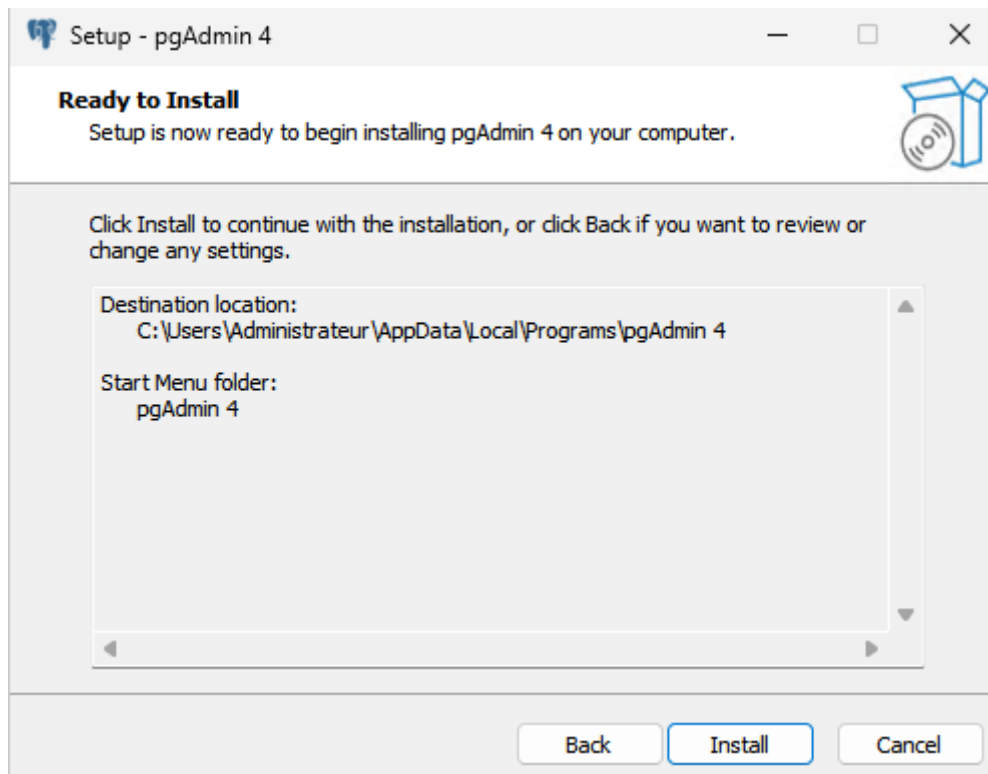



Connect to Server




Please enter the password for the user 'postgres' to connect the server - "PostgreSQL 18"

.....

☒ Save Password

File Object Tools Edit View Window Help

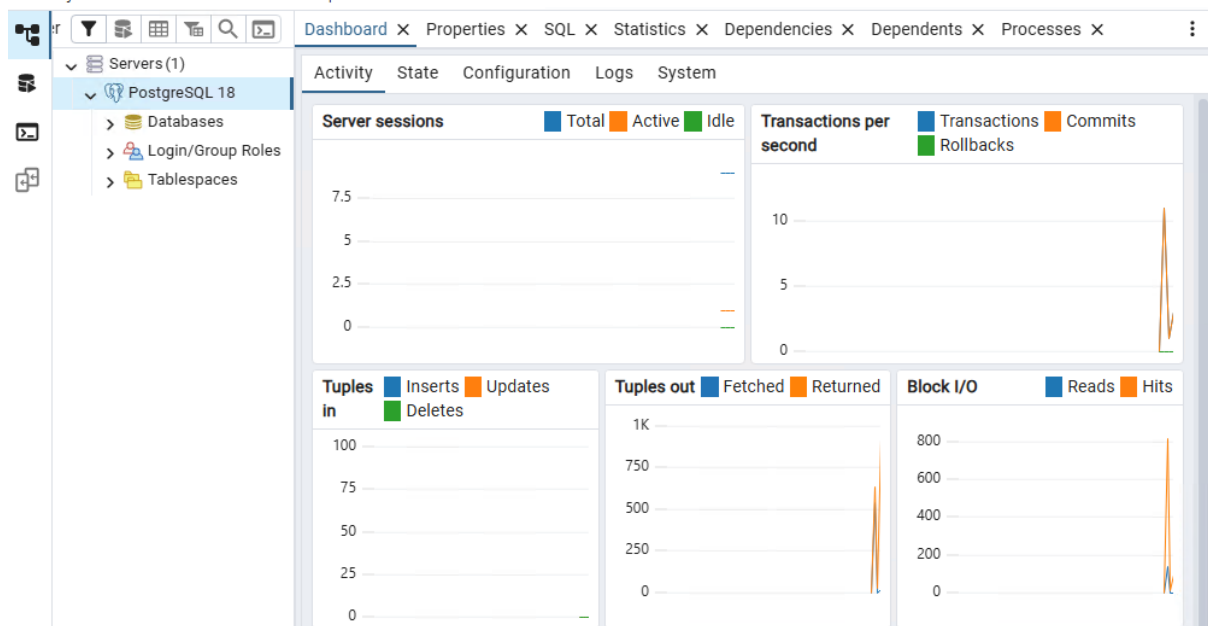

II. Installer cakephp et le connecter à la BDD PostgreSQL (sur les 2 machines)

- Installer composer

Select Setup Install Mode



Select install mode

Composer can be installed for all users (requires administrative privileges), or for you only.

 **Install for all users (recommended)**

→ Install for me only

Annuler

Composer Setup

Installation Options

Choose your installation type.

Setup will install Composer to a fixed location for all users. This includes a Control Panel uninstaller and is the recommended option. Click Next to use it.

☐ Developer mode
Take control and just install Composer. An uninstaller will not be included.

Next

Cancel

Composer Setup

Settings Check

We need to check your PHP and other settings.

Choose the command-line PHP you want to use:

C:\wamp64\bin\php\php8.3.14\php.exe

Browse...

This is the PHP in your path. Click Next to use it.

Back

Next

Cancel

Composer Setup

Proxy Settings

Choose if you need to use a proxy.



☐ Use a proxy server to connect to internet


Enter proxy url

Back

Next

Cancel

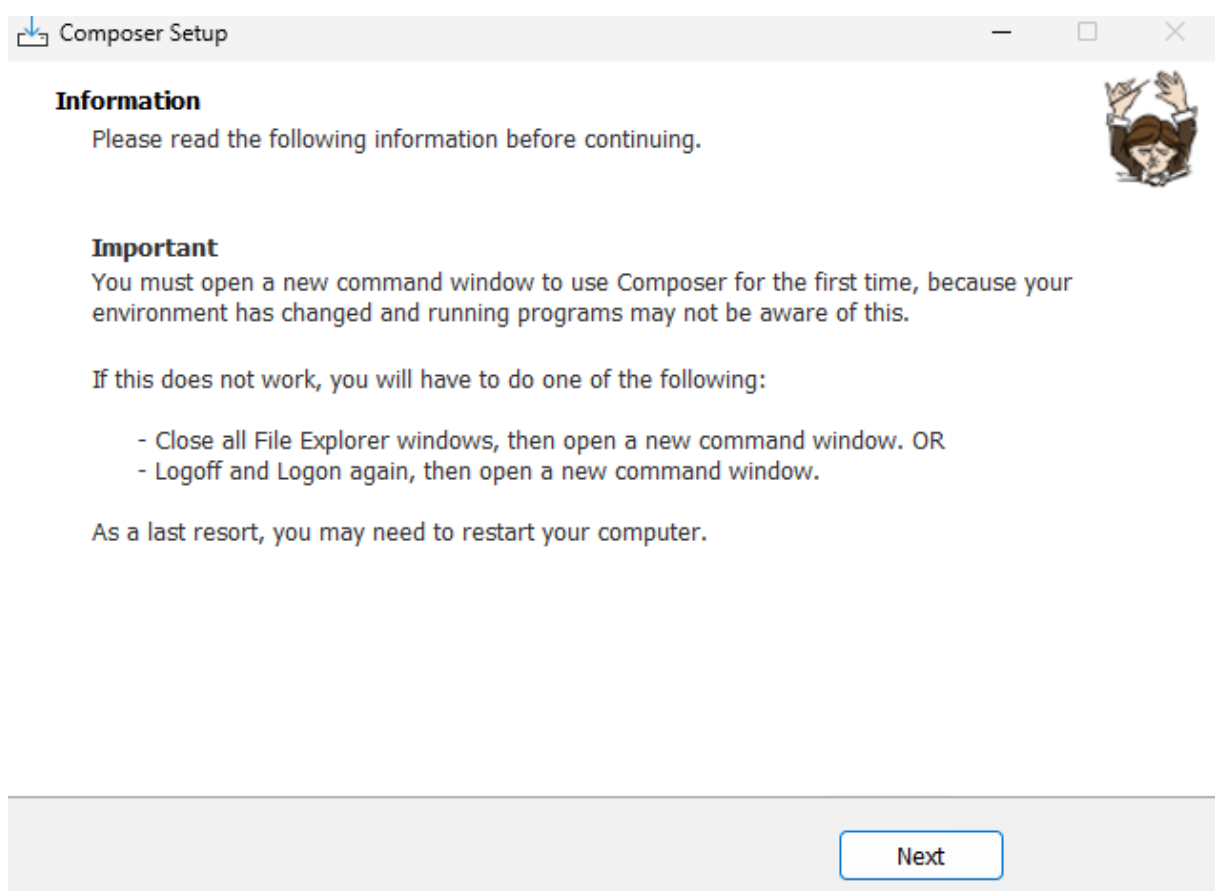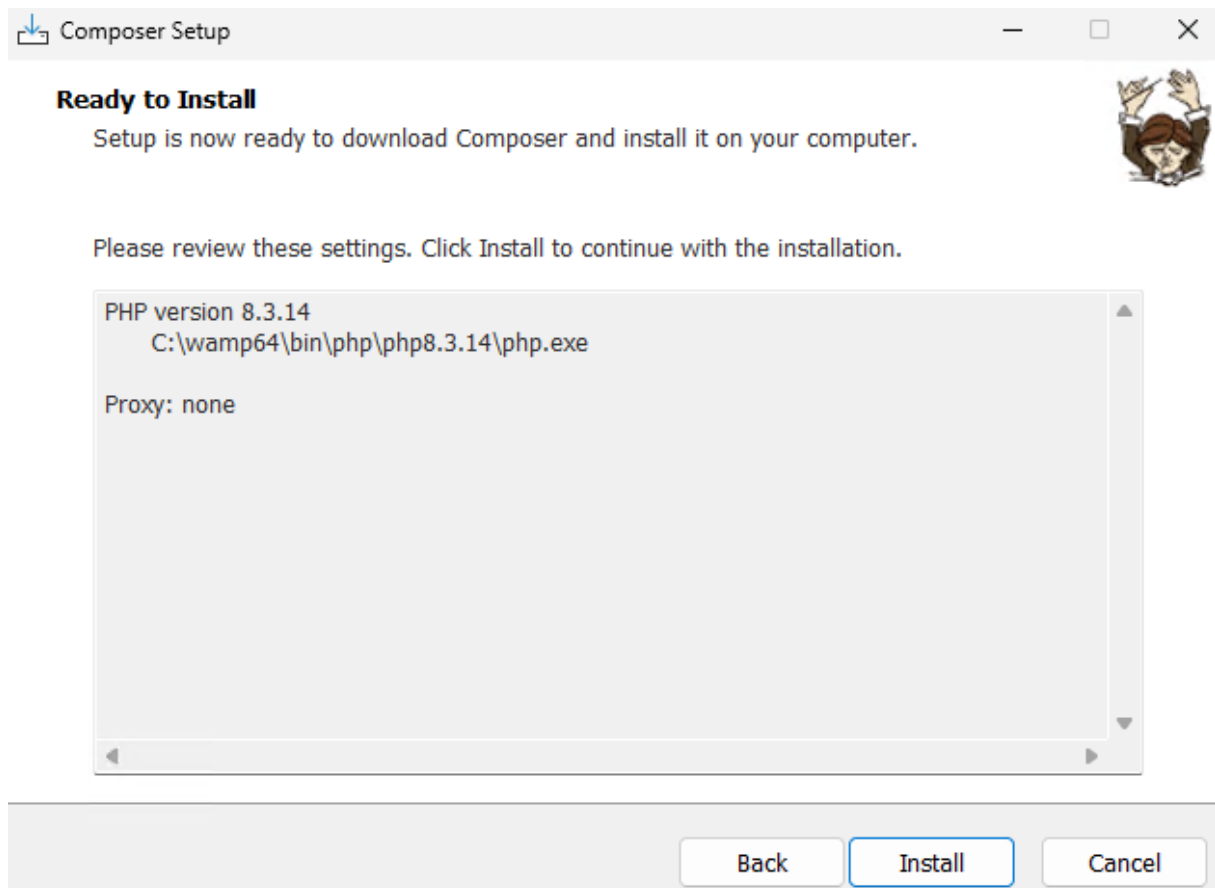

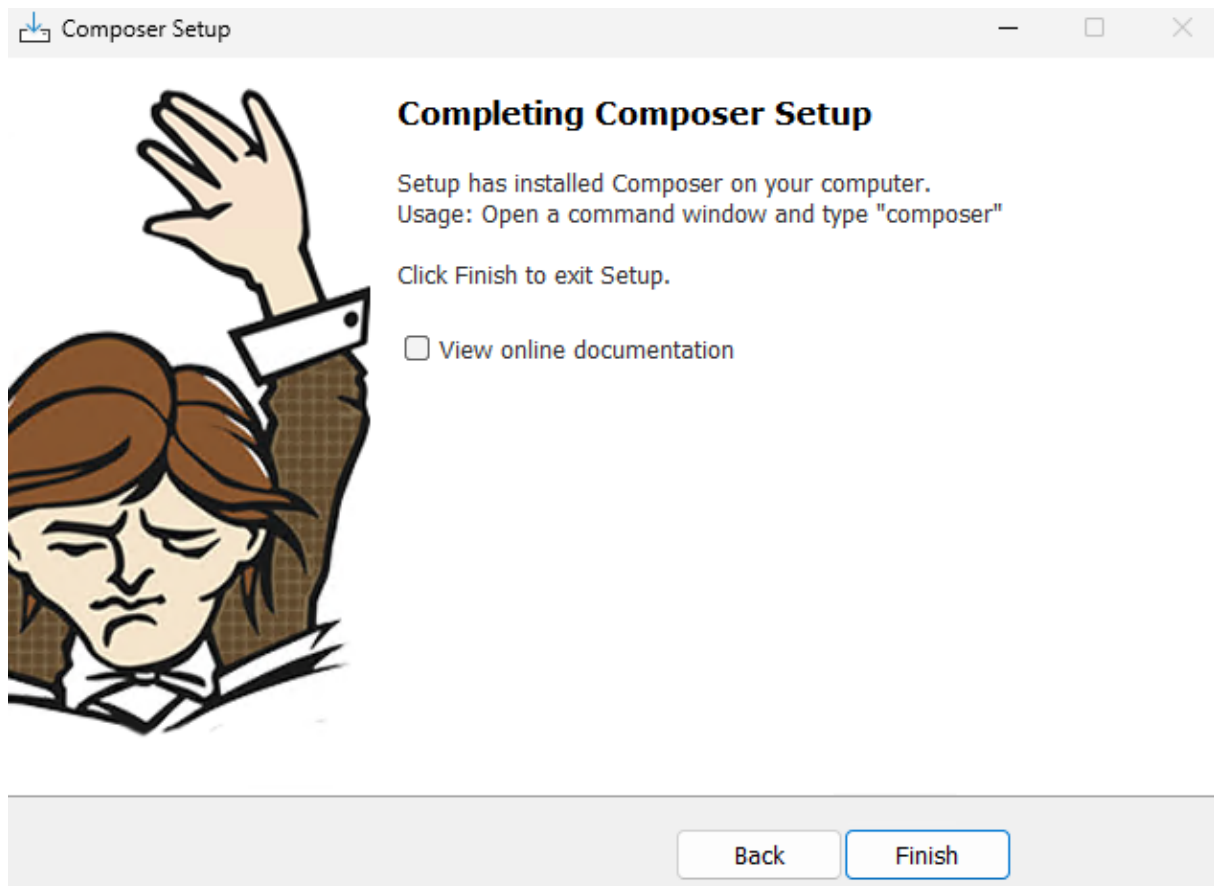

- Installation le project M2L

```
Microsoft Windows [version 10.0.26100.6899]
(c) Microsoft Corporation. Tous droits réservés.

C:\wamp64\www>composer create-project --prefer-dist cakephp/app:5.* M2L
Creating a "cakephp/app:5.*" project at "./M2L"
Installing cakephp/app (5.2.0)
- Installing cakephp/app (5.2.0): Extracting archive
```

```
PHP CodeSniffer Config installed_paths set to ../../cakephp/cakephp-codesniffer
No security vulnerability advisories found.
> App\Console\Installer::postInstall
Created 'config/app_local.php' file
Created 'C:\wamp64\www\M2L\logs' directory
Created 'C:\wamp64\www\M2L\tmp\cache\views' directory
Set Folder Permissions ? (Default to Y) [Y,n]? y
```

- Configuration de la BSD

```

SQL Shell (psql)
Server [localhost]:
Database [postgres]:
Port [5432]:
Username [postgres]:
Mot de passe pour l'utilisateur postgres :

psql (18.0)
Attention : l'encodage console (850) diffère de l'encodage Windows (1252).
Les caractères 8 bits peuvent ne pas fonctionner correctement.
Voir la section « Notes aux utilisateurs de Windows » de la page
référence de psql pour les détails.
Saisissez « help » pour l'aide.

postgres=# CREATE DATABASE m2l;
CREATE DATABASE
postgres=# CREATE USER toto WITH PASSWORD 'Bts2025@';
CREATE ROLE
postgres=# GRANT ALL PRIVILEGES ON DATABASE m2l TO toto;
GRANT
postgres=# |

postgres=# \l

```

Nom	Propriétaire	Encodage	Fournisseur de locale	Collationnement	Type caract.	Locale	Rpgles
m2l	postgres	UTF8	libc	French_France.1252	French_France.1252		
postgres	postgres	UTF8	libc	French_France.1252	French_France.1252		
template0	postgres	UTF8	libc	French_France.1252	French_France.1252		
template1	postgres	UTF8	libc	French_France.1252	French_France.1252		

(4 lignes)

- Changer Mysql en Postgres

Database

 CakePHP is NOT able to connect to the database.

Connection to Mysql could not be established: SQLSTATE[HY000]
[1045] Accès refusé pour l'utilisateur: 'toto'@'localhost' (mot de
passe: OUI)


```

Fichier  Edition  Sélection  Affichage  Atteindre  Exécuter  ...
Bienvenue  app_local.php 5  app.php 9+ x
C: > wamp64 > www > M2L > config > app.php
10  return [
271      'Datasources' => [
272          /*
280          * in app_local.php depending on the application's needs.
281          */
282          'default' => [
283              'className' => Connection::class,
284              'driver' => Postgres::class,
285              'persistent' => false,
286              'timezone' => 'UTC',

```

- Régler le problème extasions

Database driver `Cake\Database\Driver\Postgres` cannot be used due to a missing PHP extension or unmet dependency. Requested by connection `default`

Cake\Database\Exception\MissingExtensionException

- Sélectionner pgsql et pdo_pgsql

Extensions PHP 8.3.14

odbc

✓ openssl

pdo_firebird

✓ pdo_mysql

pdo_oci

pdo_odbc

✓ pdo_pgsql

✓ pdo_sqlite

✓ pgsql

shmop

snmp

✓ soap

✓ sockets

sodium

✓ sqlite3

sysvshm

tidy

✓ xsl

zend_test

✓ zip

Extensions Zend

✓ opcache

✓ xdebug 3.3.2

change the config edit

Wampserver - 3.3.7 - 64bit

Made in France by Dominique Ottello

Localhost

PhpMyAdmin

Adminer 4.8.4

Vos VirtualHosts

Apache 2.4.62.1

PHP 8.3.14

SGBD par défaut : mysql

MySQL 9.1.0

MariaDB 11.5.2

PHP 8.3.14 [Apache module]

Version

Configuration PHP


Extensions PHP

- Enlevez mb4

Database

🔴 CakePHP is NOT able to connect to the database.

SQLSTATE[22023]: Invalid parameter value: 7 ERREUR: valeur invalide pour le paramètre « client_encoding » : « utf8mb4 »

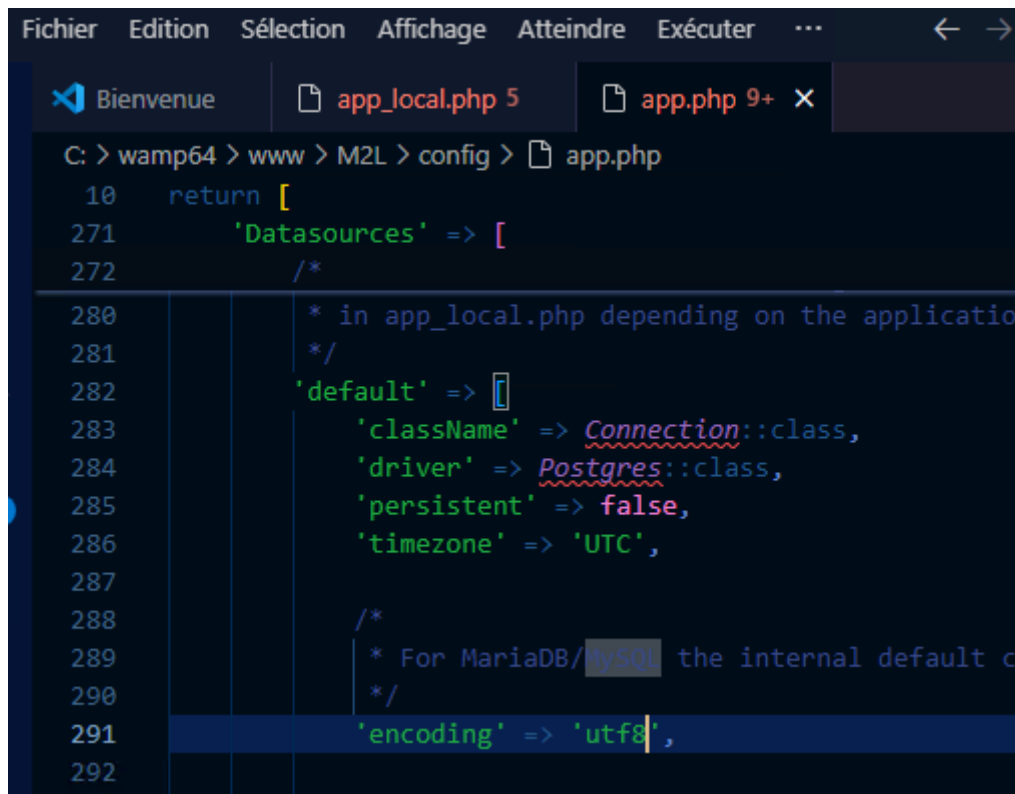




```
Fichier  Edition  Sélection  Affichage  Atteindre  Exécuter  ...  <  >
Bienvenue  app_local.php 5  app.php 9+ X
C: > wamp64 > www > M2L > config > app.php
10  return [
271      'Datasources' => [
272          /*
280          * in app_local.php depending on the application
281          */
282          'default' => [
283              'className' => Connection::class,
284              'driver' => Postgres::class,
285              'persistent' => false,
286              'timezone' => 'UTC',
287
288              /*
289              * For MariaDB/MySQL the internal default c
290              */
291              'encoding' => 'utf8',
292
```

Database

 CakePHP is able to connect to the database.

- Enlevez les commentaires de l'extensions de PHP pgsql et pdo_pgsql

```
C:\wamp64\www\M2L\bin>cake migrations migrate
Database driver 'Cake\Database\Driver\Postgres' cannot be used due to a missing PHP extension or unmet dependency. Requested by connection 'default'
```

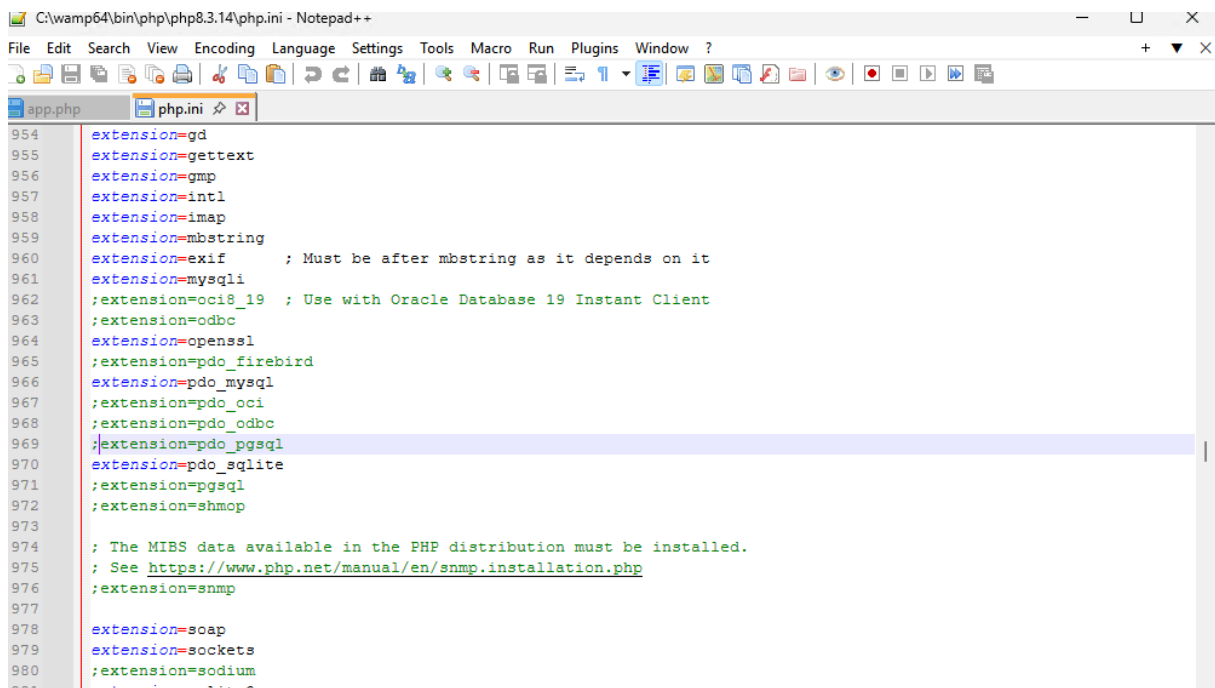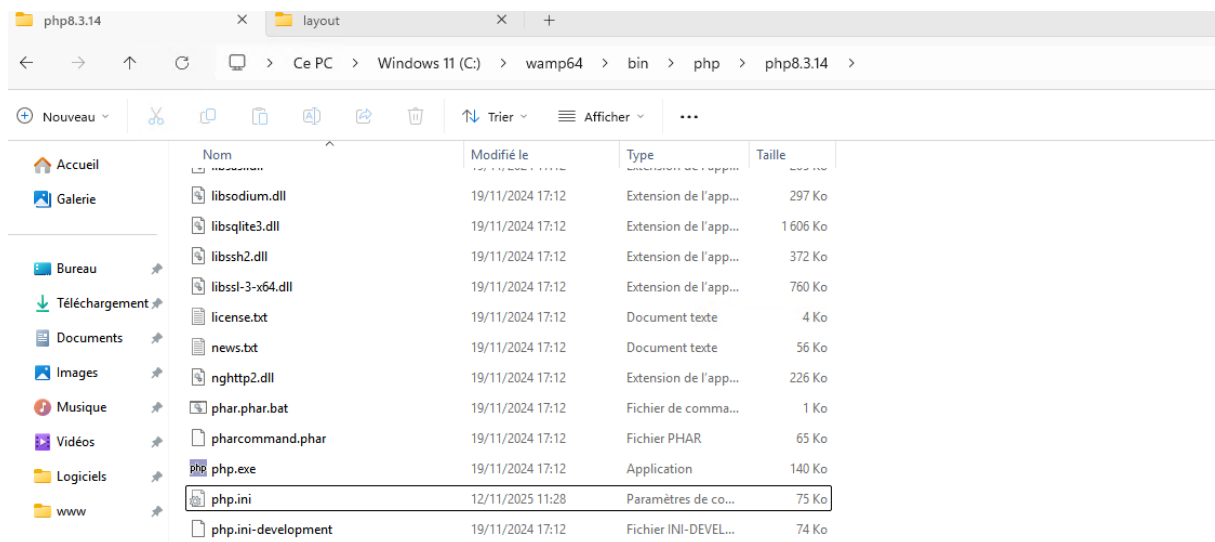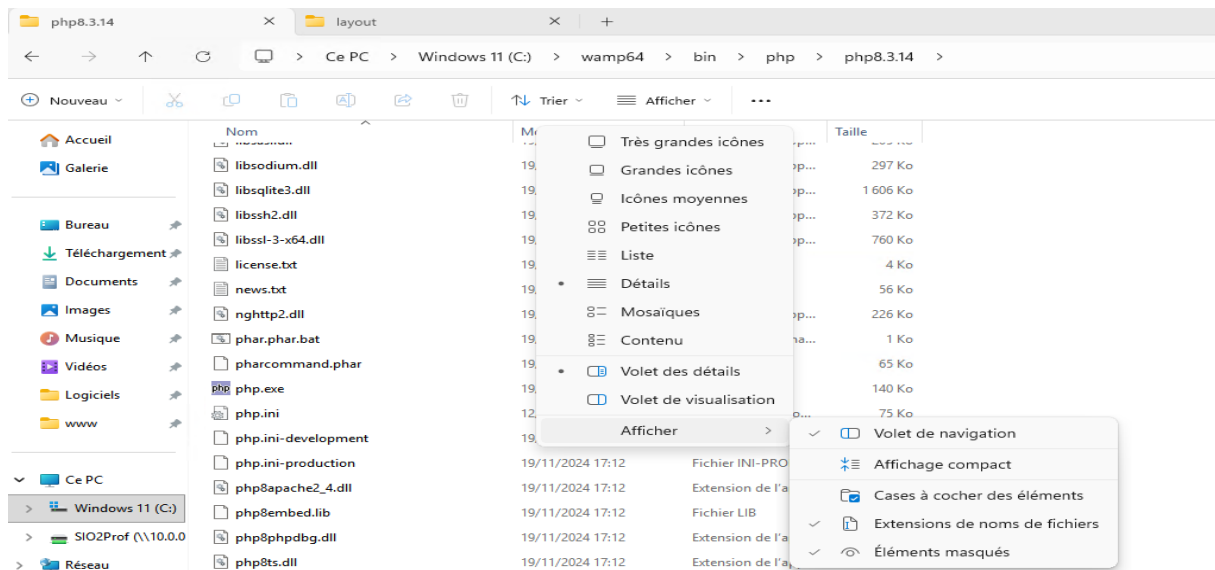

```
954 extension=gd
955 extension=gettext
956 extension=gmp
957 extension=intl
958 extension=imap
959 extension=mbstring
960 extension=exif ; Must be after mbstring as it depends on it
961 extension=mysqli
962 ;extension=oci8_19 ; Use with Oracle Database 19 Instant Client
963 ;extension=odbc
964 extension=openssl
965 ;extension=pdo_firebird
966 extension=pdo_mysql
967 ;extension=pdo_oci
968 ;extension=pdo_odbc
969 extension=pdo_pgsql
970 extension=pdo_sqlite
971 extension=pgsql
972 ;extension=shmop
973
974 ; The MIBS data available in the PHP distribution must be installed.
975 ; See https://www.php.net/manual/en/snmp.installation.php
976 ;extension=snmp
977
978 extension=soap
979 extension=sockets
980 ;extension=sodium
981 extension=sqlite3
982 ;extension=sysvshm
983 ;extension=tidy
984 extension=xsl
985 ;extension=zend_test
986 extension=zip
```

- Faire les relations postgres pour la BDD

```
postgres=# ALTER DATABASE m2l OWNER TO toto;
ALTER DATABASE
postgres=# |
```


- Créer la table Divisions avec ses initiales.

```
C:\wamp64\www\M2L\bin>cake bake migration CreateDivisions name:string created modified

Creating file C:\wamp64\www\M2L\config\Migrations\20251117113807_CreateDivisions.php
Wrote 'C:\wamp64\www\M2L\config\Migrations\20251117113807_CreateDivisions.php'

C:\wamp64\www\M2L\bin>cake migrations migrate

== 20251117113807 CreateDivisions: migrating
== 20251117113807 CreateDivisions: migrated 0.1416s
All Done. Took 0.5269s
```

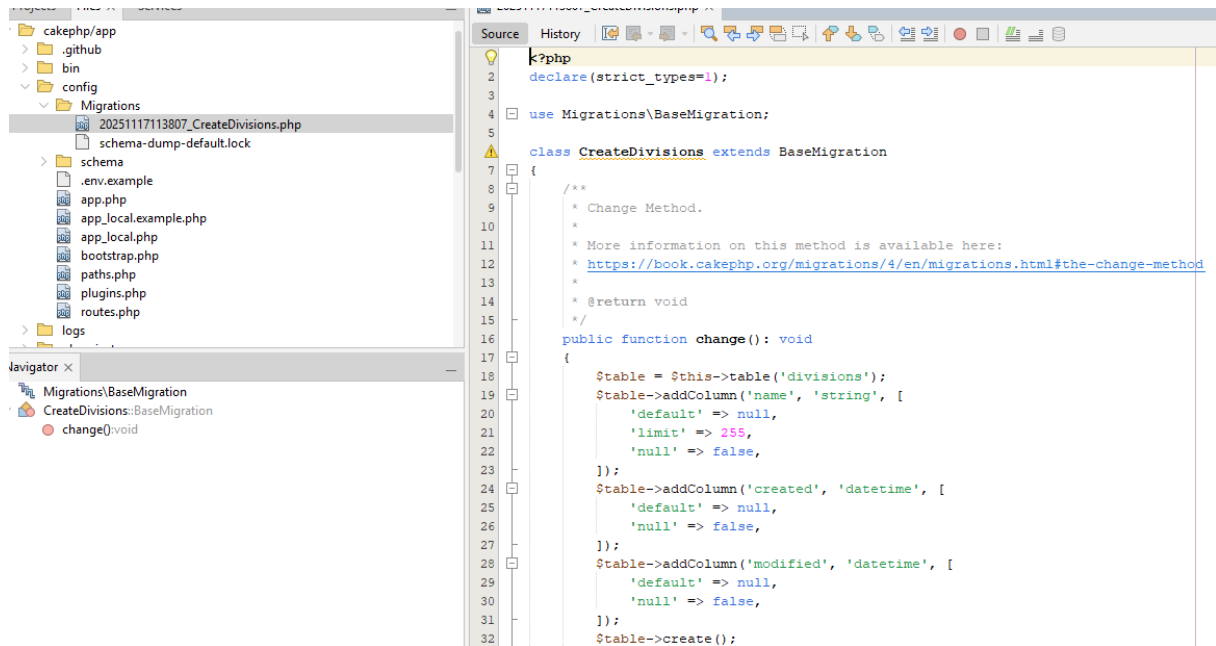

- Créer InsertDivisions et rajouter ses utilisateurs

```


C:\wamp64\www\M2L\bin>cake migrations create InsertDivisions

Creating file C:\wamp64\www\M2L\config\Migrations\20251117115859_InsertDivisions.php
Wrote 'C:\wamp64\www\M2L\config\Migrations\20251117115859_InsertDivisions.php'

C:\wamp64\www\M2L\bin>cake migrations migrate

== 20251117115859 InsertDivisions: migrating
== 20251117115859 InsertDivisions: migrated 0.0101s
All Done. Took 0.3098s

```

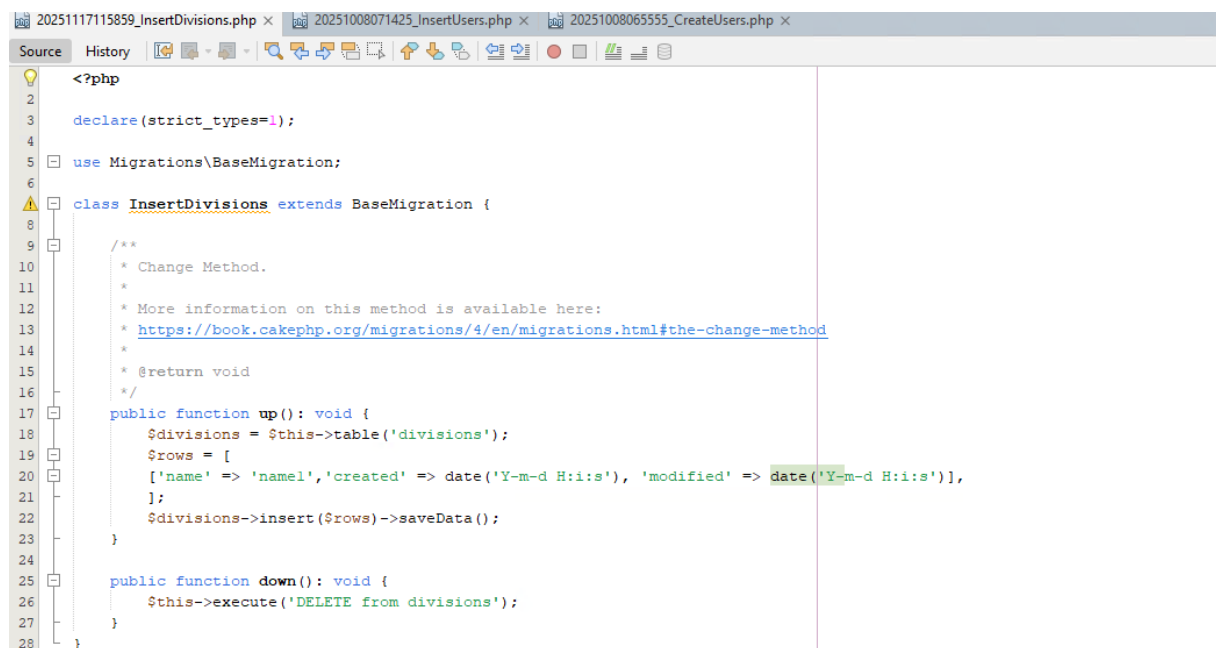

- Dans templates créer un dossier Divisions, dans le dossier Division on crée une fiche index etc.



- Créer la table Divisions avec ses initiales.

```
C:\wamp64\www\M2L\bin>cake bake migration CreateCategories name:string montant:float created modified

Creating file C:\wamp64\www\M2L\config\Migrations\20251210063300_CreateCategories.php
Wrote 'C:\wamp64\www\M2L\config\Migrations\20251210063300_CreateCategories.php'

C:\wamp64\www\M2L\bin>cake migrations migrate

== 20251210063300 CreateCategories: migrating
== 20251210063300 CreateCategories: migrated 0.1959s
All Done. Took 0.4847s
```

- Créer InsertCategories et rajouter ses utilisateurs

```
C:\wamp64\www\M2L\bin>cake migrations create InsertCategories

Creating file C:\wamp64\www\M2L\config\Migrations\20251210063709_InsertCategories.php
Wrote 'C:\wamp64\www\M2L\config\Migrations\20251210063709_InsertCategories.php'

C:\wamp64\www\M2L\bin>cake migrations migrate

== 20251210063709 InsertCategories: migrating
== 20251210063709 InsertCategories: migrated 0.0093s
All Done. Took 0.3082s
```

- Créer la table Type_championnats avec ses initiales.

```
C:\wamp64\www\M2L\bin>cake bake migration CreateType_championnats name:string created modified

Creating file C:\wamp64\www\M2L\config\Migrations\20251210064133_CreateTypeChampionnats.php
Wrote 'C:\wamp64\www\M2L\config\Migrations\20251210064133_CreateTypeChampionnats.php'

C:\wamp64\www\M2L\bin>cake migrations migrate

== 20251210064133 CreateTypeChampionnats: migrating
== 20251210064133 CreateTypeChampionnats: migrated 0.1875s
All Done. Took 0.4743s
```

- Créer Insert Type_championnats

```
C:\wamp64\www\M2L\bin>cake migrations create InsertType_championnats

Creating file C:\wamp64\www\M2L\config\Migrations\20251210064308_InsertTypeChampionnats.php
Wrote 'C:\wamp64\www\M2L\config\Migrations\20251210064308_InsertTypeChampionnats.php'

C:\wamp64\www\M2L\bin>cake migrations migrate

== 20251210064308 InsertTypeChampionnats: migrating
== 20251210064308 InsertTypeChampionnats: migrated 0.0107s
All Done. Took 0.2969s
```

```
20251117115859_InsertDivisions.php × 20251210064308_InsertTypeChampionnats.php ×
Source History
class InsertTypeChampionnats extends BaseMigration
{
    /**
     * Change Method.
     *
     * More information on this method is available here:
     * https://book.cakephp.org/migrations/4/en/migrations.html#the-change-method
     *
     * @return void
     */
    public function up(): void {
        $TypeChampionnats = $this->table('TypeChampionnats');
        $rows = [
            ['name' => 'name1', 'created' => date('Y-m-d H:i:s'), 'modified' => date('Y-m-d H:i:s')],
        ];
        $TypeChampionnats->insert($rows)->saveData();
    }


    public function down(): void {
        $this->execute('DELETE from TypeChampionnats');
    }
}
```

- Créer la table Championnats avec ses initiales et clés étrangères.

```
C:\wamp64\www\M2L\bin>cake bake migration CreateChampionnats name:string num:int num:int num:int created modified
Creating file C:\wamp64\www\M2L\config\Migrations\20251210064845_CreateChampionnats.php
Wrote 'C:\wamp64\www\M2L\config\Migrations\20251210064845_CreateChampionnats.php'

C:\wamp64\www\M2L\bin>cake migrations migrate

== 20251210064845 CreateChampionnats: migrating
== 20251210064845 CreateChampionnats: migrated 0.0869s
All Done. Took 0.5019s
```

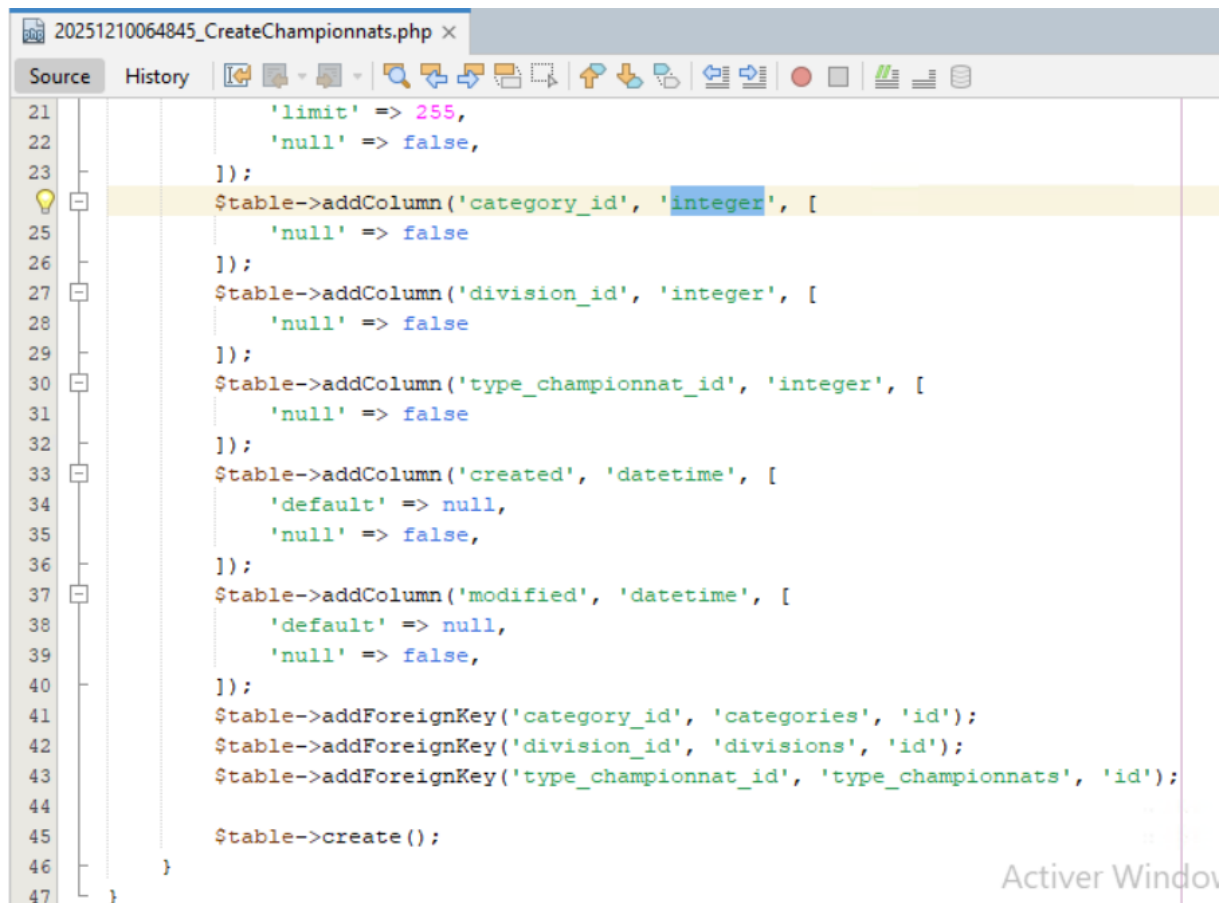

```
21         'limit' => 255,  
22         'null' => false,  
23     ]);  
24     $table->addColumn('category_id', 'integer', [  
25         'null' => false  
26     ]);  
27     $table->addColumn('division_id', 'integer', [  
28         'null' => false  
29     ]);  
30     $table->addColumn('type_championnat_id', 'integer', [  
31         'null' => false  
32     ]);  
33     $table->addColumn('created', 'datetime', [  
34         'default' => null,  
35         'null' => false,  
36     ]);  
37     $table->addColumn('modified', 'datetime', [  
38         'default' => null,  
39         'null' => false,  
40     ]);  
41     $table->addForeignKey('category_id', 'categories', 'id');  
42     $table->addForeignKey('division_id', 'divisions', 'id');  
43     $table->addForeignKey('type_championnat_id', 'type_championnats', 'id');  
44  
45     $table->create();  
46 }  
47 }
```

- Créer la table Clubs avec ses initiales.

```
C:\wamp64\www\M2L\bin>cake bake migration CreateClubs name:string created modified  
Creating file C:\wamp64\www\M2L\config\Migrations\20251212051317_CreateClubs.php  
Wrote 'C:\wamp64\www\M2L\config\Migrations\20251212051317_CreateClubs.php'
```

- Créer Insert Clubs

```
C:\wamp64\www\M2L\bin>cake migrations create InsertClubs  
Creating file C:\wamp64\www\M2L\config\Migrations\20251212051347_InsertClubs.php  
Wrote 'C:\wamp64\www\M2L\config\Migrations\20251212051347_InsertClubs.php'
```

- Créer la table Equipes avec ses initiales.

```
C:\wamp64\www\M2L\bin>cake bake migration CreateEquipes num:int name:string num:int created modified  
Creating file C:\wamp64\www\M2L\config\Migrations\20251212060056_CreateEquipes.php  
Wrote 'C:\wamp64\www\M2L\config\Migrations\20251212060056_CreateEquipes.php'
```

- Créer Insert Equipes

```
C:\wamp64\www\M2L\bin>cake migrations create InsertEquipes  
Creating file C:\wamp64\www\M2L\config\Migrations\20251212060234_InsertEquipes.php  
Wrote 'C:\wamp64\www\M2L\config\Migrations\20251212060234_InsertEquipes.php'
```