Quizz Android Studio

Table des matières

Installation Android Studio 1
Configurer le Pare-Feu 8
Créer la BDD 13
Créer le projet 13
Générer automatiquement les tables 17
Voir les résultats que ça donne 23

I. Cliquer sélectionner

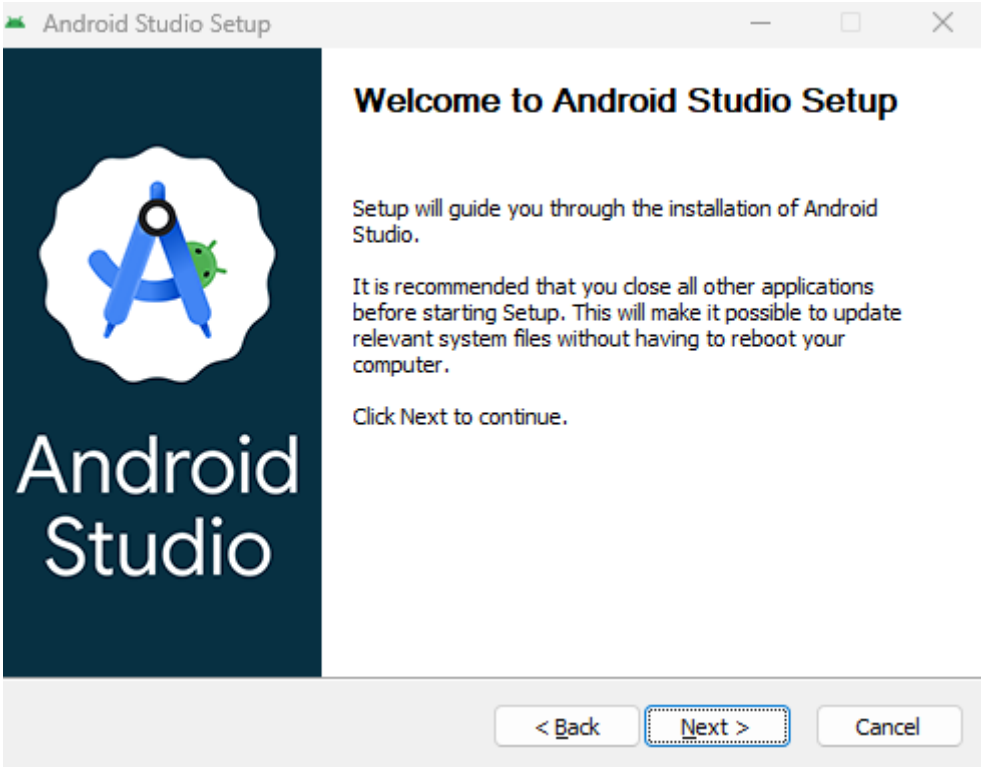

II. Cliquer Next

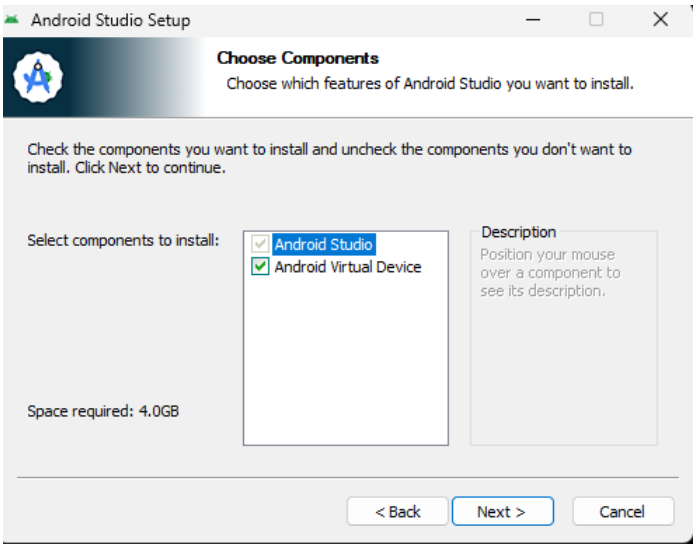

III. Cliquer Next

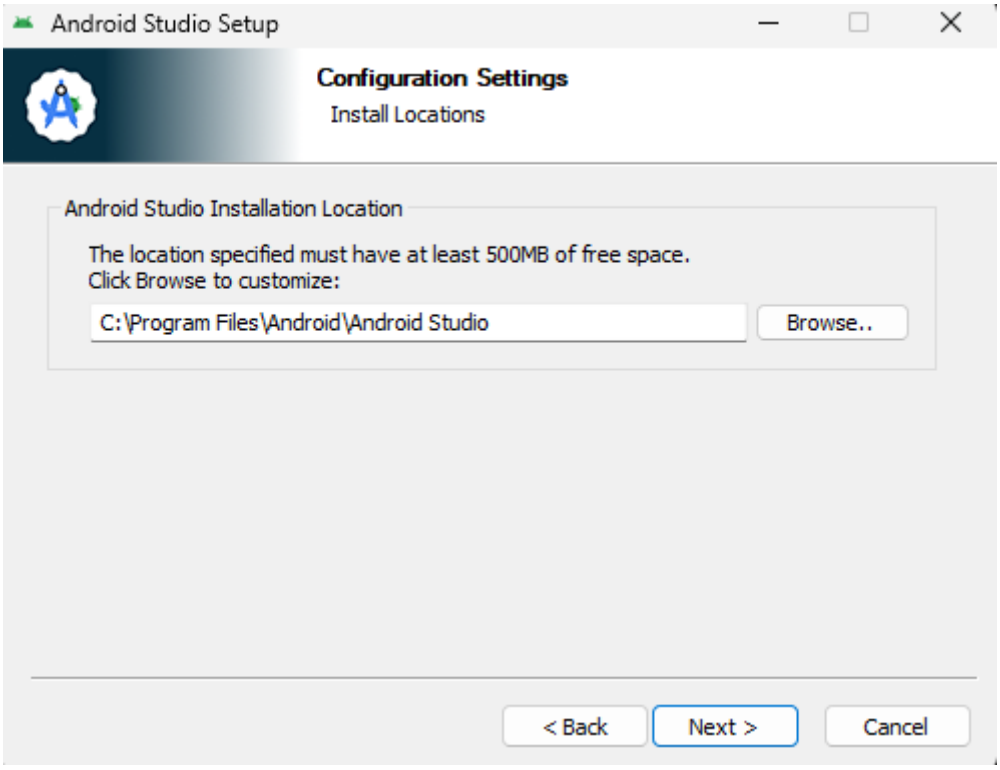

IV. Laissez par default et cliquer Installer

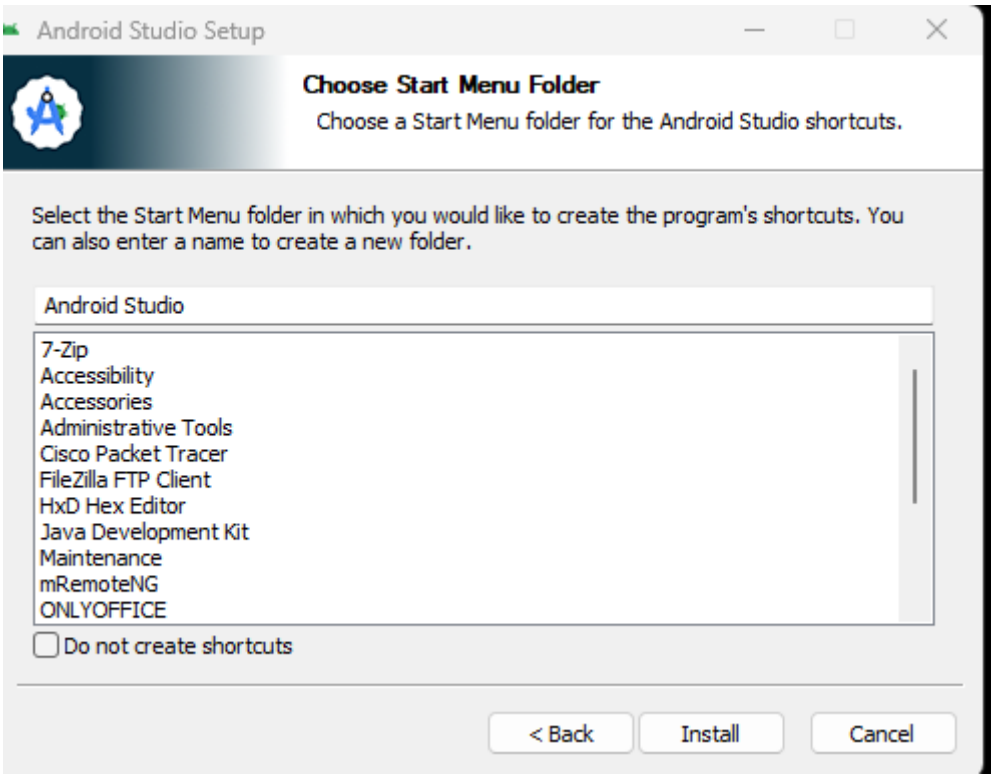

V. Cliquer Finish

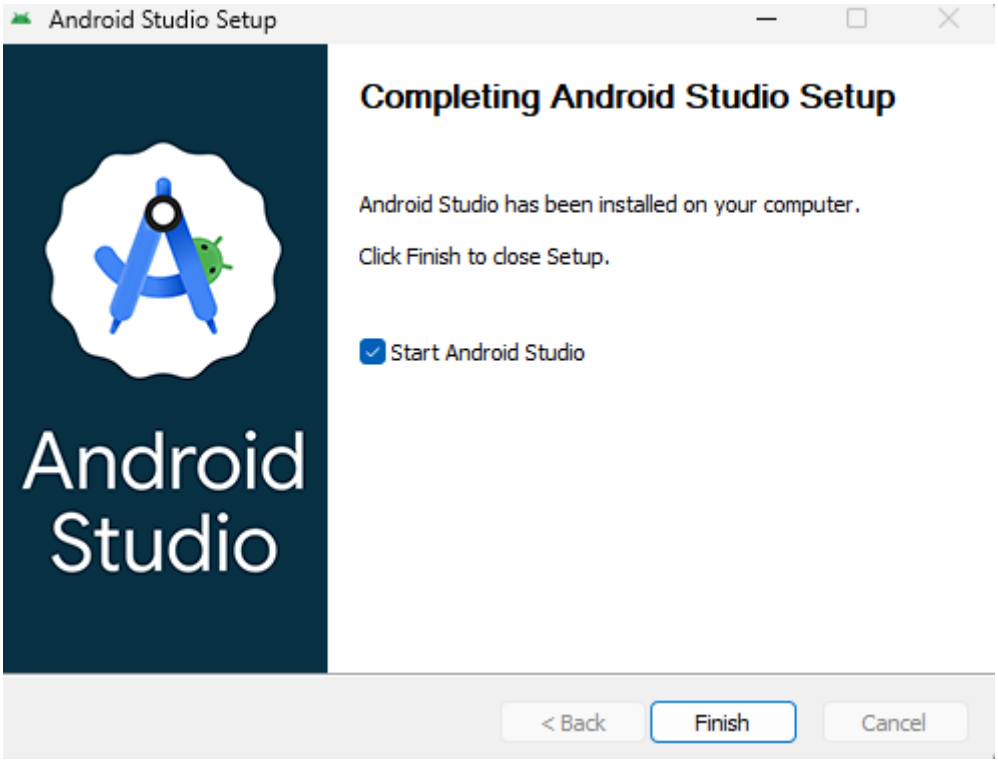

VI. Don’t send

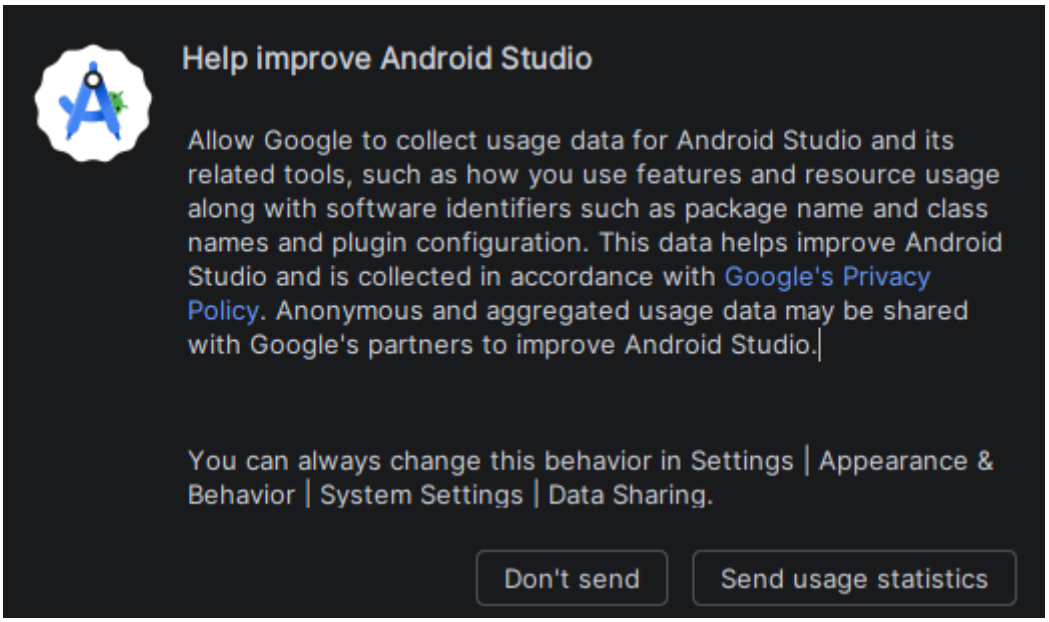

VII. Next

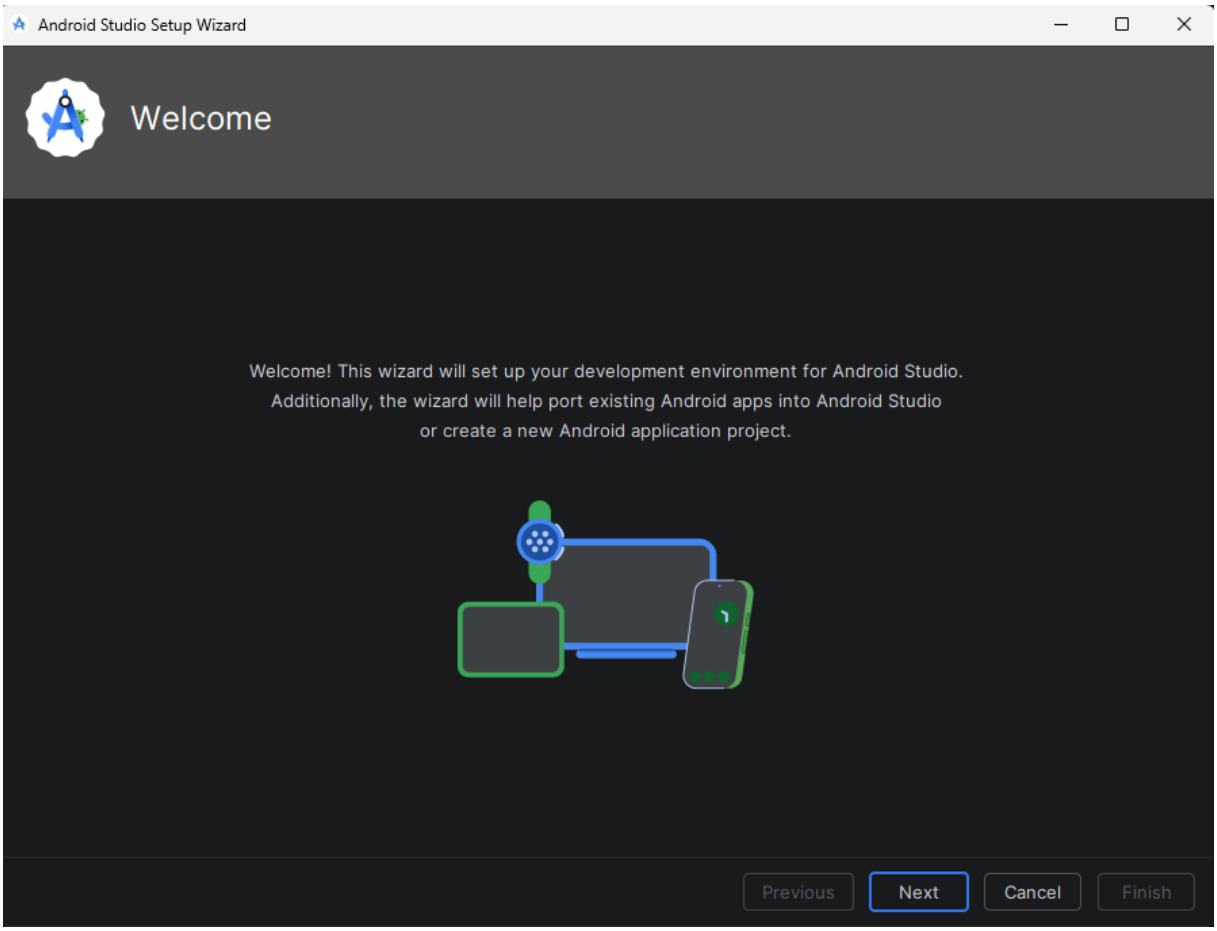

VIII. Standar et Next

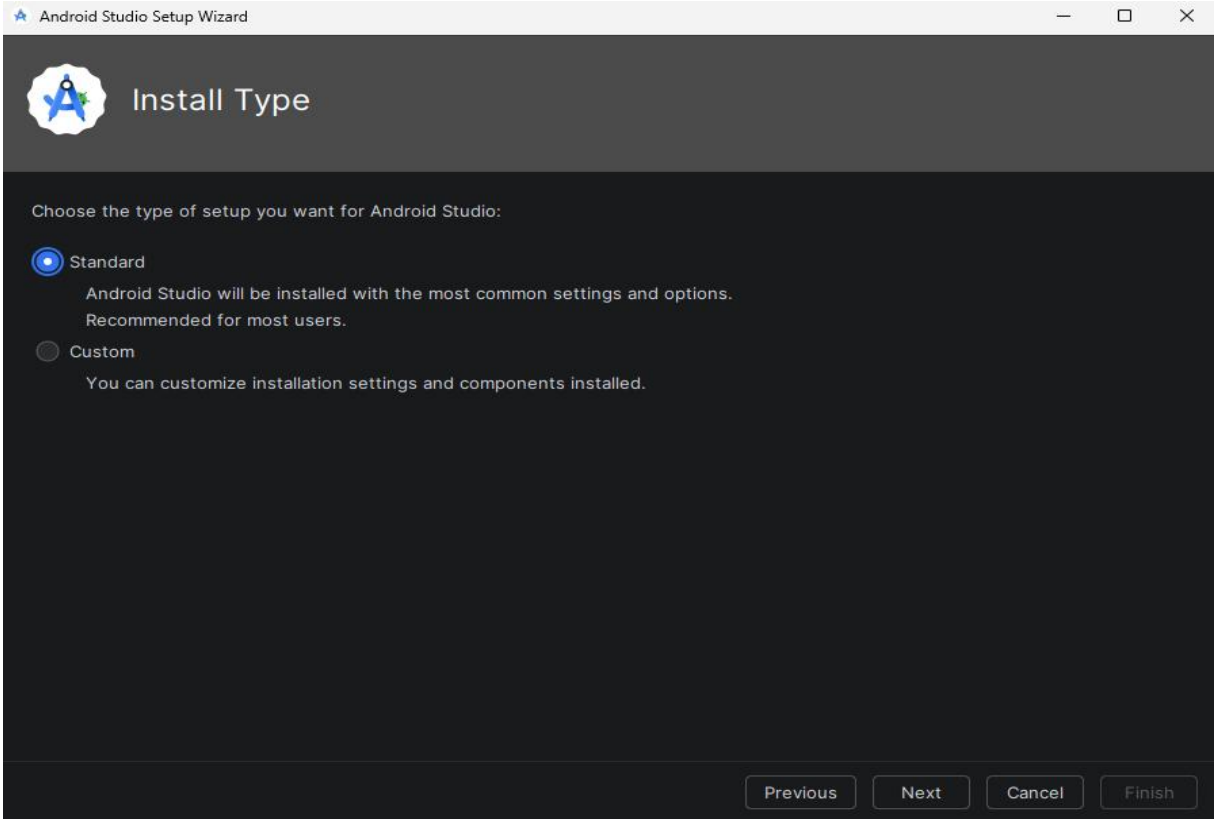

IX. Next

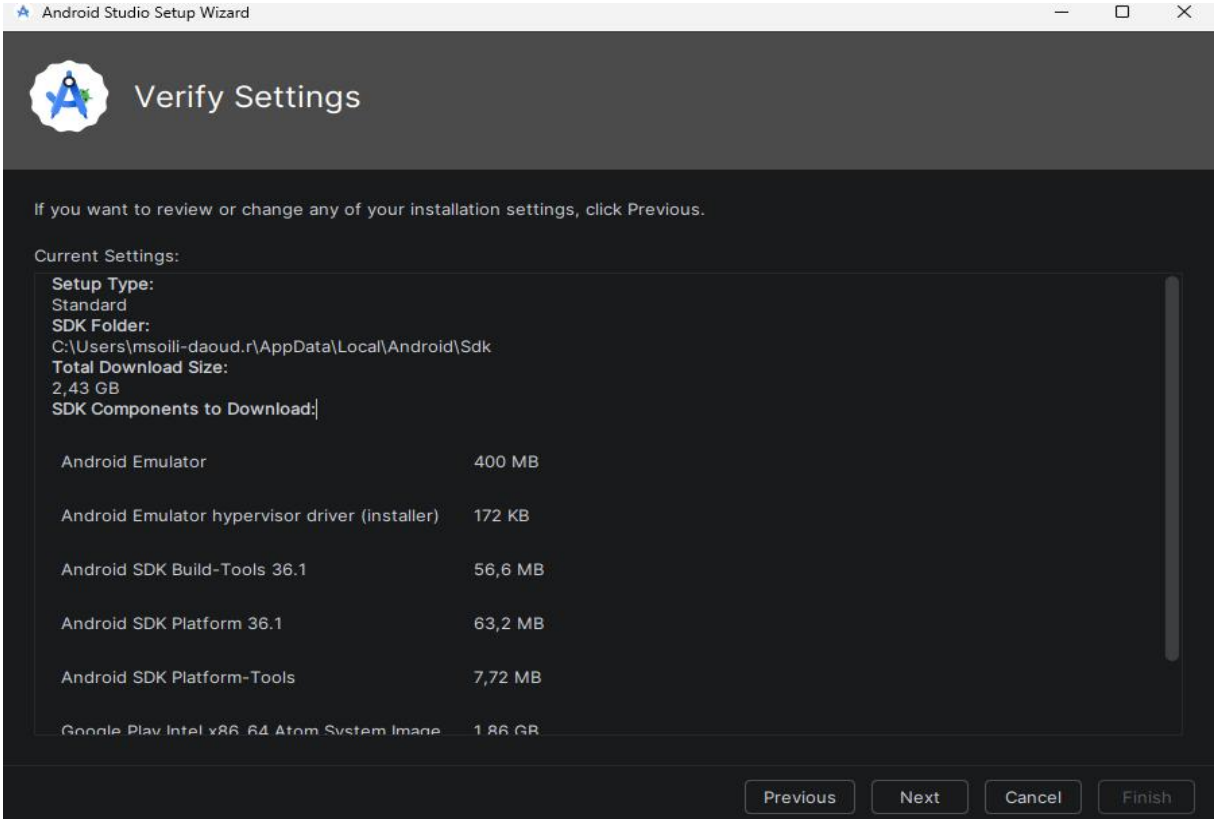

X. Accepte et Next

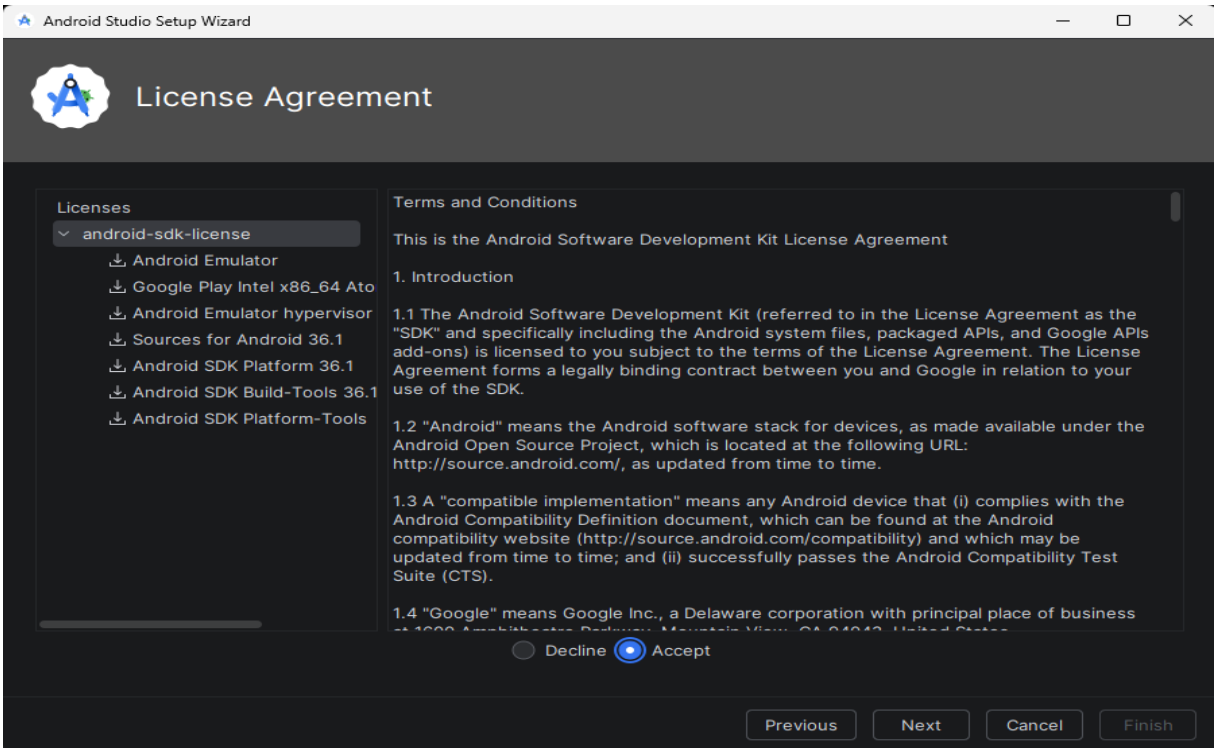

XI. Finish

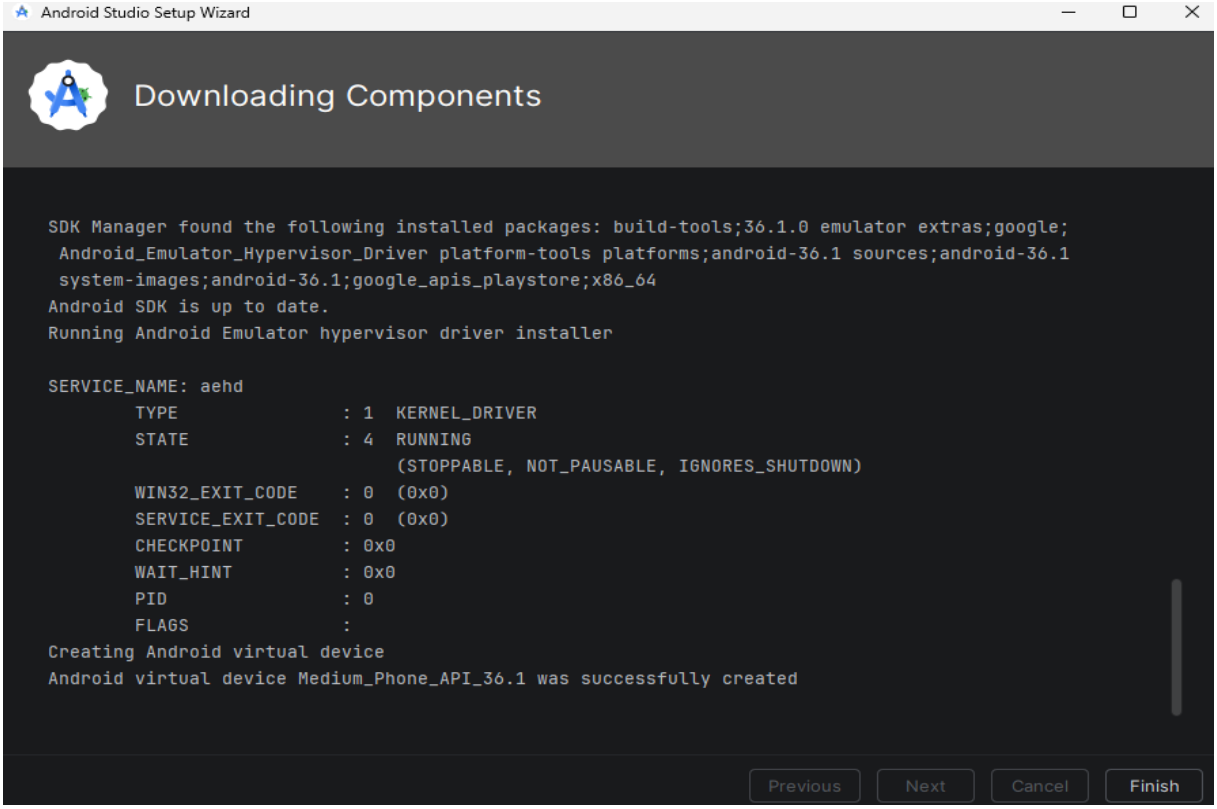

XII. Empty Actity et Next

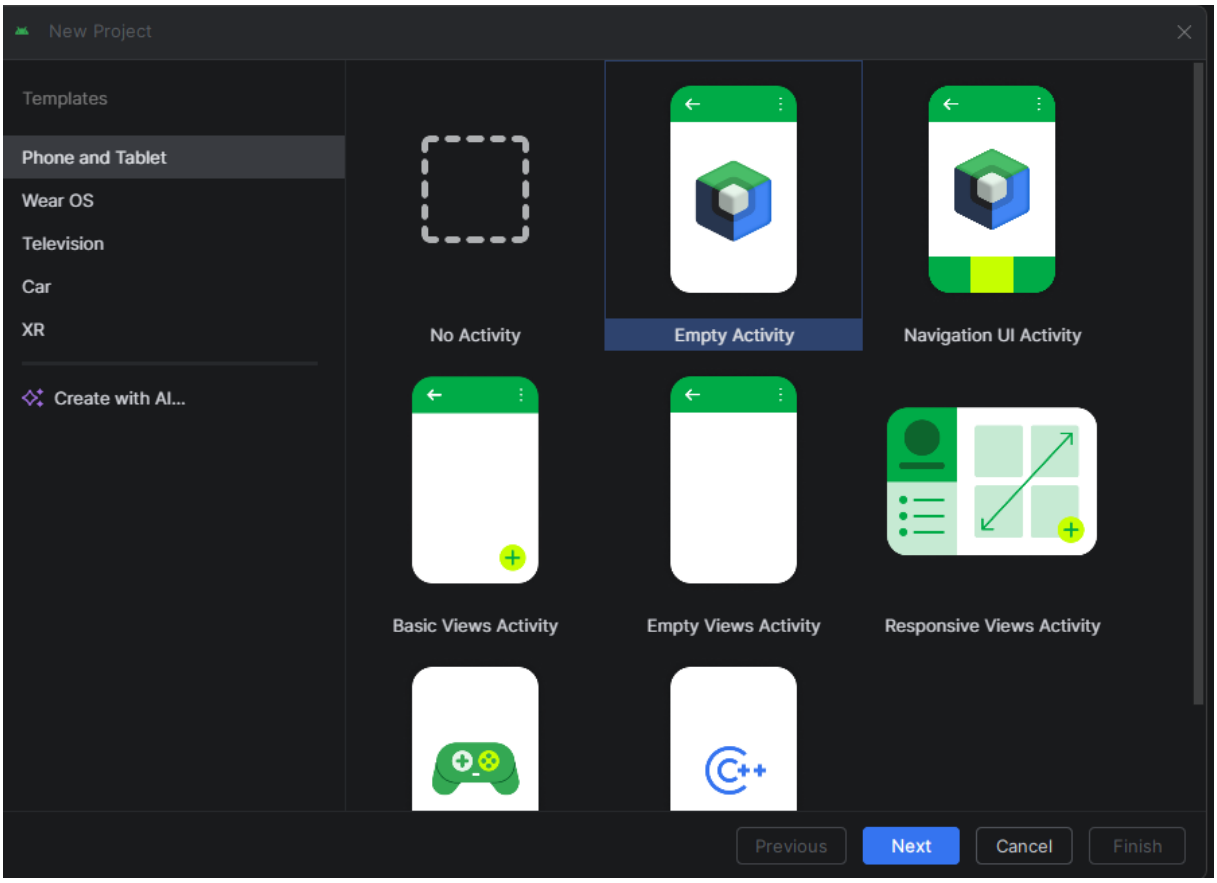
New Project
Templates
Phone and Tablet
Wear OS
Television
Car
XR
Create with AI...
No Activity
Empty Activity
Navigation UI Activity
Basic Views Activity
Empty Views Activity
Responsive Views Activity
Previous
Next
Cancel
Finish

XIII. Finish

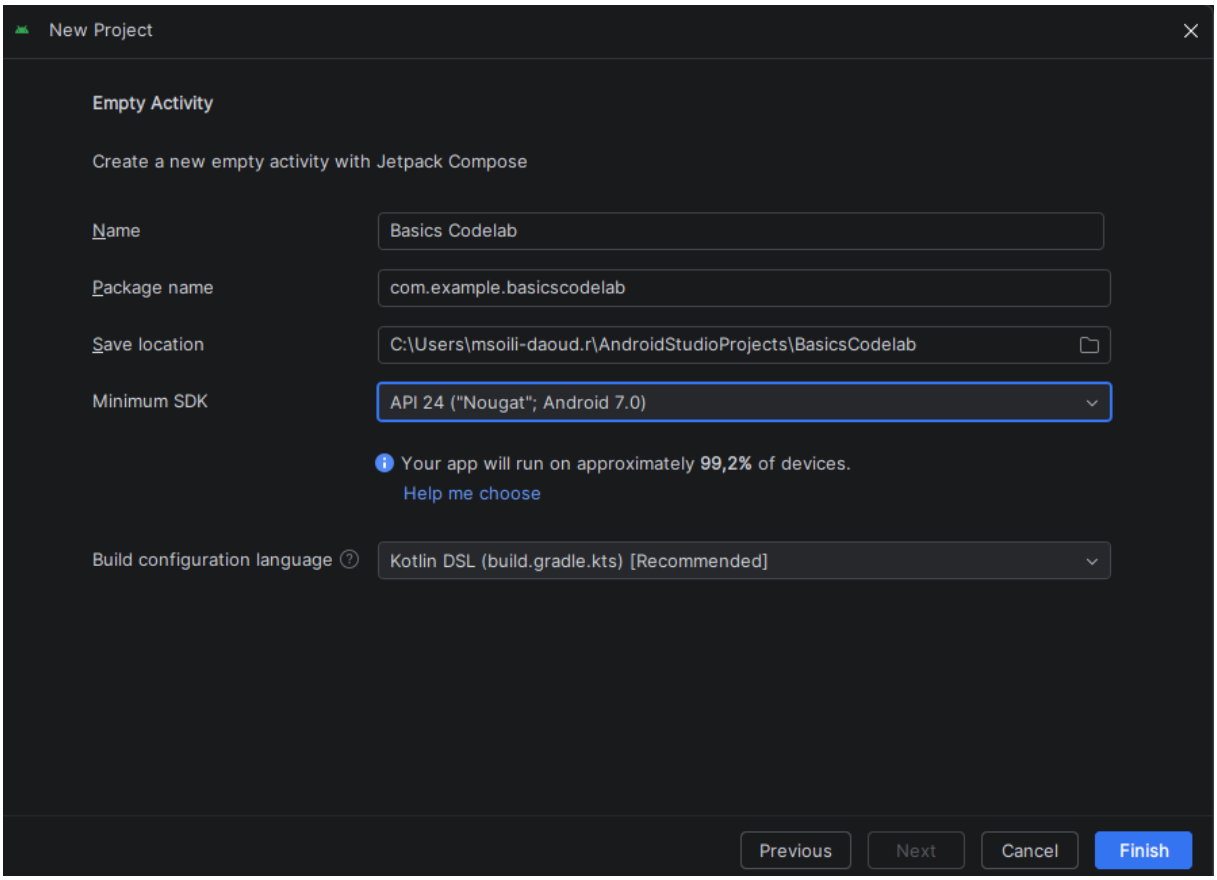
New Project
Empty Activity
Create a new empty activity with Jetpack Compose
Name
Basics Codelab
Package name
com.example.basicscodelab
Save location
C:\Users\msoili-daoud.r\AndroidStudioProjects\BasicsCodelab
Minimum SDK
API 24 ("Nougat"; Android 7.0)
Your app will run on approximately 99,2% of devices.
Help me choose
Build configuration language
Kotlin DSL (build.gradle.kts) [Recommended]
Previous
Next
Cancel
Finish

XIV. On copie IP

```
C:\Users\M'soili>ipconfig

Configuration IP de Windows


Carte Ethernet Ethernet :

   Suffixe DNS propre à la connexion. . . : sio-lnm.com
   Adresse IPv6 de liaison locale. . . . .: fe80::f9ca:3018:332e:dd6a%6
   Adresse IPv4. . . . . . . . . . . . . .: 10.0.11.87
   Masque de sous-réseau. . . . . . . . . : 255.255.0.0
   Passerelle par défaut. . . . . . . . . : 10.0.0.254

C:\Users\M'soili>
```

XV. On colle IP en remplacent l'autre

```
package com.example.quizz.model

import ...

object RetrofitClient {
    // 10.0.2.2 est l'adresse IP de ton PC vue par l'émulateur Android
    1 Usage
    private const val BASE_URL = "http://10.0.11.87/quizz/questionnaires/index-json/"

    val instance: QuizzApiService by lazy {
        Retrofit.Builder()
            .baseUrl(BASE_URL)
            .addConverterFactory(GsonConverterFactory.create())
            .build()
            .create(QuizzApiService::class.java)
    }
}
```

Configurer le Pare-Feu

XVI. Désactiver le pare-feu

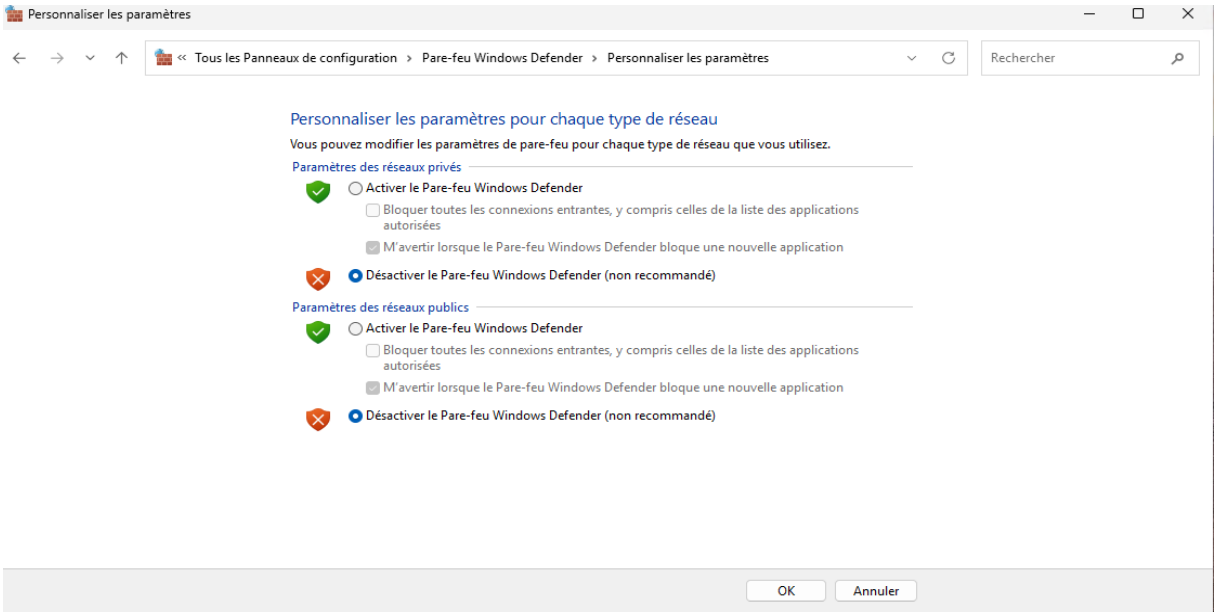

XVII. Paramètre avancer

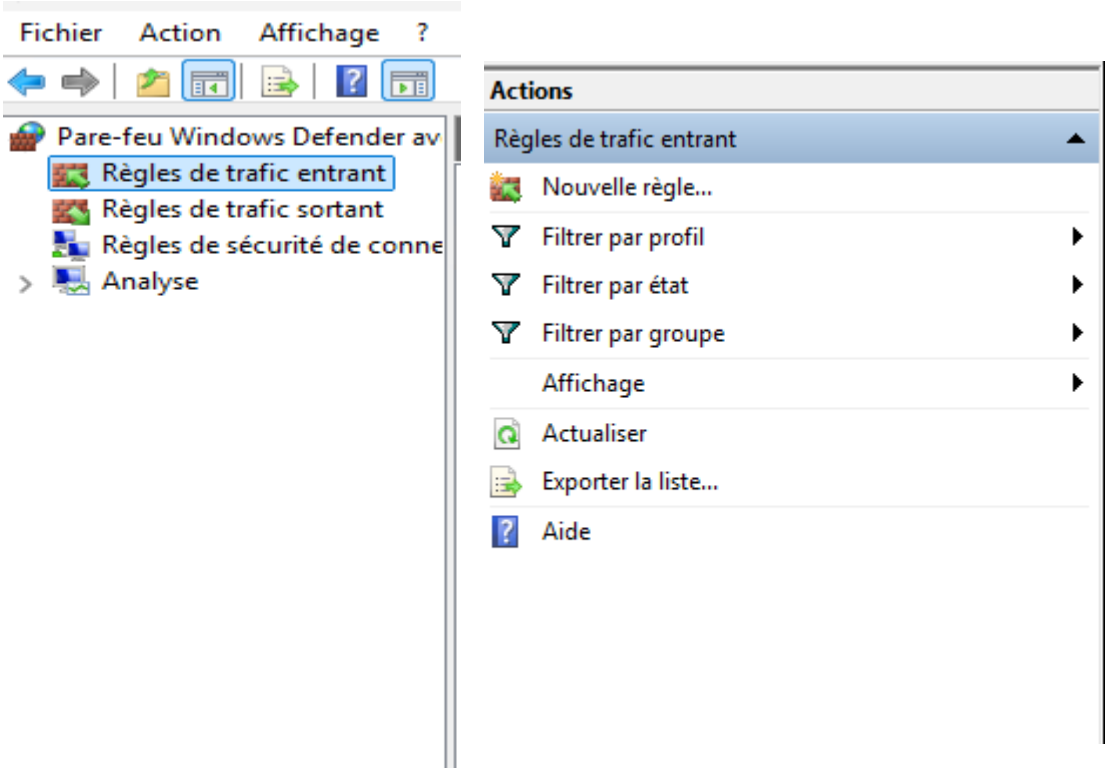

XVIII. Choisissez port et suivant

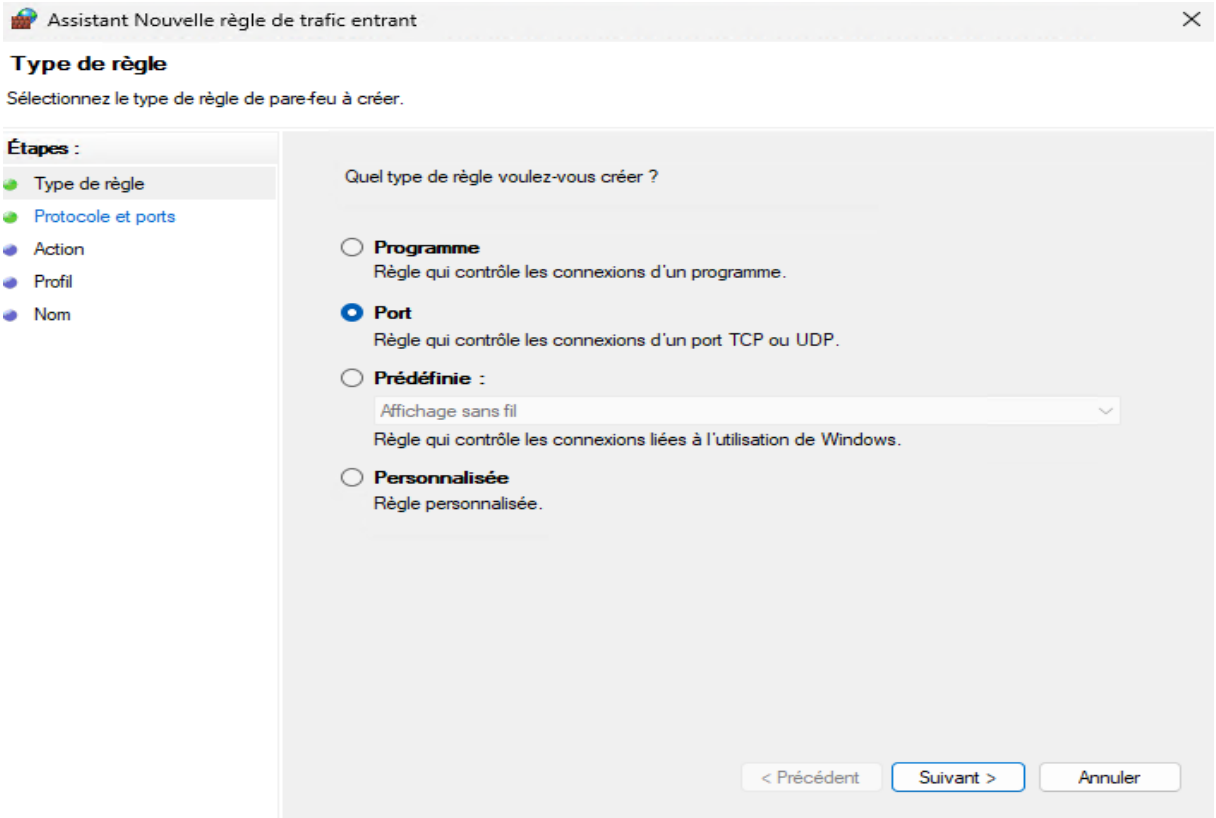

XIX. Modifier les règles comme en dessous et suivant

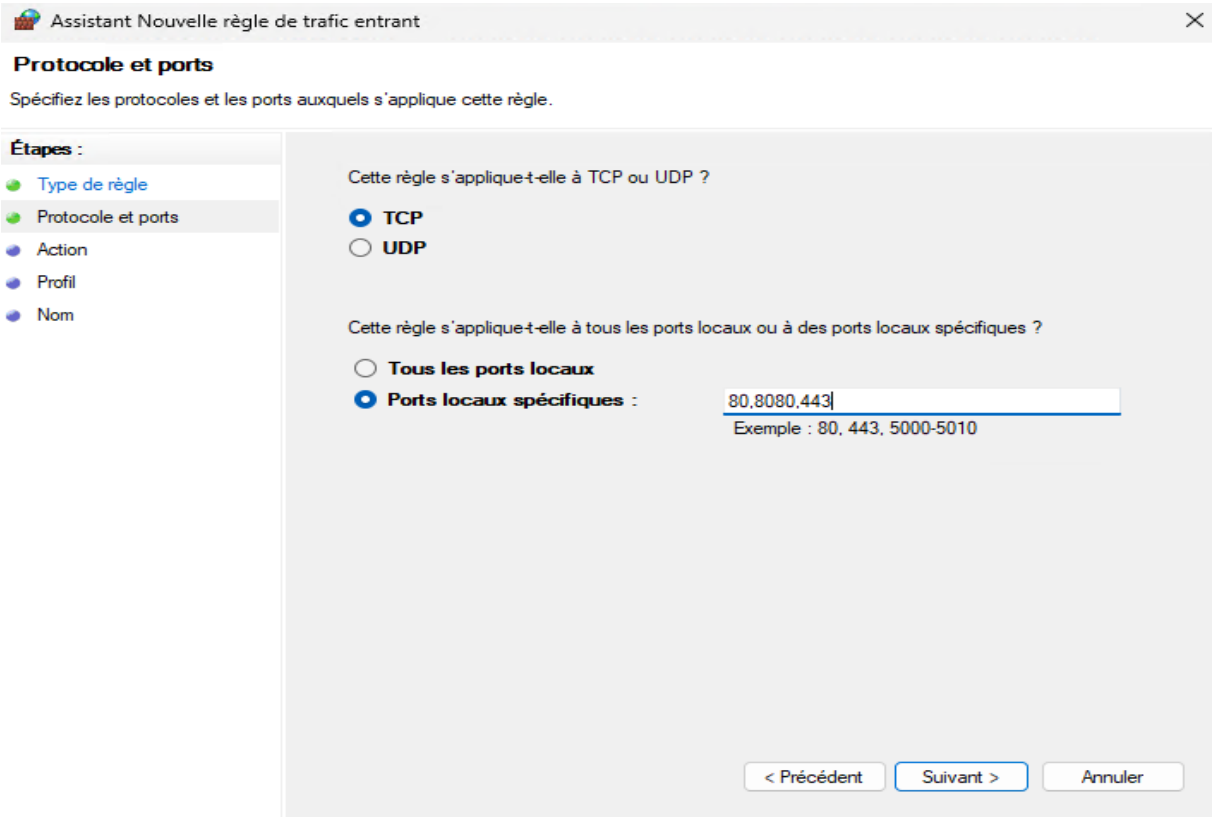

XX. Choisissez la première action et suivant

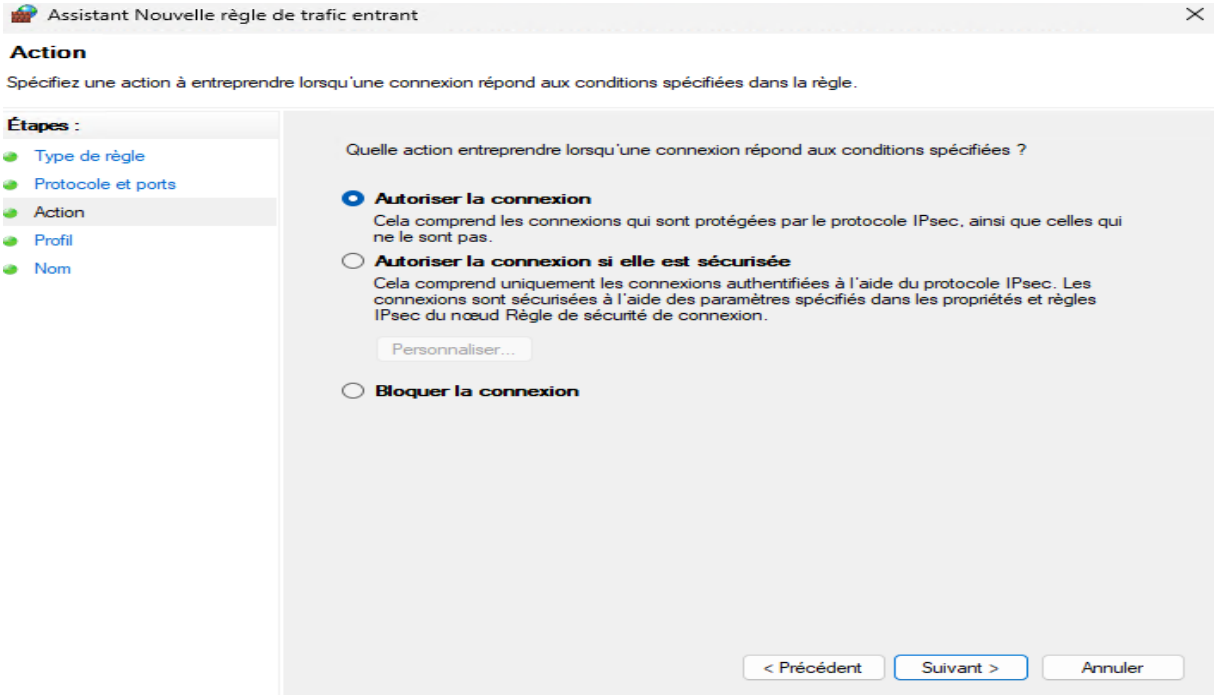

XXI. Cocher tout et suivant

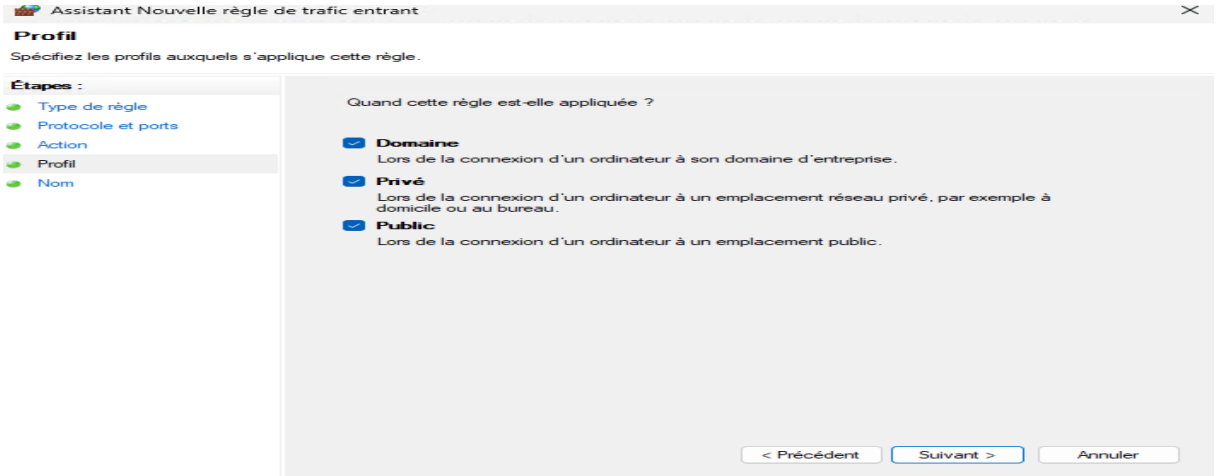

XXII. Ajouter un nom et suivant

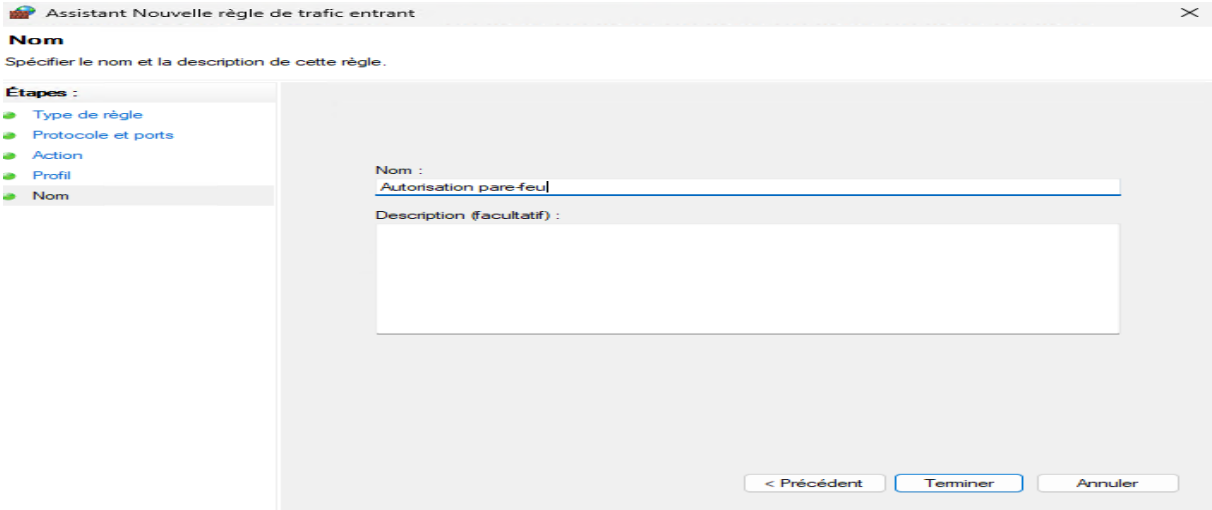

XXIII. WampServer ajoutez Require all granted dans http-vhosts.conf

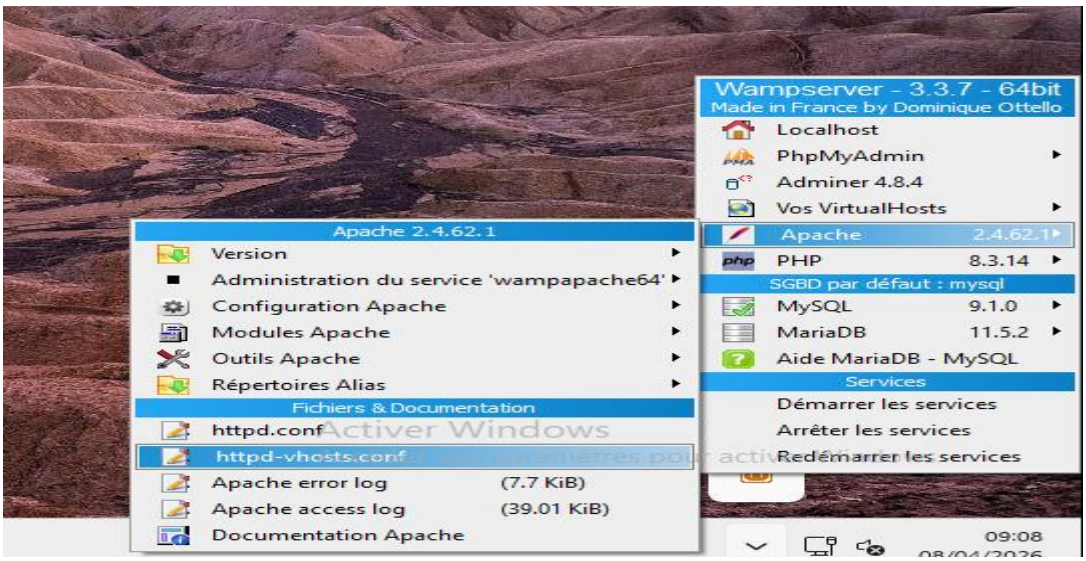

```
# Virtual Hosts
#
<VirtualHost _default_:80>
  ServerName localhost
  ServerAlias localhost
  DocumentRoot "${INSTALL_DIR}/www"
  <Directory "${INSTALL_DIR}/www/">
    Options +Indexes +Includes +FollowSymLinks +MultiViews
    AllowOverride All
    Require all granted
  </Directory>
</VirtualHost>
```

Créer la BDD

XXIV. Configurer la BDD

```
SQL Shell (psql)

Server [localhost]:
Database [postgres]:
Port [5432]:
Username [postgres]:
Mot de passe pour l'utilisateur postgres :

psql (18.0)
Attention : l'encodage console (850) diffère de l'encodage Windows (1252).
            Les caractères 8 bits peuvent ne pas fonctionner correctement.
            Voir la section « Notes aux utilisateurs de Windows » de la page
            référence de psql pour les détails.
Saisissez « help » pour l'aide.

postgres=# CREATE USER admquizz whit password "Bts2025@?";
ERREUR:  option « whit » du rôle non reconnue
LIGNE 1 : CREATE USER admquizz whit password "Bts2025@?";
                                 ^
postgres=# CREATE USER admquizz with password "Bts2025@?";
ERREUR:  erreur de syntaxe sur ou près de « "Bts2025@?" »
LIGNE 1 : CREATE USER admquizz with password "Bts2025@?";
                                             ^
postgres=# CREATE USER admquizz with password 'Bts2025@?';
CREATE ROLE
postgres=# Create database appquizz;
CREATE DATABASE
postgres=# alter databse quizz owner to admquizz;
ERREUR:  erreur de syntaxe sur ou près de « databse »
LIGNE 1 : alter databse quizz owner to admquizz;
                ^
postgres=# alter database quizz owner to admquizz;
ERREUR:  la base de données « quizz » n'existe pas
postgres=# alter database appquizz owner to admquizz;
ALTER DATABASE
postgres=# grant all privilleges on database appquizz to admquizz;
ERREUR:  erreur de syntaxe sur ou près de « privilleges »
LIGNE 1 : grant all privilleges on database appquizz to admquizz;
                    ^
postgres=# grant all privileges on database appquizz to admquizz;
GRANT
postgres=#
```

Créer le projet

XXV. Créer le projet

```
C:\wamp64\www>composer create-project --prefer-dist cakephp/app:5.* quizz
Creating a "cakephp/app:5.*" project at "./quizz"
Installing cakephp/app (5.3.1)
  - Downloading cakephp/app (5.3.1)
  - Installing cakephp/app (5.3.1): Extracting archive
Created project in C:\wamp64\www\quizz
Loading composer repositories with package information
Updating dependencies
Lock file operations: 87 installs, 0 updates, 0 removals
```

XXVI. Browse choisissez le projet que vous venez de créer

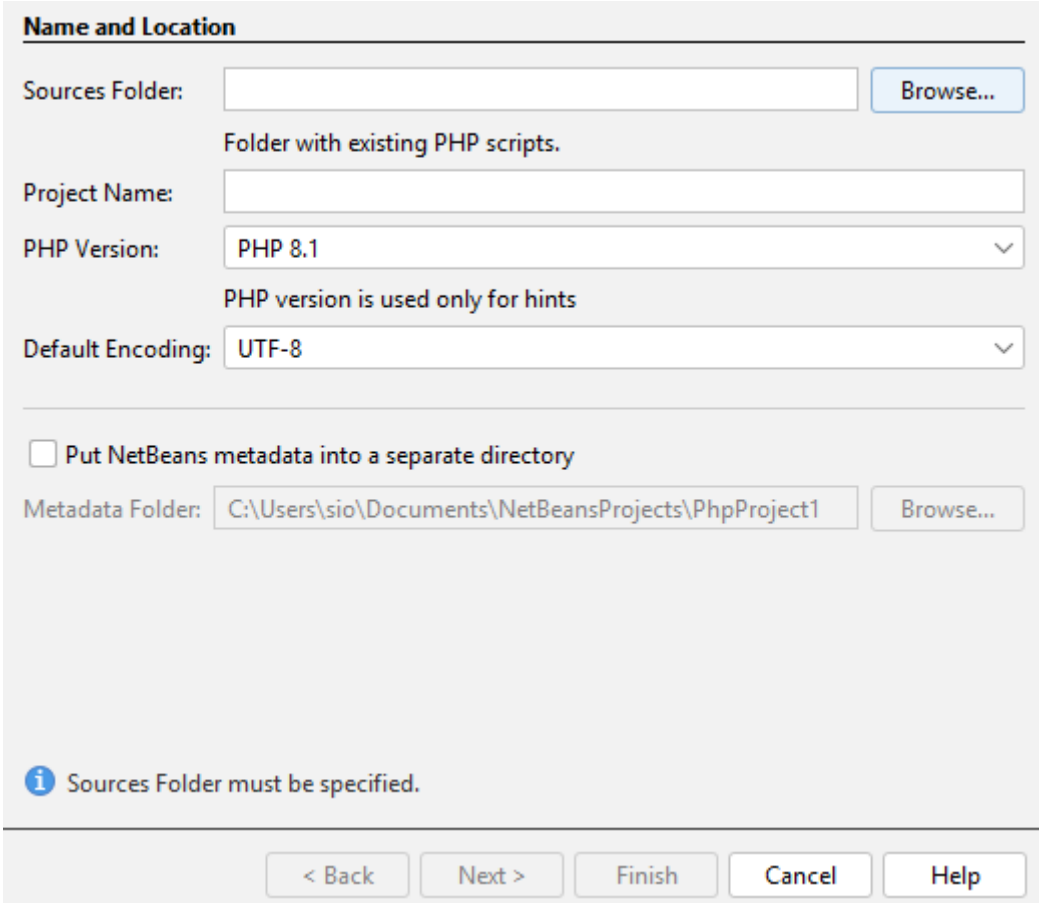

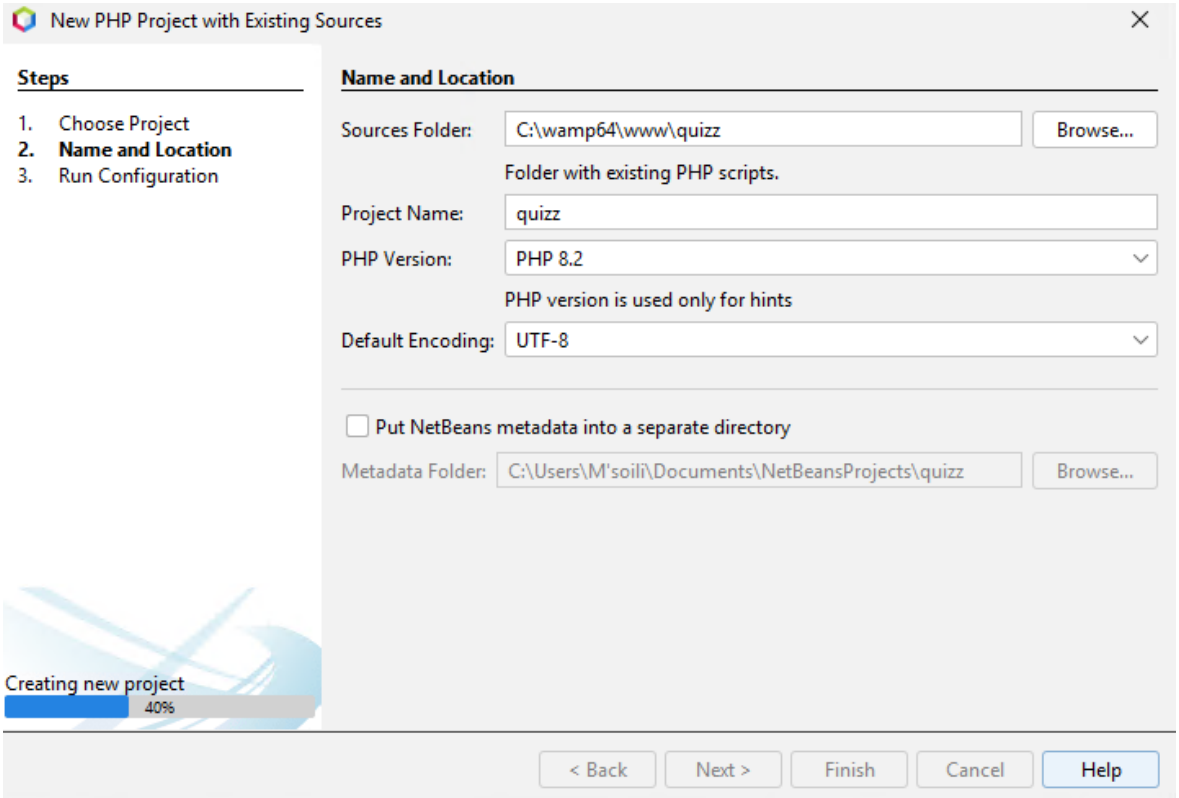

XXVII. Modifie ton app_local

index.php × app_local.php ×

Source History

```
40      'Datasources' => [
41          'default' => [
42              'host' => 'localhost',
43              /*
44               * CakePHP will use the default DB port based on the d
45               * MySQL on MAMP uses port 8889, MAMP users will want
46               * the following line and set the port accordingly
47               */
48              //'port' => 'non_standard_port_number',
49
50              'username' => 'admquizz',
51              'password' => 'Bts2025@?',
52
53              'database' => appquizz',
54              /*
55               * If not using the default 'public' schema with the P
56               * set it here.
57               */
58              //'schema' => 'myapp',
59
60              /*
61               * You can use a DSN string to set the entire configur
62               */
63              'url' => env('DATABASE_URL', null),
64          ],
65
```

XXVIII. Mettre Postgres ligne 290 au lieu de MySQL et changer ligne 297 en utf8

index.php × app_local.php × app.php ×

Source History

```
277     'Datasources' => [
278         /*
279          * These configurations should contain permanent settings u
280          * by all environments.
281          *
282          * The values in app_local.php will override any values set
283          * and should be used for local and per-environment configu
284          *
285          * Environment variable-based configurations can be loaded
286          * in app_local.php depending on the application's needs.
287          */
288         'default' => [
289             'className' => Connection::class,
290             'driver' => Postgres::class,
291             'persistent' => false,
292             'timezone' => 'UTC',
293
294             /*
295              * For MariaDB/MySQL the internal default changed from
296              */
297             'encoding' => 'utf8',
298
```

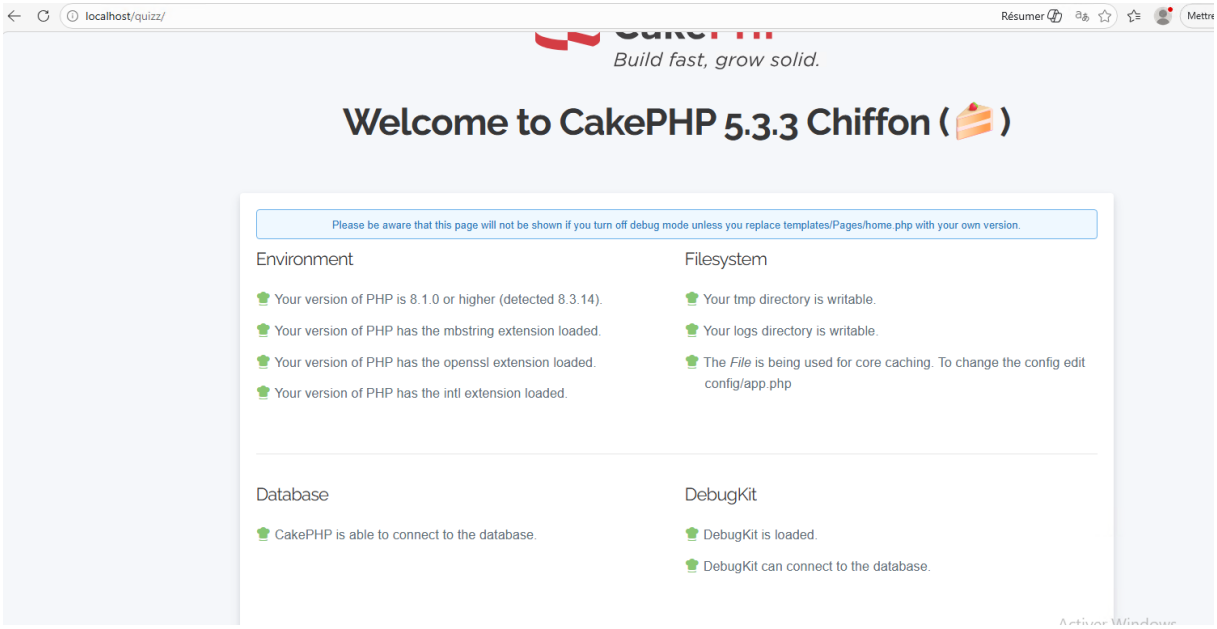

Générer automatiquement les tables

```
Creating file C:\wamp64\www\quizz\config\Migrations\20260330112137_CreateThemes.php
Wrote `C:\wamp64\www\quizz\config\Migrations\20260330112137_CreateThemes.php`


C:\wamp64\www\quizz\bin>cake bake migration CreateNiveauxs niv:string nbPoints:integer created modified

Creating file C:\wamp64\www\quizz\config\Migrations\20260330112307_CreateNiveauxs.php
Wrote `C:\wamp64\www\quizz\config\Migrations\20260330112307_CreateNiveauxs.php`


C:\wamp64\www\quizz\bin>cake bake migration CreateTypes libelle:string created modified

Creating file C:\wamp64\www\quizz\config\Migrations\20260330112358_CreateTypes.php
Wrote `C:\wamp64\www\quizz\config\Migrations\20260330112358_CreateTypes.php`


C:\wamp64\www\quizz\bin>cake bake migration CreateQuestions libelle:string created modified

Creating file C:\wamp64\www\quizz\config\Migrations\20260330112518_CreateQuestions.php
Wrote `C:\wamp64\www\quizz\config\Migrations\20260330112518_CreateQuestions.php`


C:\wamp64\www\quizz\bin>cake bake migration CreateReponses libelle:string iscorrect:boolean created modified

Creating file C:\wamp64\www\quizz\config\Migrations\20260330113800_CreateReponses.php
Wrote `C:\wamp64\www\quizz\config\Migrations\20260330113800_CreateReponses.php`
```

20260330113822_CreateQuestionsThemes.php × 20260330113908_CreateQuestionnairesQuestions.php ×

Source History

```php
    public function change(): void
    {
        $table = $this->table('questionnaires_questions');
        $table->addColumn('questionnaire_id', 'integer', [
            'default' => null,
            'limit' => 11,
            'null' => false,
        ]);
        $table->addForeignKey('questionnaire_id', 'questionnaires', 'id');
        $table->addColumn('question_id', 'integer', [
            'default' => null,
            'limit' => 11,
            'null' => false,
        ]);
        $table->addForeignKey('question_id', 'questions', 'id');
        $table->addColumn('created', 'datetime', [
            'default' => null,
            'null' => false,
        ]);
        $table->addColumn('modified', 'datetime', [
            'default' => null,
            'null' => false,
        ]);
        $table->create();
    }
}
```

20260330113822_CreateQuestionsThemes.php × 20260330113908_CreateQuestionnairesQuestions.php ×

Source History

```php
     * @return void
     */
    public function change(): void
    {
        $table = $this->table('questions_themes');
        $table->addColumn('question_id', 'integer', [
            'default' => null,
            'limit' => 11,
            'null' => false,
        ]);
        $table->addForeignKey('question_id', 'questions', 'id');
        $table->addColumn('theme_id', 'integer', [
            'default' => null,
            'limit' => 11,
            'null' => false,
        ]);
        $table->addForeignKey('theme_id', 'themes', 'id');
        $table->addColumn('created', 'datetime', [
            'default' => null,
            'null' => false,
        ]);
        $table->addColumn('modified', 'datetime', [
            'default' => null,
            'null' => false,
        ]);
        $table->create();
    }
}
```

...hp | 20260330113908_CreateQuestionnairesQuestions.php | 20260330113446_CreateReponses.php | 20260330112453_CreateQuestions.php

Source | History

```php
    public function change(): void
    {
        $table = $this->table('questions');
        $table->addColumn('libelle', 'string', [
            'default' => null,
            'limit' => 255,
            'null' => false,
        ]);
        $table->addColumn('type_id', 'integer', [
            'null' => false
        ]);
        $table->addForeignKey('type_id', 'types', 'id');
        $table->addColumn('niveau_id', 'integer', [
            'null' => false
        ]);
        $table->addForeignKey('niveau_id', 'niveaux', 'id');
        $table->addColumn('created', 'datetime', [
            'default' => null,
            'null' => false,
        ]);
        $table->addColumn('modified', 'datetime', [
            'default' => null,
            'null' => false,
        ]);
        $table->create();
    }
}
```

20260330113822_CreateQuestionsThemes.php | 20260330113908_CreateQuestionnairesQuestions.php | 20260330113446_CreateReponses.php

Source | History

```php
     *
     * @return void
     */
    public function change(): void
    {
        $table = $this->table('reponses');
        $table->addColumn('libelle', 'string', [
            'default' => null,
            'limit' => 255,
            'null' => false,
        ]);
        $table->addColumn('iscorrect', 'boolean', [
            'default' => null,
            'null' => false,
        ]);
        $table->addColumn('question_id', 'integer', [
            'null' => false
        ]);
        $table->addForeignKey('question_id', 'questions', 'id');
        $table->addColumn('created', 'datetime', [
            'default' => null,
            'null' => false,
        ]);
        $table->addColumn('modified', 'datetime', [
            'default' => null,
            'null' => false,
        ]);
        $table->create();
    }
}
```

XXIX. Migrer pour que les modifications soient prises

```
C:\wamp64\www\quizz\bin>cake migrations migrate

 == 20260330111829 CreateQuestionnaires: migrating
 == 20260330111829 CreateQuestionnaires: migrated 0.1396s

 == 20260330112039 CreateThemes: migrating
 == 20260330112039 CreateThemes: migrated 0.0378s

 == 20260330112239 CreateNiveaux: migrating
 == 20260330112239 CreateNiveaux: migrated 0.0591s

 == 20260330112347 CreateTypes: migrating
 == 20260330112347 CreateTypes: migrated 0.0546s

 == 20260330112453 CreateQuestions: migrating
 == 20260330112453 CreateQuestions: migrated 0.3381s

 == 20260330113446 CreateReponses: migrating
 == 20260330113446 CreateReponses: migrated 0.0592s

 == 20260330113822 CreateQuestionsThemes: migrating
 == 20260330113822 CreateQuestionsThemes: migrated 0.0951s

 == 20260330113908 CreateQuestionnairesQuestions: migrating
 == 20260330113908 CreateQuestionnairesQuestions: migrated 0.1794s
All Done. Took 1.8756s
```

```
C:\wamp64\www\quizz\bin>cake migrations status
using migration table cake_migrations

+--------+----------------+-------------------------------+
| Status | Migration ID   | Migration Name                |
+--------+----------------+-------------------------------+
| up     | 20260330111829 | CreateQuestionnaires          |
| up     | 20260330112039 | CreateThemes                  |
| up     | 20260330112239 | CreateNiveaux                 |
| up     | 20260330112347 | CreateTypes                   |
| up     | 20260330112453 | CreateQuestions               |
| up     | 20260330113446 | CreateReponses                |
| up     | 20260330113822 | CreateQuestionsThemes         |
| up     | 20260330113908 | CreateQuestionnairesQuestions |
+--------+----------------+-------------------------------+
```

XXX. Ça sert à générer l'interface graphique

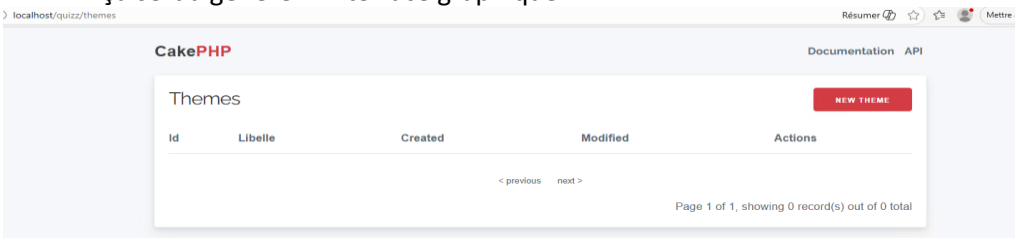

```
C:\wamp64\www\quizz\bin>cake bake all Themes
Bake All
---------------------------------------------------------------------------
One moment while associations are detected.

Baking table class for Themes...

Creating file C:\wamp64\www\quizz\src\Model\Table\ThemesTable.php
Wrote `C:\wamp64\www\quizz\src\Model\Table\ThemesTable.php`
Deleted `C:\wamp64\www\quizz\src\Model\Table\.gitkeep`

Baking entity class for Theme...

Creating file C:\wamp64\www\quizz\src\Model\Entity\Theme.php
Wrote `C:\wamp64\www\quizz\src\Model\Entity\Theme.php`
Deleted `C:\wamp64\www\quizz\src\Model\Entity\.gitkeep`

Baking test fixture for Themes...
C:\wamp64\www\quizz\bin>cake bake all Questionnaires
Bake All
---------------------------------------------------------------------------
One moment while associations are detected.

Baking table class for Questionnaires...

Creating file C:\wamp64\www\quizz\src\Model\Table\QuestionnairesTable.php
Wrote `C:\wamp64\www\quizz\src\Model\Table\QuestionnairesTable.php`

Baking entity class for Questionnaire...

C:\wamp64\www\quizz\bin>cake bake all Types
Bake All
---------------------------------------------------------------------------
One moment while associations are detected.

Baking table class for Types...

Creating file C:\wamp64\www\quizz\src\Model\Table\TypesTable.php
Wrote `C:\wamp64\www\quizz\src\Model\Table\TypesTable.php`

Baking entity class for Type...

C:\wamp64\www\quizz\bin>cake bake all Niveaux
Bake All
---------------------------------------------------------------------------
One moment while associations are detected.

Baking table class for Niveaux...

Creating file C:\wamp64\www\quizz\src\Model\Table\NiveauxTable.php
Wrote `C:\wamp64\www\quizz\src\Model\Table\NiveauxTable.php`

Baking entity class for Niveaux...
```

```
C:\wamp64\www\quizz\bin>cake bake all Questions
Bake All
---------------------------------------------------------------------------------
One moment while associations are detected.

Baking table class for Questions...

Creating file C:\wamp64\www\quizz\src\Model\Table\QuestionsTable.php
Wrote `C:\wamp64\www\quizz\src\Model\Table\QuestionsTable.php`

Baking entity class for Question...
```

```
C:\wamp64\www\quizz\bin>cake bake all Reponses
Bake All
---------------------------------------------------------------------------------
One moment while associations are detected.

Baking table class for Reponses...

Creating file C:\wamp64\www\quizz\src\Model\Table\ReponsesTable.php
Wrote `C:\wamp64\www\quizz\src\Model\Table\ReponsesTable.php`

Baking entity class for Reponse...
```

...hp | 20260330112453_CreateQuestions.php | bootstrap.php | 20260330112347_CreateTypes.php

Source | History

```php
     * @return void
     */
    public function change(): void
    {
        $table = $this->table('niveaux');
        $table->addColumn('niv', 'string', [
            'default' => null,
            'limit' => 255,
            'null' => false,
        ]);
        $table->addColumn('nbpoints', 'integer', [
            'default' => null,
            'limit' => 11,
            'null' => false,
        ]);
        $table->addColumn('created', 'datetime', [
            'default' => null,
            'null' => false,
        ]);
        $table->addColumn('modified', 'datetime', [
            'default' => null,
            'null' => false,
        ]);
        $table->create();
    }
}

    public function indexJson() {
        $questionnaires = $this->Questionnaires->find('all')
                ->select(['id', 'libelle']) // On ne prend que le strict nécessaire
                ->toArray();

        $this->setRequest($this->getRequest()->withHeader('Accept', 'application/json'));
        $this->set(compact('questionnaires'));
        $this->response = $this->response->withType('application/json');
        $this->viewBuilder()
                ->setClassName('Json')
                ->setOption('serialize', ['questionnaires']);
    }
}
```

Voir les résultats que ça donne

XXXI. Récupérer questions ainsi dates création et modifier

```php
    public function viewJson($id = null) {
        $id = (int) $id;
        $questions = $this->Questionnaires->get($id, contain: ['Questions']);
        $this->set(compact('questions'));

        $this->setRequest($this->getRequest()->withHeader('Accept', 'application/json'));
        $this->set(compact('questions'));
        $this->response = $this->response->withType('application/json');
        $this->viewBuilder()
                ->setClassName('Json')
                ->setOption('serialize', ['questions']);
    }
}
```

localhost/quizz/questionnaires/view-json/1

Impression automatique


```
{
    "questions": {
        "id": 1,
        "libelle": "premier",
        "created": "2026-04-01T06:49:57+00:00",
        "modified": "2026-04-01T06:49:57+00:00",
        "questions": []
    }
}
```


XXXII. Récupérer questionnaires sans dates création et modifier

```php
    public function viewJson($id = null) {
        $id = (int) $id;
        // On récupère le questionnaire par son ID avec toute sa hiérarchie
        $questionnaire = $this->Questionnaires->get($id, [
            'fields' => ['id','libelle'],
            'contain' => [
                'Questions' => [
                    'fields' => ['id', 'libelle', 'type_id', 'niveau_id'],
                    'Niveaux' => [
                        'fields' => ['id', 'niv', 'nbpoints'],
                    ],
                    'Themes' => [
                        'fields' => ['id','libelle'],
                    ],
                    'Reponses' => [
                        'fields' => ['id','libelle','iscorrect','question_id'],
                    ],
                    'Types' => [
                        'fields' => ['id','libelle'],
                    ]
                ]
            ]
        ]);
        $this->setRequest($this->getRequest()->withHeader('Accept', 'application/json'));
        $this->set(compact('questionnaire'));
        $this->response = $this->response->withType('application/json');
        $this->viewBuilder()
                ->setClassName('Json')
                ->setOption('serialize', ['questionnaire']);
    }
}
```

localhost/quizz/questionnaires/view-json/1

Impression automatique


```
{
    "questionnaire": {
        "id": 1,
        "libelle": "premier",
        "questions": []
    }
}
```


XXXIII. Affichage 4 buttons pour un raccourci dans tous les pages.

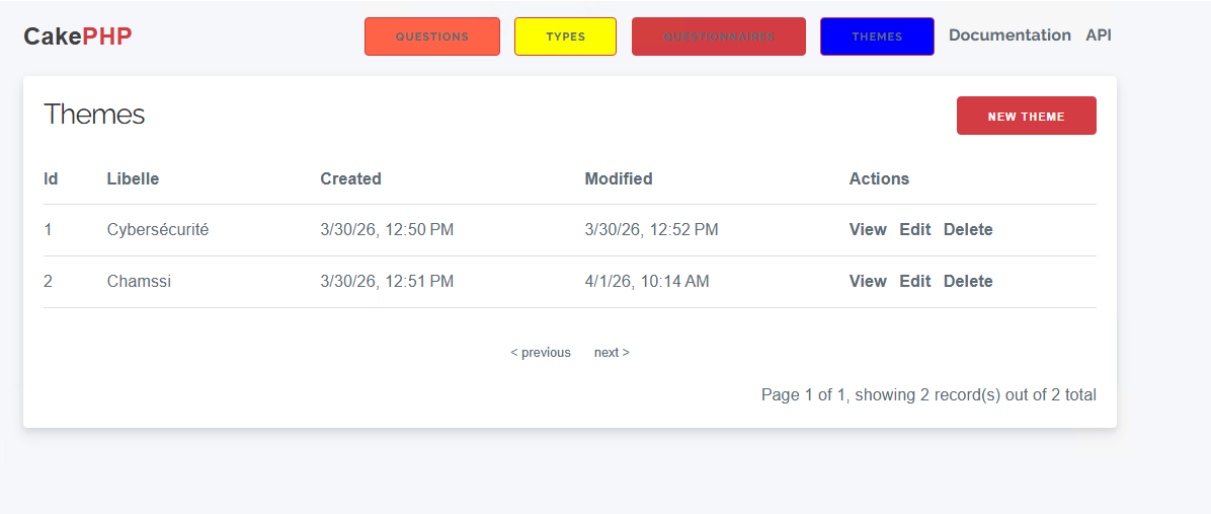

XXXIV. Afficher le nombres questions modifier ligne 9.

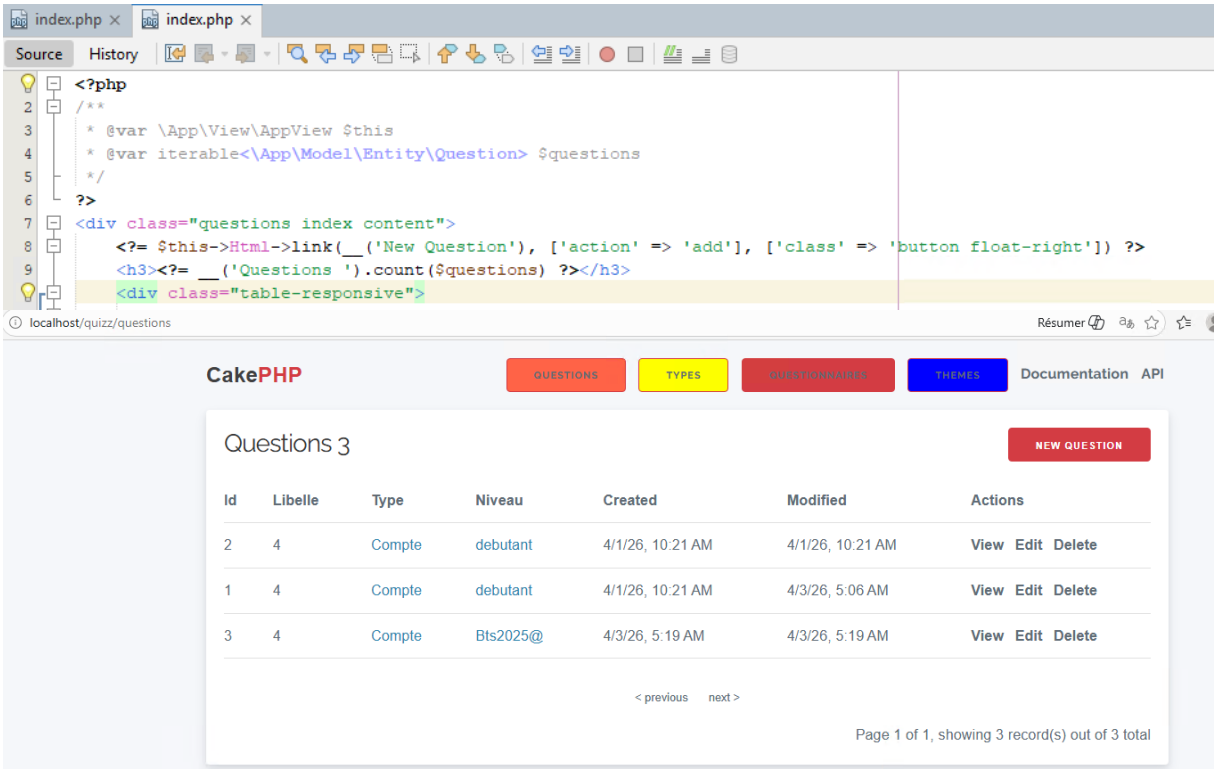

XXXV. Afficher le nombre de questions. Ajouter la lige 16 et 27

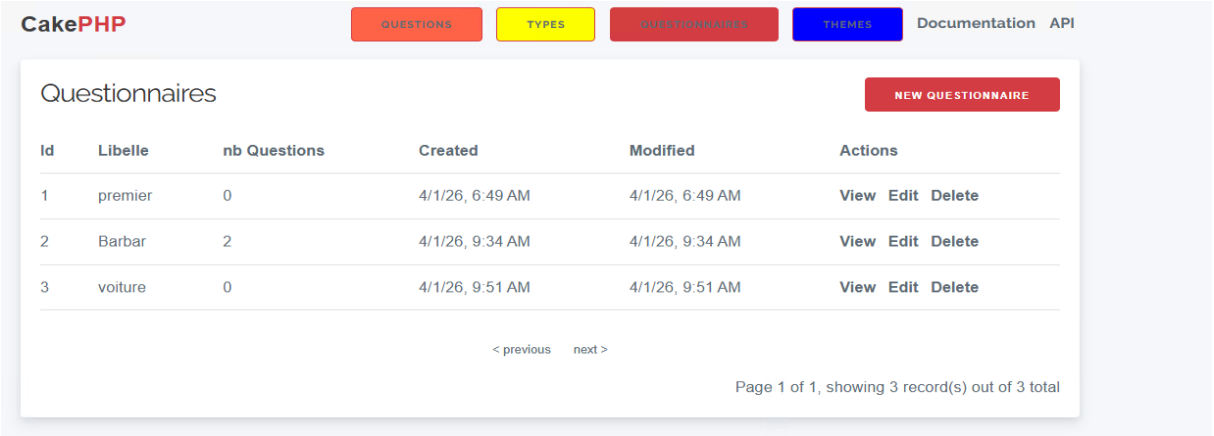


```
7   <div class="questionnaires index content">
8       <?= $this->Html->link(__('New Questionnaire'), ['action' => 'add'], ['class' => 'button f
9       <h3><?= __('Questionnaires') ?></h3>
10      <div class="table-responsive">
11          <table>
12              <thead>
13                  <tr>
14                      <th><?= $this->Paginator->sort('id') ?></th>
15                      <th><?= $this->Paginator->sort('libelle') ?></th>
                        <th><?= __('nb Questions') ?></th>
17                      <th><?= $this->Paginator->sort('created') ?></th>
18                      <th><?= $this->Paginator->sort('modified') ?></th>
19                      <th class="actions"><?= __('Actions') ?></th>
20                  </tr>
21              </thead>
23              <?php foreach ($questionnaires as $questionnaire): ?>
                    <tr>
25                      <td><?= $this->Number->format($questionnaire->id) ?></td>
26                      <td><?= h($questionnaire->libelle) ?></td>
27                      <td><?= h(count($questionnaire->questions)) ?></td>
28                      <td><?= h($questionnaire->created) ?></td>
29                      <td><?= h($questionnaire->modified) ?></td>
30                      <td class="actions">
31                          <?= $this->Html->link(__('View'), ['action' => 'view', $questionnaire->id]) ?>
32                          <?= $this->Html->link(__('Edit'), ['action' => 'edit', $questionnaire->id]) ?>
33                          <?=
```