

### 3D Parallel and High-Performance Molecular Dynamics Simulation

Motohiko Tanaka, and Yasunari Zempo<sup>1</sup>

Innovative Energy Science and Engineering, Chubu University, Aichi, Japan

<sup>1</sup> Computer and Information Sciences, Hosei University, Tokyo, Japan

During the annual year 2021, we executed "Parallel Development of Electromagnetic Molecular Dynamics Simulations". There are several themes including "Electromagnetic carbon-gold-atom nanotube accelerator", "Vector-parallel SIESTA-4.1b code", "Development of spectrum analysis code due to maximum entropy method". In this report, we report the vector-parallel SIESTA code in the NIFS Simulator.

In NEC's SX-Aurora TSUBASA of vector-and-parallel simulator, the parallel SIESTA code does not compile at all. On the other hand, Intel's intel-lx compiles SIESTA-4.1b after making some modifications, about which we will report here.

First, one downloads the SIESTA-4.1b code by internet. On our Linux, one does 'tar -xzf siesta-4.1-b4.tar.gz'. Under the NEC's compiler, one invokes the 'module load intel-lx', and does 'sh ./Src/obj\_setup.sh' for SIESTA Obj directory; one siesta-4.1b's MPICH+OMP script should be,

```
CC= mpiicc -O2 -qopenmp
FPP= $(FC) -E -P -x c
FC= mpiifort
MPI_INTERFACE = libmpi_f90.a
MPI_INCLUDE = .
FC_SERIAL= ifort
FFLAGS = -O2 -fPIC -qopenmp
LIBS = -L${MKLROOT}/lib/intel64 -lmkl_scalapack_lp64 -lmkl_intel_lp64 -lmkl_sequential -lmkl_core -lmkl_blacs_intelmpi_lp64 -mkl -qopenmp -lpthread -lm -ldl
```

Then, one proceeds the 'make' step. For NEC's own compiler problem, one must add additional terms. At first for the six files including "iokp.f", "m\_mixing.F90", "m\_ts\_contour\_neq.f90", "m\_ts\_electype.F90", "m\_ts\_weight.F90" and "ofc.f90", one changes the correct statement as 'e12.6' by 'e13.6'. Next point is that one must omit the \$OMP lines of "inal\_H\_f\_stress.F" as:

```
!!$OMP parallel default(shared)
!!$OMP workshare
    H_tmp = 0.0_dp
!!$OMP end workshare nowait
!!$OMP single
!    Initialize forces and stress .....
    nullify(fal)
    call re_alloc( fal, 1, 3, 1, na_u, 'fal', 'final_H_f_stress' )
!!$OMP end single
!!$OMP workshare
    fa(1:3,1:na_u) = 0.0_dp
    fal(1:3,1:na_u) = 0.0_dp
    stress(1:3,1:3) = 0.0_dp
    stressl(1:3,1:3) = 0.0_dp
!!$OMP end workshare nowait
!!$OMP end parallel
```

The vector lines must be changed as "novector" in the "old\_atmfuncs.f" file:

```

!NEC$ novector
      do 5 izeta=1,nzetasave(l,nsm,is)
        norb=norb+(2*1+1)
        indx=indx+1
        if(norb.ge.io) goto 30
5      continue

```

They are the lines at 426, 436, 492, 502, 523, 570, 580, 605, 666, 712, 724 and 756 of "old\_atmfuns.f" file.

The file "normalize\_dm.F90" undergoes an error, thus one just skips as '! call die(msg)' at the line 95. One compiles the rest of the code. Finally for execution, one must write:

```

#PBS -v NQSV_MPI_VER= 2020update0
#PBS -v OMP_NUM_THREADS=4
module load intel-lx/$NQSV_MPI_VER

```

#### References:

1. SIESTA-4.1 [https://siesta-project.org/SIESTA\\_MATERIAL/Docs/Manuals/manuals.html](https://siesta-project.org/SIESTA_MATERIAL/Docs/Manuals/manuals.html)
2. M. Tanaka and Y. Zempo, Annual Report of 2022, National Institute of Fusion Science, Japan.

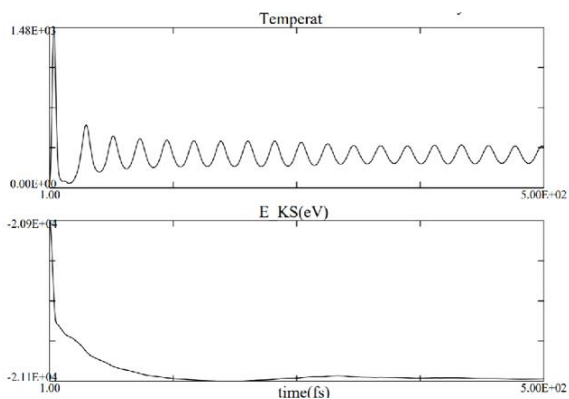


Fig.1 By Nose thermostat, temperature and KS energy up to 500 steps, Dt=1 fs.

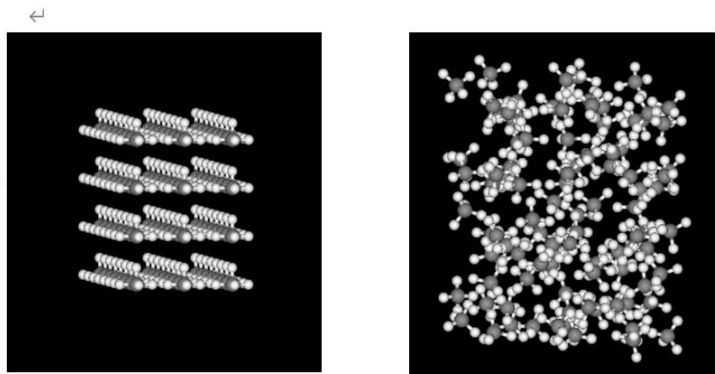


Fig.2 Initial and final states of CH4 molecules, C96H384, about elapsed 200 minutes/48\_MPI-1\_OMP by Intel-LX.