

UFC Analysis - IDS 702 Final Project

Arko Bhattacharya, Eric Ortega Rodriguez, Mu Niu, Nruta Choudhari

2024-12-15

Abstract

Introduction

The Ultimate Fighting Championship (UFC) is the world's leading mixed martial arts (MMA) promotion, known for bringing together elite fighters from diverse combat sports backgrounds. Founded in 1993, the UFC has grown into a global phenomenon, hosting events worldwide that showcase athletes competing in disciplines such as boxing, wrestling, Muay Thai, Brazilian JiuJitsu, and judo. UFC fights take place in a distinct eight-sided cage, known as the Octagon, where fighters test their skills in striking, grappling, and overall strategy under a unified set of rules. The sport has evolved significantly over the years, introducing standardized weight classes, safety regulations, and scoring systems to ensure competitive fairness and fighter safety.

This project examines UFC performances using data on UFC fights from 2010 to the present (last updated in November, 2024). The data, sourced from Kaggle, includes key fighter metrics, fight outcomes, betting odds, and performance indicators such as strikes landed and submission attempts. By leveraging this dataset, we aim to analyze factors influencing fight outcomes and performances.

Our research questions are:

1. How does the reach of the fighter relate to the total number of strikes landed during a fight?
2. Is the fight outcome associated with the number of submission attempts made by a fighter?

These questions are worth exploring because they provide a deeper understanding of UFC performance dynamics. For instance, examining the relationship between a fighter's reach and the total number of strikes landed can underscore the tactical performance of physical attributes in effective striking. Similarly, analyzing the association between fight outcomes and submission attempts can shed light on the strategic role of grappling in securing victories.

The findings from this analysis offer valuable insights for fighters, coaches, and analysts, helping optimize training strategies, improve fight preparation, and enhance understanding of opponents' strengths and weaknesses.

Methods

Data and Preprocessing

The dataset was obtained from Kaggle, a widely recognized platform for sharing datasets and data science resources. Each row of the dataset refers to an individual bout, which refers to an individual match between two fighters. This includes data on fighter attributes such as **height, weight, reach, stance, and age**, as well as fight statistics like **strikes landed, significant strikes, takedowns, submission attempts, and knockdowns**. Additionally, it documents fight outcomes, including the **winner, method of victory** (e.g., knockout, submission, decision), the **round in which the fight ended**, and the **total duration of the fight**.

The dataset contains 6,478 rows across 118 columns, with several variables containing missing values. During preprocessing, columns with over 6,000 missing values were dropped due to their lack of significance and the infeasibility of imputation. Other columns had a smaller proportion of missing values, and rows with missing values in key variables (e.g., strikes landed, reach, and weight class) were removed. This resulted in a final dataset with 4,895 rows. Most of the missing values were concentrated in performance metrics, such as submission attempts or specific strike statistics.

In UFC, fighters are assigned to either the red corner or the blue corner, which indicates their position in the Octagon and helps differentiate between competitors. For the first research question, the dataset was filtered to include the variables related to reach, weight class, height, strikes landed and current win streak, ensuring that key confounding variables were included. The data for fighters in the red and blue corners were combined into a single dataframe to facilitate analysis.

For the second research question, a new binary variable, **Outcome** was created to indicate the winner. A value of 1 was assigned if the fighter in the red corner won, and a value of 0 if the fighter in the blue corner won. The model included variables such as submission attempts, significant strikes landed, fight duration, and weight class to account for both physical attributes and performance metrics. These variables ensured a more comprehensive analysis of the factors influencing fight outcomes while addressing potential confounders.

Model Fitting and Evaluation

To examine the relationship between a fighter's reach and the total number of strikes landed during a fight, a Multiple Linear Regression (MLR) model was utilized. The model included key predictors such as logarithmic transformation of reach, logarithmic transformation of height,

win streak and weight class, with an interaction term between the win streak and weight class to explore potential moderating effects. Outliers and influential points were identified using Cook's distance, and there were removed to improve model robustness. Diagnostics, including residuals vs. fitted plots, were performed to assess linearity and homoscedasticity, while Variance Inflation Factor (VIF) was used to evaluate multicollinearity. Model performance was measured using the R-squared value.

For the second research question, a logistic regression model was employed to predict fight outcomes (binary: win or loss) using submission attempts, reach, significance strikes, fight duration, and weight class as predictors. The model was refined using stepwise selection to identify the most significant predictors, and diagnostics such as Cook's distance, leverage, and deviance residuals were used to detect and remove influential points. The final logistic regression model included key predictors such as logarithmic transformations of submission attempts, logarithmic transformation of reach, logarithmic transformation of significant strikes landed, and logarithmic transformation of fight duration. Model performance was evaluated using the area under the receiver operating characteristic curve (ROC curve), and diagnostic plots were generated to assess the model's fit.

All the analyses were conducted in R.

Results

```
# loading all the libraries
library(dplyr)
```

Attaching package: 'dplyr'

The following objects are masked from 'package:stats':

filter, lag

The following objects are masked from 'package:base':

intersect, setdiff, setequal, union

```
library(car)          # For VIF
```

Loading required package: carData

```
Attaching package: 'car'
```

```
The following object is masked from 'package:dplyr':
```

```
recode
```

```
library(ggplot2)      # For residual plots
library(broom)
library(knitr)
```

```
# reading the data
ufc <- read.csv("ufc-master.csv")
dim(ufc)
```

```
[1] 6478 118
```

```
# DATA CLEANING CELL
# removing the data which has way too many missing values
```

```
ufc = subset(ufc, select = -c(BMatchWCRank, RMatchWCRank, RWFlyweightRank,
                           RWFeatherweightRank, RWStrawweightRank, RWBantamweightRank,
                           RHeavyweightRank, RLIGHTHeavyweightRank, RMiddleweightRank,
                           RWelterweightRank, RLIGHTweightRank, RFeatherweightRank,
                           RBantamweightRank, RFlyweightRank, RPFPRank, BWFlyweightRank,
                           BWFeatherweightRank, BWStrawweightRank, BWBantamweightRank,
                           BHeavyweightRank, BLIGHTHeavyweightRank, BMiddleweightRank,
                           BWelterweightRank, BLIGHTweightRank, BFeatherweightRank,
                           BBantamweightRank, BFlyweightRank, BPFPRank))
```

```
# removing all missing value rows from the columns of interest
ufc_clean <- ufc %>%
  filter(
    !is.na(RedAvgSubAtt),
    !is.na(BlueAvgSubAtt),
    !is.na(BlueReachCms),
    !is.na(RedReachCms),
    !is.na(BlueAvgSigStrLanded),
    !is.na(RedAvgSigStrLanded),
    !is.na(TotalFightTimeSecs),
    !is.na(WeightClass)
```

```
)  
nrow(ufc_clean)
```

[1] 4895

Research Question 1: How does the reach of the fighter relate to the total number of strikes landed during a fight?

```
filtered_ufc_blue <- ufc_clean[c("BlueReachCms", "BlueAvgSigStrLanded", "WeightClass", "BlueHeight", "WinStreak")]
colnames(filtered_ufc_blue) <- c("ReachCms", "AvgSigStrLanded", "WeightClass", "Height", "WinStreak")
filtered_ufc_red <- ufc_clean[c("RedReachCms", "RedAvgSigStrLanded", "WeightClass", "RedHeight", "WinStreak")]
colnames(filtered_ufc_red) <- c("ReachCms", "AvgSigStrLanded", "WeightClass", "Height", "WinStreak")

# appending the two data sets
ufc_q1 <- rbind(filtered_ufc_blue, filtered_ufc_red)

# exclude outlier (one observation with 0 cm reach)
ufc_q1 <- ufc_q1[ufc_q1$ReachCms > 0,]
ufc_q1 <- ufc_q1[ufc_q1$AvgSigStrLanded > 0,]

model_q1 <- lm(AvgSigStrLanded ~ ReachCms + WeightClass*WinStreak + Height,
                 data = ufc_q1)

cooks_d <- cooks.distance(model_q1)
influential <- which(cooks_d > (4 / nrow(ufc_q1)))
ufc_q1_clean <- ufc_q1[-influential,]

model_q1_clean <- lm(AvgSigStrLanded ~ log(ReachCms) + WinStreak * WeightClass + log(Height))
summary(model_q1_clean)
```

Call:

```
lm(formula = AvgSigStrLanded ~ log(ReachCms) + WinStreak * WeightClass +  
    log(Height), data = ufc_q1_clean)
```

Residuals:

Min	1Q	Median	3Q	Max
-26.646	-14.706	-3.488	11.234	67.651

Coefficients:

	Estimate	Std. Error	t value
(Intercept)	370.84260	36.25877	10.228
log(ReachCms)	-52.68014	7.20203	-7.315
WinStreak	0.88969	0.44797	1.986
WeightClassCatch Weight	-11.98423	3.11742	-3.844
WeightClassFeatherweight	3.15345	0.99510	3.169
WeightClassFlyweight	-5.12434	1.27743	-4.011
WeightClassHeavyweight	5.67378	1.35218	4.196
WeightClassLight Heavyweight	8.21926	1.26942	6.475
WeightClassLightweight	5.88441	0.93235	6.311
WeightClassMiddleweight	5.28211	1.09455	4.826
WeightClassWelterweight	7.67438	1.01547	7.557
WeightClassWomen's Bantamweight	-8.38313	1.52870	-5.484
WeightClassWomen's Featherweight	-15.29454	4.30357	-3.554
WeightClassWomen's Flyweight	-14.94543	1.39726	-10.696
WeightClassWomen's Strawweight	-13.58684	1.45493	-9.339
log(Height)	-15.59306	9.11990	-1.710
WinStreak:WeightClassCatch Weight	-0.23074	1.87824	-0.123
WinStreak:WeightClassFeatherweight	0.07549	0.61197	0.123
WinStreak:WeightClassFlyweight	1.09982	0.85105	1.292
WinStreak:WeightClassHeavyweight	-0.08639	0.65154	-0.133
WinStreak:WeightClassLight Heavyweight	-0.29595	0.63414	-0.467
WinStreak:WeightClassLightweight	0.08217	0.54268	0.151
WinStreak:WeightClassMiddleweight	-0.24912	0.53973	-0.462
WinStreak:WeightClassWelterweight	0.11901	0.55113	0.216
WinStreak:WeightClassWomen's Bantamweight	1.70091	1.02098	1.666
WinStreak:WeightClassWomen's Featherweight	-1.01963	3.74947	-0.272
WinStreak:WeightClassWomen's Flyweight	-1.23959	0.77629	-1.597
WinStreak:WeightClassWomen's Strawweight	3.87668	1.15362	3.360
Pr(> t)			
(Intercept)	< 2e-16	***	
log(ReachCms)	2.80e-13	***	
WinStreak	0.047055	*	
WeightClassCatch Weight	0.000122	***	
WeightClassFeatherweight	0.001535	**	
WeightClassFlyweight	6.08e-05	***	
WeightClassHeavyweight	2.74e-05	***	
WeightClassLight Heavyweight	9.98e-11	***	
WeightClassLightweight	2.89e-10	***	
WeightClassMiddleweight	1.42e-06	***	
WeightClassWelterweight	4.50e-14	***	
WeightClassWomen's Bantamweight	4.27e-08	***	
WeightClassWomen's Featherweight	0.000381	***	

```

WeightClassWomen's Flyweight           < 2e-16 ***
WeightClassWomen's Strawweight         < 2e-16 ***
log(Height)                          0.087339 .
WinStreak:WeightClassCatch Weight    0.902230
WinStreak:WeightClassFeatherweight   0.901824
WinStreak:WeightClassFlyweight       0.196284
WinStreak:WeightClassHeavyweight    0.894523
WinStreak:WeightClassLight Heavyweight 0.640726
WinStreak:WeightClassLightweight     0.879649
WinStreak:WeightClassMiddleweight   0.644412
WinStreak:WeightClassWelterweight   0.829044
WinStreak:WeightClassWomen's Bantamweight 0.095757 .
WinStreak:WeightClassWomen's Featherweight 0.785675
WinStreak:WeightClassWomen's Flyweight  0.110345
WinStreak:WeightClassWomen's Strawweight 0.000781 ***
---
Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1


Residual standard error: 17.21 on 9241 degrees of freedom
Multiple R-squared:  0.07087,   Adjusted R-squared:  0.06816
F-statistic: 26.11 on 27 and 9241 DF,  p-value: < 2.2e-16

```

```

par(mfrow = c(2, 2), mar = c(2,2,2,2))
plot(model_q1_clean)

```

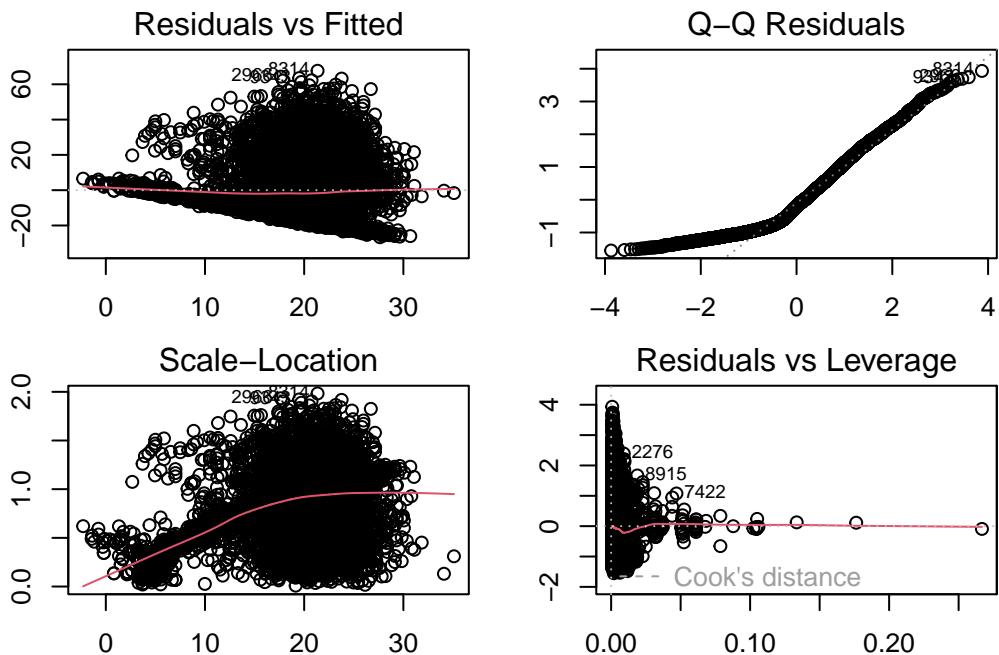

```
vif(model_q1_clean)
```

there are higher-order terms (interactions) in this model
consider setting type = 'predictor'; see ?vif

	GVIF	Df	GVIF^(1/(2*Df))
log(ReachCms)	5.706517	1	2.388832
WinStreak	11.784558	1	3.432864
WeightClass	1301.454686	12	1.348242
log(Height)	6.579795	1	2.565111
WinStreak:WeightClass	3430.026689	12	1.403796

```
r_squared <- summary(model_q1_clean)$r.squared
cat("R-squared:", r_squared, "\n")
```

R-squared: 0.07087118

Research Question 2: Is the fight outcome associated with the number of submission attempts made by a fighter?

```

ufc_q2 <- ufc_clean %>%
  mutate(
    Outcome = ifelse(Winner == "Red", 1, 0), # Binary outcome: 1 for Red win, 0 for Blue win
    WeightClass = as.factor(WeightClass),
    TotalRedSubAttempts = RedAvgSubAtt,           # Red's submission attempts
    TotalBlueSubAttempts = BlueAvgSubAtt
  ) %>%
  mutate(
    LogRedSubAttempts = log1p(TotalRedSubAttempts),
    LogBlueSubAttempts = log1p(TotalBlueSubAttempts),
    LogBlueReach = log1p(BlueReachCms),
    LogRedReach = log1p(RedReachCms),
    LogBlueSigStr = log1p(BlueAvgSigStrLanded),
    LogRedSigStr = log1p(RedAvgSigStrLanded),
    LogFightTime = log1p(TotalFightTimeSecs)
  )

# Check dimensions of the cleaned dataset
dim(ufc_q2)

```

[1] 4895 100

```

sim_logistic_model <- glm(
  Outcome ~
    LogRedSubAttempts +
    LogBlueSubAttempts +
    LogBlueReach +
    LogRedReach +
    LogBlueSigStr +
    LogRedSigStr +
    LogFightTime +
    WeightClass,
  data = ufc_q2,
  family = binomial
)

step_model <- step(sim_logistic_model, direction = "both")

```

Start: AIC=6606.31
 Outcome ~ LogRedSubAttempts + LogBlueSubAttempts + LogBlueReach +

LogRedReach + LogBlueSigStr + LogRedSigStr + LogFightTime +
WeightClass

	Df	Deviance	AIC
- WeightClass	12	6576.9	6592.9
- LogFightTime	1	6567.5	6605.5
<none>		6566.3	6606.3
- LogBlueReach	1	6569.7	6607.7
- LogRedReach	1	6573.9	6611.9
- LogBlueSubAttempts	1	6578.2	6616.2
- LogRedSubAttempts	1	6587.2	6625.2
- LogRedSigStr	1	6624.5	6662.5
- LogBlueSigStr	1	6625.8	6663.8

Step: AIC=6592.94

Outcome ~ LogRedSubAttempts + LogBlueSubAttempts + LogBlueReach +
LogRedReach + LogBlueSigStr + LogRedSigStr + LogFightTime

	Df	Deviance	AIC
- LogFightTime	1	6577.8	6591.8
<none>		6576.9	6592.9
- LogRedReach	1	6584.6	6598.6
- LogBlueReach	1	6584.8	6598.8
- LogBlueSubAttempts	1	6589.3	6603.3
+ WeightClass	12	6566.3	6606.3
- LogRedSubAttempts	1	6597.5	6611.5
- LogRedSigStr	1	6634.1	6648.1
- LogBlueSigStr	1	6637.7	6651.7

Step: AIC=6591.77

Outcome ~ LogRedSubAttempts + LogBlueSubAttempts + LogBlueReach +
LogRedReach + LogBlueSigStr + LogRedSigStr

	Df	Deviance	AIC
<none>		6577.8	6591.8
+ LogFightTime	1	6576.9	6592.9
- LogRedReach	1	6585.2	6597.2
- LogBlueReach	1	6586.0	6598.0
- LogBlueSubAttempts	1	6590.4	6602.4
+ WeightClass	12	6567.5	6605.5
- LogRedSubAttempts	1	6597.9	6609.9
- LogRedSigStr	1	6635.0	6647.0
- LogBlueSigStr	1	6638.4	6650.4

```

# Calculate Cook's distance and leverage
cooks_distance <- cooks.distance(step_model)
hat_values <- hatvalues(step_model)
residuals <- residuals(step_model, type = "deviance")

# Thresholds
n <- nrow(ufc_q2)
p <- length(coef(step_model)) - 1
cooks_threshold <- 4 / n
leverage_threshold <- 2 * (p + 1) / n

# Identify influential points
influential_points <- which(cooks_distance > cooks_threshold |
                             hat_values > leverage_threshold |
                             abs(residuals) > 2)

# Remove influential points
ufc_q2_filtered <- ufc_q2[-influential_points, ]

# Refit the model
final_model <- glm(formula = Outcome ~ LogRedSubAttempts + LogBlueSubAttempts +
                     LogBlueReach + LogRedReach + LogBlueSigStr + LogRedSigStr,
                     family = binomial, data = ufc_q2_filtered)

# Model summary
summary(final_model)

```

Call:

```
glm(formula = Outcome ~ LogRedSubAttempts + LogBlueSubAttempts +
    LogBlueReach + LogRedReach + LogBlueSigStr + LogRedSigStr,
    family = binomial, data = ufc_q2_filtered)
```

Coefficients:

	Estimate	Std. Error	z value	Pr(> z)
(Intercept)	0.68061	2.87556	0.237	0.812897
LogRedSubAttempts	0.43736	0.09732	4.494	6.98e-06 ***
LogBlueSubAttempts	-0.34346	0.09384	-3.660	0.000252 ***
LogBlueReach	-2.10785	0.76588	-2.752	0.005920 **
LogRedReach	2.03037	0.74314	2.732	0.006292 **
LogBlueSigStr	-0.46782	0.05704	-8.201	2.37e-16 ***
LogRedSigStr	0.46156	0.05861	7.876	3.39e-15 ***


```
---  
Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

(Dispersion parameter for binomial family taken to be 1)

```
Null deviance: 6324.0 on 4643 degrees of freedom  
Residual deviance: 6221.7 on 4637 degrees of freedom  
AIC: 6235.7
```

Number of Fisher Scoring iterations: 4

```
par(mfrow=c(2,2), mar = c(2,2,2,2))  
plot(final_model)
```

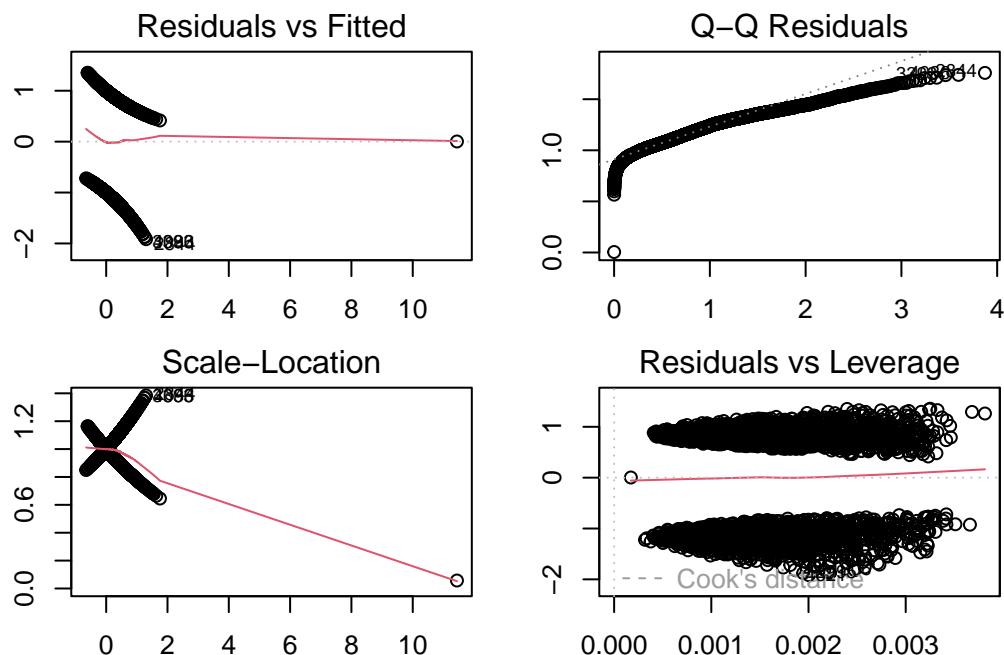

Appendix

1. Research Question 1

```
summary(model_q1)
```

Call:

```
lm(formula = AvgSigStrLanded ~ ReachCms + WeightClass * WinStreak +
    Height, data = ufc_q1)
```

Residuals:

Min	1Q	Median	3Q	Max
-40.690	-16.289	-5.282	12.193	130.324

Coefficients:

	Estimate	Std. Error	t value
(Intercept)	70.464514	7.601471	9.270
ReachCms	-0.291116	0.044133	-6.596
WeightClassCatch Weight	-9.095782	3.143148	-2.894
WeightClassFeatherweight	1.876641	1.086578	1.727
WeightClassFlyweight	-4.529124	1.338491	-3.384
WeightClassHeavyweight	3.178827	1.502231	2.116
WeightClassLight Heavyweight	6.209295	1.391018	4.464
WeightClassLightweight	4.596201	1.021647	4.499
WeightClassMiddleweight	2.927605	1.219982	2.400
WeightClassWelterweight	6.033458	1.113355	5.419
WeightClassWomen's Bantamweight	-0.802552	1.602920	-0.501
WeightClassWomen's Featherweight	-12.811029	3.967100	-3.229
WeightClassWomen's Flyweight	-9.880458	1.540134	-6.415
WeightClassWomen's Strawweight	-4.992836	1.487524	-3.356
WinStreak	0.870168	0.412687	2.109
Height	0.003184	0.057040	0.056
WeightClassCatch Weight:WinStreak	-1.423668	1.632883	-0.872
WeightClassFeatherweight:WinStreak	0.554692	0.544312	1.019
WeightClassFlyweight:WinStreak	1.981276	0.668963	2.962
WeightClassHeavyweight:WinStreak	0.396386	0.606659	0.653
WeightClassLight Heavyweight:WinStreak	-0.306468	0.565002	-0.542
WeightClassLightweight:WinStreak	-0.348661	0.499440	-0.698
WeightClassMiddleweight:WinStreak	-0.051047	0.525470	-0.097
WeightClassWelterweight:WinStreak	-0.279404	0.510292	-0.548
WeightClassWomen's Bantamweight:WinStreak	-0.246415	0.878204	-0.281
WeightClassWomen's Featherweight:WinStreak	-1.308624	1.961281	-0.667
WeightClassWomen's Flyweight:WinStreak	-1.583140	0.826751	-1.915
WeightClassWomen's Strawweight:WinStreak	3.041336	0.843915	3.604
Pr(> t)			
(Intercept)	< 2e-16	***	
ReachCms	4.43e-11	***	
WeightClassCatch Weight	0.003814	**	

```

WeightClassFeatherweight          0.084179 .
WeightClassFlyweight             0.000718 ***
WeightClassHeavyweight            0.034364 *
WeightClassLight Heavyweight      8.14e-06 ***
WeightClassLightweight            6.91e-06 ***
WeightClassMiddleweight           0.016427 *
WeightClassWelterweight          6.13e-08 ***
WeightClassWomen's Bantamweight   0.616607
WeightClassWomen's Featherweight  0.001245 **
WeightClassWomen's Flyweight      1.47e-10 ***
WeightClassWomen's Strawweight    0.000792 ***
WinStreak                         0.035010 *
Height                            0.955490
WeightClassCatch Weight:WinStreak 0.383299
WeightClassFeatherweight:WinStreak 0.308195
WeightClassFlyweight:WinStreak     0.003067 **
WeightClassHeavyweight:WinStreak   0.513519
WeightClassLight Heavyweight:WinStreak 0.587541
WeightClassLightweight:WinStreak   0.485130
WeightClassMiddleweight:WinStreak  0.922613
WeightClassWelterweight:WinStreak  0.584022
WeightClassWomen's Bantamweight:WinStreak 0.779031
WeightClassWomen's Featherweight:WinStreak 0.504642
WeightClassWomen's Flyweight:WinStreak  0.055535 .
WeightClassWomen's Strawweight:WinStreak 0.000315 ***
---
Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

```

Residual standard error: 19.83 on 9707 degrees of freedom
Multiple R-squared: 0.03763, Adjusted R-squared: 0.03495
F-statistic: 14.06 on 27 and 9707 DF, p-value: < 2.2e-16

```
# 1. Check Variance Inflation Factor (VIF) for collinearity
vif_values <- vif(model_q1)
```

there are higher-order terms (interactions) in this model
consider setting type = 'predictor'; see ?vif


```
print("Variance Inflation Factor (VIF):")
```

```
[1] "Variance Inflation Factor (VIF):"
```

```
print(vif_values)
```

	GVIF	Df	GVIF ^{(1/(2*Df))}
ReachCms	5.823552	1	2.413204
WeightClass	476.978854	12	1.293017
WinStreak	11.703017	1	3.420967
Height	6.653360	1	2.579411
WeightClass:WinStreak	1247.323837	12	1.345858

```
# 2. Residuals vs Fitted Plot for Linearity  
par(mfrow = c(2, 2), mar = c(2, 2, 2, 2)) # Set plotting layout  
plot(model_q1)
```

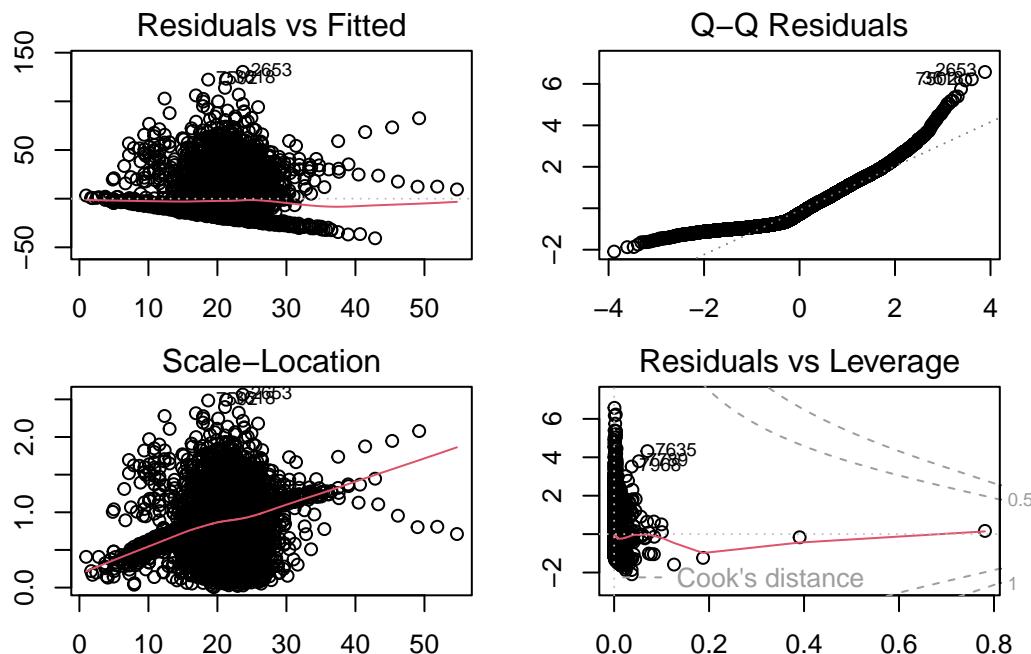

```
r_squared <- summary(model_q1)$r.squared  
cat("R-squared:", r_squared, "\n")
```

R-squared: 0.03763049

2. Research Question 2

```
# Model summary of the initial simple logistic model
summary(sim_logistic_model)
```

Call:

```
glm(formula = Outcome ~ LogRedSubAttempts + LogBlueSubAttempts +
    LogBlueReach + LogRedReach + LogBlueSigStr + LogRedSigStr +
    LogFightTime + WeightClass, family = binomial, data = ufc_q2)
```

Coefficients:

	Estimate	Std. Error	z value	Pr(> z)
(Intercept)	-5.351057	6.459545	-0.828	0.407447
LogRedSubAttempts	0.405680	0.089319	4.542	5.57e-06 ***
LogBlueSubAttempts	-0.292197	0.084704	-3.450	0.000561 ***
LogBlueReach	-1.439347	0.907894	-1.585	0.112883
LogRedReach	2.491817	0.903558	2.758	0.005819 **
LogBlueSigStr	-0.365003	0.048374	-7.545	4.51e-14 ***
LogRedSigStr	0.373853	0.050081	7.465	8.33e-14 ***
LogFightTime	0.035227	0.032697	1.077	0.281313
WeightClassCatch Weight	-0.057436	0.343726	-0.167	0.867293
WeightClassFeatherweight	-0.027917	0.131144	-0.213	0.831425
WeightClassFlyweight	-0.003566	0.159466	-0.022	0.982161
WeightClassHeavyweight	-0.045397	0.208875	-0.217	0.827942
WeightClassLight Heavyweight	-0.176252	0.192860	-0.914	0.360776
WeightClassLightweight	-0.136914	0.126242	-1.085	0.278128
WeightClassMiddleweight	-0.276099	0.164307	-1.680	0.092883 .
WeightClassWelterweight	-0.281531	0.145431	-1.936	0.052888 .
WeightClassWomen's Bantamweight	-0.177841	0.191071	-0.931	0.351979
WeightClassWomen's Featherweight	0.230400	0.512452	0.450	0.652996
WeightClassWomen's Flyweight	-0.122585	0.184749	-0.664	0.506998
WeightClassWomen's Strawweight	0.011955	0.187268	0.064	0.949100

Signif. codes:	0 ****	0.001 **	0.01 *	0.05 .
	'	'	'	'


(Dispersion parameter for binomial family taken to be 1)

```
Null deviance: 6674.5 on 4894 degrees of freedom
Residual deviance: 6566.3 on 4875 degrees of freedom
AIC: 6606.3
```

Number of Fisher Scoring iterations: 4

```
par(mfrow=c(2,2), mar = c(2,2,2,2))

plot(sim_logistic_model)
```

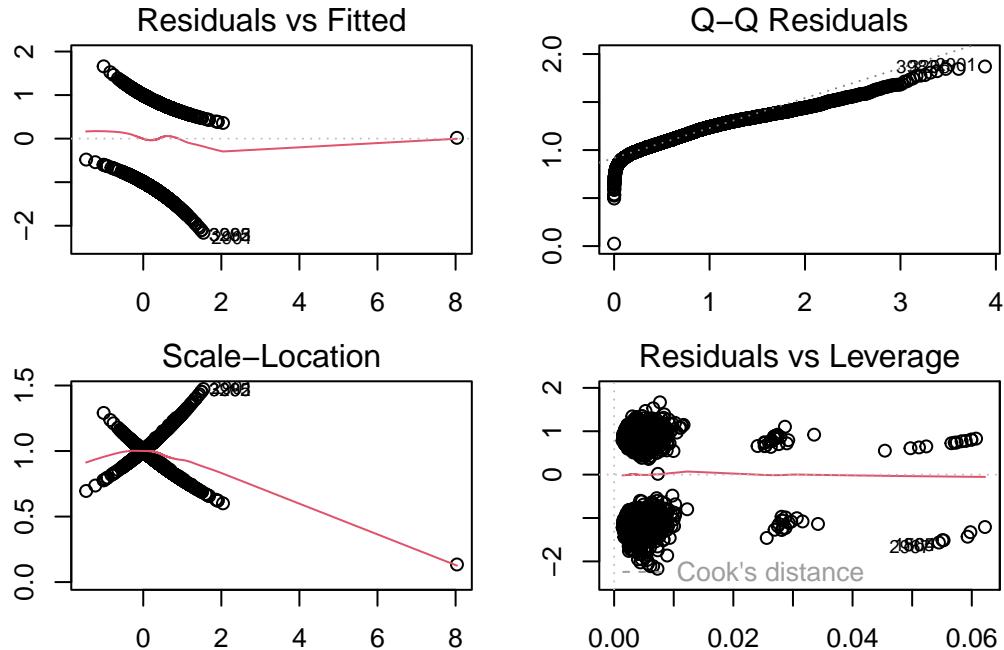

```
# Model summary of the step model
summary(step_model)
```

Call:
`glm(formula = Outcome ~ LogRedSubAttempts + LogBlueSubAttempts + LogBlueReach + LogRedReach + LogBlueSigStr + LogRedSigStr, family = binomial, data = ufc_q2)`

Coefficients:

	Estimate	Std. Error	z value	Pr(> z)
(Intercept)	0.36477	2.73096	0.134	0.893744
LogRedSubAttempts	0.39057	0.08768	4.454	8.41e-06 ***
LogBlueSubAttempts	-0.29815	0.08385	-3.556	0.000377 ***
LogBlueReach	-1.90853	0.71404	-2.673	0.007521 **
LogRedReach	1.88597	0.69892	2.698	0.006967 **
LogBlueSigStr	-0.36729	0.04821	-7.618	2.57e-14 ***
LogRedSigStr	0.36873	0.04979	7.405	1.31e-13 ***

Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1

(Dispersion parameter for binomial family taken to be 1)

Null deviance: 6674.5 on 4894 degrees of freedom
Residual deviance: 6577.8 on 4888 degrees of freedom
AIC: 6591.8

Number of Fisher Scoring iterations: 4

```
par(mfrow=c(2,2), mar = c(2,2,2,2))  
plot(step_model)
```

