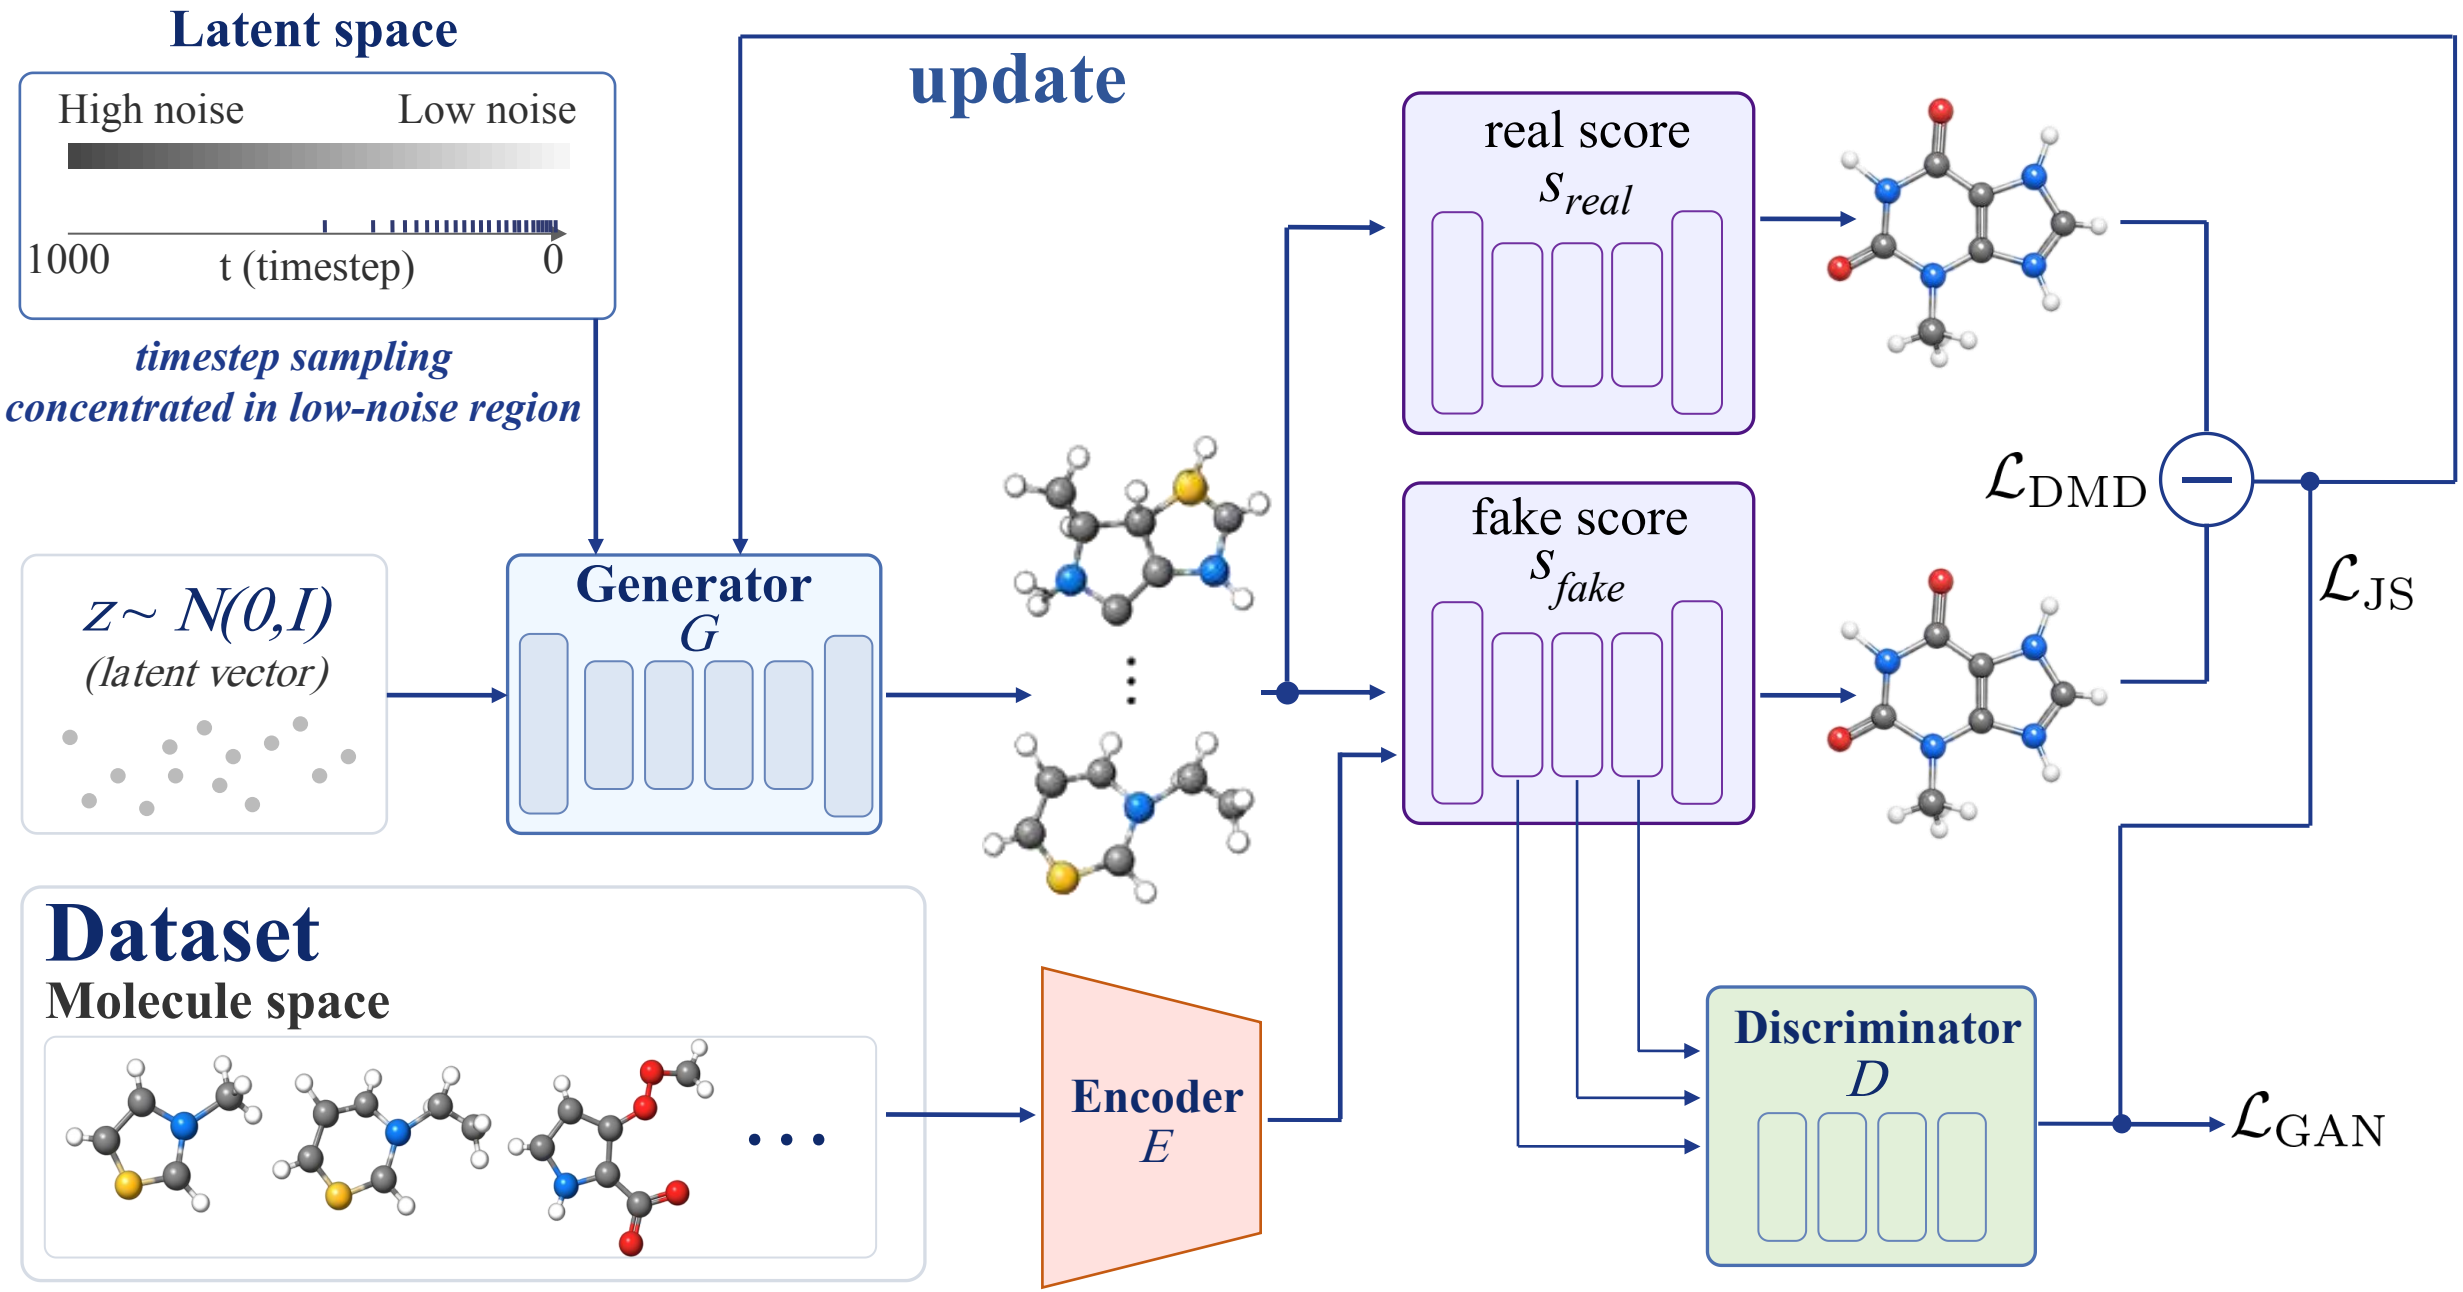
Latent space
High noise
Low noise
1000
t (timestep)
0
timestep sampling
concentrated in low-noise region
update
z ~ N(0,I)
(latent vector)
Generator
G
real score
s_{real}
fake score
s_{fake}
$\mathcal{L}_{DMD}$
$\mathcal{L}_{JS}$
Dataset
Molecule space
Encoder
E
Discriminator
D
$\mathcal{L}_{GAN}$