

C2W2_Assignment

May 30, 2021

1 Breast Cancer Prediction

In this exercise, you will train a neural network on the [Breast Cancer Dataset](#) to predict if the tumor is malignant or benign.

If you get stuck, we recommend that you review the ungraded labs for this week.

1.1 Imports

```
[1]: import tensorflow as tf
from tensorflow.keras.models import Model
from tensorflow.keras.layers import Dense, Input

import numpy as np
import matplotlib.pyplot as plt
import matplotlib.ticker as mticker
import pandas as pd
from sklearn.model_selection import train_test_split
from sklearn.metrics import confusion_matrix
import itertools
from tqdm import tqdm
import tensorflow_datasets as tfds

tf.get_logger().setLevel('ERROR')
```

1.2 Load and Preprocess the Dataset

We first load the dataset and create a data frame using pandas. We explicitly specify the column names because the CSV file does not have column headers.

```
[2]: data_file = './data/data.csv'
col_names = ["id", "clump_thickness", "un_cell_size", "un_cell_shape",
↪ "marginal_adheshion", "single_eph_cell_size", "bare_nuclei",
↪ "bland_chromatin", "normal_nucleoli", "mitoses", "class"]
df = pd.read_csv(data_file, names=col_names, header=None)
```

```
[3]: df.head()
```

```
[3]:      id  clump_thickness  un_cell_size  un_cell_shape  marginal_adhesion  \
0  1000025                5              1              1                1
1  1002945                5              4              4                5
2  1015425                3              1              1                1
3  1016277                6              8              8                1
4  1017023                4              1              1                3

      single_eph_cell_size  bare_nuclei  bland_chromatin  normal_nucleoli  \
0                2              1              3              1
1                7             10              3              2
2                2              2              3              1
3                3              4              3              7
4                2              1              3              1

      mitoses  class
0          1      2
1          1      2
2          1      2
3          1      2
4          1      2
```

We have to do some preprocessing on the data. We first pop the id column since it is of no use for our problem at hand.

```
[4]: df.pop("id")
```

```
[4]: 0      1000025
1      1002945
2      1015425
3      1016277
4      1017023
...
694    776715
695    841769
696    888820
697    897471
698    897471
Name: id, Length: 699, dtype: int64
```


Upon inspection of data, you can see that some values of the **bare_nuclei** column are unknown. We drop the rows with these unknown values. We also convert the **bare_nuclei** column to numeric. This is required for training the model.

```
[5]: df = df[df["bare_nuclei"] != '?']
df.bare_nuclei = pd.to_numeric(df.bare_nuclei)
```

We check the class distribution of the data. You can see that there are two classes, 2.0 and 4.0
According to the dataset: * **2.0 = benign** * **4.0 = malignant**

```
[6]: df['class'].hist(bins=20)
```

```
[6]: <matplotlib.axes._subplots.AxesSubplot at 0x7f591aea4dd0>
```

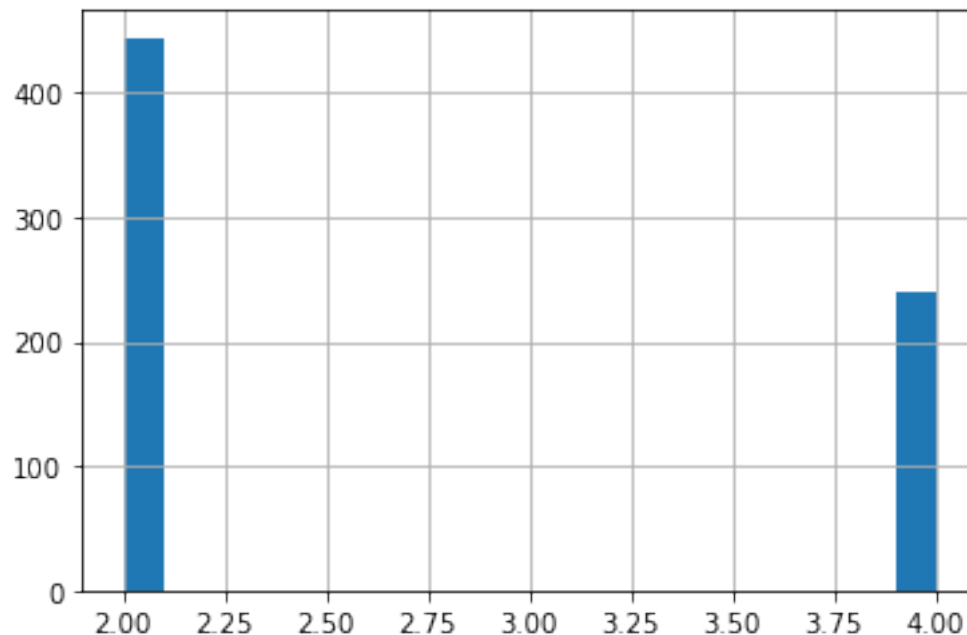

We are going to model this problem as a binary classification problem which detects whether the tumor is malignant or not. Hence, we change the dataset so that: * **benign(2.0) = 0** * **malignant(4.0) = 1**

```
[7]: df['class'] = np.where(df['class'] == 2, 0, 1)
```

We then split the dataset into training and testing sets. Since the number of samples is small, we will perform validation on the test set.

```
[8]: train, test = train_test_split(df, test_size = 0.2)
```

We get the statistics for training. We can look at statistics to get an idea about the distribution of plots. If you need more visualization, you can create additional data plots. We will also be using the mean and standard deviation from statistics for normalizing the data

```
[9]: train_stats = train.describe()  
train_stats.pop('class')  
train_stats = train_stats.transpose()
```

We pop the class column from the training and test sets to create train and test outputs.

```
[10]: train_Y = train.pop("class")
      test_Y = test.pop("class")
```

Here we normalize the data by using the formula: $\mathbf{X} = (\mathbf{X} - \text{mean}(\mathbf{X})) / \text{StandardDeviation}(\mathbf{X})$

```
[11]: def norm(x):
      return (x - train_stats['mean']) / train_stats['std']
```

```
[12]: norm_train_X = norm(train)
      norm_test_X = norm(test)
```

We now create Tensorflow datasets for training and test sets to easily be able to build and manage an input pipeline for our model.

```
[13]: train_dataset = tf.data.Dataset.from_tensor_slices((norm_train_X.values,
    ↪train_Y.values))
      test_dataset = tf.data.Dataset.from_tensor_slices((norm_test_X.values, test_Y.
    ↪values))
```

We shuffle and prepare a batched dataset to be used for training in our custom training loop.

```
[14]: batch_size = 32
      train_dataset = train_dataset.shuffle(buffer_size=len(train)).batch(batch_size)
      test_dataset = test_dataset.batch(batch_size=batch_size)
```

```
[15]: a = enumerate(train_dataset)

      print(len(list(a)))
```

18

1.3 Define the Model

Now we will define the model. Here, we use the Keras Functional API to create a simple network of two `Dense` layers. We have modelled the problem as a binary classification problem and hence we add a single layer with sigmoid activation as the final layer of the model.

```
[16]: def base_model():
      inputs = tf.keras.layers.Input(shape=(len(train.columns)))

      x = tf.keras.layers.Dense(128, activation='relu')(inputs)
      x = tf.keras.layers.Dense(64, activation='relu')(x)
      outputs = tf.keras.layers.Dense(1, activation='sigmoid')(x)
      model = tf.keras.Model(inputs=inputs, outputs=outputs)
      return model
```

```
model = base_model()
```

1.4 Define Optimizer and Loss

We use RMSprop optimizer and binary crossentropy as our loss function.

```
[17]: optimizer = tf.keras.optimizers.RMSprop(learning_rate=0.001)
      loss_object = tf.keras.losses.BinaryCrossentropy()
```

1.5 Evaluate Untrained Model

We calculate the loss on the model before training begins.


```
[18]: outputs = model(norm_test_X.values)
      loss_value = loss_object(y_true=test_Y.values, y_pred=outputs)
      print("Loss before training %.4f" % loss_value.numpy())
```

Loss before training 0.6919

We also plot the confusion matrix to visualize the true outputs against the outputs predicted by the model.

```
[19]: def plot_confusion_matrix(y_true, y_pred, title='', labels=[0,1]):
      cm = confusion_matrix(y_true, y_pred)
      fig = plt.figure()
      ax = fig.add_subplot(111)
      cax = ax.matshow(cm)
      plt.title(title)
      fig.colorbar(cax)
      ax.set_xticklabels([''] + labels)
      ax.set_yticklabels([''] + labels)
      plt.xlabel('Predicted')
      plt.ylabel('True')
      fmt = 'd'
      thresh = cm.max() / 2.
      for i, j in itertools.product(range(cm.shape[0]), range(cm.shape[1])):
          plt.text(j, i, format(cm[i, j], fmt),
                   horizontalalignment="center",
                   color="black" if cm[i, j] > thresh else "white")
      plt.show()
```

```
[20]: plot_confusion_matrix(test_Y.values, tf.round(outputs), title='Confusion Matrix_
      ↪for Untrained Model')
```

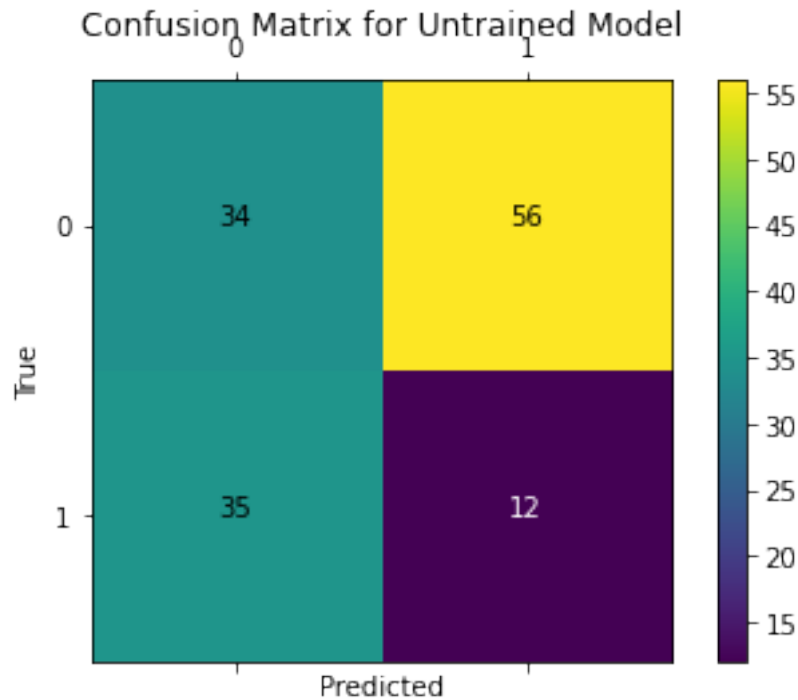

1.6 Define Metrics (Please complete this section)

1.6.1 Define Custom F1Score Metric

In this example, we will define a custom F1Score metric using the formula.

$$\text{F1 Score} = 2 * ((\text{precision} * \text{recall}) / (\text{precision} + \text{recall}))$$

$$\text{precision} = \text{true_positives} / (\text{true_positives} + \text{false_positives})$$

$$\text{recall} = \text{true_positives} / (\text{true_positives} + \text{false_negatives})$$

We use `confusion_matrix` defined in `tf.math` to calculate precision and recall.

Here you can see that we have subclassed `tf.keras.Metric` and implemented the three required methods `update_state`, `result` and `reset_states`.

1.6.2 Please complete the `result()` method:

```
[23]: class F1Score(tf.keras.metrics.Metric):

    def __init__(self, name='f1_score', **kwargs):
        '''initializes attributes of the class'''
```

```

# call the parent class init
super(F1Score, self).__init__(name=name, **kwargs)

# Initialize Required variables
# true positives
self.tp = tf.Variable(0, dtype = 'int32')
# false positives
self.fp = tf.Variable(0, dtype = 'int32')
# true negatives
self.tn = tf.Variable(0, dtype = 'int32')
# false negatives
self.fn = tf.Variable(0, dtype = 'int32')

def update_state(self, y_true, y_pred, sample_weight=None):
    '''
    Accumulates statistics for the metric

    Args:
        y_true: target values from the test data
        y_pred: predicted values by the model
    '''

    # Calulcate confusion matrix.
    conf_matrix = tf.math.confusion_matrix(y_true, y_pred, num_classes=2)

    # Update values of true positives, true negatives, false positives and
    → false negatives from confusion matrix.
    self.tn.assign_add(conf_matrix[0][0])
    self.tp.assign_add(conf_matrix[1][1])
    self.fp.assign_add(conf_matrix[0][1])
    self.fn.assign_add(conf_matrix[1][0])

def result(self):
    '''Computes and returns the metric value tensor.'''

    # Calculate precision
    if (self.tp + self.fp == 0):
        precision = 1.0
    else:
        precision = self.tp / (self.tp + self.fp)

    # Calculate recall
    if (self.tp + self.fn == 0):
        recall = 1.0
    else:
        recall = self.tp / (self.tp + self.fn)

```

```

    # Return F1 Score
    ### START CODE HERE ###
    f1_score = 2*(precision*recall)/(precision + recall)
    ### END CODE HERE ###

    return f1_score

def reset_states(self):
    '''Resets all of the metric state variables.'''

    # The state of the metric will be reset at the start of each epoch.
    self.tp.assign(0)
    self.tn.assign(0)
    self.fp.assign(0)
    self.fn.assign(0)

```

```

[24]: # Test Code:

test_F1Score = F1Score()

test_F1Score.tp = tf.Variable(2, dtype = 'int32')
test_F1Score.fp = tf.Variable(5, dtype = 'int32')
test_F1Score.tn = tf.Variable(7, dtype = 'int32')
test_F1Score.fn = tf.Variable(9, dtype = 'int32')
test_F1Score.result()

```

```

[24]: <tf.Tensor: shape=(), dtype=float64, numpy=0.2222222222222222>

```

Expected Output:

```

<tf.Tensor: shape=(), dtype=float64, numpy=0.2222222222222222>

```

We initialize the separate metrics required for training and validation. In addition to our custom F1Score metric, we are also using BinaryAccuracy defined in `tf.keras.metrics`

```

[25]: train_f1score_metric = F1Score()
      val_f1score_metric = F1Score()

      train_acc_metric = tf.keras.metrics.BinaryAccuracy()
      val_acc_metric = tf.keras.metrics.BinaryAccuracy()

```

1.7 Apply Gradients (Please complete this section)

The core of training is using the model to calculate the logits on specific set of inputs and compute the loss(in this case **binary crossentropy**) by comparing the predicted outputs to the true outputs. We then update the trainable weights using the optimizer algorithm chosen. The optimizer algorithm requires our computed loss and partial derivatives of loss with respect to each of the trainable weights to make updates to the same.

We use gradient tape to calculate the gradients and then update the model trainable weights using the optimizer.

1.7.1 Please complete the following function:

```
[26]: def apply_gradient(optimizer, loss_object, model, x, y):  
    '''  
    applies the gradients to the trainable model weights  
  
    Args:  
        optimizer: optimizer to update model weights  
        loss_object: type of loss to measure during training  
        model: the model we are training  
        x: input data to the model  
        y: target values for each input  
    '''  
  
    with tf.GradientTape() as tape:  
        ### START CODE HERE ###  
        logits = model(x)  
        loss_value = loss_object(y, logits)  
  
        gradients = tape.gradient(loss_value, model.trainable_variables)  
        optimizer.apply_gradients(zip(gradients, model.trainable_variables))  
        ### END CODE HERE ###  
  
    return logits, loss_value
```

```
[27]: # Test Code:  
  
test_model = tf.keras.models.load_model('./test_model')  
test_logits, test_loss = apply_gradient(optimizer, loss_object, test_model,  
    ↪ norm_test_X.values, test_Y.values)  
  
print(test_logits.numpy()[:8])  
print(test_loss.numpy())  
  
del test_model  
del test_logits  
del test_loss
```

```
[[0.5344353 ]  
 [0.54712695]  
 [0.5301612 ]  
 [0.5625965 ]  
 [0.5371001 ]  
 [0.44471383]
```

```
[0.48179647]
[0.5278803 ]]
0.7098816
```

Expected Output:

The output will be close to these values:

```
[[0.5516499 ]
 [0.52124363]
 [0.5412698 ]
 [0.54203206]
 [0.50022954]
 [0.5459626 ]
 [0.47841492]
 [0.54381996]]
0.7030578
```

1.8 Training Loop (Please complete this section)

This function performs training during one epoch. We run through all batches of training data in each epoch to make updates to trainable weights using our previous function. You can see that we also call `update_state` on our metrics to accumulate the value of our metrics.

We are displaying a progress bar to indicate completion of training in each epoch. Here we use `tqdm` for displaying the progress bar.

1.8.1 Please complete the following function:

```
[28]: def train_data_for_one_epoch(train_dataset, optimizer, loss_object, model,
                                   train_acc_metric, train_f1score_metric,
                                   verbose=True):
    """
    Computes the loss then updates the weights and metrics for one epoch.

    Args:
        train_dataset: the training dataset
        optimizer: optimizer to update model weights
        loss_object: type of loss to measure during training
        model: the model we are training
        train_acc_metric: calculates how often predictions match labels
        train_f1score_metric: custom metric we defined earlier
    """
    losses = []

    #Iterate through all batches of training data
    for step, (x_batch_train, y_batch_train) in enumerate(train_dataset):
```

```

        #Calculate loss and update trainable variables using optimizer
        ### START CODE HERE ###
        logits, loss_value = apply_gradient(optimizer, loss_object, model,
→x_batch_train, y_batch_train)
        losses.append(loss_value)
        ### END CODE HERE ###

        #Round off logits to nearest integer and cast to integer for calculating
→metrics
        logits = tf.round(logits)
        logits = tf.cast(logits, 'int64')

        #Update the training metrics
        ### START CODE HERE ###
        train_acc_metric.update_state(y_batch_train, logits)
        train_f1score_metric.update_state(y_batch_train, logits)
        ### END CODE HERE ###

        #Update progress
        if verbose:
            print("Training loss for step %s: %.4f" % (int(step),
→float(loss_value)))

        return losses

```

```

[29]: # TEST CODE

test_model = tf.keras.models.load_model('./test_model')

test_losses = train_data_for_one_epoch(train_dataset, optimizer, loss_object,
→test_model,

                                train_acc_metric, train_f1score_metric,
→verbose=False)

for test_loss in test_losses:
    print(test_loss.numpy())

del test_model
del test_losses

```

```

0.7391727
0.60878825
0.5503328
0.498039
0.44289324
0.4355663
0.38906476

```

```
0.31107628
0.32120475
0.2890497
0.27672273
0.27553055
0.27625903
0.36322004
0.2563722
0.14737695
0.22202872
0.14298762
```

Expected Output:

The losses should generally be decreasing and will start from around 0.75. For example:

```
0.7600615
0.6092045
0.5525634
0.4358902
0.4765755
0.43327087
0.40585428
0.32855004
0.35755336
0.3651728
0.33971977
0.27372319
0.25026917
0.29229593
0.242178
0.20602849
0.15887335
0.090397514
```

At the end of each epoch, we have to validate the model on the test dataset. The following function calculates the loss on test dataset and updates the states of the validation metrics.

```
[30]: def perform_validation():
        losses = []

        #Iterate through all batches of validation data.
        for x_val, y_val in test_dataset:

            #Calculate validation loss for current batch.
            val_logits = model(x_val)
            val_loss = loss_object(y_true=y_val, y_pred=val_logits)
            losses.append(val_loss)
```

```

#Round off and cast outputs to either 0 or 1
val_logits = tf.cast(tf.round(model(x_val)), 'int64')

#Update validation metrics
val_acc_metric.update_state(y_val, val_logits)
val_f1score_metric.update_state(y_val, val_logits)

return losses

```

Next we define the training loop that runs through the training samples repeatedly over a fixed number of epochs. Here we combine the functions we built earlier to establish the following flow: 1. Perform training over all batches of training data. 2. Get values of metrics. 3. Perform validation to calculate loss and update validation metrics on test data. 4. Reset the metrics at the end of epoch. 5. Display statistics at the end of each epoch.

Note : We also calculate the training and validation losses for the whole epoch at the end of the epoch.

```

[31]: # Iterate over epochs.
epochs = 5
epochs_val_losses, epochs_train_losses = [], []

for epoch in range(epochs):
    print('Start of epoch %d' % (epoch,))
    #Perform Training over all batches of train data
    losses_train = train_data_for_one_epoch(train_dataset, optimizer,
    ↪loss_object, model, train_acc_metric, train_f1score_metric)

    # Get results from training metrics
    train_acc = train_acc_metric.result()
    train_f1score = train_f1score_metric.result()

    #Perform validation on all batches of test data
    losses_val = perform_validation()

    # Get results from validation metrics
    val_acc = val_acc_metric.result()
    val_f1score = val_f1score_metric.result()

    #Calculate training and validation losses for current epoch
    losses_train_mean = np.mean(losses_train)
    losses_val_mean = np.mean(losses_val)
    epochs_val_losses.append(losses_val_mean)
    epochs_train_losses.append(losses_train_mean)

```

```

    print('\n Epoch %s: Train loss: %.4f  Validation Loss: %.4f, Train Accuracy:
    ↳ %.4f, Validation Accuracy %.4f, Train F1 Score: %.4f, Validation F1 Score:↳
    ↳ %.4f' % (epoch, float(losses_train_mean), float(losses_val_mean),
    ↳ float(train_acc), float(val_acc), train_f1score, val_f1score))

    #Reset states of all metrics
    train_acc_metric.reset_states()
    val_acc_metric.reset_states()
    val_f1score_metric.reset_states()
    train_f1score_metric.reset_states()

```

Start of epoch 0

```

Training loss for step 0: 0.7376
Training loss for step 1: 0.5967
Training loss for step 2: 0.4928
Training loss for step 3: 0.4217
Training loss for step 4: 0.3746
Training loss for step 5: 0.3648
Training loss for step 6: 0.2644
Training loss for step 7: 0.2620
Training loss for step 8: 0.2519
Training loss for step 9: 0.2420
Training loss for step 10: 0.2318
Training loss for step 11: 0.2357
Training loss for step 12: 0.1670
Training loss for step 13: 0.1576
Training loss for step 14: 0.1846
Training loss for step 15: 0.2361
Training loss for step 16: 0.1561
Training loss for step 17: 0.1695

```

Epoch 0: Train loss: 0.3082 Validation Loss: 0.1537, Train Accuracy: 0.9253,
Validation Accuracy 0.9688, Train F1 Score: 0.8933, Validation F1 Score: 0.9474

Start of epoch 1

```

Training loss for step 0: 0.1164
Training loss for step 1: 0.2290
Training loss for step 2: 0.1429
Training loss for step 3: 0.1241
Training loss for step 4: 0.1474
Training loss for step 5: 0.0686
Training loss for step 6: 0.1596
Training loss for step 7: 0.0851
Training loss for step 8: 0.1072
Training loss for step 9: 0.0702
Training loss for step 10: 0.0576
Training loss for step 11: 0.0853
Training loss for step 12: 0.0491

```

Training loss for step 13: 0.0442
Training loss for step 14: 0.1410
Training loss for step 15: 0.0635
Training loss for step 16: 0.1632
Training loss for step 17: 0.0224

Epoch 1: Train loss: 0.1043 Validation Loss: 0.0960, Train Accuracy: 0.9722,
Validation Accuracy 0.9688, Train F1 Score: 0.9588, Validation F1 Score: 0.9474
Start of epoch 2

Training loss for step 0: 0.0288
Training loss for step 1: 0.1554
Training loss for step 2: 0.0615
Training loss for step 3: 0.1042
Training loss for step 4: 0.0192
Training loss for step 5: 0.0644
Training loss for step 6: 0.2492
Training loss for step 7: 0.0708
Training loss for step 8: 0.1328
Training loss for step 9: 0.0655
Training loss for step 10: 0.0165
Training loss for step 11: 0.1577
Training loss for step 12: 0.0224
Training loss for step 13: 0.0287
Training loss for step 14: 0.1121
Training loss for step 15: 0.0550
Training loss for step 16: 0.0340
Training loss for step 17: 0.0189

Epoch 2: Train loss: 0.0776 Validation Loss: 0.0850, Train Accuracy: 0.9740,
Validation Accuracy 0.9688, Train F1 Score: 0.9612, Validation F1 Score: 0.9474
Start of epoch 3

Training loss for step 0: 0.0963
Training loss for step 1: 0.0318
Training loss for step 2: 0.0350
Training loss for step 3: 0.0459
Training loss for step 4: 0.0168
Training loss for step 5: 0.0888
Training loss for step 6: 0.0284
Training loss for step 7: 0.1307
Training loss for step 8: 0.1016
Training loss for step 9: 0.1413
Training loss for step 10: 0.0373
Training loss for step 11: 0.0231
Training loss for step 12: 0.0934
Training loss for step 13: 0.0554
Training loss for step 14: 0.1594
Training loss for step 15: 0.0395
Training loss for step 16: 0.1205

Training loss for step 17: 0.0227

Epoch 3: Train loss: 0.0704 Validation Loss: 0.0799, Train Accuracy: 0.9740,
Validation Accuracy 0.9688, Train F1 Score: 0.9612, Validation F1 Score: 0.9474
Start of epoch 4

Training loss for step 0: 0.0218
Training loss for step 1: 0.0142
Training loss for step 2: 0.0875
Training loss for step 3: 0.0772
Training loss for step 4: 0.0104
Training loss for step 5: 0.0324
Training loss for step 6: 0.1543
Training loss for step 7: 0.0573
Training loss for step 8: 0.0446
Training loss for step 9: 0.2268
Training loss for step 10: 0.0671
Training loss for step 11: 0.0130
Training loss for step 12: 0.0169
Training loss for step 13: 0.0405
Training loss for step 14: 0.0337
Training loss for step 15: 0.0865
Training loss for step 16: 0.1675
Training loss for step 17: 0.0021


Epoch 4: Train loss: 0.0641 Validation Loss: 0.0748, Train Accuracy: 0.9774,
Validation Accuracy 0.9688, Train F1 Score: 0.9664, Validation F1 Score: 0.9474

1.9 Evaluate the Model

1.9.1 Plots for Evaluation


We plot the progress of loss as training proceeds over number of epochs.

```
[32]: def plot_metrics(train_metric, val_metric, metric_name, title, ylim=5):  
    plt.title(title)  
    plt.ylim(0,ylim)  
    plt.gca().xaxis.set_major_locator(mticker.MultipleLocator(1))  
    plt.plot(train_metric,color='blue',label=metric_name)  
    plt.plot(val_metric,color='green',label='val_' + metric_name)  
  
    plot_metrics(epochs_train_losses, epochs_val_losses, "Loss", "Loss", ylim=1.0)
```

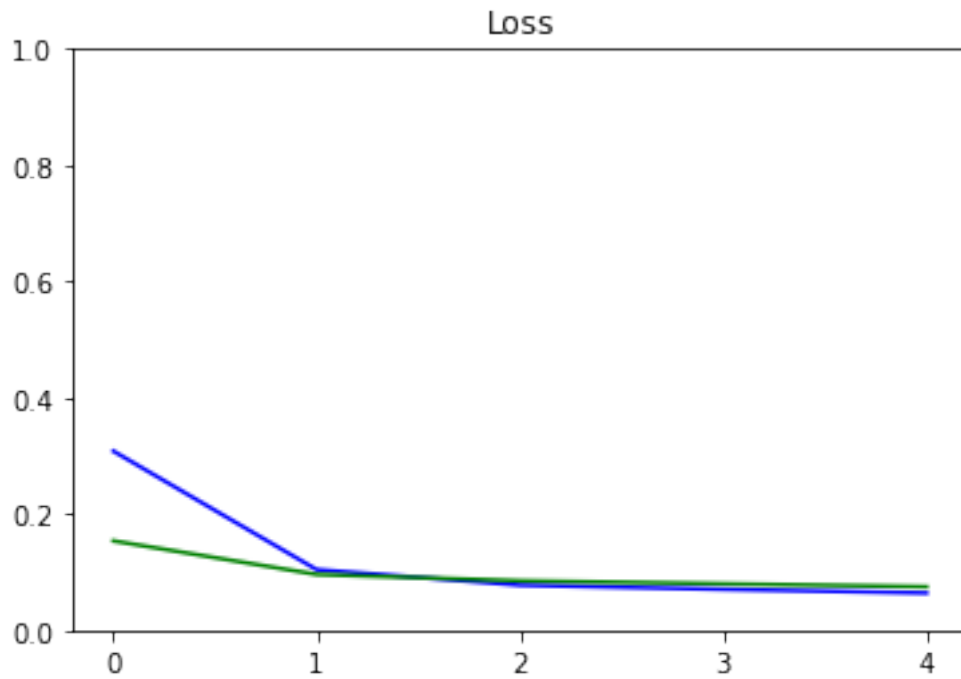We plot the confusion matrix to visualize the true values against the values predicted by the model.

```
[33]: test_outputs = model(norm_test_X.values)
      plot_confusion_matrix(test_Y.values, tf.round(test_outputs), title='Confusion_
      ↪Matrix for Untrained Model')
```

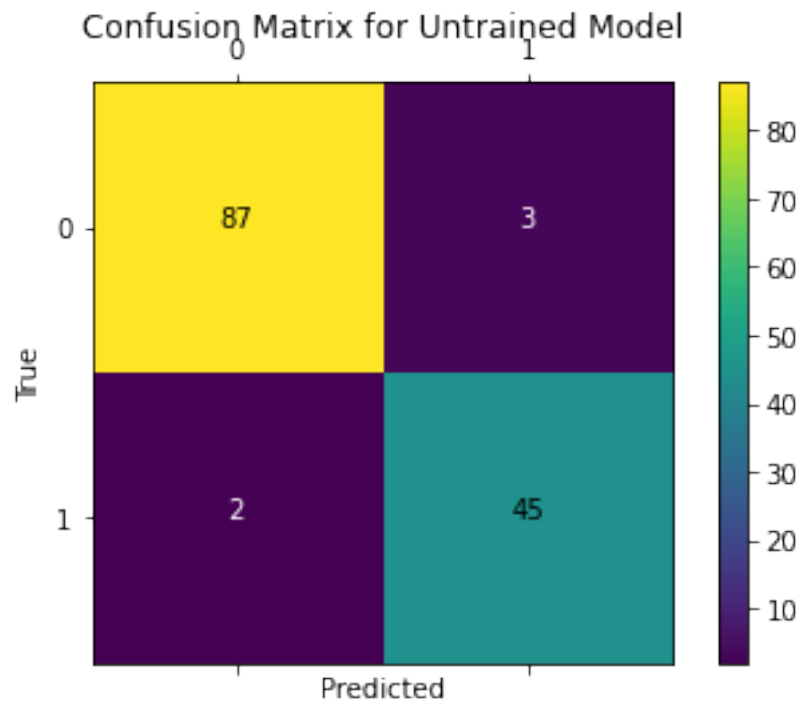

[]: