

```

require(enviR) # MANDATORY: defining the root folder DO NOT change this line
rootDIR = "C:/Users/jomue/edu/geoAI"
source(file.path(enviR::alternativeEnvi(root_folder =
rootDIR),"src/geo_AI_setup.R"),echo = TRUE) #read data
Koralle<-sf::st_read("E:/Koralle/images/Coral_bleaching_10m_2022.shp") Koralle
Coral_ras = raster::stack("E:/Koralle/images/Coral_2017_old.tif") Coral_ras
names(Coral_ras)<-c("red","green","blue") Coral_ras<-
subset(Coral_ras,c("red","green","blue")) Koralle<-Koralle[,c(2:6)] Koralle =
sf::st_transform(Koralle, crs(Coral_ras)) Coral_extent <- raster::extent(Coral_ras) Koralle <-
sf::st_crop(Koralle, Coral_extent) Koralle # rasterize the coral rasterized_vector <-
raster::rasterize(Koralle, Coral_ras[[1]]) rasterized_vector
rasterized_vector[is.na(rasterized_vector[2:4])] <- 1
rasterized_vector[is.na(rasterized_vector[1,3,4])] <- 2
rasterized_vector[is.na(rasterized_vector[1,2,4])] <- 3
rasterized_vector[is.na(rasterized_vector[1:3])] <- 4 rasterized_vector
raster::writeRaster(rasterized_vector,
("E:/Koralle/images/Coral_Mask_2017_bleaching.tif"), overwrite = T) # divide to training
and testing extent e_test <- raster::extent(3e+05, 7390240, 409800, 74300000) e_train <-
raster::extent(3e+05, 74300000, 409800, 7500040)

coral_mask_train <- raster::crop(rasterized_vector, e_train) coral_dop_train <-
raster::crop(Coral_ras, e_train)

coral_mask_test <- raster::crop(rasterized_vector, e_test) coral_dop_test <-
raster::crop(Coral_ras, e_test)

raster::writeRaster( coral_mask_test,
("E:/Koralle/images/Coral_Mask_bleaching_2017_test.tif"), overwrite = T )

raster::writeRaster( coral_dop_test,
("E:/Koralle/images/Coral_Dop_bleaching_2017_test.tif"), overwrite = T )

raster::writeRaster( coral_mask_train,
("E:/Koralle/images/Coral_Mask_bleaching_2017_train.tif"), overwrite = T )

raster::writeRaster( coral_dop_train,
("E:/Koralle/images/Coral_Dop_bleaching_2017_train.tif"), overwrite = T )

subset_ds <- function(input_raster, model_input_shape, path, targetname = "", mask =
FALSE) { # determine next number of quadrats in x and y direction, by simple rounding
targetsizeX <- model_input_shape[1] targetsizeY <- model_input_shape[2] inputX <-
ncol(input_raster) inputY <- nrow(input_raster) # determine dimensions of raster so that #
it can be split by whole number of subsets (by shrinking it) while (inputX %% targetsizeX !
= 0) { inputX = inputX - 1 } while (inputY %% targetsizeY != 0) { inputY = inputY - 1 } #
determine difference diffX <- ncol(input_raster) - inputX diffY <- nrow(input_raster) -
inputY # determine new dimensions of raster and crop, # cutting evenly on all sides if
possible newXmin <- floor(diffX / 2) newXmax <- ncol(input_raster) - ceiling(diffX / 2) - 1

```

```

newYmin <- floor(diffY / 2) newYmax <- nrow(input_raster) - ceiling(diffY / 2) - 1
rst_cropped <- suppressMessages(raster::crop( input_raster, raster::extent(input_raster,
newYmin, newYmax, newXmin, newXmax) )) agg <-
suppressMessages(raster::aggregate(rst_cropped[[1]], c(targetsizeX, targetsizeY))) agg[] <-
suppressMessages(1:ncell(agg)) agg_poly <-
suppressMessages(raster::rasterToPolygons(agg)) names(agg_poly) <- "polis" if (mask)
{ lapply( seq_along(agg), FUN = function(i) { subs <- local({ e1 <-
raster::extent(agg_poly[agg_poly$polis == i,]) subs <-
suppressMessages(raster::crop(rst_cropped, e1)) }) writePNG(as.array(subs), target =
paste0(path, targetname, i, ".png")) } ) } else{ lapply( seq_along(agg), FUN = function(i)
{ subs <- local({ e1 <- raster::extent(agg_poly[agg_poly$polis == i,]) subs <-
suppressMessages(raster::crop(rst_cropped, e1)) # rescale to 0-1, for png export if (mask
== FALSE) { subs <- suppressMessages((subs - cellStats(subs, "min")) / (cellStats(subs,
"max") - cellStats(subs, "min"))) } }) writePNG(as.array(subs), target = paste0(path,
targetname, i, ".png")) } ) } rm(subs, agg, agg_poly) gc() return(rst_cropped) } remove_files
<- function(df) { lapply( seq(1, nrow(df)), FUN = function(i) { local({ fil = df$list_masks[i]
png = readPNG(fil) len = length(png) if (AllEqual(png)) { file.remove(df$list_dops[i])
file.remove(df$list_masks[i]) } else { } } ) } ) }

```

read training data

```

coral_mask_train <-
raster::stack("E:/Koralle/images/Coral_Mask_bleaching_2017_train.tif") coral_dop_train <-
raster::stack("E:/Koralle/images/Coral_Dop_bleaching_2017_train.tif") # set the size of
each image model_input_shape = c(128, 128)

subset_ds( input_raster = coral_mask_train, path =
"E:/Koralle/images/Cor_bleaching_2017/", mask = TRUE, model_input_shape =
model_input_shape )

subset_ds( input_raster = coral_dop_train, path =
"E:/Koralle/images/Dop_bleaching_2017/", mask = FALSE, model_input_shape =
model_input_shape )

```

list all created files in both folders

```

list_dops <- list.files("E:/Koralle/images/Dop_bleaching_2017/", full.names = TRUE,
pattern = ".png") list_masks <- list.files("E:/Koralle/images/Cor_bleaching_2017/", full.names
= TRUE, pattern = ".png")

```

create a data fram

```

df = data.frame(list_dops, list_masks)

```

```
remove_files(df)
```

list the files again

```
files <- data.frame( img = list.files( file.path("E:/Koralle/images/Dop_bleaching_2017/"),  
full.names = TRUE, pattern = ".png" ), mask = list.files(  
file.path("E:/Koralle/images/Cor_bleaching_2017/"), full.names = TRUE, pattern = ".png" ) )  
# split randomly into training and validation (not testing!!) data sets  
set.seed(7) data <- initial_split(files, prop = 0.8)
```

function to prepare your data set for all further processes

```
prepare_ds <- function(files = NULL, train, predict = FALSE, subsets_path = NULL,  
model_input_shape = c(256, 256), batch_size = batch_size, visual = FALSE) { if (!predict) { #  
function for random change of saturation, brightness and hue, # will be used as part of the  
augmentation  
spectral_augmentation <- function(img) { img <- tfimage  
random_brightness(img, max_delta = 0.1) img <- tfimage  
random_contrast(img, lower = 0.9, upper = 1.1) img <- tfimage  
random_saturation(img, lower = 0.9, upper = 1.1) # make  
sure we still are between 0 and 1  
img <- tf$clip_by_value(img, 0, 1) } # create a tf_dataset  
from the input data.frame # right now still containing only paths to images  
dataset <- tensor_slices_dataset(files) # use dataset_map to apply function on each record of the  
dataset # (each record being a list with two items: img and mask), the # function is  
list_modify, which modifies the list items # 'img' and 'mask' by using the results of  
applying decode_png on the img and the mask # -> i.e. pngs are loaded and placed where  
the paths to the files were (for each record in dataset)  
dataset <- dataset_map(dataset, function(x) list_modify( .x, img = tf$image  
decode_png(tfioread_file(x$mask)) )) # convert to float32: # for each record in  
dataset, both its list items are modified # by the result of applying convert_image_dtype to  
them  
dataset <- dataset_map(dataset, function(x) list_modify( .x, img = tf$image  
convert_image_dtype(img, dtype = tf$float32), mask = tf$image  
convert_image_dtype(mask, dtype = tf$float32) )) # data augmentation performed on training set only  
if (train) { # augmentation 1: flip left right, including random change of # saturation, brightness and  
contrast # for each record in dataset, only the img item is modified by the result # of  
applying spectral_augmentation to it  
augmentation <- dataset_map(dataset, function(x) list_modify(x, img = spectral_augmentation(x$img)))  
#...as opposed to this, flipping is applied to img and mask of each record  
augmentation <- dataset_map(augmentation, function(x) list_modify( .x, img = tfimage  
flip_left_right(x$img), mask = tfimage  
flip_left_right(x$mask) ))  
dataset_augmented <- dataset_concatenate(augmentation, dataset) # augmentation 2: flip up down, # including random change of saturation,  
brightness and contrast  
augmentation <- dataset_map(dataset, function(x) list_modify(x, img = spectral_augmentation(x$img),  
augmentation <- dataset_map(image  
flip_up_down(x$img), mask = tfimage  
flip_up_down(x$mask) ))  
dataset_augmented <- dataset_concatenate(augmentation, dataset_augmented) # augmentation 3: flip left right  
AND up down, # including random change of saturation, brightness and contrast
```

```

augmentation <- dataset_map(dataset, function(.x) list_modify(.x, img =
spectral_augmentation(.x$img))) augmentation <- dataset_map(augmentation, function(.x)
list_modify(.x, img = tfimageflip_left_right(.x$img, mask=tfimageflip_left_right(mask)
mask))) augmentation <- dataset_map(augmentation, function(.x) list_modify(.x, img = tf
imageflip_up_down(.x$img, mask=tfimageflip_up_down(mask))) dataset_augmented <-
dataset_concatenate(augmentation, dataset_augmented) } # shuffling on training set only #
unsauber if (!visual) { if (train) { dataset <- dataset_shuffle(dataset_augmented, buffer_size
= batch_size * 256) } # train in batches; batch size might need to be adapted depending on
# available memory dataset <- dataset_batch(dataset, batch_size) } if (visual) { dataset <-
dataset_augmented } # output needs to be unnamed dataset <- dataset_map(dataset,
unnamed) } else{ # make sure subsets are read in in correct order # so that they can later be
reassembled correctly # needs files to be named accordingly (only number) o <-
order(as.numeric(tools::file_path_sans_ext(basename( list.files(subsets_path) ))))
subset_list <- list.files(subsets_path, full.names = T)[o] dataset <-
tensor_slices_dataset(subset_list) dataset <- dataset_map(dataset, function(.x) tfimage
decode_png(tfioread_file(.x))) dataset <- dataset_map(dataset, function(.x) tfimage
convert_image_dtype(.x, dtype = tf$float32)) dataset <- dataset_batch(dataset, batch_size)
dataset <- dataset_map(dataset, unnamed) } }

```

one more parameter

```
batch_size = 8
```

prepare data for training

```

training_dataset <- prepare_ds( training(data), train = TRUE, predict = FALSE,
model_input_shape = model_input_shape, batch_size = batch_size )

```

also prepare validation data

```

validation_dataset <- prepare_ds( testing(data), train = FALSE, predict = FALSE,
model_input_shape = model_input_shape, batch_size = batch_size )

```


we first get a all our training data

```
it <- as_iterator(training_dataset) it <- iterate(it) # head(it)
```

we convert our data to an array and also subset our iterator e.g.

with the 4th batch ([[4]]) of the images ([[1]])

```
im <- as.array(it[[4]][[1]]) # then we subset just take the first image out of our batch im <-  
im[1,,] # and plot it plot(as.raster(im))
```

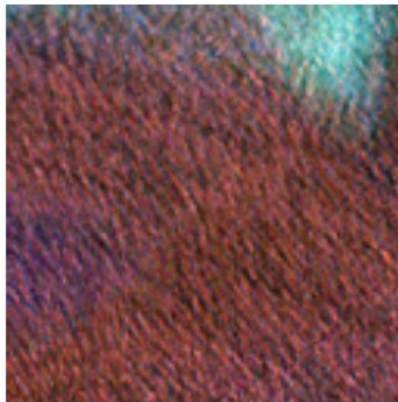

and for the according mask it is almost the same

```
ma <- as.array(it[[4]][[2]]) ma <- ma[1,,] plot(as.raster(ma))
```



```


#U-Net # function to build a U-Net # of course it is possible to change the input_shape
get_unet_128 <- function(input_shape = c(128, 128, 3), num_classes = 1) { inputs <-
layer_input(shape = input_shape) # 128 down1 <- inputs %>% layer_conv_2d(filters = 64,
kernel_size = c(3, 3), padding = "same") %>% layer_activation("relu") %>%
layer_conv_2d(filters = 64, kernel_size = c(3, 3), padding = "same") %>%
layer_activation("relu") down1_pool <- down1 %>% layer_max_pooling_2d(pool_size = c(2,
2), strides = c(2, 2)) # 64 down2 <- down1_pool %>% layer_conv_2d(filters = 128,
kernel_size = c(3, 3), padding = "same") %>% layer_activation("relu") %>%
layer_conv_2d(filters = 128, kernel_size = c(3, 3), padding = "same") %>%
layer_activation("relu") down2_pool <- down2 %>% layer_max_pooling_2d(pool_size = c(2,
2), strides = c(2, 2)) # 32 down3 <- down2_pool %>% layer_conv_2d(filters = 256,
kernel_size = c(3, 3), padding = "same") %>% layer_activation("relu") %>%
layer_conv_2d(filters = 256, kernel_size = c(3, 3), padding = "same") %>%
layer_activation("relu") down3_pool <- down3 %>% layer_max_pooling_2d(pool_size = c(2,
2), strides = c(2, 2)) # 16 down4 <- down3_pool %>% layer_conv_2d(filters = 512,
kernel_size = c(3, 3), padding = "same") %>% layer_activation("relu") %>%
layer_conv_2d(filters = 512, kernel_size = c(3, 3), padding = "same") %>%
layer_activation("relu") down4_pool <- down4 %>% layer_max_pooling_2d(pool_size = c(2,
2), strides = c(2, 2)) # # 8 center <- down4_pool %>% layer_conv_2d(filters = 1024,
kernel_size = c(3, 3), padding = "same") %>% layer_activation("relu") %>%
layer_conv_2d(filters = 1024, kernel_size = c(3, 3), padding = "same") %>%
layer_activation("relu") # center up4 <- center %>% layer_upsampling_2d(size = c(2, 2))
%>% { layer_concatenate(inputs = list(down4, .), axis = 3) } %>% layer_conv_2d(filters =
512, kernel_size = c(3, 3), padding = "same") %>% layer_activation("relu") %>%
layer_conv_2d(filters = 512, kernel_size = c(3, 3), padding = "same") %>%
layer_activation("relu") %>% layer_conv_2d(filters = 512, kernel_size = c(3, 3), padding =
"same") %>% layer_activation("relu") # 16 up3 <- up4 %>% layer_upsampling_2d(size =
c(2, 2)) %>% { layer_concatenate(inputs = list(down3, .), axis = 3) } %>%
layer_conv_2d(filters = 256, kernel_size = c(3, 3), padding = "same") %>%
layer_activation("relu") %>% layer_conv_2d(filters = 256, kernel_size = c(3, 3), padding =
"same") %>% layer_activation("relu") %>% layer_conv_2d(filters = 256, kernel_size = c(3,
3), padding = "same") %>% layer_activation("relu") # 32 up2 <- up3 %>%
layer_upsampling_2d(size = c(2, 2)) %>% { layer_concatenate(inputs = list(down2, .), axis =
3) } %>% layer_conv_2d(filters = 128, kernel_size = c(3, 3), padding = "same") %>%
layer_activation("relu") %>% layer_conv_2d(filters = 128, kernel_size = c(3, 3), padding =
"same") %>% layer_activation("relu") %>% layer_conv_2d(filters = 128, kernel_size = c(3,
3), padding = "same") %>% layer_activation("relu") # # 64 up1 <- up2 %>%
layer_upsampling_2d(size = c(2, 2)) %>% { layer_concatenate(inputs = list(down1, .), axis =
3) } %>% layer_conv_2d(filters = 64, kernel_size = c(3, 3), padding = "same") %>%
layer_activation("relu") %>% layer_conv_2d(filters = 64, kernel_size = c(3, 3), padding =
"same") %>% layer_activation("relu") %>% layer_conv_2d(filters = 64, kernel_size = c(3,
3), padding = "same") %>% layer_activation("relu") # 128 classify <- layer_conv_2d( up1,
filters = num_classes, kernel_size = c(1, 1), activation = "sigmoid" ) model <-
keras_model(inputs = inputs, outputs = classify) return(model) }

```

```
UNET_model <- get_UNET_128() # compile the model UNET_model %>% compile( optimizer =  
optimizer_adam(learning_rate = 0.0001), loss = "binary_crossentropy", metrics =  
"accuracy" )
```

train the model


```
hist <- UNET_model %>% fit( training_dataset, validation_data = validation_dataset, epochs  
= 10, verbose = 1 )
```

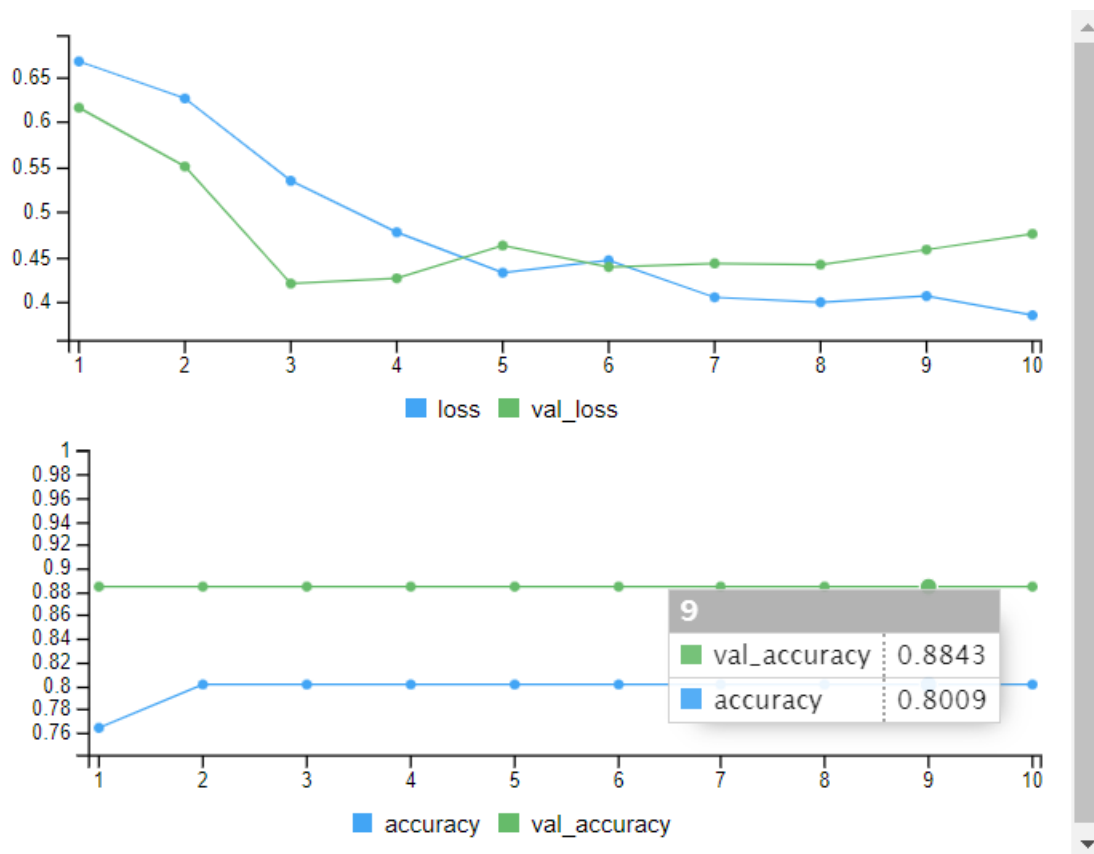

save the model

```
UNET_model %>% save_model_hdf5(file.path("E:/Koralle/images/models/",  
"UNET_corals_2017_bleaching.hdf5"), overwrite=T)
```

```
plot(hist)
```

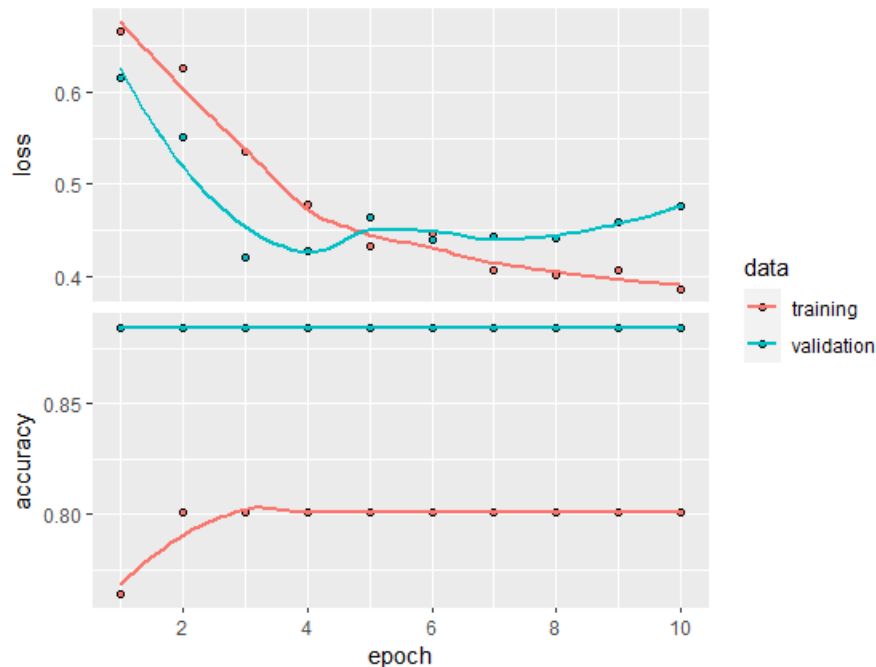

load the test data

```
coral_mask_test <- stack("E:/Koralle/images/Coral_Mask_bleaching_2017_test.tif")
coral_dop_test <- stack("E:/Koralle/images/Coral_Dop_bleaching_2017_test.tif") target_rst
<- subset_ds( input_raster = coral_mask_test, path =
"E:/Koralle/images/Cor_test_bleaching_2017/", mask = TRUE, model_input_shape =
model_input_shape ) subset_ds( input_raster = coral_dop_test, path =
"E:/Koralle/images/Dop_test_bleaching_2017/", mask = FALSE, model_input_shape =
model_input_shape ) # write the target_rst to later rebuild your image
writeRaster( target_rst,
file.path("E:/Koralle/images/models/model_test_2017_bleaching/","coral_mask_bleaching
_2017_test_target.tif"), overwrite = T )
```

```
#list and prepare files again test_file <- data.frame( img = list.files(
file.path("E:/Koralle/images/Dop_test_bleaching_2017"), full.names = T, pattern = ".png" ),
mask = list.files( file.path("E:/Koralle/images/Cor_test_bleaching_2017"), full.names = T,
pattern = ".png" ) )
```



```
testing_dataset <- prepare_ds( test_file, train =FALSE, predict = FALSE, model_input_shape
= model_input_shape, batch_size = batch_size ) # load a U-Net unet_model <-
load_model_hdf5(file.path("E:/Koralle/images/models/",
"unet_corals_2017_bleaching.hdf5"), compile = TRUE) # evaluate the model with test set ev
<- unet_model$evaluate(testing_dataset) # prepare data for prediction prediction_dataset
<- prepare_ds( predict = TRUE, subsets_path =
paste0(file.path("E:/Koralle/images/Dop_test_bleaching_2017/")), model_input_shape =
```




```

model_input_shape, batch_size = batch_size ) # get sample of data from testing data
t_sample <- floor(runif(n = 5, min = 1, max = nrow(test_file))) # simple visual comparison
of mask, image and prediction for (i in t_sample) { png_path <- test_file png_path <-
png_path[i,] img <- image_read(png_path[, 1]) mask <- image_read(png_path[, 2]) pred <-
image_read(as.raster(predict(object = unet_model, testing_dataset)[i, , ])) out <-
image_append(c( image_annotate( mask, "Mask", size = 10, color = "black", boxcolor =
"white" ), image_annotate( img, "Original Image", size = 10, color = "black", boxcolor =
"white" ), image_annotate( pred, "Prediction", size = 10, color = "black", boxcolor =
"white" ) )) plot(out) }

```

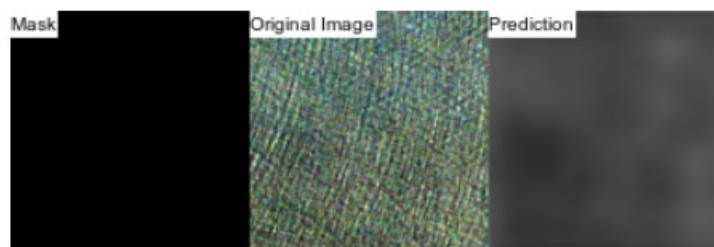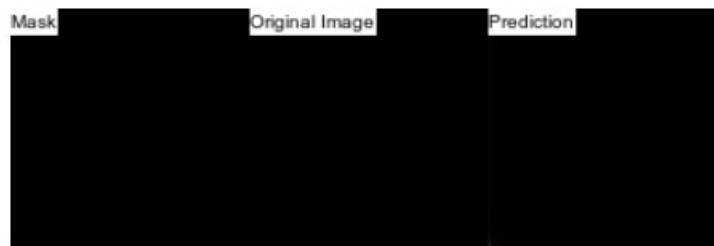

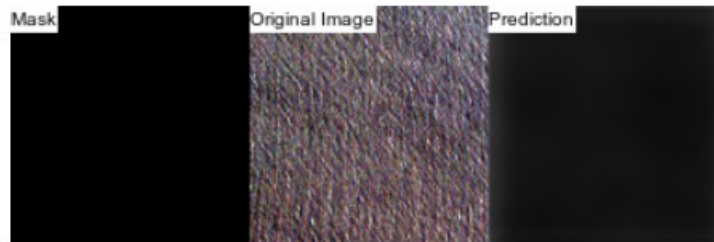

```
# function to rebuild your image rebuild_img <- function(pred_subsets, out_path,
target_rst, model_name) { subset_pixels_x <- ncol(pred_subsets[1,,]) subset_pixels_y <-
nrow(pred_subsets[1,,]) tiles_rows <- nrow(target_rst) / subset_pixels_y tiles_cols <-
ncol(target_rst) / subset_pixels_x # load target image to determine dimensions
target_stars <- st_as_stars(target_rst, proxy = F) #prepare subfolder for output
result_folder <- paste0(out_path, model_name) if (dir.exists(result_folder))
{ unlink(result_folder, recursive = T) } dir.create(path = result_folder) # for each tile,
create a stars from corresponding predictions, # assign dimensions using original/target
image, and save as tif: for (crow in 1:tiles_rows) { for (ccol in 1:tiles_cols) { i <- (crow - 1) *
tiles_cols + (ccol - 1) + 1 dimx <- c(((ccol - 1) * subset_pixels_x + 1), (ccol *
subset_pixels_x)) dimy <- c(((crow - 1) * subset_pixels_y + 1), (crow * subset_pixels_y))
cstars <- st_as_stars(t(pred_subsets[i,, 1])) attr(cstars, "dimensions")[[2]]$delta = -1 #set
dimensions using original raster st_dimensions(cstars) <- st_dimensions(target_stars[,
dimx[1]:dimx[2], dimy[1]:dimy[2]])[1:2] write_stars(cstars, dsn = paste0(result_folder,
"/out", i, ".tif")) } } starstiles <- as.vector(list.files(result_folder, full.names = T), mode =
"character") sf::gdal_utils( util = "buildvrt", source = starstiles, destination =
paste0(result_folder, "/mosaic.vrt") ) sf::gdal_utils( util = "warp", source =
paste0(result_folder, "/mosaic.vrt"), destination = paste0(result_folder, "/mosaic.tif") ) }
#load target raster target_rst <-
raster(file.path("E:/Koralle/images/models/model_test_2017_bleaching/", "coral_mask_ble
aching_2017_test_target.tif"), overwrite=T) # make the actual prediction pred_subsets <-
predict(object = unet_model, x = prediction_dataset) # name your output path model_name
<- "unet_abc_bleaching_2017" # rebuild .tif from each patch rebuild_img( pred_subsets =
pred_subsets, out_path = paste0(file.path("E:/Koralle/images/prediction/", "/"), target_rst
= target_rst, model_name = model_name )
```

```
image<-stack("E:/Koralle/images/prediction/unet_abc_bleaching_2017/mosaic.tif")  
plot(image)
```

