

HTML

Example of HTML Tags:

```
<!DOCTYPE html>
<html>
  <head>
    <title>Title of the
document</title>
  </head>
  <body>
    <h1>This is heading 1</h1>
    <h2>This is heading 2</h2>
    <p>Here is the paragraph.</p>
  </body>
</html>
```


This is heading 1

This is heading 2

Here is the paragraph.

HTML Paragraphs

```
!DOCTYPE html>
<html>
  <head>
    <title>Title of the document</title>
  </head>
  <body>
    <h2>Elements example</h2>
    <p>This is some paragraph.</p>
    <p>This is another paragraph <br/> with
line break.</p>  </body>
</html>
```

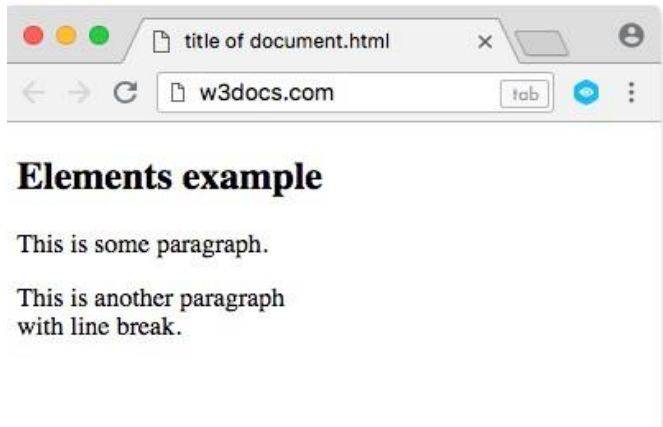

HTML Image:

```
<!DOCTYPE html>
<html>
  <head>
    <title>Title of the document</title>
  </head>
  <body>
    <h1>This is an image example</h1>
    
  </body>
</html>
```



Example of the HTML <button> tag:

```
<!DOCTYPE html>
<html>
  <head>
    <title>Title of the document</title>
  </head>
  <body>
    <h1>Example of the HTML button
tag:</h1>
    <p>You can specify the HTML buttons
with the button tag:</p>
    <button type="button">Button</button>
  </body>
</html>
```



HTML Table Tags: Some HTML tags are:

Tag	Description
<code><table></code>	Defines a table
<code><th></code>	Defines a header cell in a table
<code><tr></code>	Defines a row in a table
<code><td></code>	Defines a cell in a table
<code><caption></code>	Defines a table caption

Without those tags more attributes are available like cellpadding, cellspacing, colspan, rowspan, etc.

1. Design this following table by using HTML table.

Name	Salary
Ramesh Raman	5000
Shabbir Hussein	7000

HTML code:

```
<!DOCTYPE html>
<html>

  <head>
    <title>HTML Table Header</title>
  </head>
  <body>
    <table border = "1">
      <tr>
        <th>Name</th>
        <th>Salary</th>
      </tr>
      <tr>
        <td>Ramesh Raman</td>
        <td>5000</td>
      </tr>
      <tr>
        <td>Shabbir Hussein</td>
```

```

        <td>7000</td>
    </tr>
</table>
</body>
</html>

```

2. Colspan and Rowspan Attributes:

CT Design this following table by using HTML table:

Column 1	Column 2	Column 3
Row 1 Cell 1	Row 1 Cell 2	Row 1 Cell 3
	Row 2 Cell 2	Row 2 Cell 3
Row 3 Cell 1		

HTML code:

```

<!DOCTYPE html>
<html>

    <head>
        <title>HTML Table
        Colspan/Rowspan</title>
    </head>

    <body>
        <table border = "1">
            <tr>
                <th>Column 1</th>
                <th>Column 2</th>
                <th>Column 3</th>
            </tr>
            <tr>
                <td rowspan = "2">Row 1 Cell
1</td>
                <td>Row 1 Cell 2</td>
                <td>Row 1 Cell 3</td>
            </tr>
            <tr>
                <td>Row 2 Cell 2</td>
                <td>Row 2 Cell 3</td>
            </tr>
            <tr>
                <td colspan = "3">Row 3 Cell 1</td>
            </tr>
        </table>
    </body>
</html>

```

```

                <td colspan = "3">Row 3 Cell
1</td>
        </tr>
</table>
</body>

</html>

```

3. Design this following table by using HTML table

Firm	Org	Lob	Sub Lob	Business Plans	Business Components
XYZ	CST	CT	ADS	1	10
			BTO	2	15
			CSI	3	6
		VCT	ADS	4	10
			BTO	5	15
	Sub Total			6	15
	CST	CT	ADS	7	10
			BTO	8	15
			CSI	9	6
		VCT	ADS	10	10
	Sub Total			11	15

HTML Code:

```

<html>
<body>
<table border="1" cellpadding="1" cellspacing="1">
  <thead>
    <tr>
      <th>Firm</th>
      <th>Org</th>
      <th>Lob</th>
      <th>Sub Lob</th>
      <th>Business Plans</th>
      <th>Business Components</th>
    </tr>
  </thead>

  <tbody>
    <tr>

```

```

        <td rowspan="11">XYZ</td>
        <td rowspan="5">CST</td>
        <td rowspan="3">CT</th>
        <td>ADS</td>
        <td>1</td>
        <td>10</td>
    </tr>
    <tr>
        <td>BTO</th>
        <td>2</td>
        <td>15</td>
    </tr>
    <tr>
        <td>CSI</th>
        <td>3</td>
        <td>6</td>
    </tr>
    <tr>
        <td rowspan="2">VCT</th>
        <td>ADS</td>
        <td>4</td>
        <td>10</td>
    </tr>
    <tr>
        <td>BTO</th>
        <td>5</td>
        <td>15</td>
    </tr>
    <tr>
        <td colspan="3"> Sub Total</td>
        <td>6</td>
        <td>15</td>
    </tr>
    <tr>
        <td rowspan="4">CST</td>
        <td rowspan="3">CT</th>
        <td>ADS</td>
        <td>7</td>
        <td>10</td>
    </tr>
    <tr>
        <td>BTO</th>
        <td>8</td>

```

```

        <td>15</td>
    </tr>
    <tr>
        <td>CSI</th>
        <td>9</td>
        <td>6</td>
    </tr>
    <tr>
        <td rowspan="1">VCT</th>
        <td>ADS</td>
        <td>10</td>
        <td>10</td>
    </tr>
    <tr>
        <td colspan="3">Sub Total</td>
        <td>11</td>
        <td>15</td>
    </tr>
</tbody>
</table>
</body>
</html>

```

Homework

Days	Time					
	8:00	9:00	10:00	11:00	11:30	12:30
Mon	Course 1	Course 2	Course 3	B R E A K	Course 5	
Tue			Course 2		Course 4	Course 1
Wed	Course 3				Course 2	
Thr	Course 4	Course 2	Course 3		Thesis	
Fri			Course 1			

Draw This table by HTML

HTML Forms:

An HTML form is used to collect user input. The user input is most often sent to a server for processing.

Example

First name:

Last name:

The `<form>` Element

The HTML `<form>` element is used to create an HTML form for user input:

```
<form>
  .
  form elements
  .
</form>
```

The HTML `<form>` Elements

The HTML `<form>` element can contain one or more of the following form elements:

- `<input>`
- `<label>`
- `<select>`
- `<textarea>`
- `<button>`
- `<fieldset>`
- `<legend>`
- `<datalist>`
- `<output>`
- `<option>`
- `<optgroup>`

The <input> Element

The HTML <input> element is the most used form element.

An <input> element can be displayed in many ways, depending on the type attribute.

Here are some examples:

Type	Description
<input type="text">	Displays a single-line text input field
<input type="radio">	Displays a radio button (for selecting one of many choices)
<input type="checkbox">	Displays a checkbox (for selecting zero or more of many choices)
<input type="submit">	Displays a submit button (for submitting the form)
<input type="button">	Displays a clickable button

The <label> Element:

Notice the use of the <label> element in the example above. The <label> tag defines a label for many form elements.

The <label> element is useful for screen-reader users, because the screen-reader will read out loud the label when the user focus on the input element.

The <label> element also help users who have difficulty clicking on very small regions (such as radio buttons or checkboxes) - because when the user clicks the text within the <label> element, it toggles the radio button/checkbox.

The for attribute of the <label> tag should be equal to the id attribute of the <input> element to bind them together.

Radio Buttons

The <input type="radio"> defines a radio button. Radio buttons let a user select ONE of a limited number of choices.

Checkboxes

The `<input type="checkbox">` defines a **checkbox**.

Checkboxes let a user select ZERO or MORE

options of a limited number of choices. **The**

Submit Button

The `<input type="submit">` defines a button for submitting the form data to a form-handler.

The form-handler is typically a file on the server with a script for processing input data.

The form-handler is specified in the form's **action** attribute.

Example:

```
<html>
<body>
<h1 align="center">Input Form</h1>

    <form align="center">
        First Name: <input type="text" name="firstname">
        Last Name : <input type="text"
name="lastname"><br><br>
        User Name : <input type="text" name="user">
        Password : <input type="text"
name="password"><br><br>

        <b>Gender</b>
        <input type="radio" name="s" value="male">Male
        <input type="radio" name="s"
value="female">Female<br><br>

        <b>Religion</b>
        <input type="checkbox" name="religion"
value="muslim">Muslim
        <input type="checkbox" name="religion"
value="others">Others<br><br>

        <b>IT Expert</b>
        <input type="checkbox" name="expert"
value="hardware">Hardware Expert
        <input type="checkbox" name="expert"
value="software">Software Expert
```

```

        <input type="checkbox" name="expert"
value="graphic">Graphic Designer
        <input type="checkbox" name="expert"
value="Network">Network Expert<br><br>        <b>Select
DepartMent</b>
        <select name="department">
        <option>CIS</option>
        <option>SWE</option>
        <option>EEE</option>
        <option>CSE</option>

        <input type ="submit" value= "Submit">

</form>

</body>
</html>

```

Output:

Input Form

First Name: Last Name :

User Name : Password :

Gender ☐ Male ☐ Female

Religion ☐ Muslim ☐ Others

IT Expert ☐ Hardware Expert ☐ Software Expert ☐ Graphic Designer ☐ Network Expert

Select DepartMent

The Action Attribute:

The action attribute defines the action to be performed when the form is submitted.

Usually, the form data is sent to a file on the server when the user clicks on the submit button.

In the example below, the form data is sent to a file called "action_page.php". This file contains a server-side script that handles the form data:

```
<!DOCTYPE html>
<html>
<body>

<form action="/action_page.php">
  <label for="fname">First name:</label><br>
  <input type="text" id="fname" name="fname"
value="John"><br>
  <label for="lname">Last name:</label><br>
  <input type="text" id="lname" name="lname"
value="Doe"><br><br>
  <input type="submit" value="Submit">
</form>

</body>
</html>
```

Output:



The screenshot shows the rendered HTML form. It consists of two text input fields and a submit button. The first input field is labeled "First name:" and contains the text "John". The second input field is labeled "Last name:" and contains the text "Doe". Below these fields is a button labeled "Submit".

After Submitting:

Submitted Form Data

Your input was received as:

fname=John&lname=Doe

The server has processed your input and returned this answer.

HW: Design by HTML

Name :	
Password :	
Gender :	☐ Male ☐ Female
Email :	
Phone no :	+88015
Submit	