


1194059 Muhammad Rizal Supriadi 100Error
Python

mrsupriadi2000

March 2022

1 Case Variabel

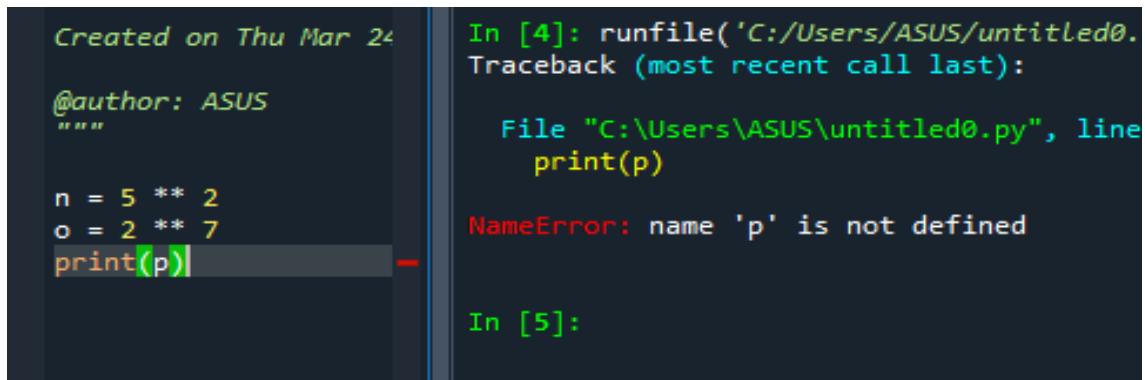


```
Created on Thu Mar 24  
@author: ASUS  
"""  
  
n = 5 ** 2  
o = 2 ** 7  
print(p)
```

```
In [4]: runfile('C:/Users/ASUS/untitled0.  
Traceback (most recent call last):  
  
  File "C:\Users\ASUS\untitled0.py", line  
    print(p)  
NameError: name 'p' is not defined  
  
In [5]:
```

Gambar 1: Case-1 Error

Solusi-Case1 Mengecek kembali pemanggilan variabel. Berikut merupakan script yang benar

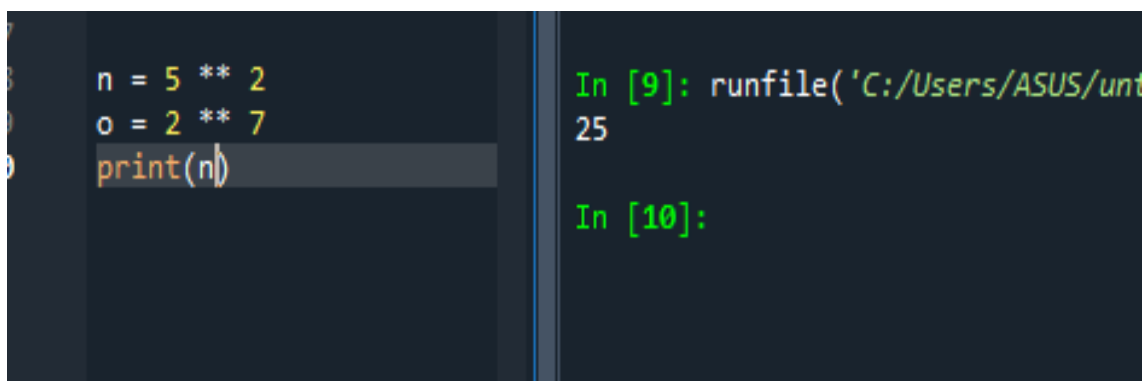


```
n = 5 ** 2  
o = 2 ** 7  
print(n)
```

```
In [9]: runfile('C:/Users/ASUS/unt  
25  
  
In [10]:
```

Gambar 2: Case-1 Solved

2 Case Variabel Value

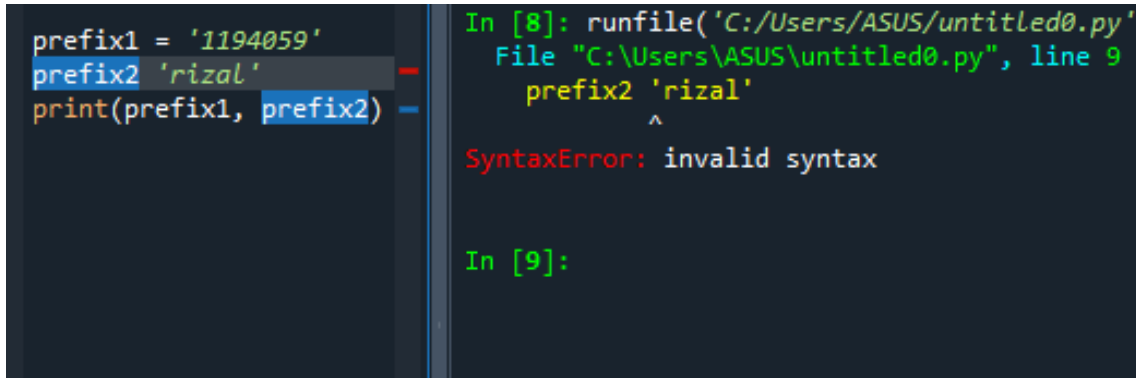


```
prefix1 = '1194059'
prefix2 = 'rizal'
print(prefix1, prefix2)
```

```
In [8]: runfile('C:/Users/ASUS/untitled0.py')
File "C:\Users\ASUS\untitled0.py", line 9
    prefix2 'rizal'
           ^
SyntaxError: invalid syntax

In [9]:
```

Gambar 3: Case-2 Error

Solusi-Case2 Mengecek kembali syntax yang ditulis pada bagian prefix2 'rizal' dimana kita lupa menambahkan tanda sama dengan. Berikut merupakan script yang benar

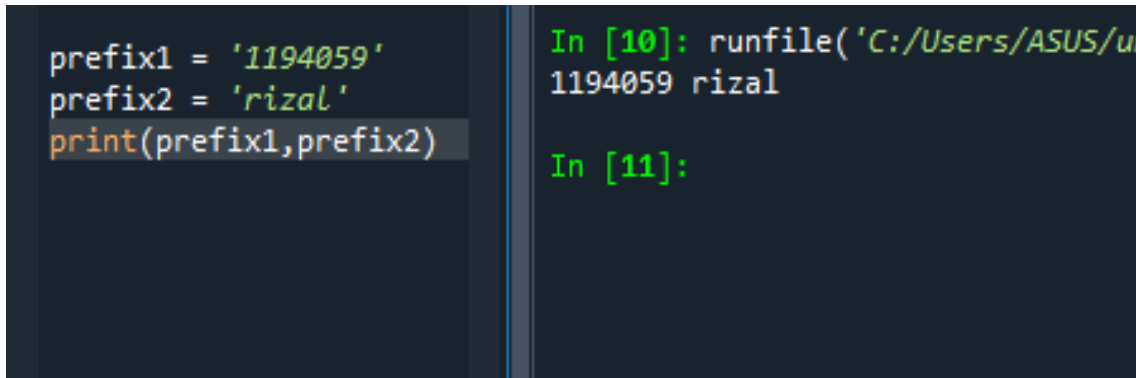


```
prefix1 = '1194059'
prefix2 = 'rizal'
print(prefix1, prefix2)
```

```
In [10]: runfile('C:/Users/ASUS/untitled0.py')
1194059 rizal

In [11]:
```

Gambar 4: Case-2 Solved

3 Case Array

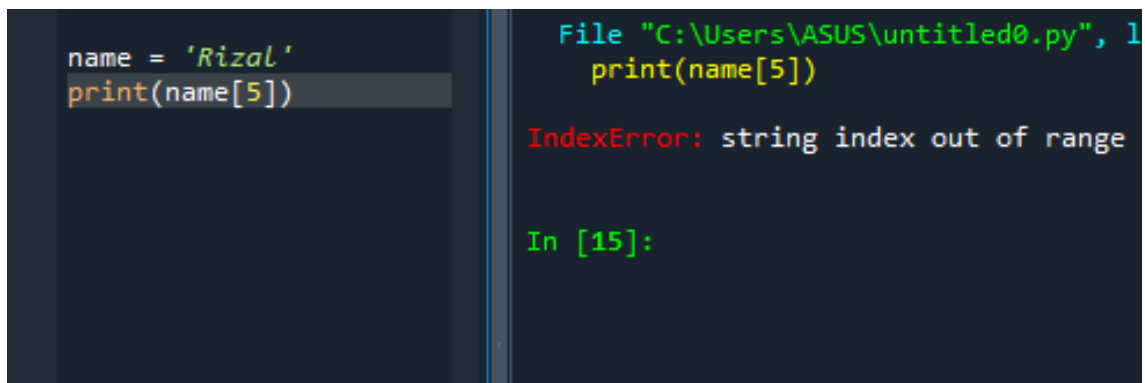


```
name = 'Rizal'
print(name[5])
```

```
File "C:\Users\ASUS\untitled0.py", line 1
    print(name[5])
IndexError: string index out of range

In [15]:
```

Gambar 5: Case-3 Error

Solusi-Case3 Menginputkan angka yang benar pada rentang array 'Rizal' array dimulai dari angka 0, berikut script yang benar

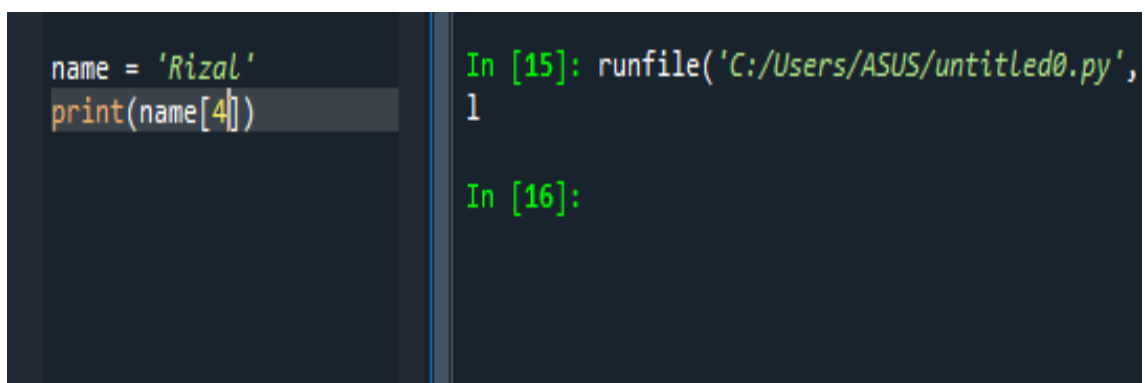


```
name = 'Rizal'
print(name[4])
```

```
In [15]: runfile('C:/Users/ASUS/untitled0.py',
1
In [16]:
```

Gambar 6: Case-3 Solved

4 Case Array

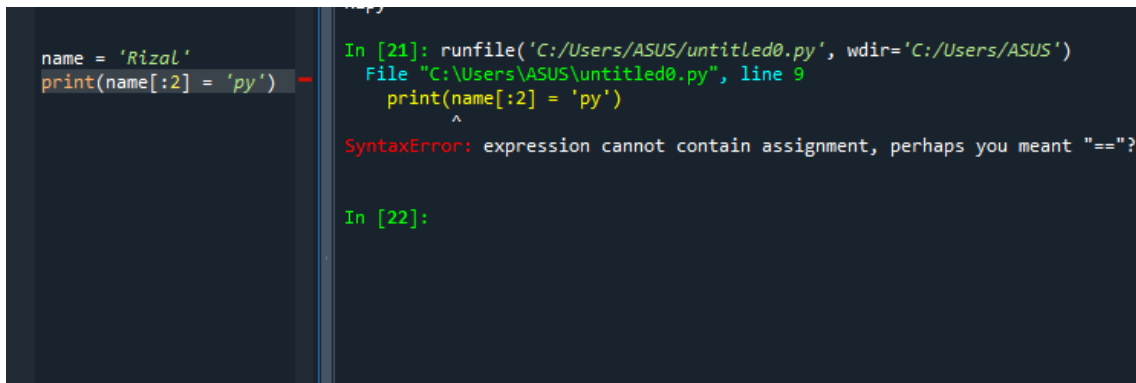


```
name = 'Rizal'
print(name[:2] = 'py')
```

```
In [21]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/Users/ASUS')
File "C:\Users\ASUS\untitled0.py", line 9
    print(name[:2] = 'py')
                  ^
SyntaxError: expression cannot contain assignment, perhaps you meant "=="?

In [22]:
```

Gambar 7: Case-4 Error

Solusi-Case4 Dari error diatas kita tau bahwa tanda sama dengan digunakan untuk memasukan nilai ,sedangkan untuk menggaungkan string maka gunakan tanda +

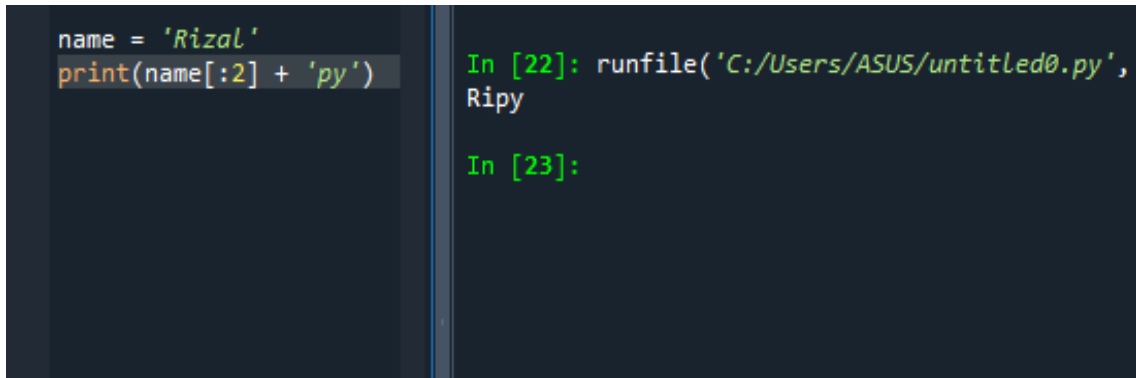


```
name = 'Rizal'
print(name[:2] + 'py')
```

```
In [22]: runfile('C:/Users/ASUS/untitled0.py',
Ripy

In [23]:
```

Gambar 8: Case-4 Solved

5 Case Looping

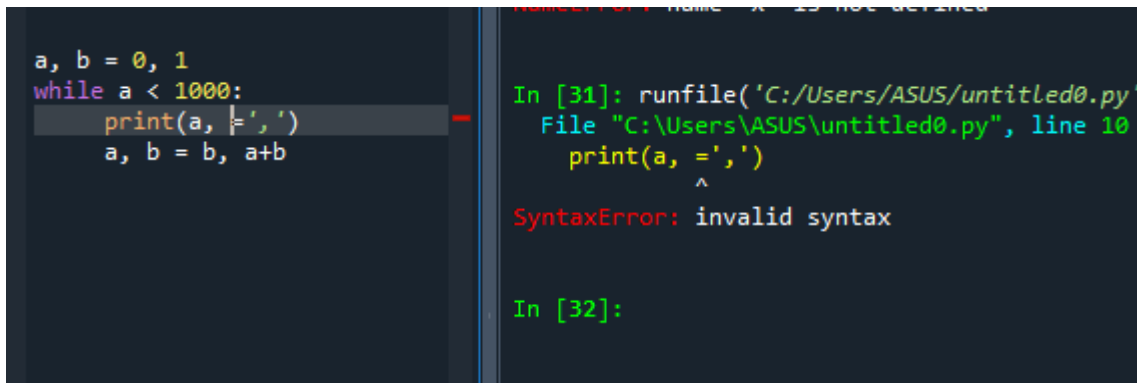


```
a, b = 0, 1
while a < 1000:
    print(a, '=', ' ')
    a, b = b, a+b

In [31]: runfile('C:/Users/ASUS/untitled0.py'
File "C:/Users/ASUS/untitled0.py", line 10
    print(a, '=', ' ')
          ^
SyntaxError: invalid syntax

In [32]:
```

Gambar 9: Case-5 Error

Solusi-Case5 Pada gambar tersebut menjelaskan error yang terjadi karena sintakx, untuk mengatasiya .. dalam perulangan tersebut harus menambahkan fungsi end di sebelum tanda sama dengan.

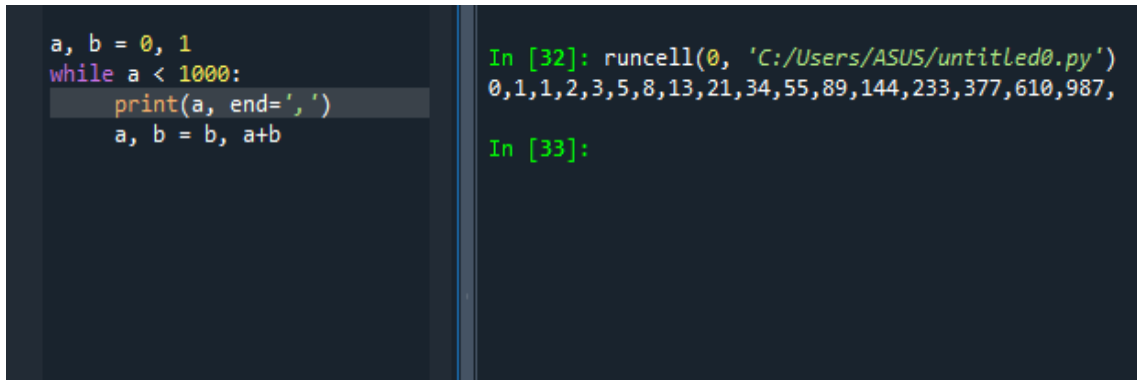


```
a, b = 0, 1
while a < 1000:
    print(a, end=' ')
    a, b = b, a+b

In [32]: runcell(0, 'C:/Users/ASUS/untitled0.py')
0,1,1,2,3,5,8,13,21,34,55,89,144,233,377,610,987,

In [33]:
```

Gambar 10: Case-5 Solved

6 Case Print

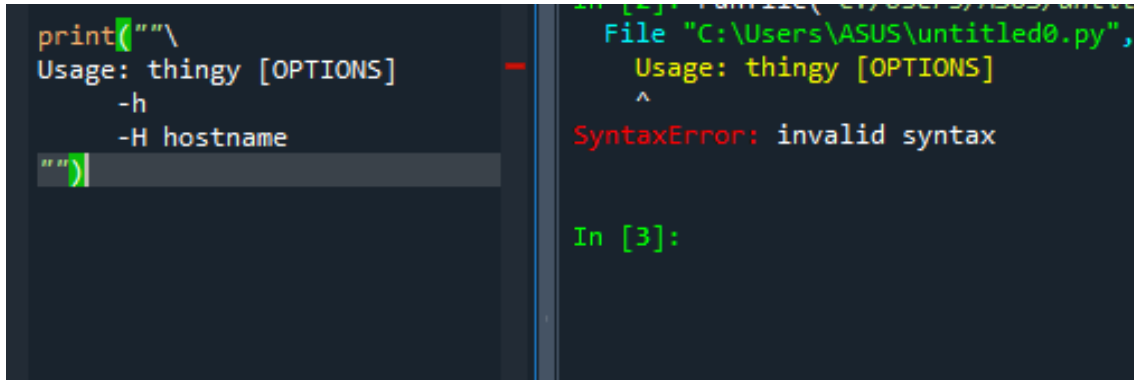


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/Users/ASUS/untitled0.py')
File "C:/Users/ASUS/untitled0.py", line 3, in <module>
    Usage: thingy [OPTIONS]
    ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 11: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

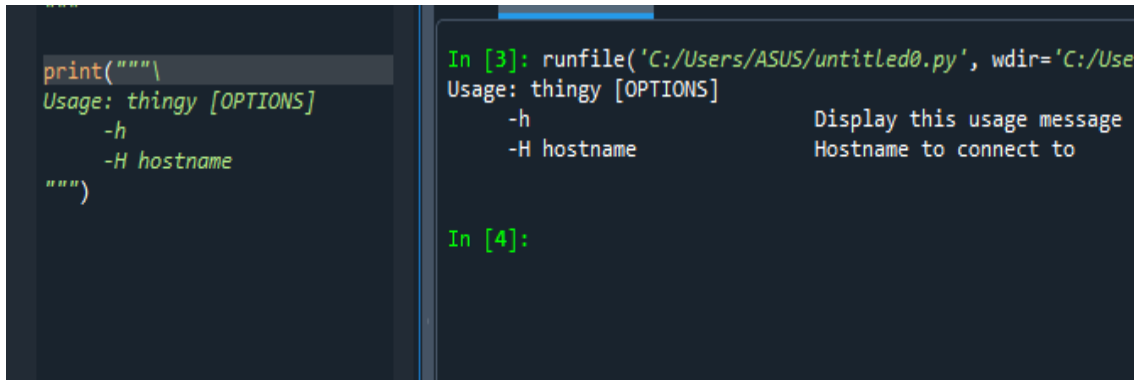


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/Users/ASUS/untitled0.py')
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 12: Case-6 Solved

7 Case Indentation

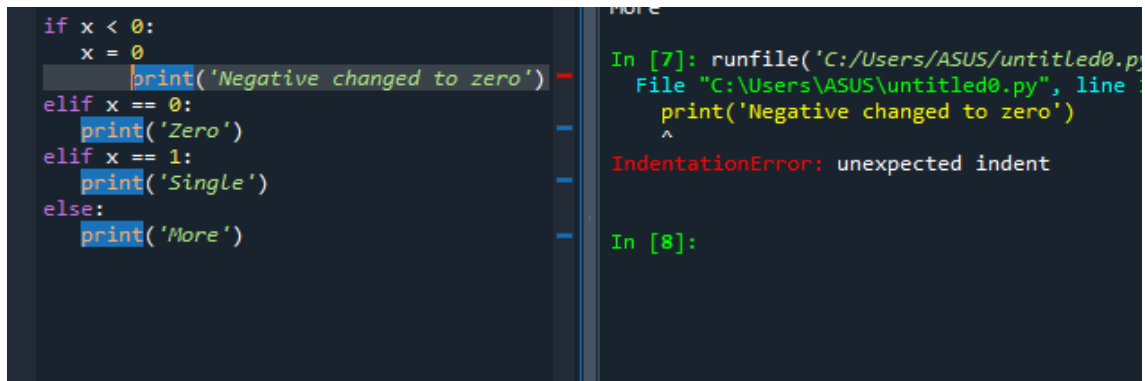


```
if x < 0:
    x = 0
    print('Negative changed to zero')
elif x == 0:
    print('Zero')
elif x == 1:
    print('Single')
else:
    print('More')
```

```
In [7]: runfile('C:/Users/ASUS/untitled0.py',
File "C:\Users\ASUS\untitled0.py", line 1
    print('Negative changed to zero')
    ^
IndentationError: unexpected indent

In [8]:
```

Gambar 13: Case-7 Error

Solusi-Case7 Error tersebut terjadi karena masalah indentasi, jadi kita harus perhatikan dengan benar setiap code yang kita tuliskan ketika menggunakan suatu conditional

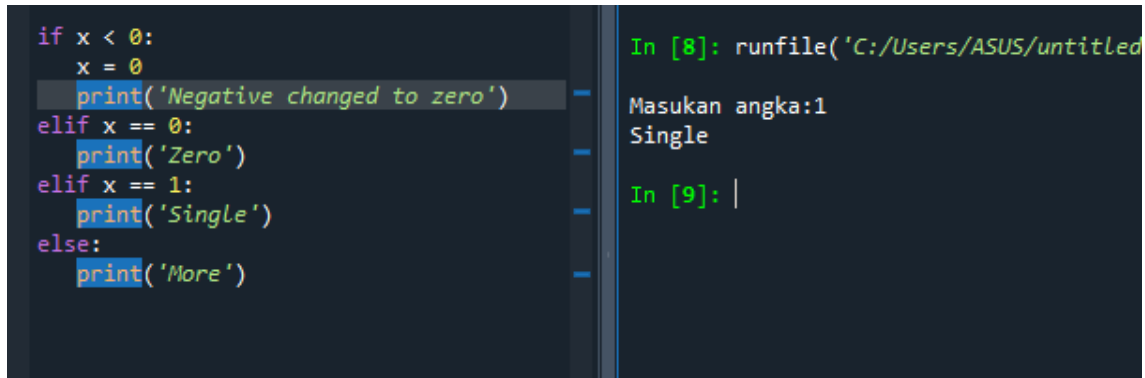


```
if x < 0:
    x = 0
    print('Negative changed to zero')
elif x == 0:
    print('Zero')
elif x == 1:
    print('Single')
else:
    print('More')
```

```
In [8]: runfile('C:/Users/ASUS/untitled0.py',
Masukan angka:1
Single

In [9]: |
```

Gambar 14: Case-7 Solved

8 Case Array String

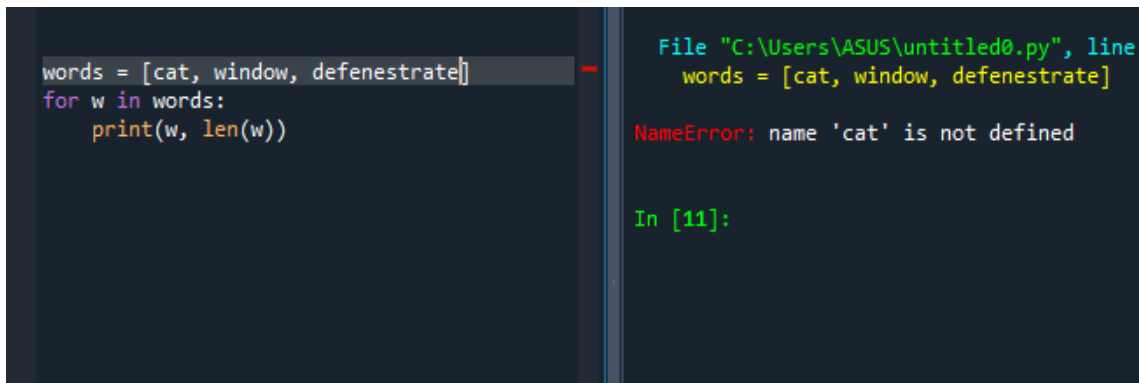

```
words = [cat, window, defenestrate]
for w in words:
    print(w, len(w))
```


```
File "C:\Users\ASUS\untitled0.py", line
words = [cat, window, defenestrate]

NameError: name 'cat' is not defined

In [11]:
```

Gambar 15: Case-8 Error

Solusi-Case8 Cat tidak terdefinisi ketika dijalankan, solusinya yaitu untuk array yang berbentuk string harus menggunakan tanda petik

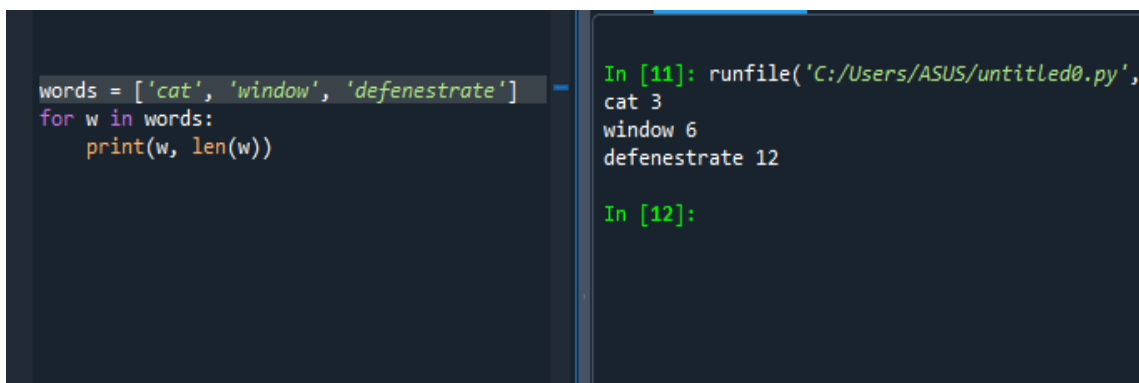


```
words = ['cat', 'window', 'defenestrate']
for w in words:
    print(w, len(w))
```

```
In [11]: runfile('C:/Users/ASUS/untitled0.py',
cat 3
window 6
defenestrate 12

In [12]:
```

Gambar 16: Case-8 Solved

9 Case Print Lopping array

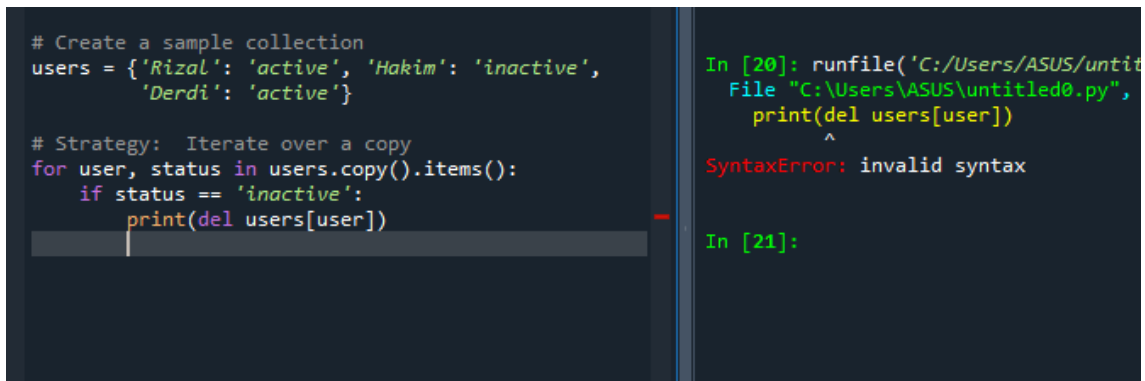

```
# Create a sample collection
users = {'Rizal': 'active', 'Hakim': 'inactive',
        'Derdi': 'active'}


# Strategy: Iterate over a copy
for user, status in users.copy().items():
    if status == 'inactive':
        print(del users[user])
```

```
In [20]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
        print(del users[user])
        ^
SyntaxError: invalid syntax

In [21]:
```

Gambar 17: Case-9 Error

Solusi-Case9 Kita tidak dapat menggabungkan antara perintah del di dalam print, solusianya yaitu dengan memisahkan print yang dimana membawa nilai user. Berikut scriptnya

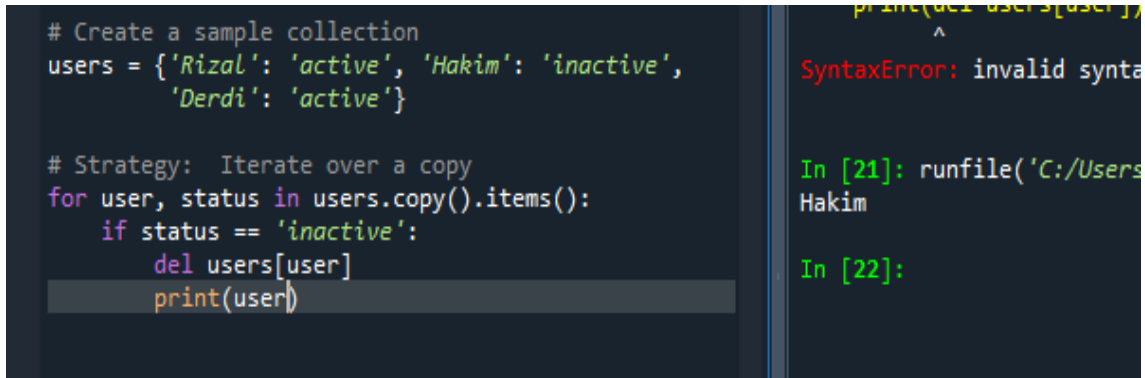

```
# Create a sample collection
users = {'Rizal': 'active', 'Hakim': 'inactive',
        'Derdi': 'active'}

# Strategy: Iterate over a copy
for user, status in users.copy().items():
    if status == 'inactive':
        del users[user]
        print(user)
```


```
print(del users[user])
^
SyntaxError: invalid syntax

In [21]: runfile('C:/Users
Hakim

In [22]:
```

Gambar 18: Case-9 Solved

10 Case Looping Tipe data

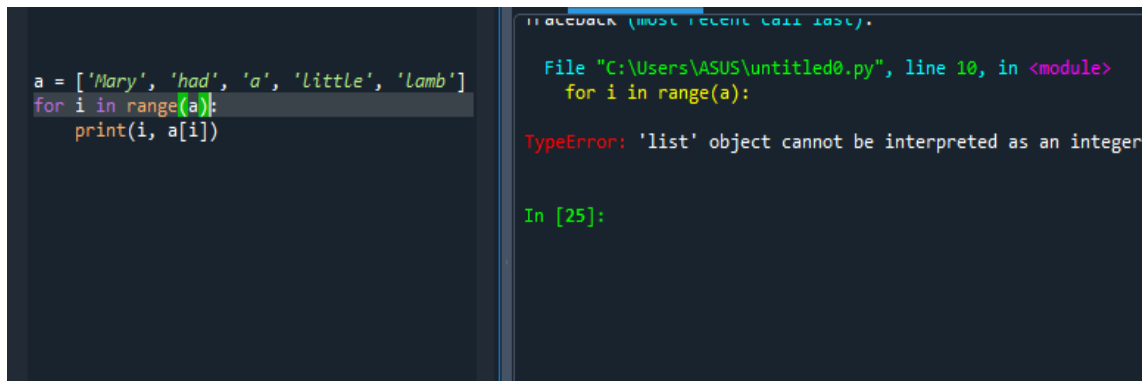


```
a = ['Mary', 'had', 'a', 'little', 'lamb']
for i in range(a):
    print(i, a[i])
```

```
Traceback (most recent call last):
  File "C:\Users\ASUS\untitled0.py", line 10, in <module>
    for i in range(a):
TypeError: 'list' object cannot be interpreted as an integer

In [25]:
```

Gambar 19: Case-10 Error

Solusi-Case10 Kita melihat dalam array terdapat nilai yang berupa string, untuk melakukan perulangan data secara bergantian kita diharuskan untuk menggunakan 'len' yang memperbolehkan nilai string

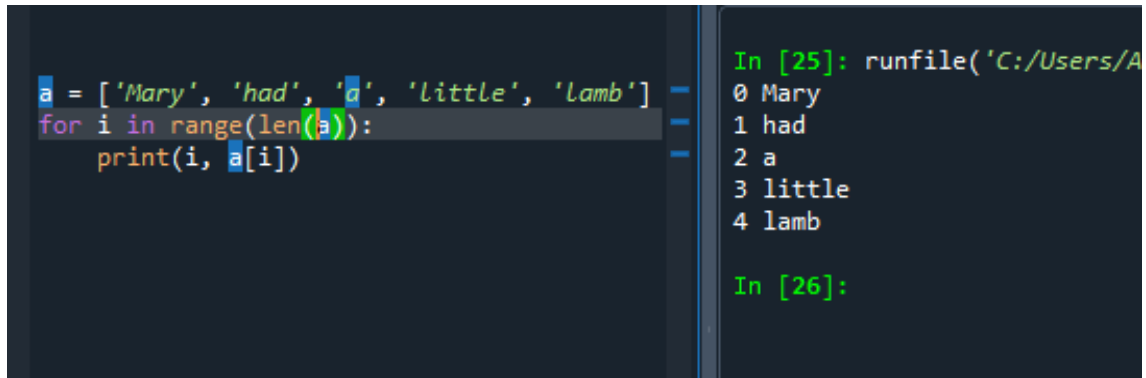


```
a = ['Mary', 'had', 'a', 'little', 'lamb']
for i in range(len(a)):
    print(i, a[i])
```

```
In [25]: runfile('C:/Users/A
0 Mary
1 had
2 a
3 little
4 lamb

In [26]:
```

Gambar 20: Case-10 Solved

11 Case SUM

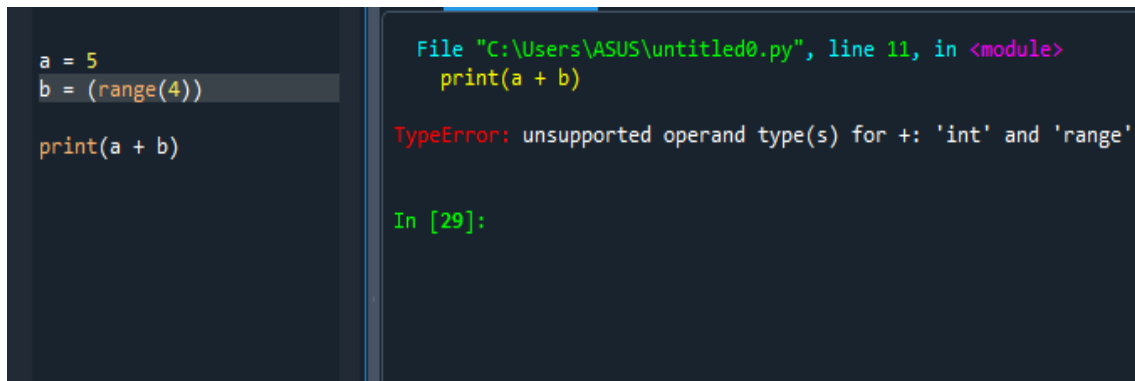

```
a = 5
b = (range(4))


print(a + b)
```

```
File "C:\Users\ASUS\untitled0.py", line 11, in <module>
    print(a + b)
TypeError: unsupported operand type(s) for +: 'int' and 'range'

In [29]:
```

Gambar 21: Case-11 Error

Solusi-Case11 Untuk menjumlahkan antara angka dengan range angka, maka kita harus menambahkan sum untuk membungkus range

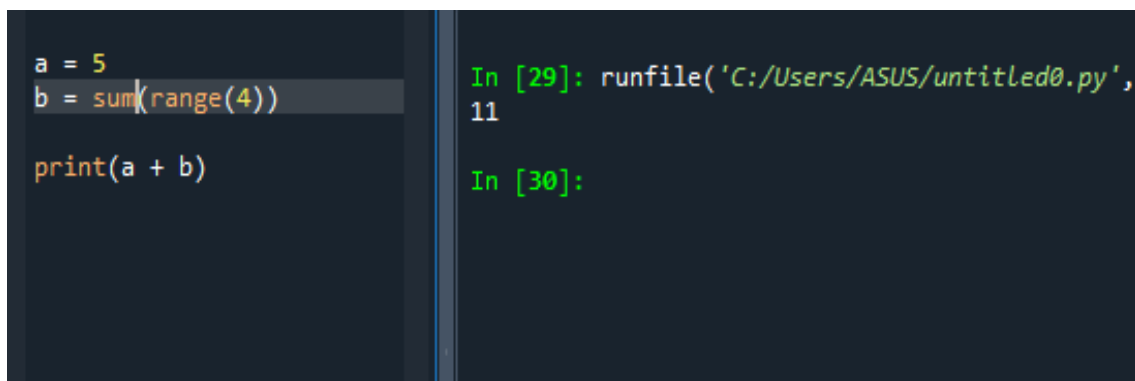

```
a = 5
b = sum(range(4))


print(a + b)
```

```
In [29]: runfile('C:/Users/ASUS/untitled0.py',
11

In [30]:
```

Gambar 22: Case-11 Solved

12 Case Continue

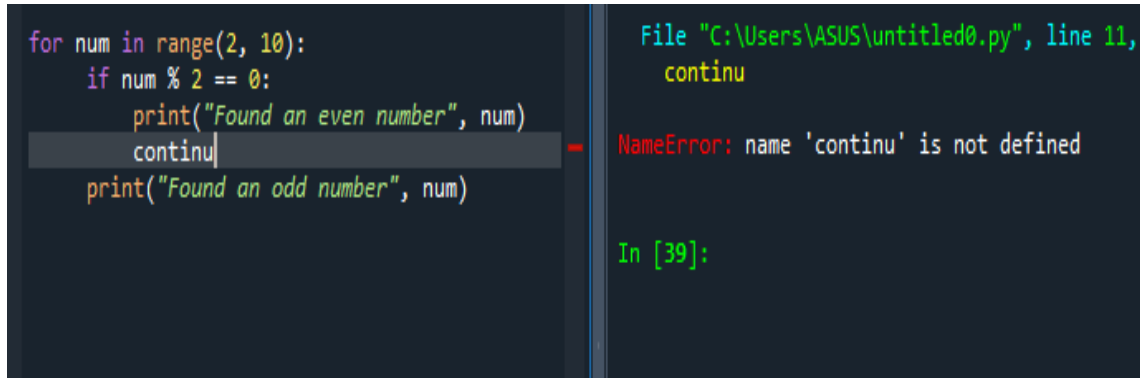

```
for num in range(2, 10):
    if num % 2 == 0:
        print("Found an even number", num)
        continu
    print("Found an odd number", num)
```


File "C:\Users\ASUS\untitled0.py", line 11,
continuu

— NameError: name 'continuu' is not defined

In [39]:

Gambar 23: Case-12 Error

Solusi-Case12 Untuk melanjutkan eksekusi program kita harus dengan teliti memperhatikan penulisan dari continue

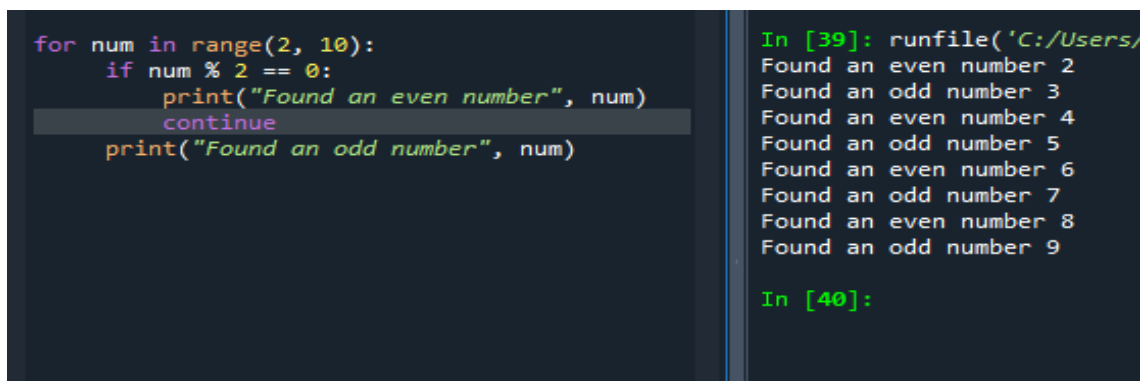


```
for num in range(2, 10):
    if num % 2 == 0:
        print("Found an even number", num)
        continue
    print("Found an odd number", num)
```

In [39]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/Users/ASUS/Desktop')
Found an even number 2
Found an odd number 3
Found an even number 4
Found an odd number 5
Found an even number 6
Found an odd number 7
Found an even number 8
Found an odd number 9

In [40]:

Gambar 24: Case-12 Solved

13 Case While Conditional

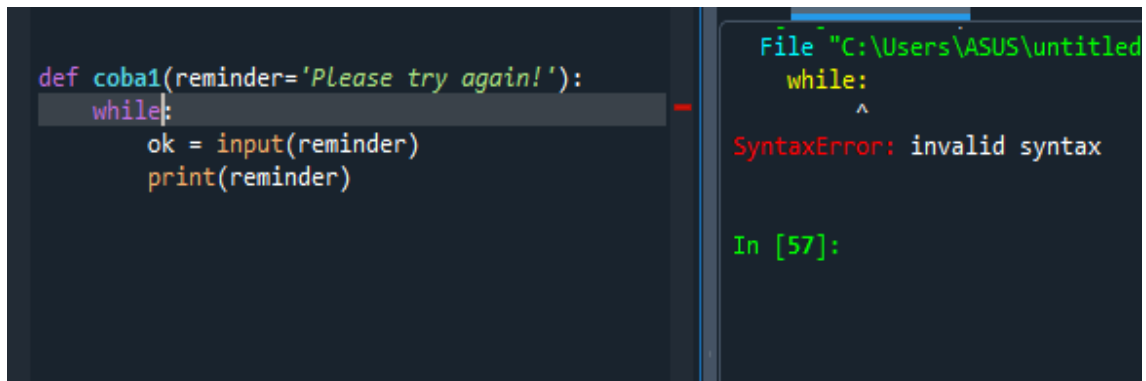


```
def coba1(reminder='Please try again!'):
    while:
        ok = input(reminder)
        print(reminder)
```

File "C:\Users\ASUS\untitled" line 2
while:
^
SyntaxError: invalid syntax

In [57]:

Gambar 25: Case-13 Error

Solusi-Case13 Menggunakan while condition harus diikuti dengan kondisinya seperti berikut

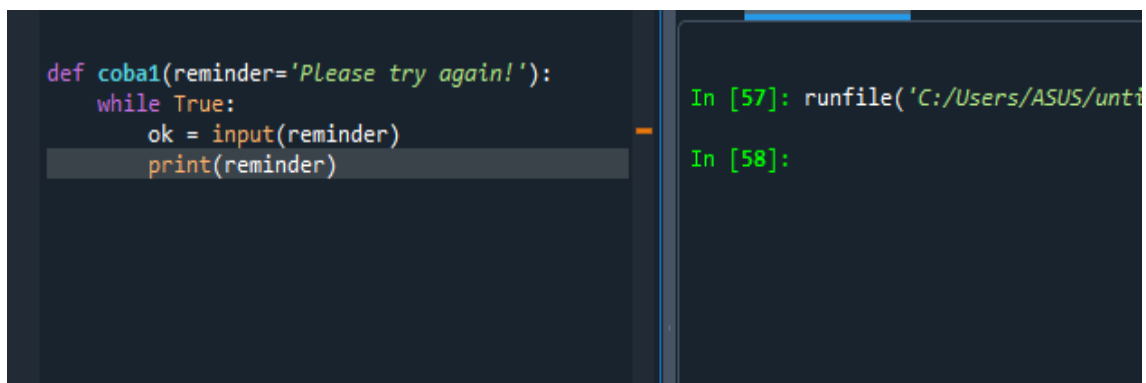


```
def coba1(reminder='Please try again!'):
    while True:
        ok = input(reminder)
        print(reminder)
```

In [57]: runfile('C:/Users/ASUS/untitled', run_to_completion=True, show_stdout=True)

In [58]:

Gambar 26: Case-13 Solved

14 Case Append

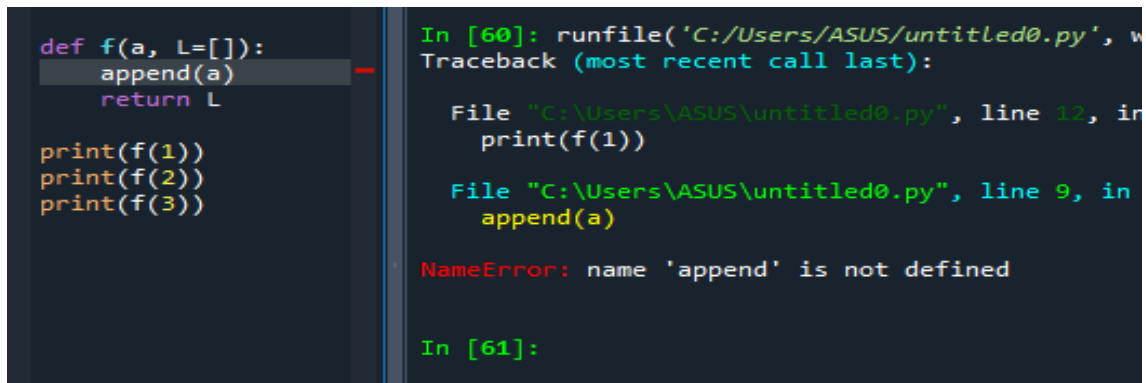

```
def f(a, L=[]):
    append(a)
    return L

print(f(1))
print(f(2))
print(f(3))
```

```
In [60]: runfile('C:/Users/ASUS/untitled0.py', w
Traceback (most recent call last):

  File "C:/Users/ASUS/untitled0.py", line 12, in
    print(f(1))


  File "C:/Users/ASUS/untitled0.py", line 9, in
    append(a)

NameError: name 'append' is not defined

In [61]:
```

Gambar 27: Case-14 Error

Solusi-Case14 Syarat menggunakan append yaitu ada variabel terlebih dahulu yang membawa nilai, solusinya mengubah menjadi L.append

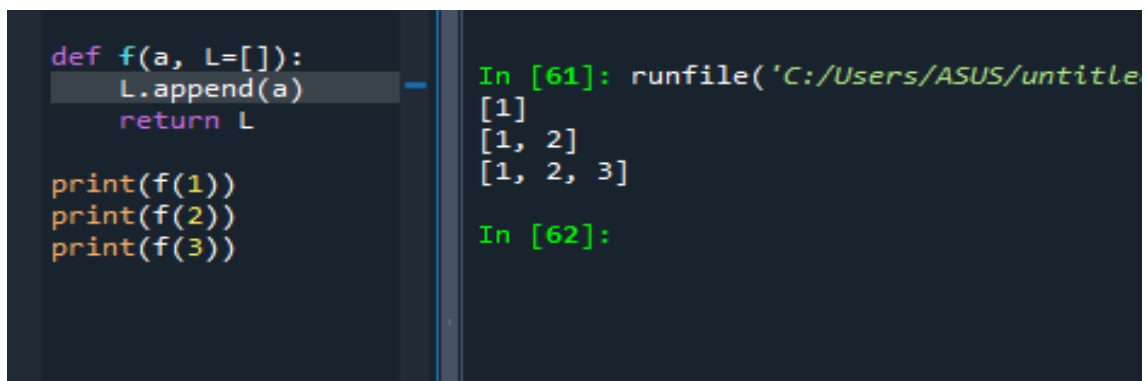

```
def f(a, L=[]):
    L.append(a)
    return L


print(f(1))
print(f(2))
print(f(3))
```

```
In [61]: runfile('C:/Users/ASUS/untitled
[1]
[1, 2]
[1, 2, 3]

In [62]:
```

Gambar 28: Case-14 Solved

15 Case Definition If condition

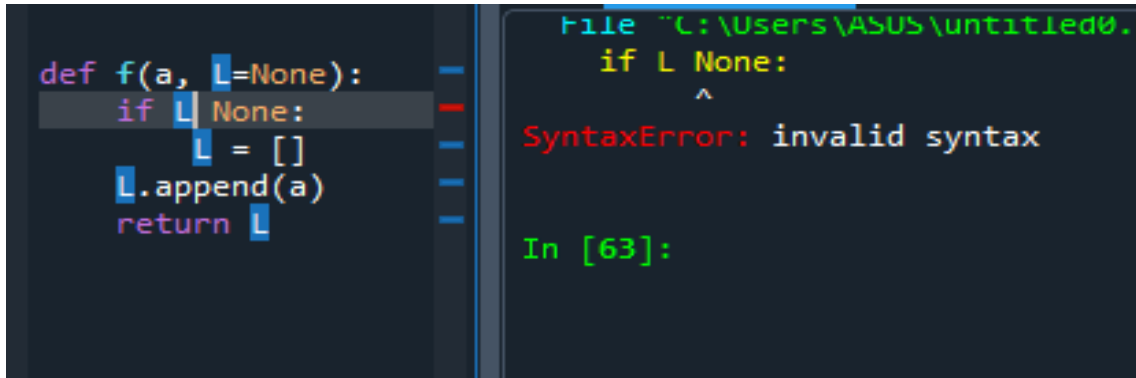


```
def f(a, L=None):  
    if L None:  
        L = []  
        L.append(a)  
        return L
```

```
File "C:\Users\ASUS\untitled0.py", line 2  
    if L None:  
        ^  
SyntaxError: invalid syntax
```

```
In [63]:
```

Gambar 29: Case-15 Error

Solusi-Case15 dalam kondisi if variabel L harus di perjelasan dengan menambahkan penggunaan is .. seperti berikut

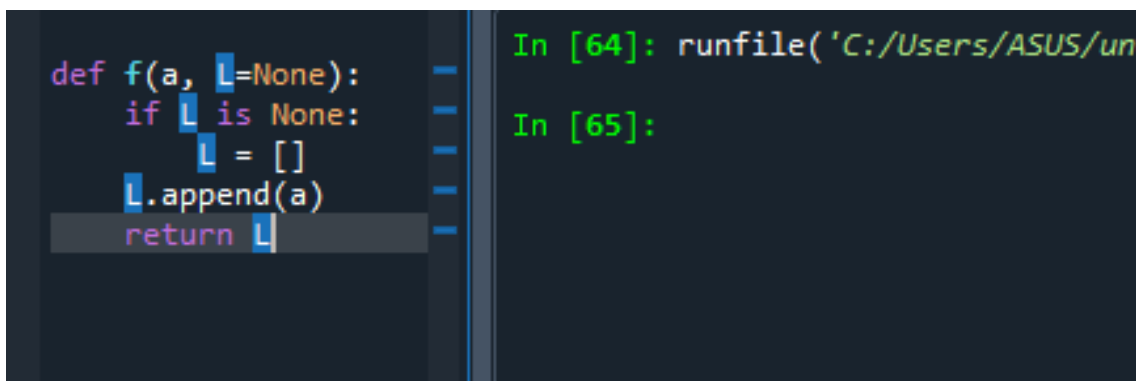


```
def f(a, L=None):  
    if L is None:  
        L = []  
        L.append(a)  
        return L
```

```
In [64]: runfile('C:/Users/ASUS/untitled0.py', run_together=True, run_with_args=True)
```

```
In [65]:
```

Gambar 30: Case-15 Solved

16 Case Function

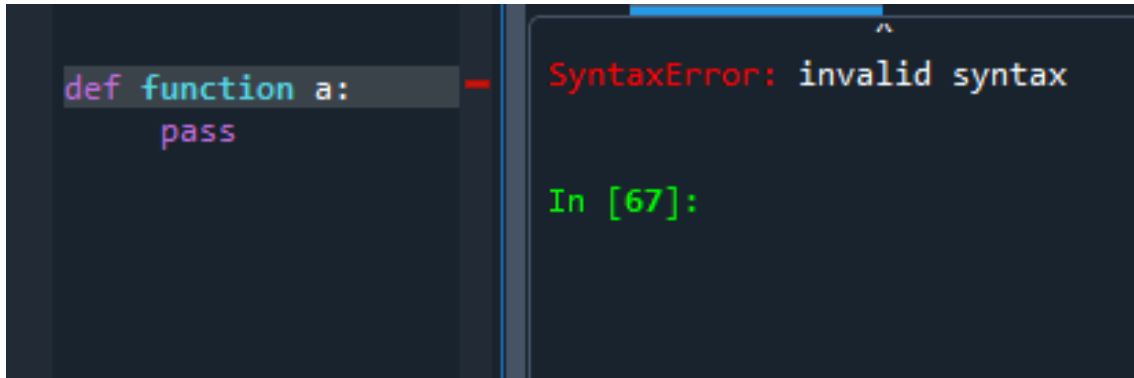


```
def function a:
    pass
```

```
SyntaxError: invalid syntax

In [67]:
```

Gambar 31: Case-16 Error

Solusi-Case16 Dalam penulisan function python nama function harus dibungkus dengan tanda kurung

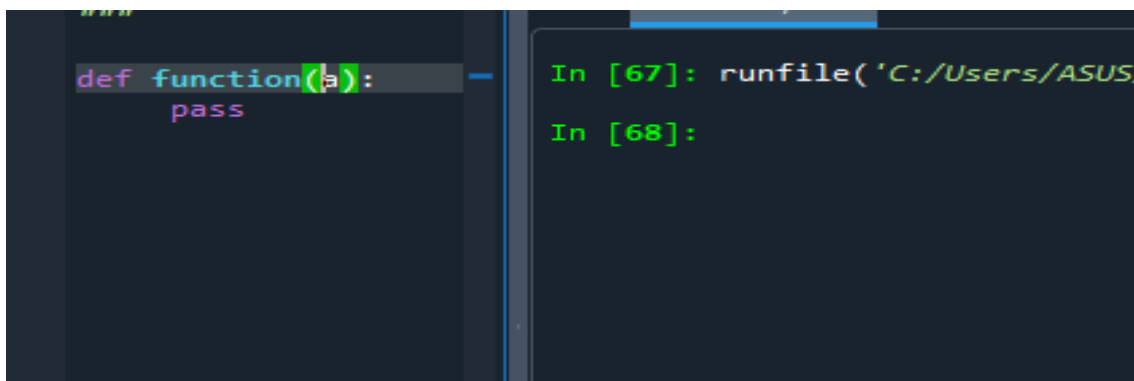


```
def function(a):
    pass
```

```
In [67]: runfile('C:/Users/ASUS,...')
In [68]:
```

Gambar 32: Case-16 Solved

17 Case Lambda

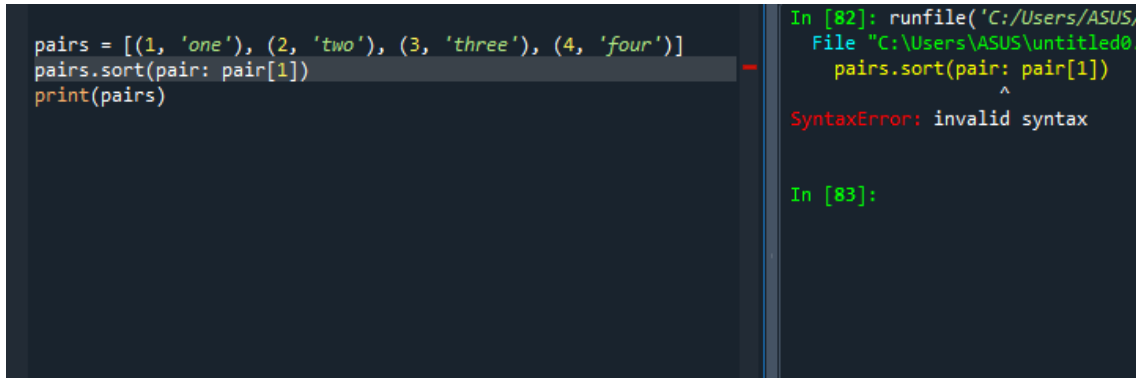


```
pairs = [(1, 'one'), (2, 'two'), (3, 'three'), (4, 'four')]
pairs.sort(pair: pair[1])
print(pairs)
```

In [82]: runfile('C:/Users/ASUS/...
File "C:/Users/ASUS/untitled0.p
pairs.sort(pair: pair[1])
^
SyntaxError: invalid syntax

In [83]:

Gambar 33: Case-17 Error

Solusi-Case17 Untuk memanggil sintak secara berurutan kita harus memanggil atau menggunakan `key=lambda`

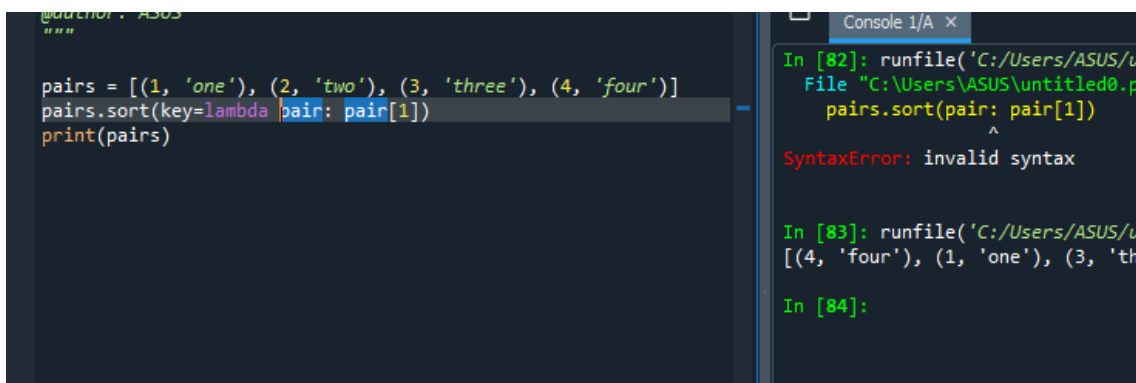

```
pairs = [(1, 'one'), (2, 'two'), (3, 'three'), (4, 'four')]
pairs.sort(key=lambda pair: pair[1])
print(pairs)
```

Console 1/A x


In [82]: runfile('C:/Users/ASUS/u
File "C:/Users/ASUS/untitled0.p
pairs.sort(pair: pair[1])
^
SyntaxError: invalid syntax

In [83]: runfile('C:/Users/ASUS/u
[(4, 'four'), (1, 'one'), (3, 'th

In [84]:

Gambar 34: Case-17 Solved

18 Case Print Function

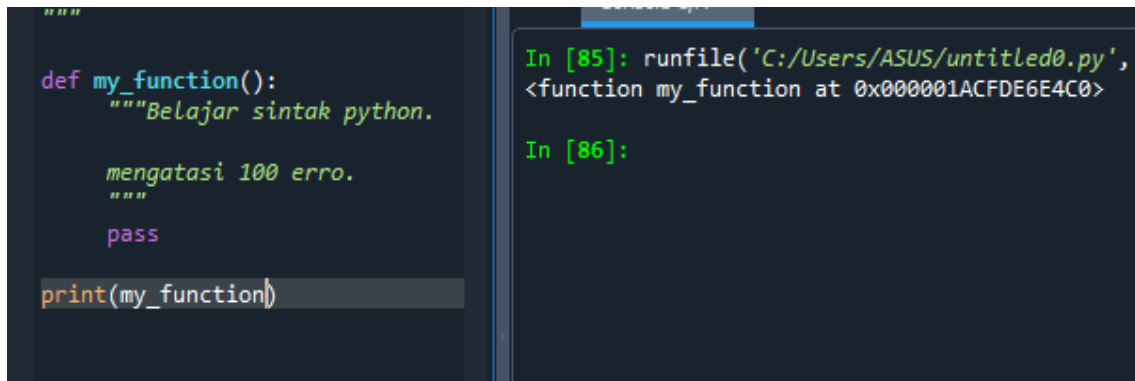


```
"""  
def my_function():  
    """Belajar sintak python.  
  
    mengatasi 100 erro.  
    """  
    pass  
print(my_function)
```

```
In [85]: runfile('C:/Users/ASUS/untitled0.py',  
<function my_function at 0x000001ACFDE6E4C0>  
  
In [86]:
```

Gambar 35: Case-18 Error

Solusi-Case18 Untuk menampilkan string multiple baris dengan memanggil function, tentunya bukan hanya print nama function tetapi harus diikuti dengan fungsi doc

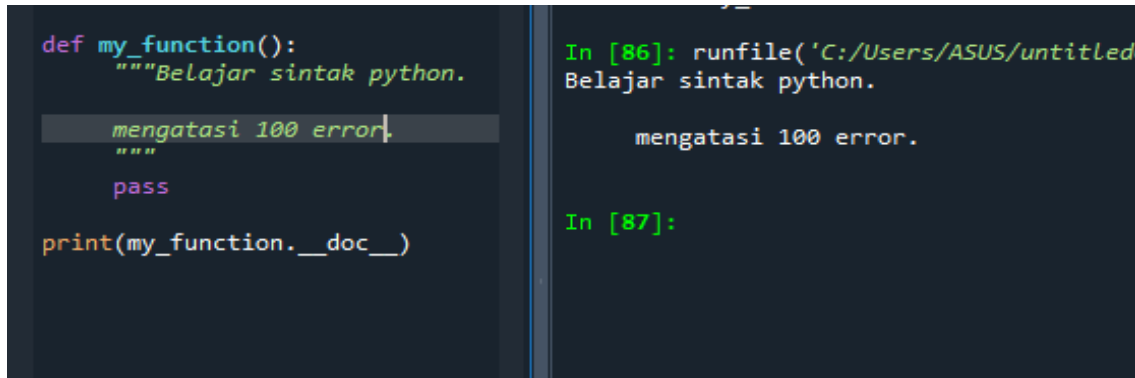


```
def my_function():  
    """Belajar sintak python.  
  
    mengatasi 100 error.  
    """  
    pass  
print(my_function.__doc__)
```

```
In [86]: runfile('C:/Users/ASUS/untitled0.py',  
Belajar sintak python.  
  
mengatasi 100 error.  
  
In [87]:
```

Gambar 36: Case-18 Solved

19 Case Append

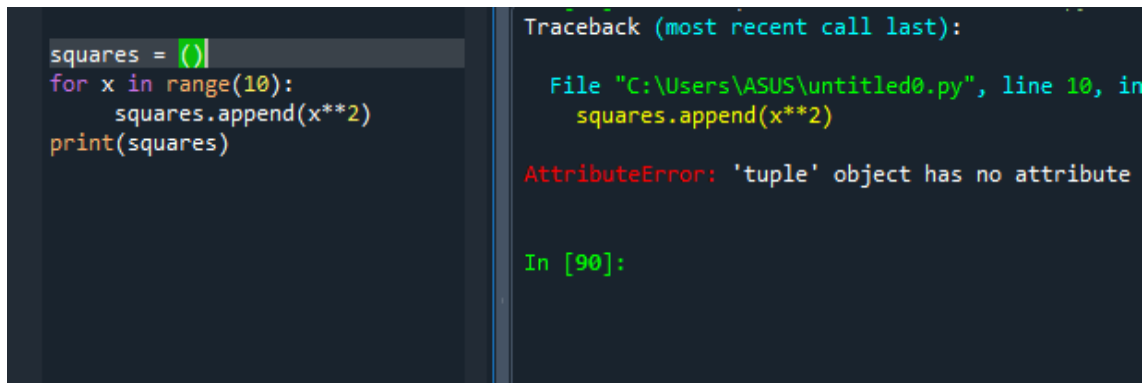


```
squares = ()  
for x in range(10):  
    squares.append(x**2)  
print(squares)
```

```
Traceback (most recent call last):  
  File "C:\Users\ASUS\untitled0.py", line 10, in  
    squares.append(x**2)  
AttributeError: 'tuple' object has no attribute  
  
In [90]:
```

Gambar 37: Case-19 Error

Solusi-Case19 Dalam penggunaan append kita harus menggunakan kurung siku

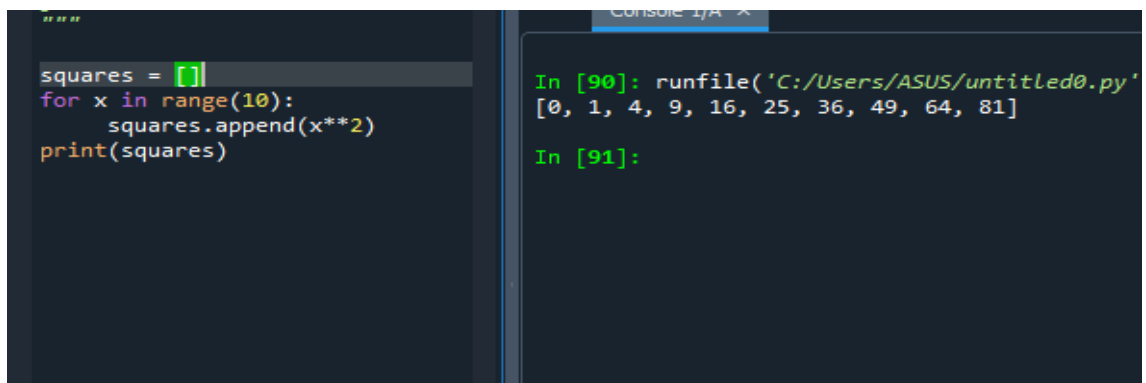


```
squares = []  
for x in range(10):  
    squares.append(x**2)  
print(squares)
```

```
In [90]: runfile('C:/Users/ASUS/untitled0.py')  
[0, 1, 4, 9, 16, 25, 36, 49, 64, 81]  
  
In [91]:
```

Gambar 38: Case-19 Solved

20 Case Print

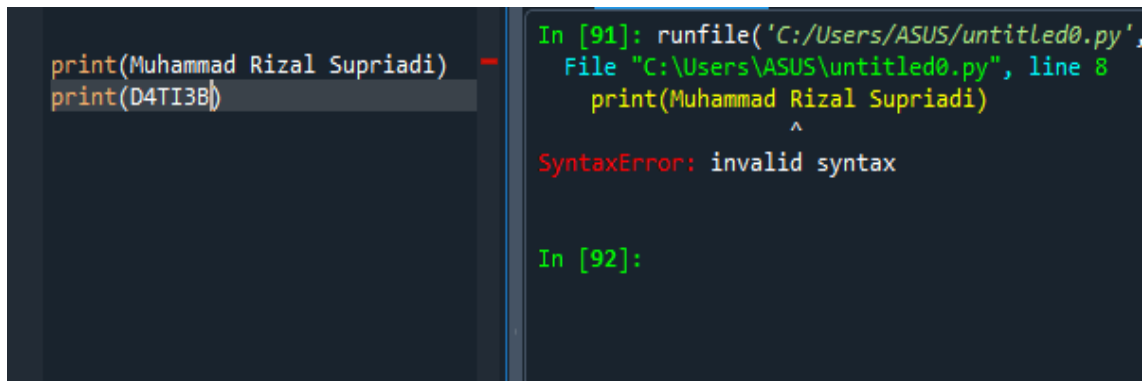


```
print(Muhammad Rizal Supriadi)
print(D4TI3B)
```

```
In [91]: runfile('C:/Users/ASUS/untitled0.py',
File "C:\Users\ASUS\untitled0.py", line 8
    print(Muhammad Rizal Supriadi)
          ^
SyntaxError: invalid syntax

In [92]:
```

Gambar 39: Case-20 Error

Solusi-Case20 Print nilai string harus dibungkus dengan tanda petik

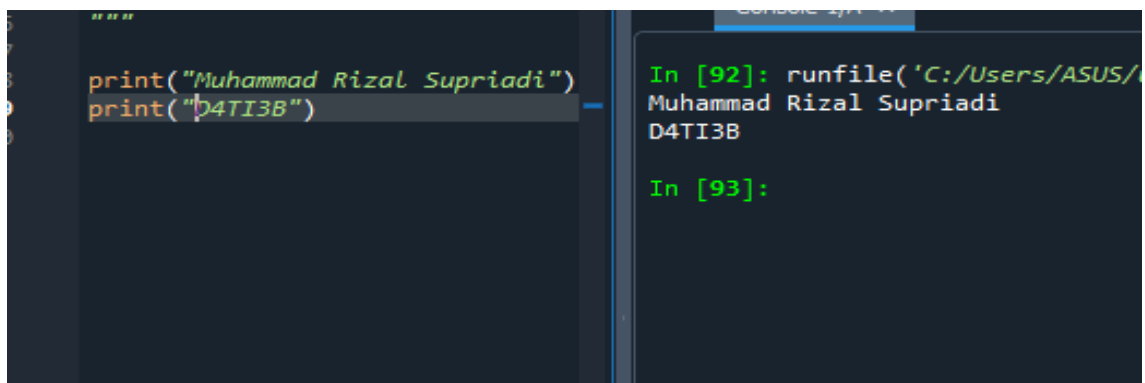


```
print("Muhammad Rizal Supriadi")
print("D4TI3B")
```

```
In [92]: runfile('C:/Users/ASUS/untitled0.py',
Muhammad Rizal Supriadi
D4TI3B

In [93]:
```

Gambar 40: Case-20 Solved

21 Case Perkalin

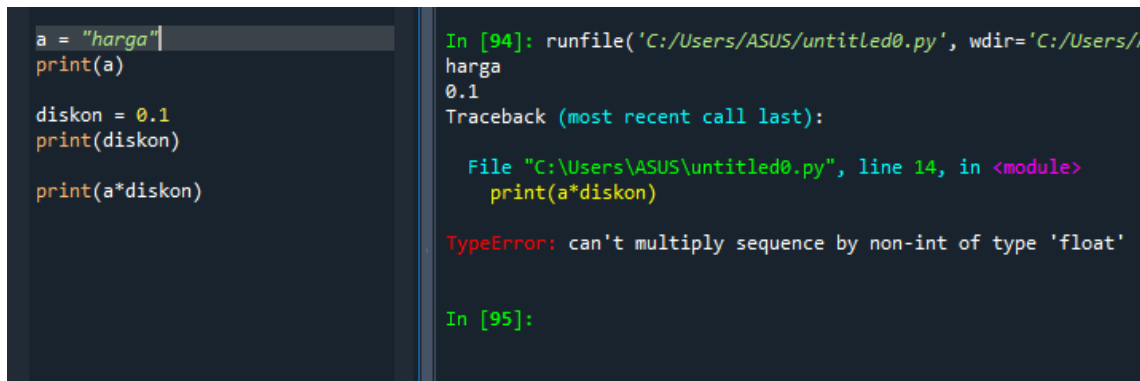

```
a = "harga"
print(a)

diskon = 0.1
print(diskon)

print(a*diskon)


In [94]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/Users/ASUS/untitled0.py')
harga
0.1
Traceback (most recent call last):

  File "C:/Users/ASUS/untitled0.py", line 14, in <module>
    print(a*diskon)
TypeError: can't multiply sequence by non-int of type 'float'

In [95]:
```

Gambar 41: Case-21 Error

Solusi-Case21 Error terjadi karena string tidak dapat dikalikan dengan integer

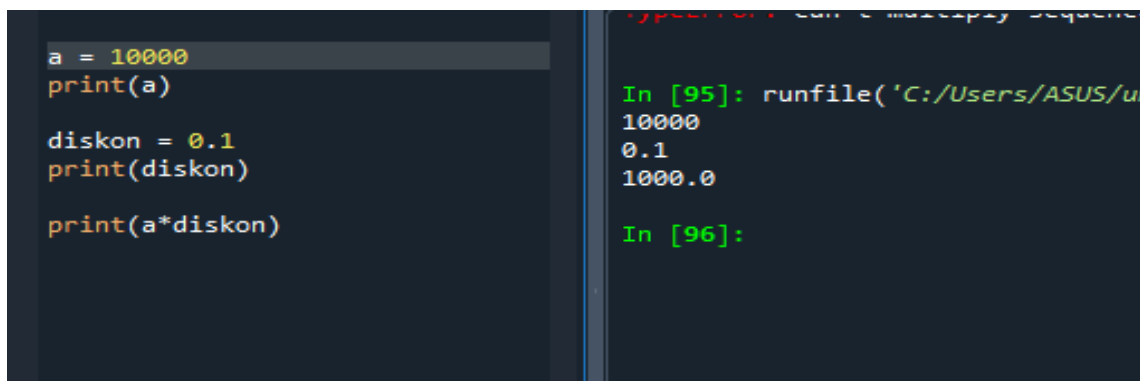

```
a = 10000
print(a)

diskon = 0.1
print(diskon)


print(a*diskon)

In [95]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/Users/ASUS/untitled0.py')
10000
0.1
1000.0

In [96]:
```

Gambar 42: Case-21 Solved

22 Case Print

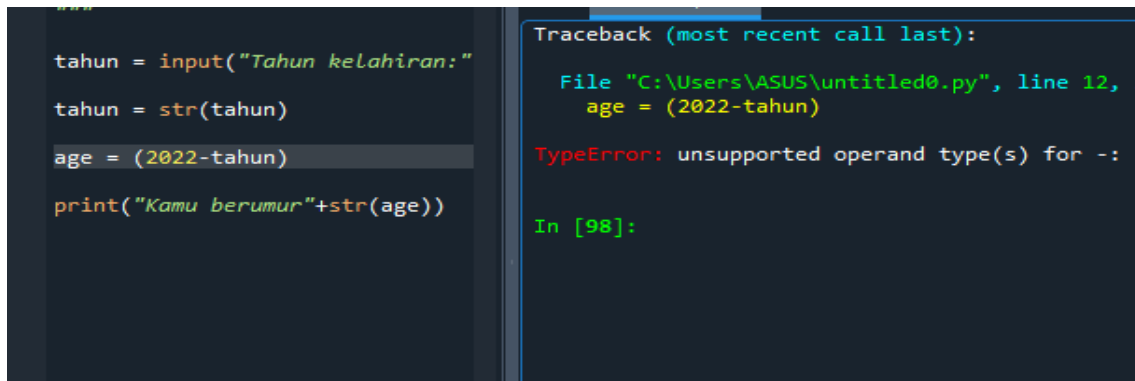


```
tahun = input("Tahun kelahiran:")
tahun = str(tahun)
age = (2022-tahun)
print("Kamu berumur"+str(age))
```

```
Traceback (most recent call last):
  File "C:\Users\ASUS\untitled0.py", line 12, in
    age = (2022-tahun)
TypeError: unsupported operand type(s) for -: 'int' and 'str'

In [98]:
```

Gambar 43: Case-22 Error

Solusi-Case22 Untuk melakukan perulangan `str(tahun)` harus diganti menjadi `int(tahun)`

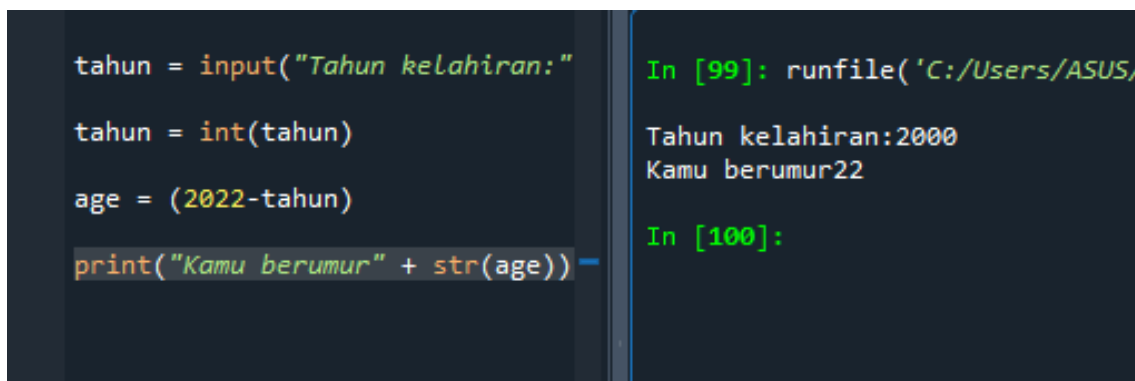

```
tahun = input("Tahun kelahiran:")
tahun = int(tahun)
age = (2022-tahun)
print("Kamu berumur" + str(age))
```


```
In [99]: runfile('C:/Users/ASUS/untitled0.py', to_run=True)

Tahun kelahiran:2000
Kamu berumur22

In [100]:
```

Gambar 44: Case-22 Solved

23 Case Kurung Kurawal

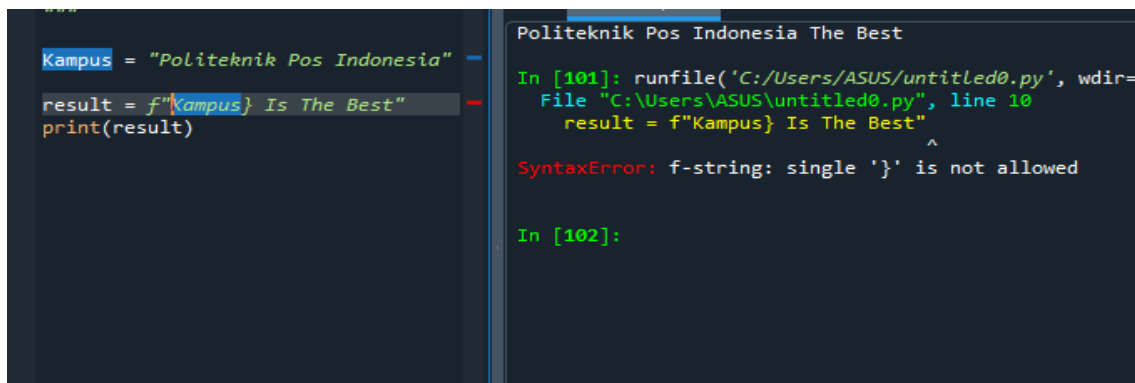

The screenshot shows a Jupyter Notebook with two panels. The left panel contains the following code:

```
kampus = "Politeknik Pos Indonesia"
result = f"{kampus} Is The Best"
print(result)
```


The right panel shows the output of the code, which is a `SyntaxError`:

```
Politeknik Pos Indonesia The Best
In [101]: runfile('C:/Users/ASUS/untitled0.py', wdir=
File "C:/Users/ASUS/untitled0.py", line 10
    result = f"kampus} Is The Best"
              ^
SyntaxError: f-string: single '}' is not allowed

In [102]:
```

Gambar 45: Case-23 Error

Solusi-Case23 Error terjadi karena saya tidak membuka dengan kurung kurawal untuk Kampus

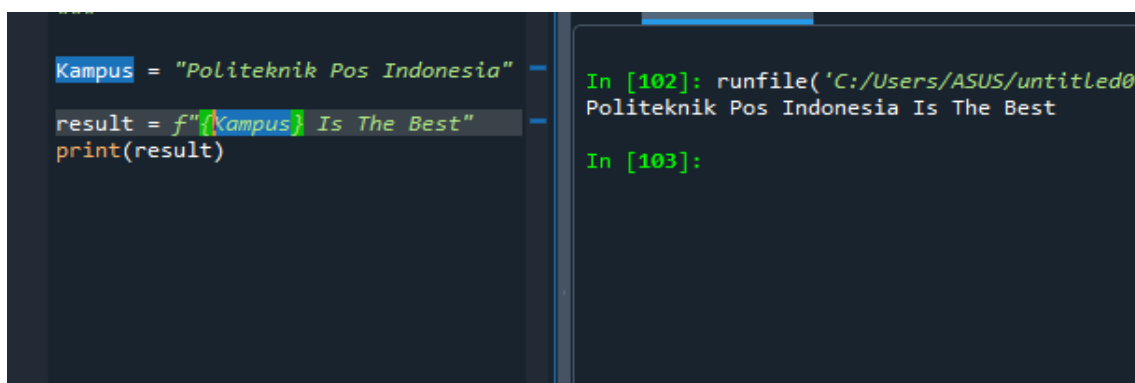

The screenshot shows a Jupyter Notebook with two panels. The left panel contains the following code:

```
kampus = "Politeknik Pos Indonesia"
result = f"{kampus} Is The Best"
print(result)
```


The right panel shows the output of the code, which is the correct string:

```
In [102]: runfile('C:/Users/ASUS/untitled0.
Politeknik Pos Indonesia Is The Best

In [103]:
```

Gambar 46: Case-23 Solved

24 Case Math

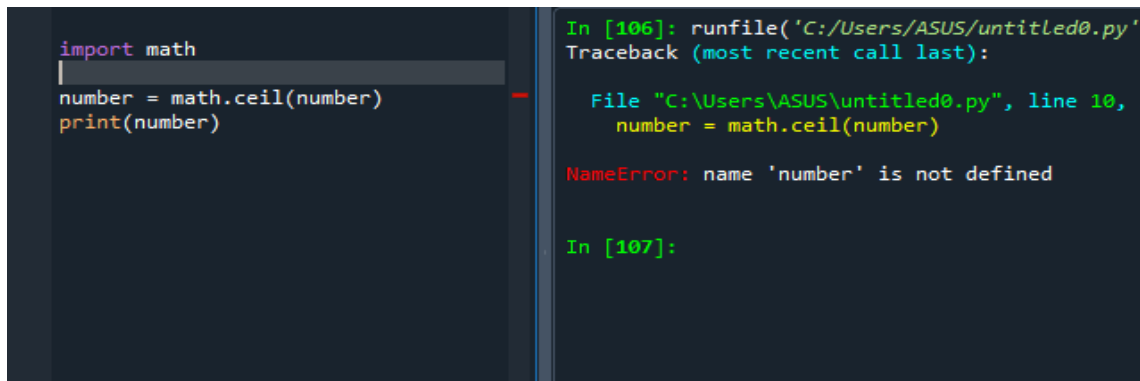

```
import math
number = math.ceil(number)
print(number)
```

```
In [106]: runfile('C:/Users/ASUS/untitled0.py')
Traceback (most recent call last):


  File "C:\Users\ASUS\untitled0.py", line 10,
    number = math.ceil(number)

NameError: name 'number' is not defined

In [107]:
```

Gambar 47: Case-24 Error

Solusi-Case24 Number belum didefinisikan jadi belum terdapat nilai

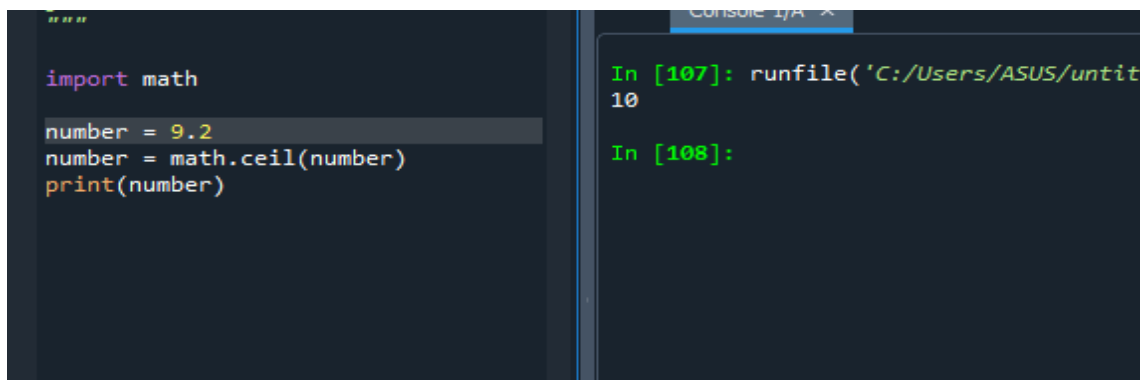


```
import math
number = 9.2
number = math.ceil(number)
print(number)
```

```
In [107]: runfile('C:/Users/ASUS/untit
10

In [108]:
```

Gambar 48: Case-24 Solved

25 Case IF

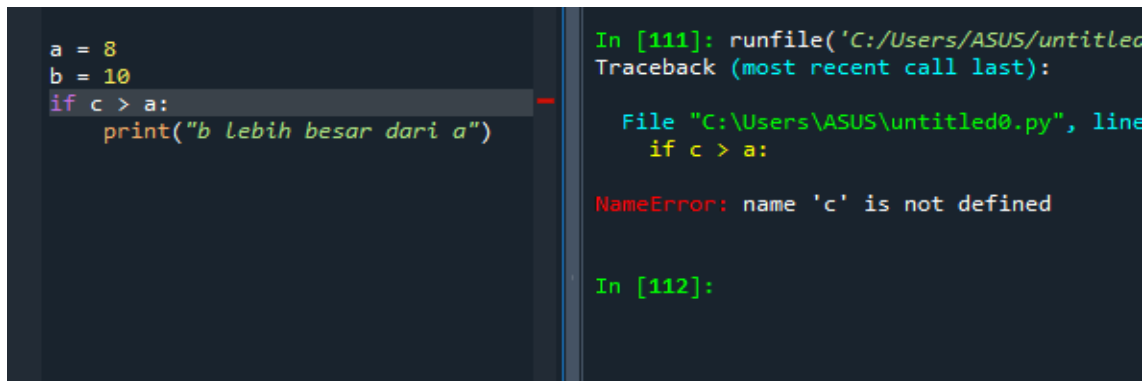

```
a = 8
b = 10
if c > a:
    print("b lebih besar dari a")


In [111]: runfile('C:/Users/ASUS/untitled0.py', line 1, namespace=None)
Traceback (most recent call last):

  File "C:/Users/ASUS/untitled0.py", line 3, in <module>
    if c > a:
NameError: name 'c' is not defined

In [112]:
```

Gambar 49: Case-25 Error

Solusi-Case25 variabel c tidak terdefinisi dan harus di sinkronkan

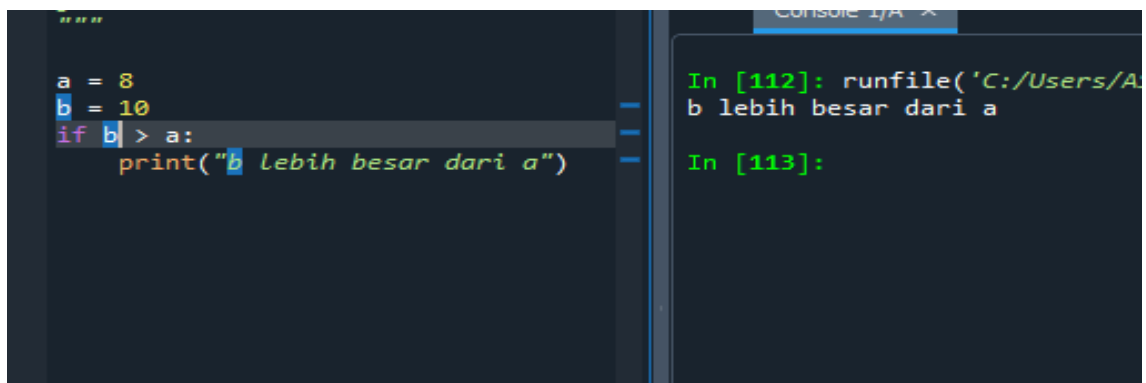


```
a = 8
b = 10
if b > a:
    print("b lebih besar dari a")

In [112]: runfile('C:/Users/ASUS/untitled0.py', line 1, namespace=None)
b lebih besar dari a

In [113]:
```

Gambar 50: Case-25 Solved

26 Case Print

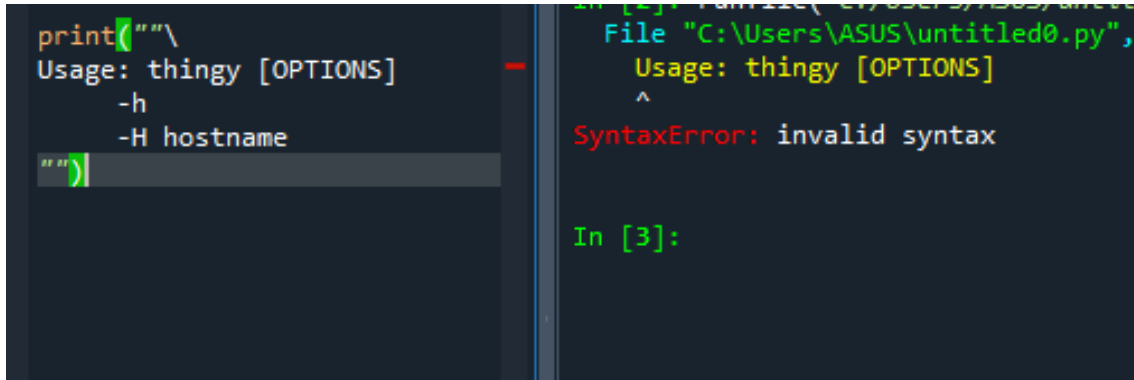


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
File "C:\Users\ASUS\untitled0.py",
  Usage: thingy [OPTIONS]
  ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 51: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

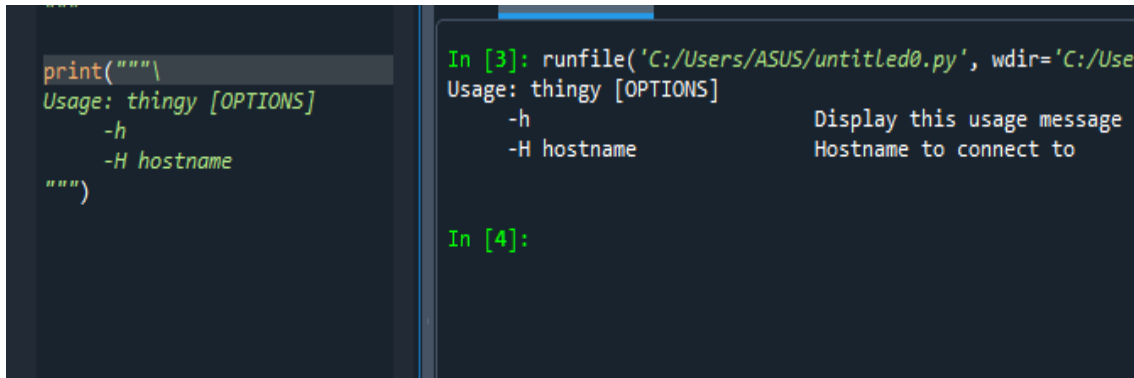


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 52: Case-6 Solved

27 Case Print

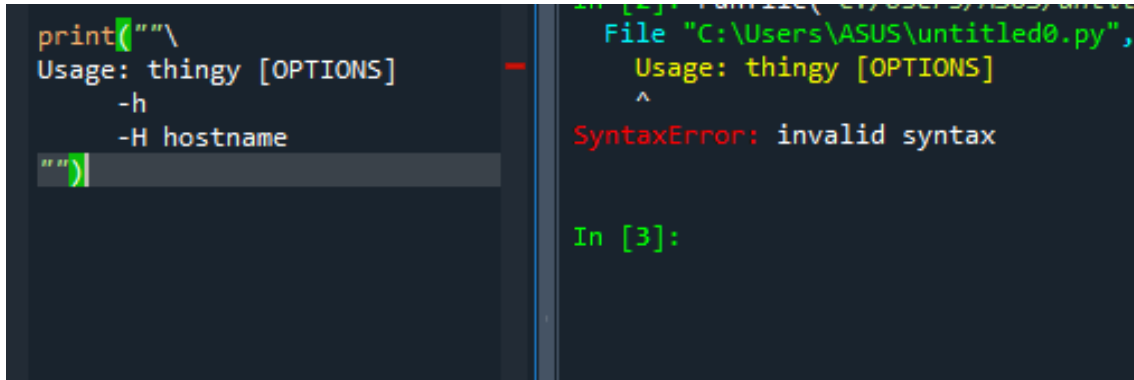


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 53: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

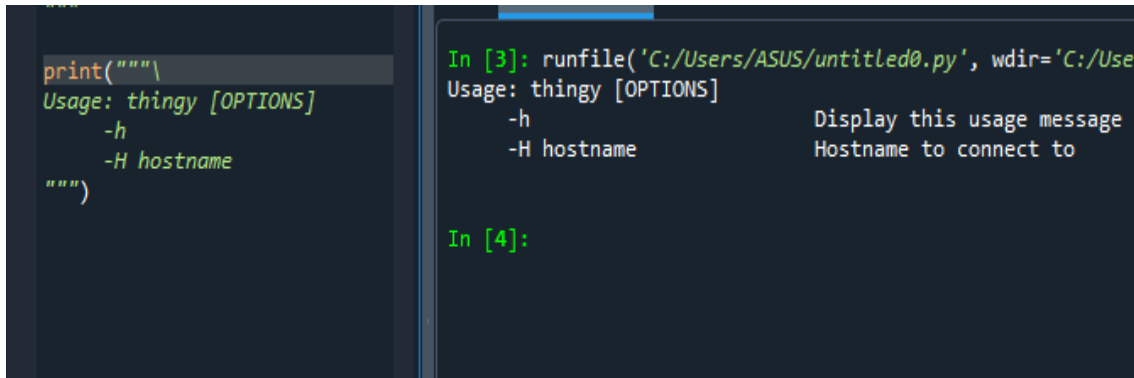


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 54: Case-6 Solved

28 Case Print

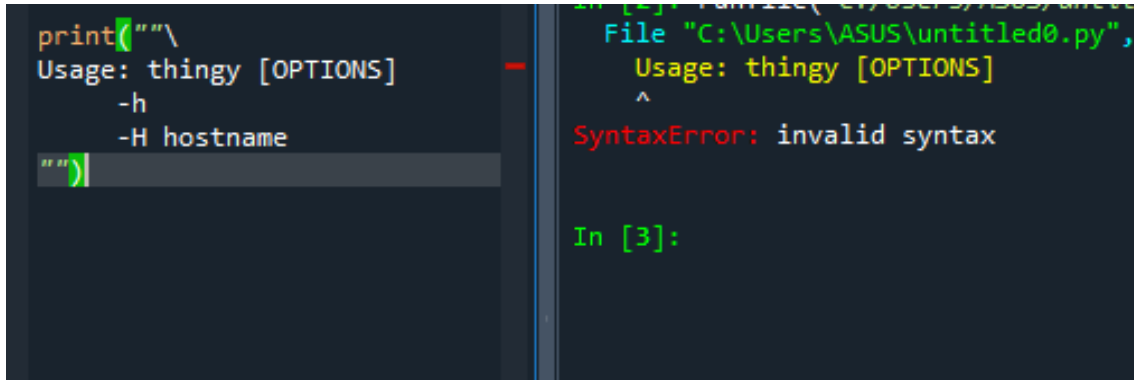


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
File "C:\Users\ASUS\untitled0.py",
  Usage: thingy [OPTIONS]
    ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 55: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

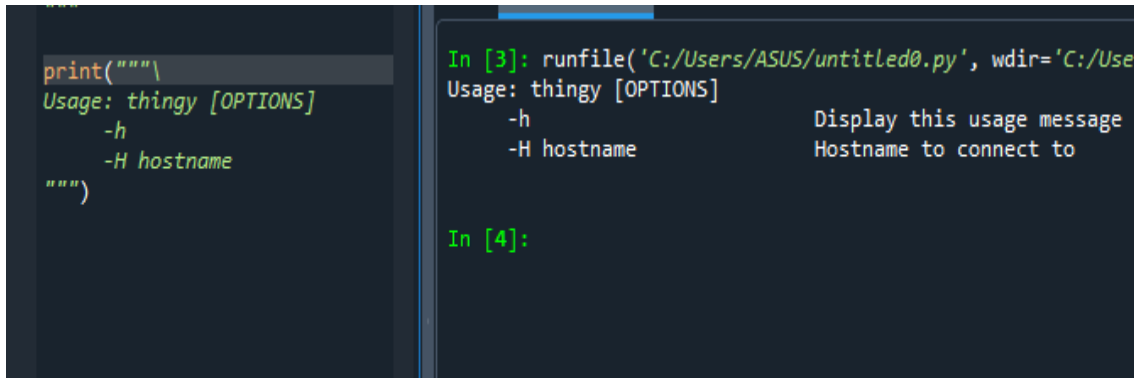


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 56: Case-6 Solved

29 Case Print

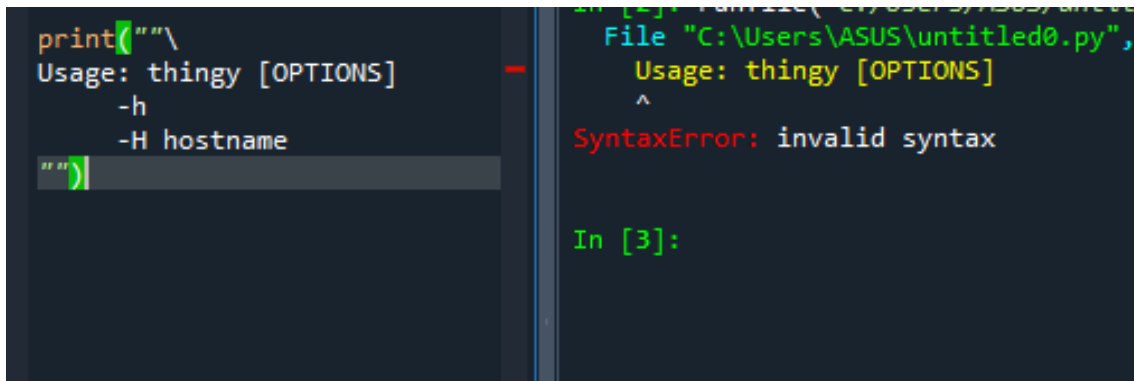


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
File "C:\Users\ASUS\untitled0.py",
  Usage: thingy [OPTIONS]
  ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 57: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

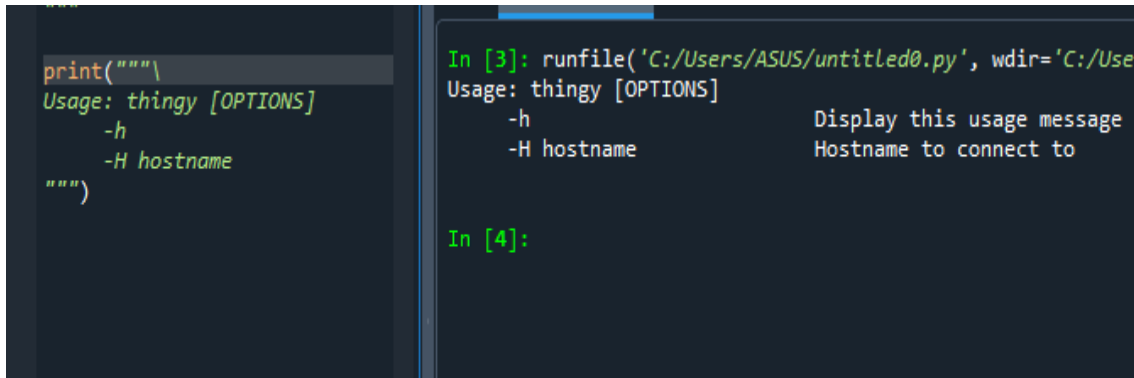


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 58: Case-6 Solved

30 Case Print

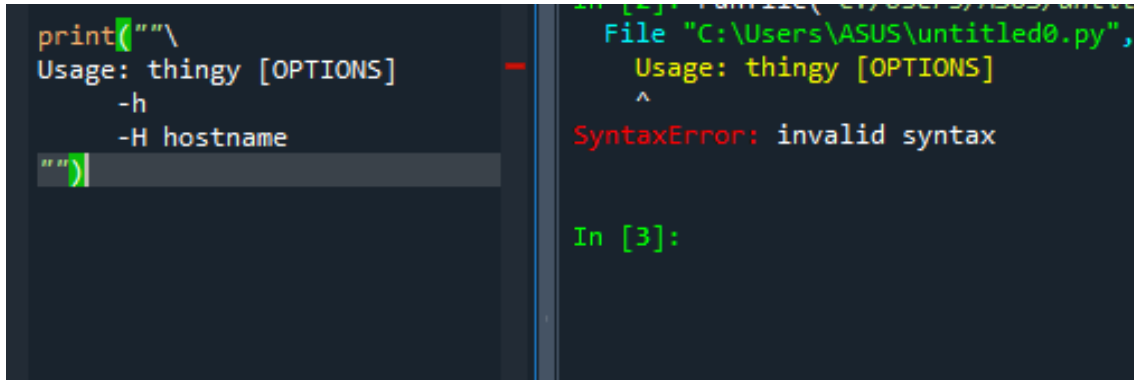


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
File "C:\Users\ASUS\untitled0.py",
  Usage: thingy [OPTIONS]
  ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 59: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

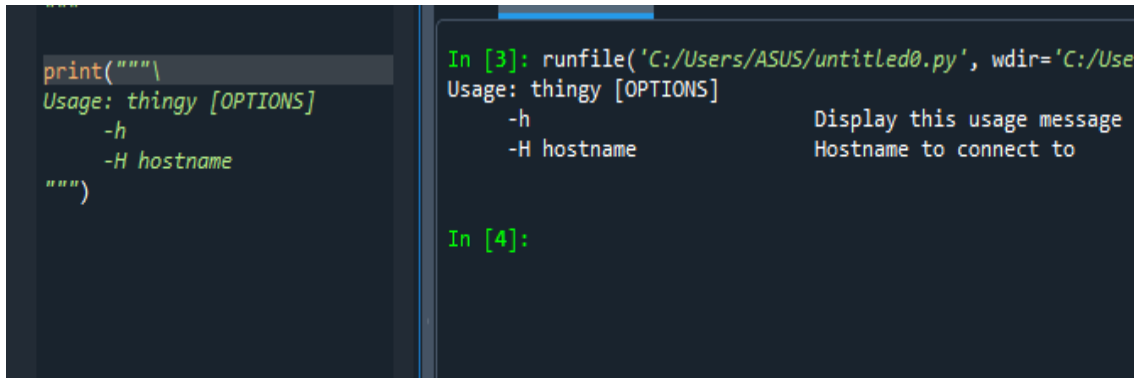


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 60: Case-6 Solved

31 Case Print

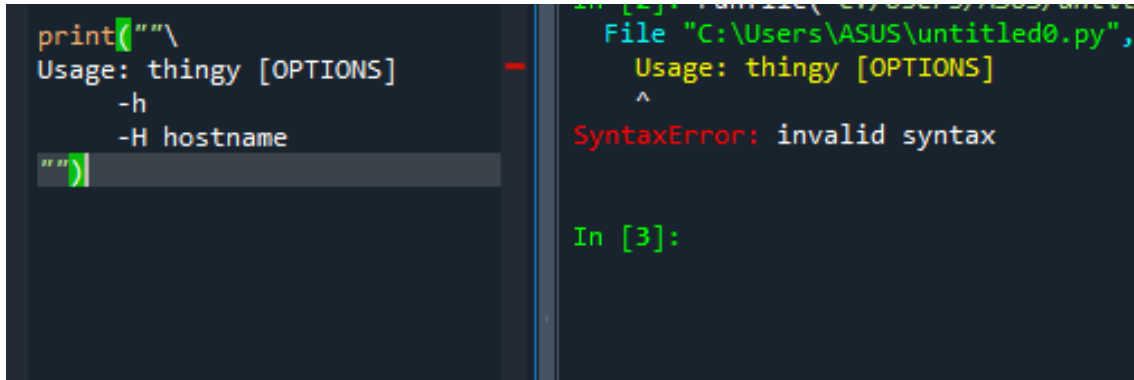


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
File "C:\Users\ASUS\untitled0.py",
  Usage: thingy [OPTIONS]
  ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 61: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

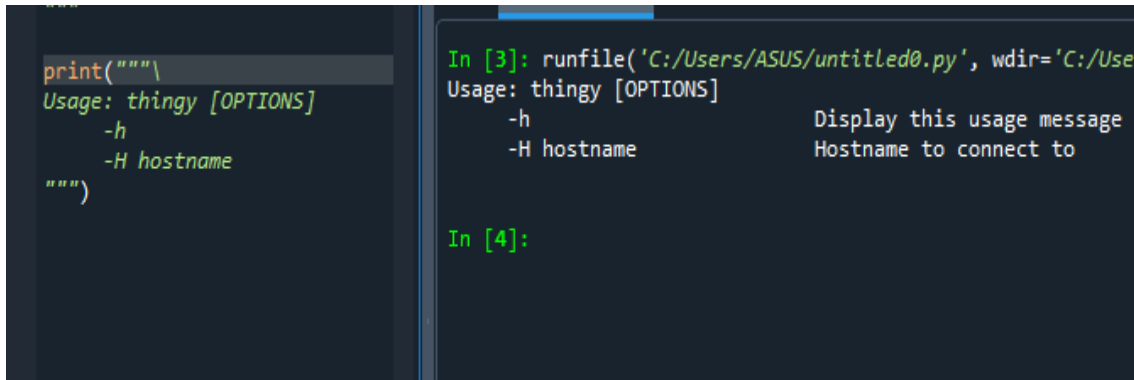


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 62: Case-6 Solved

32 Case Print

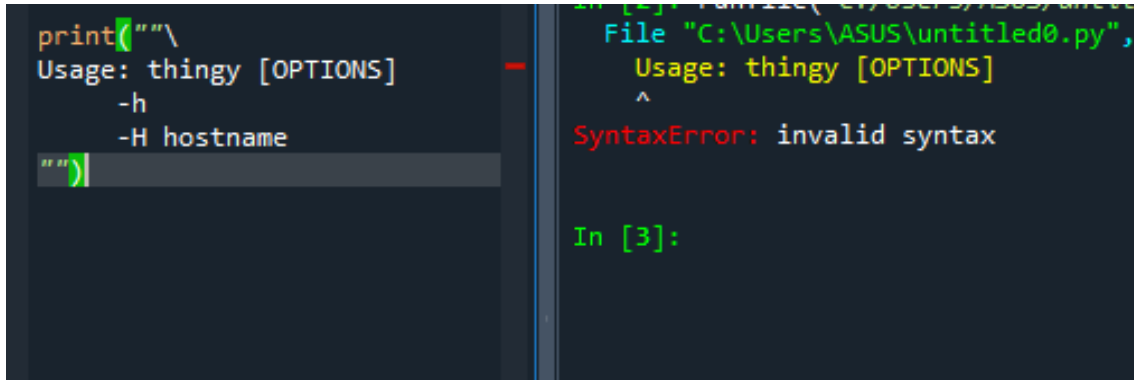


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
File "C:\Users\ASUS\untitled0.py",
  Usage: thingy [OPTIONS]
    ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 63: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

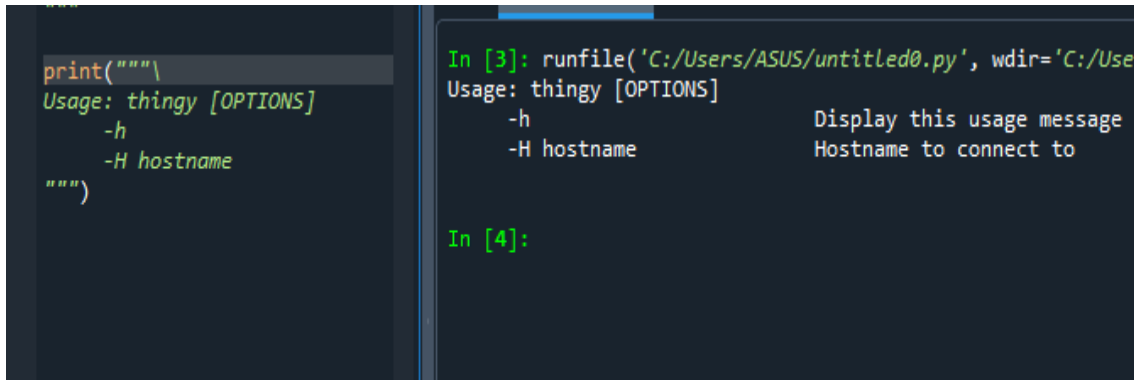


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 64: Case-6 Solved

33 Case Print

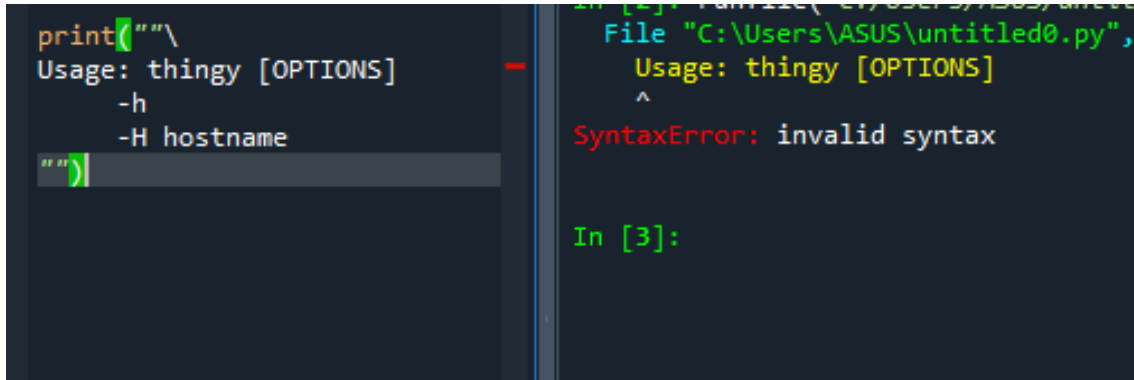


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
File "C:\Users\ASUS\untitled0.py",
  Usage: thingy [OPTIONS]
    ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 65: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

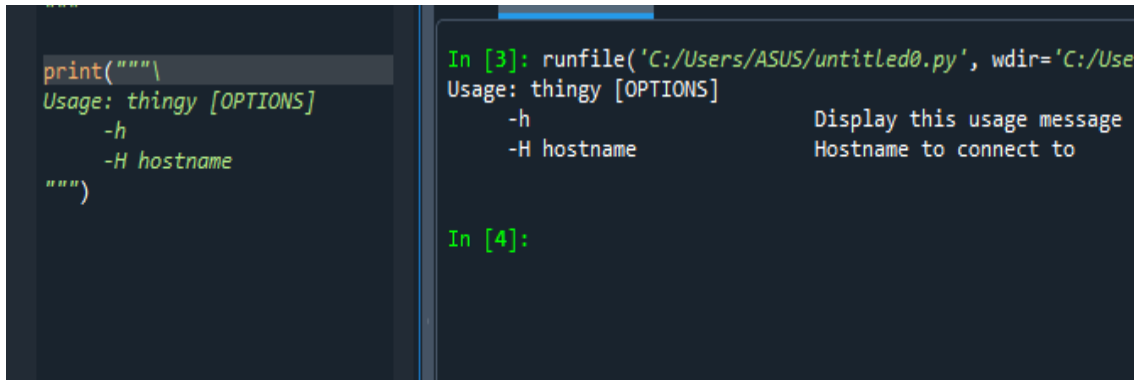


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 66: Case-6 Solved

34 Case Print

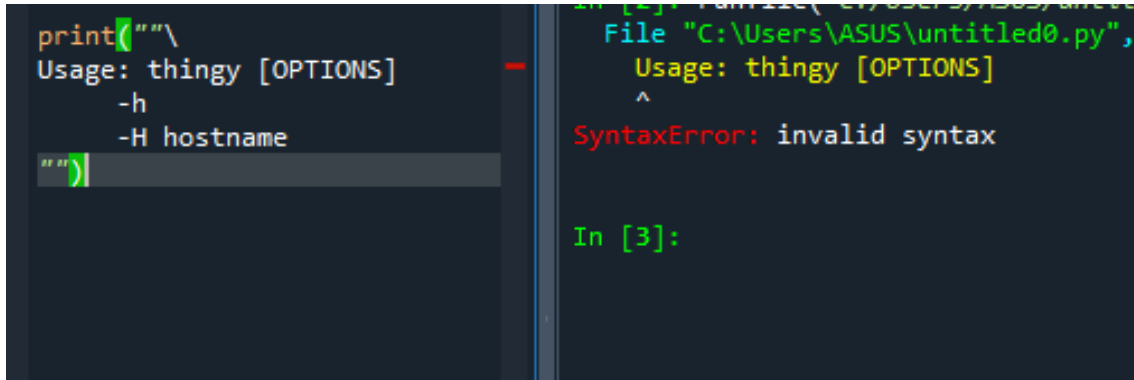


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 67: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

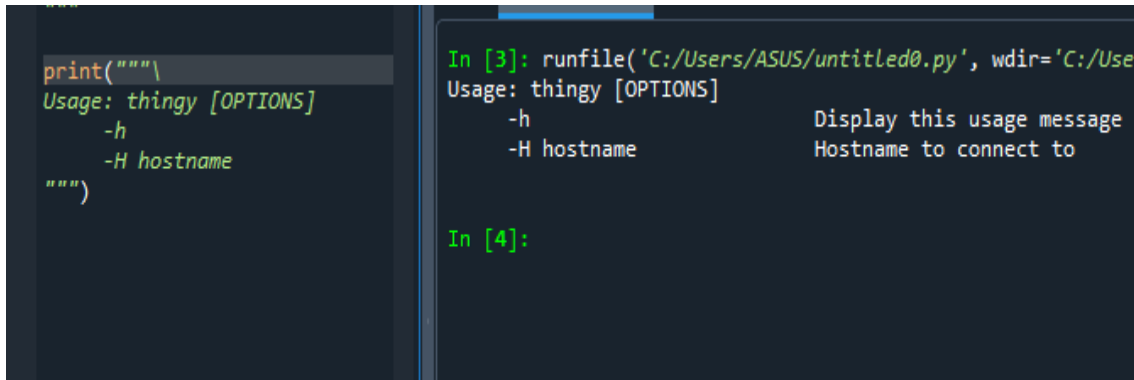


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 68: Case-6 Solved

35 Case Print

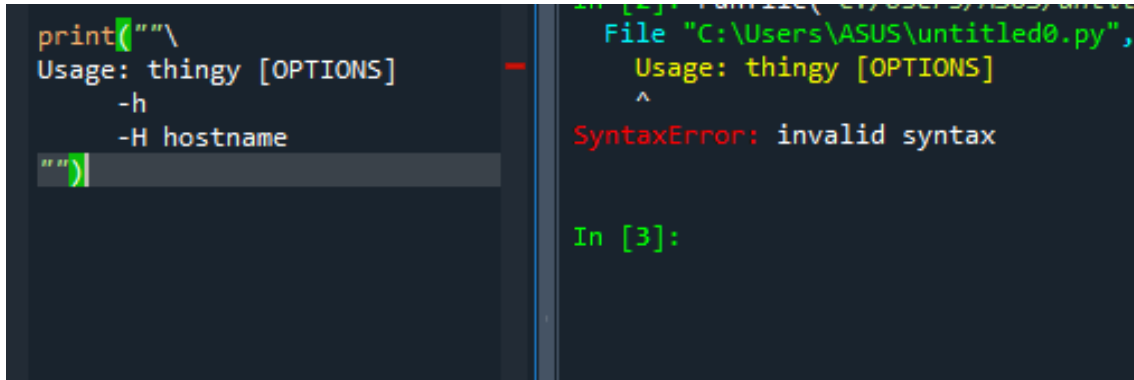


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
File "C:\Users\ASUS\untitled0.py",
  Usage: thingy [OPTIONS]
  ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 69: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

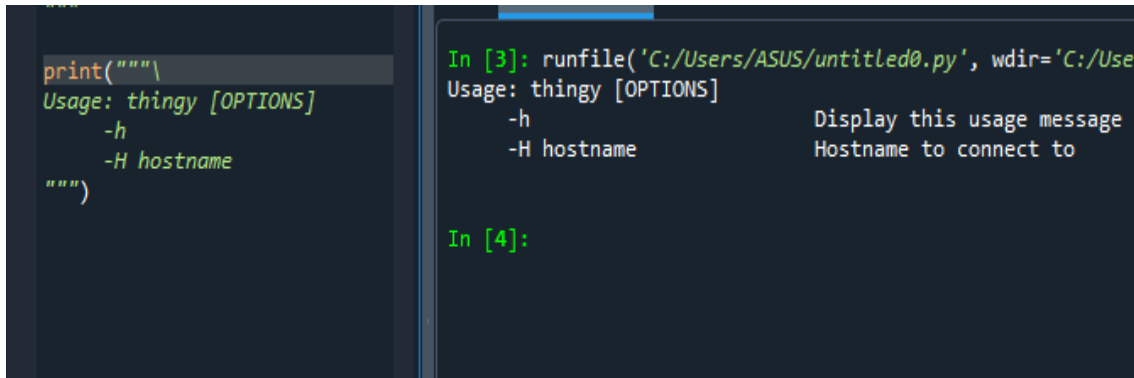


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 70: Case-6 Solved

36 Case Print

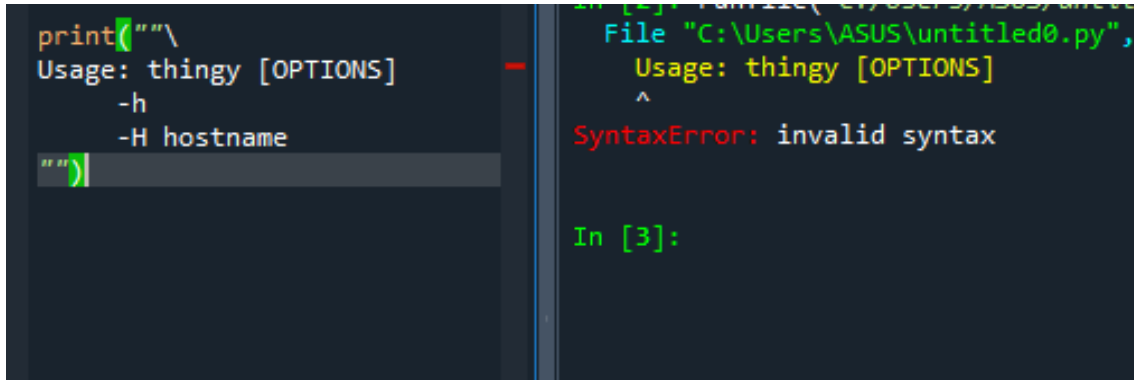


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")

In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/Users/ASUS')
File "C:\Users\ASUS\untitled0.py", line 5, in <module>
    Usage: thingy [OPTIONS]
    ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 71: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

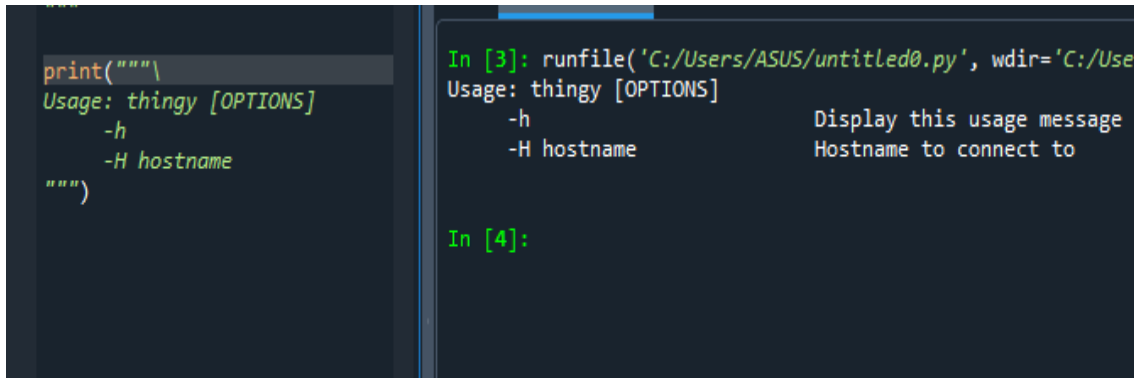


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")

In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/Users/ASUS')
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 72: Case-6 Solved

37 Case Print

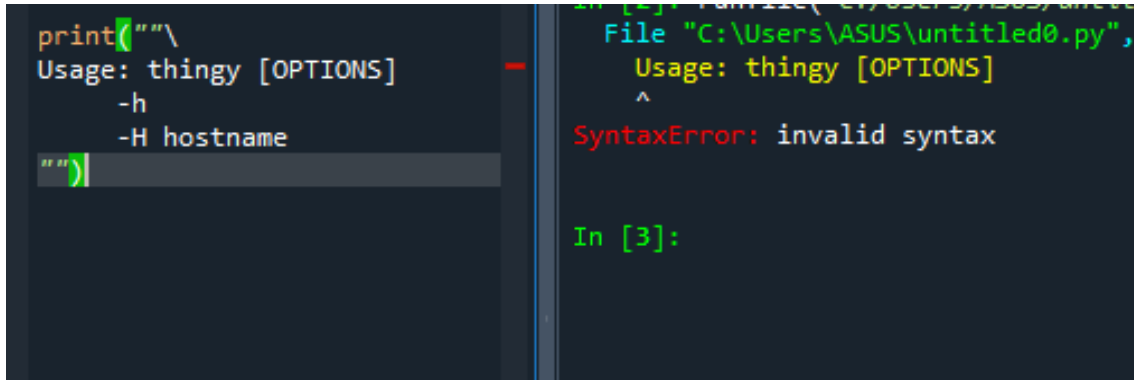


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
File "C:\Users\ASUS\untitled0.py",
  Usage: thingy [OPTIONS]
  ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 73: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

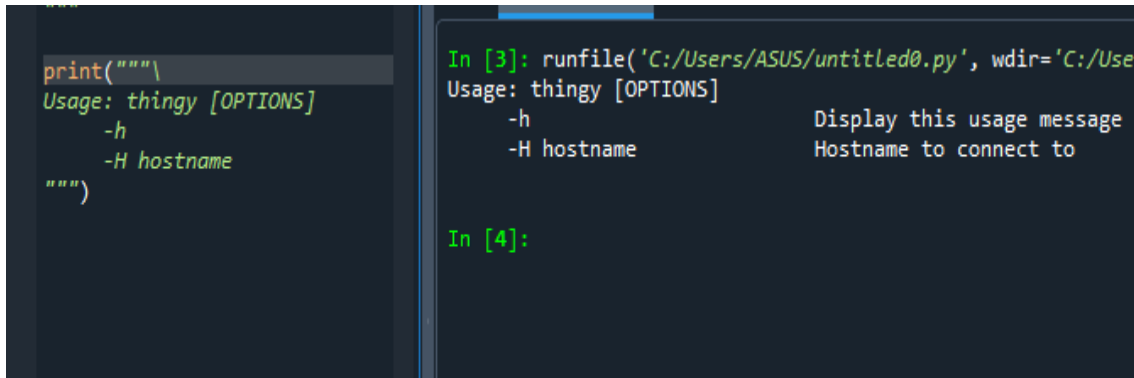


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 74: Case-6 Solved

38 Case Print

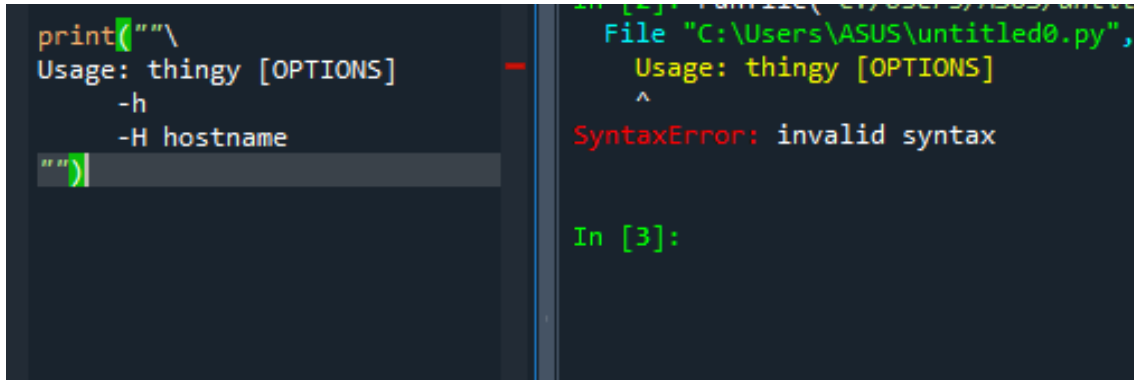


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
File "C:\Users\ASUS\untitled0.py",
  Usage: thingy [OPTIONS]
  ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 75: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

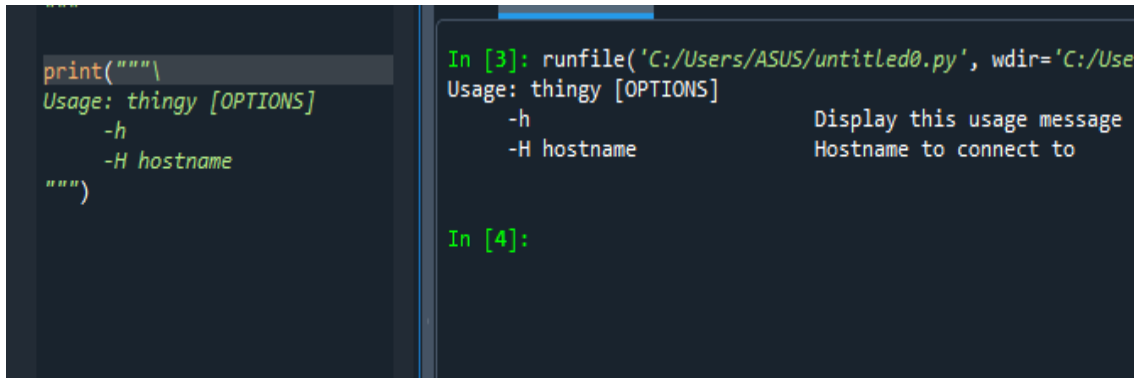


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 76: Case-6 Solved

39 Case Print

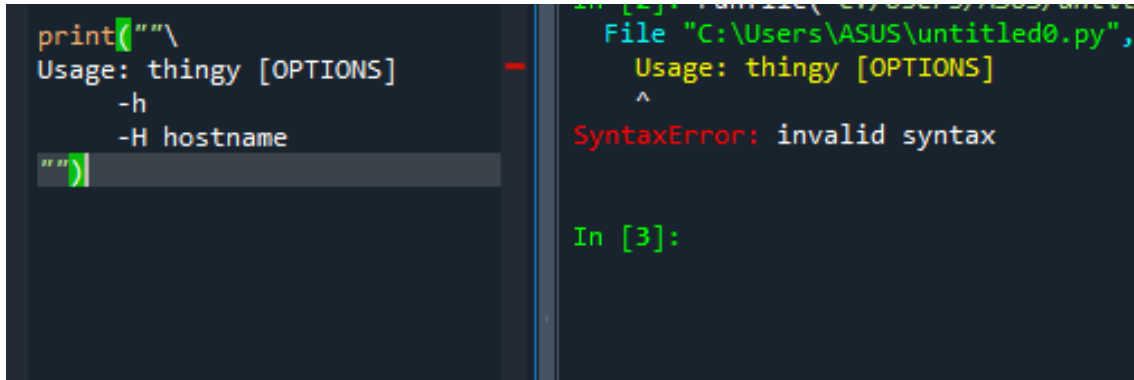


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 77: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

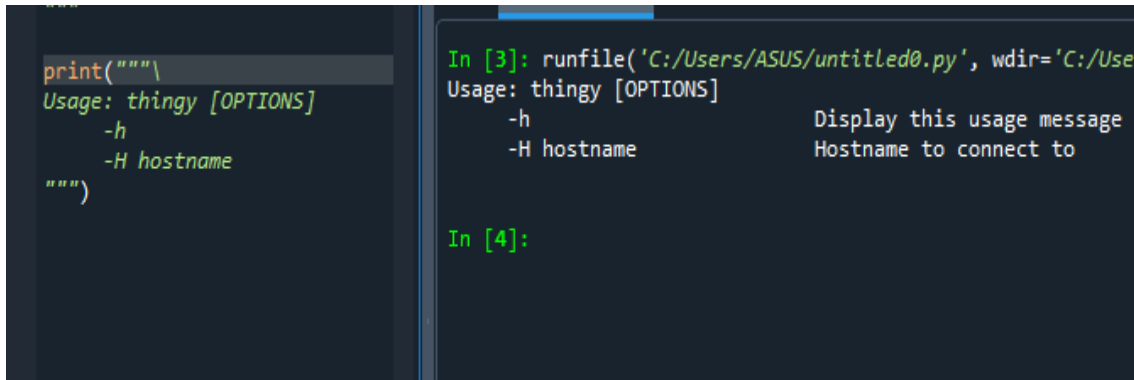


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 78: Case-6 Solved

40 Case Print

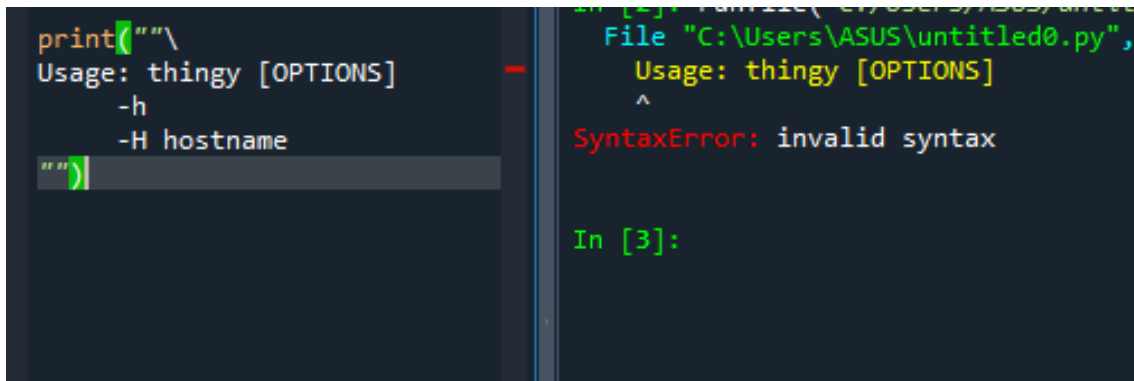


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 79: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

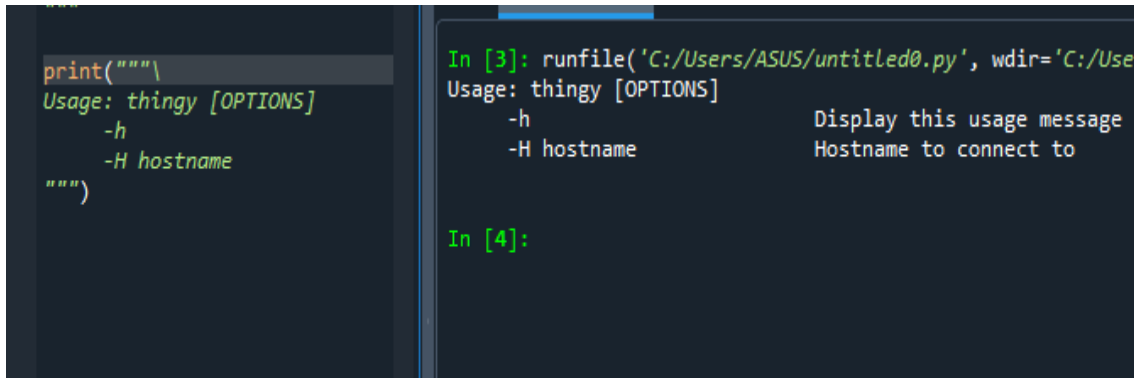


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 80: Case-6 Solved

41 Case Print

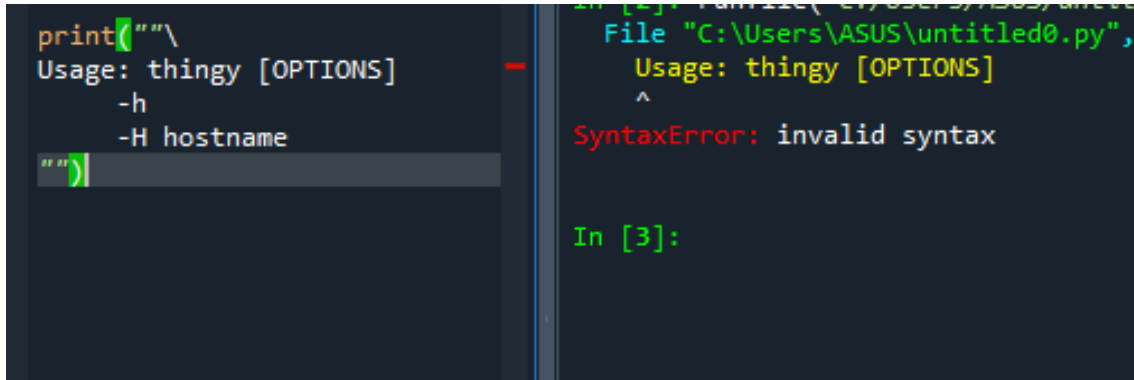


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
File "C:\Users\ASUS\untitled0.py",
  Usage: thingy [OPTIONS]
  ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 81: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

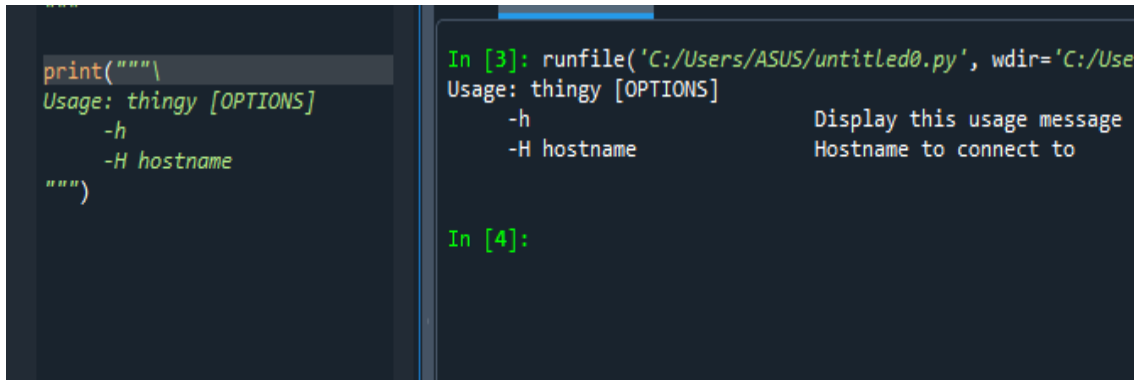


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 82: Case-6 Solved

42 Case Print

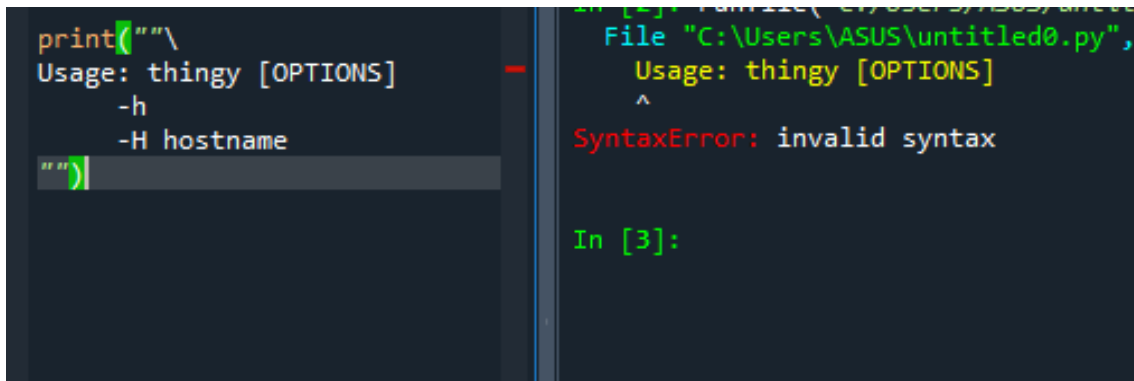


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 83: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

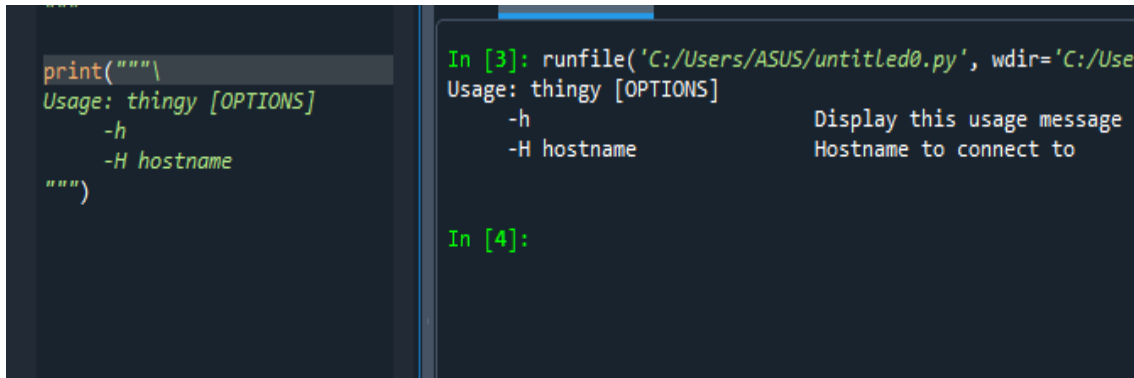


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 84: Case-6 Solved

43 Case Print

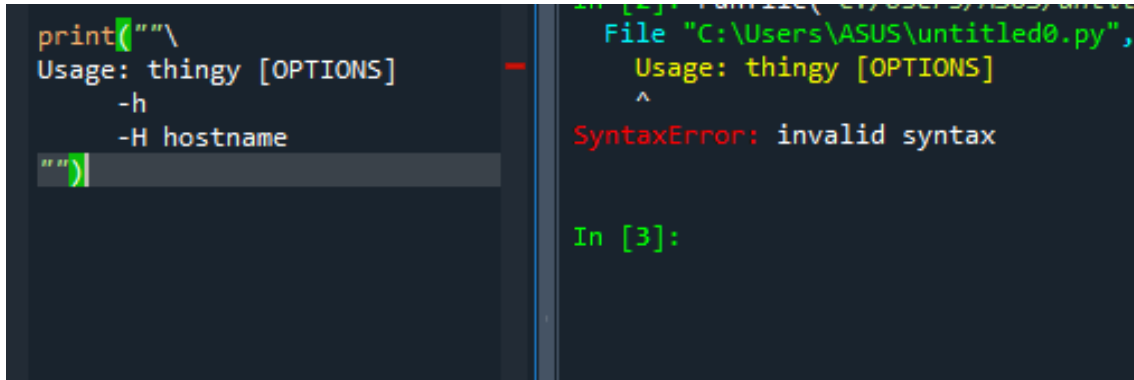


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 85: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

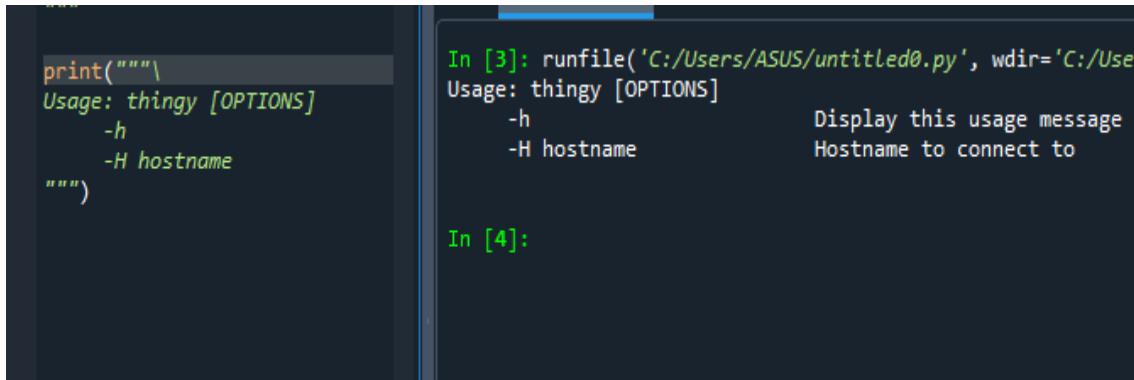


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 86: Case-6 Solved

44 Case Print

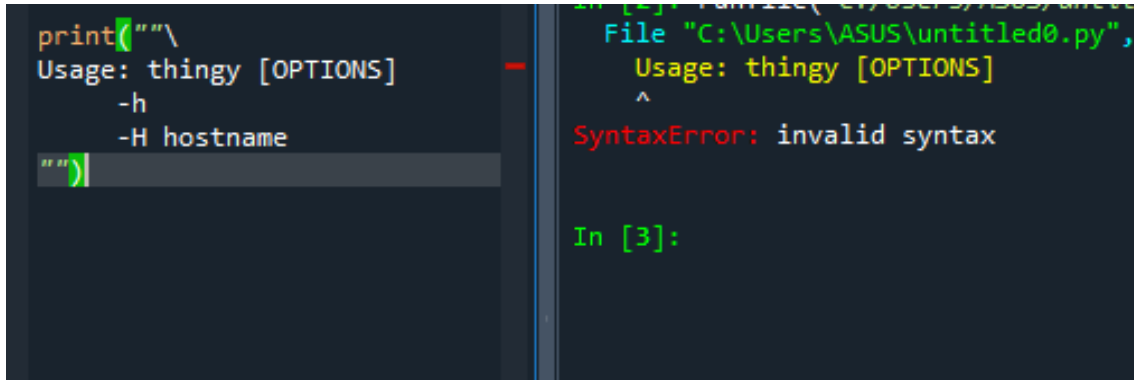


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 87: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

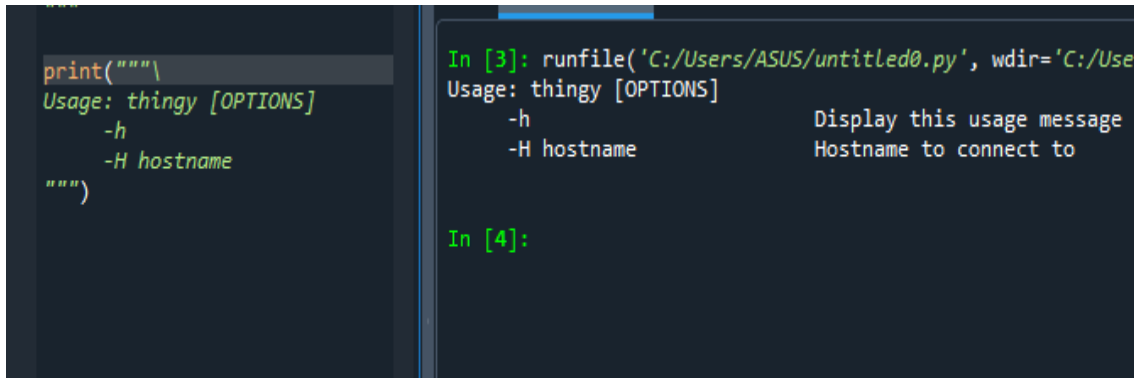


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 88: Case-6 Solved

45 Case Print

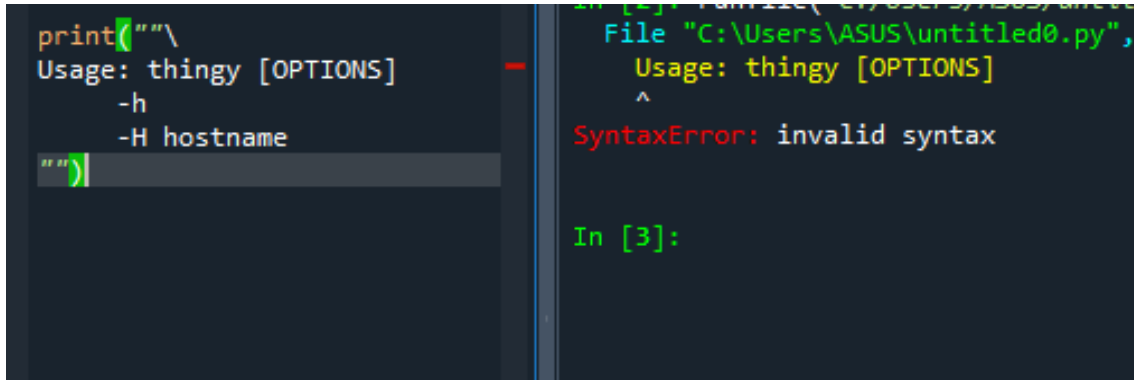


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 89: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

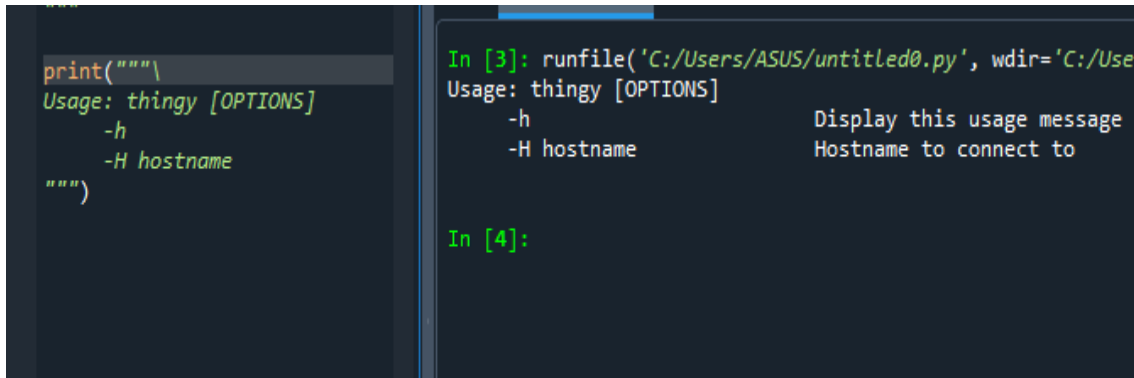


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 90: Case-6 Solved

46 Case Print

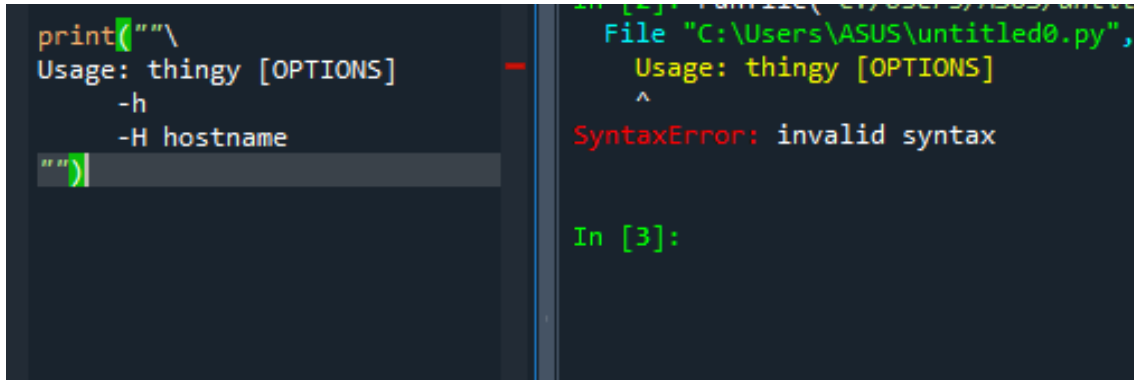


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")

In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/Users/ASUS/untitled0.py')
File "C:/Users/ASUS/untitled0.py", line 1, in <module>
    Usage: thingy [OPTIONS]
    ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 91: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

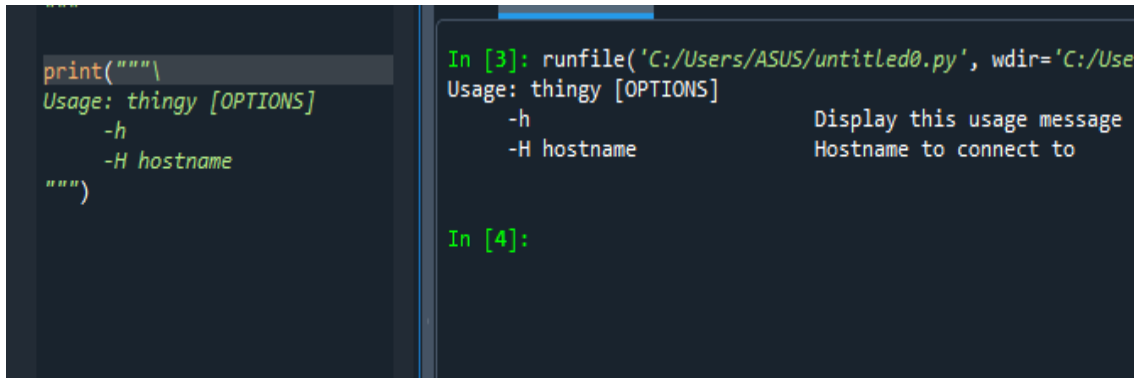


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")

In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/Users/ASUS/untitled0.py')
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 92: Case-6 Solved

47 Case Print

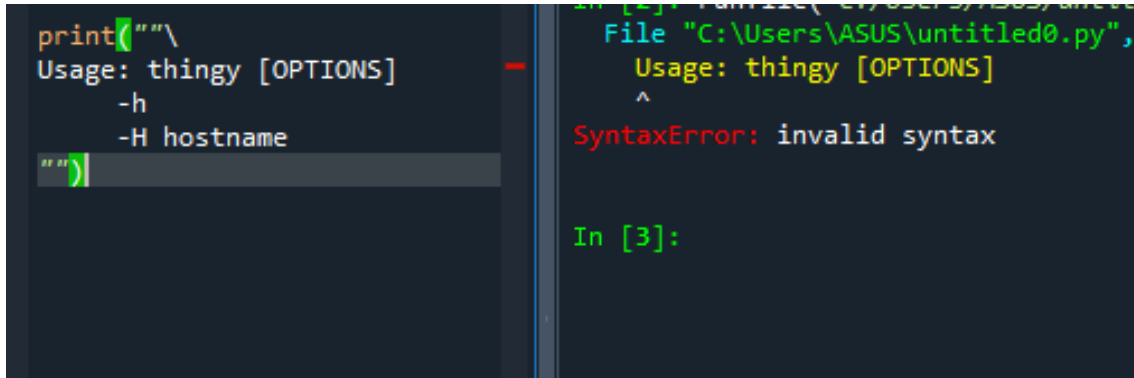


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
File "C:\Users\ASUS\untitled0.py",
  Usage: thingy [OPTIONS]
  ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 93: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

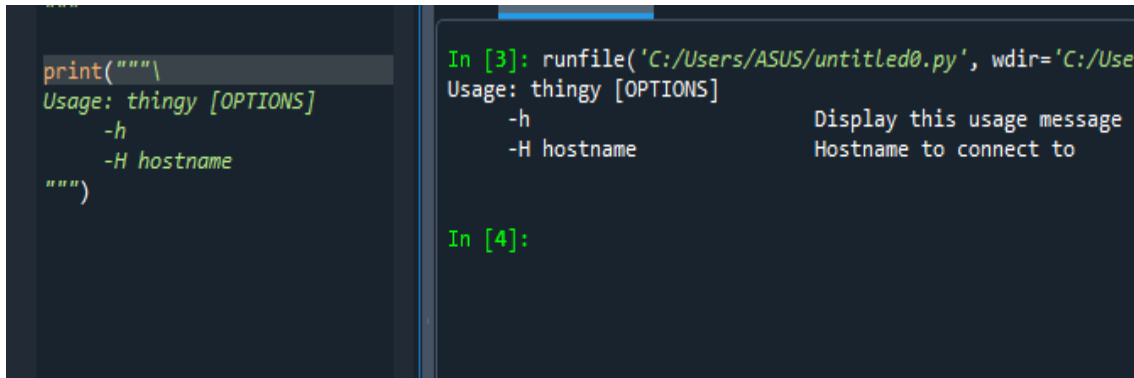


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 94: Case-6 Solved

48 Case Print

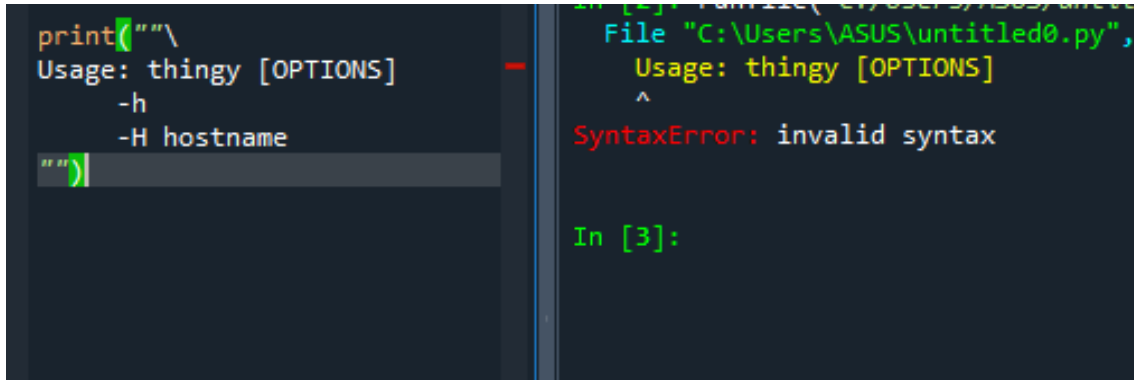


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 95: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

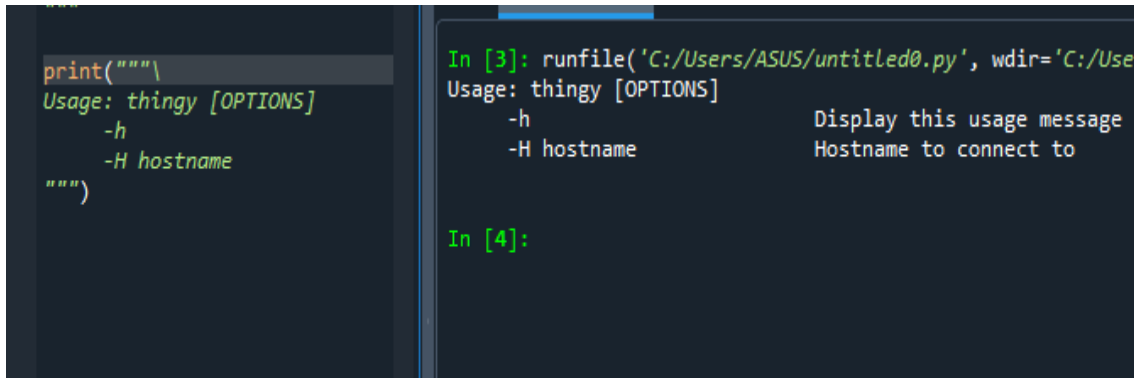


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 96: Case-6 Solved

49 Case Print

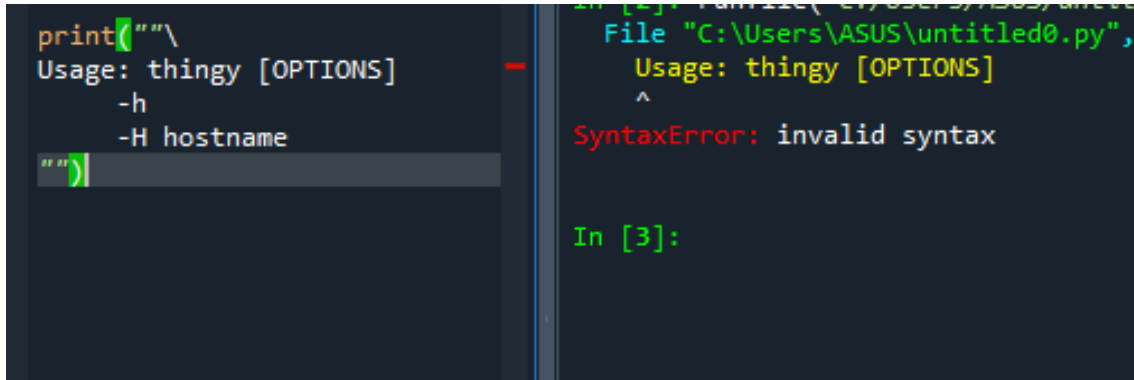


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")

In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 97: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

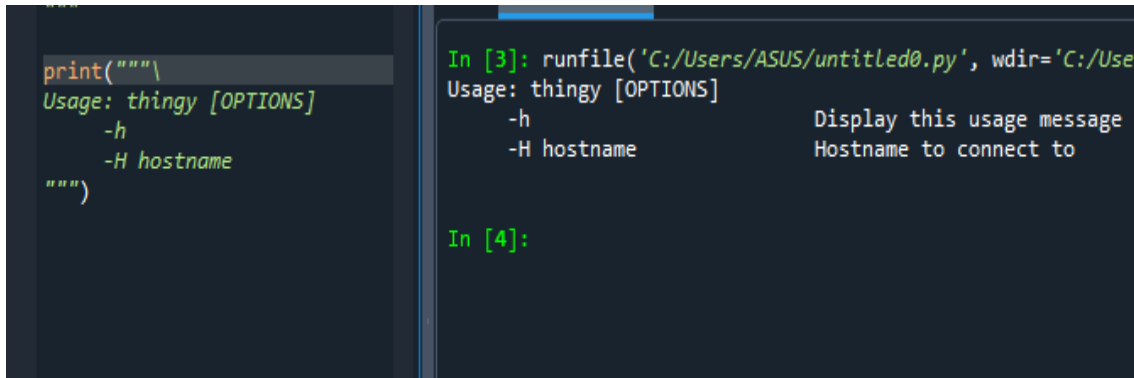


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")

In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 98: Case-6 Solved

50 Case Print

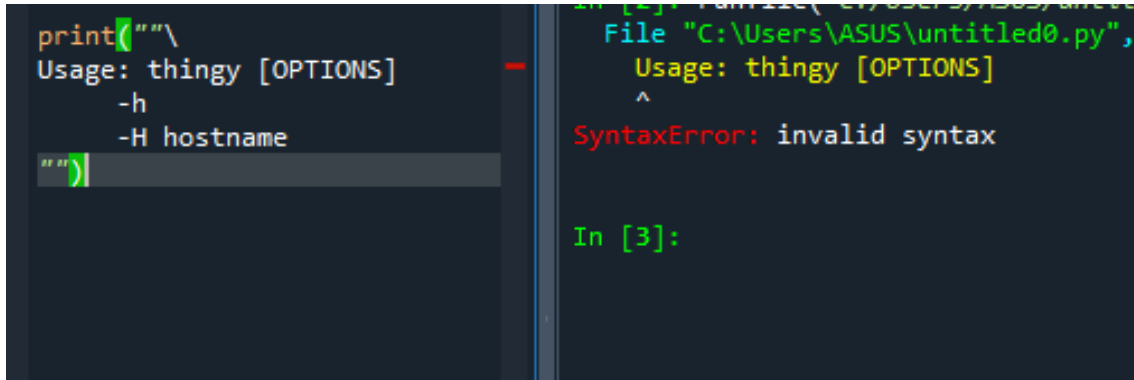


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
File "C:\Users\ASUS\untitled0.py",
  Usage: thingy [OPTIONS]
  ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 99: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

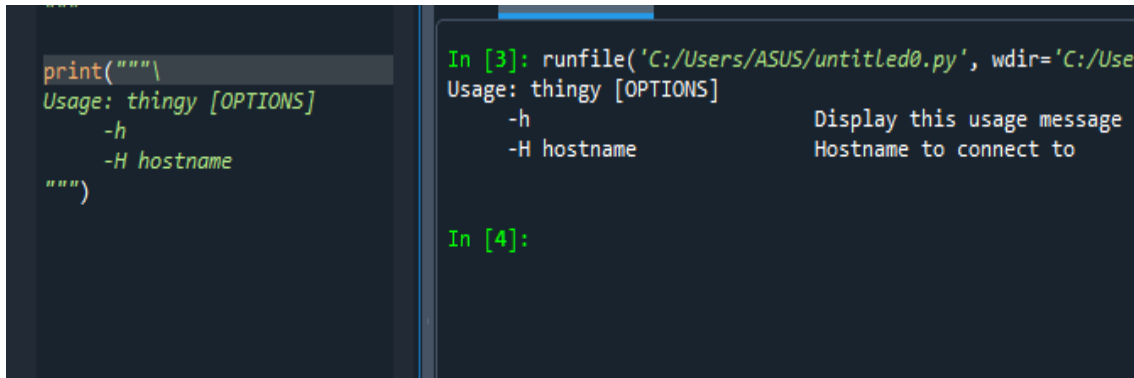


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 100: Case-6 Solved

51 Case Print

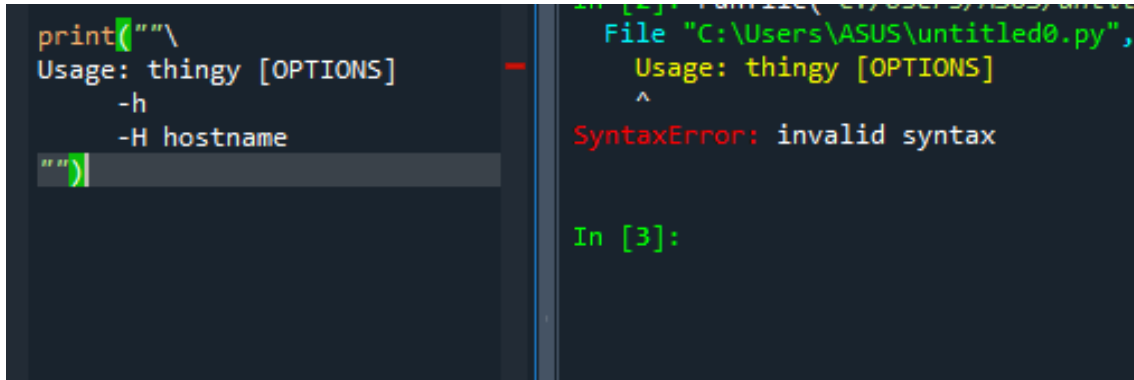


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 101: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

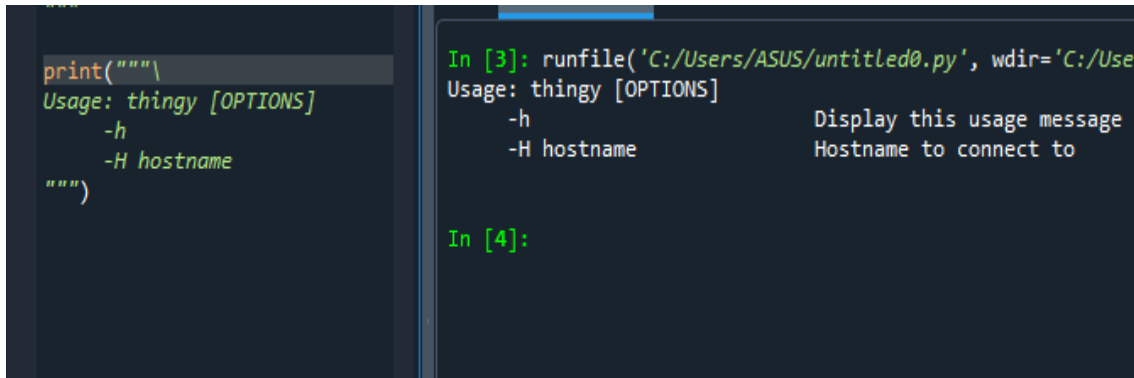


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 102: Case-6 Solved

52 Case Print

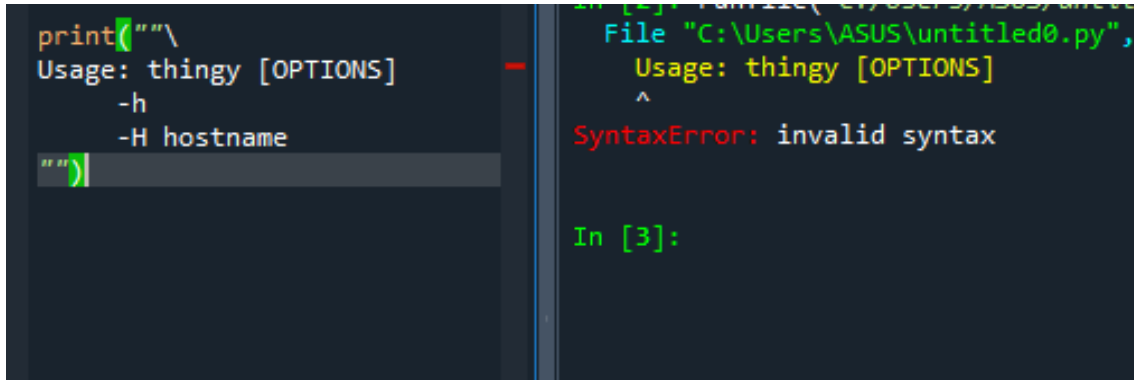


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 103: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

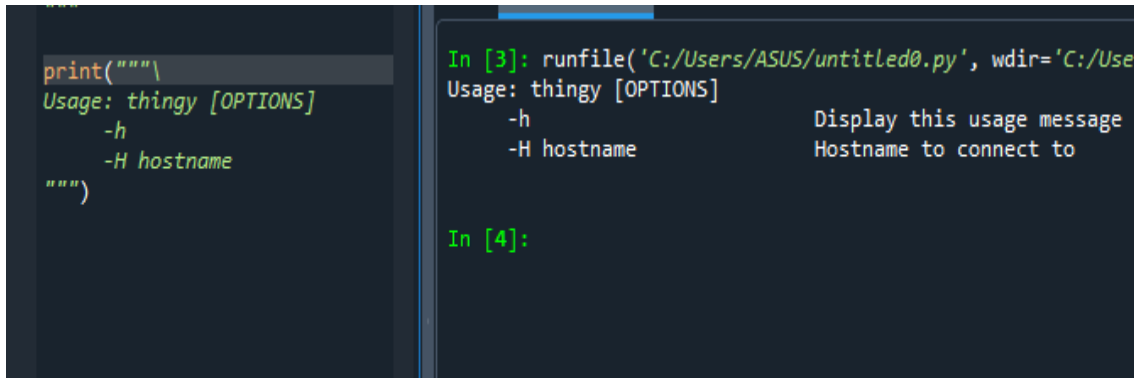


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 104: Case-6 Solved

53 Case Print

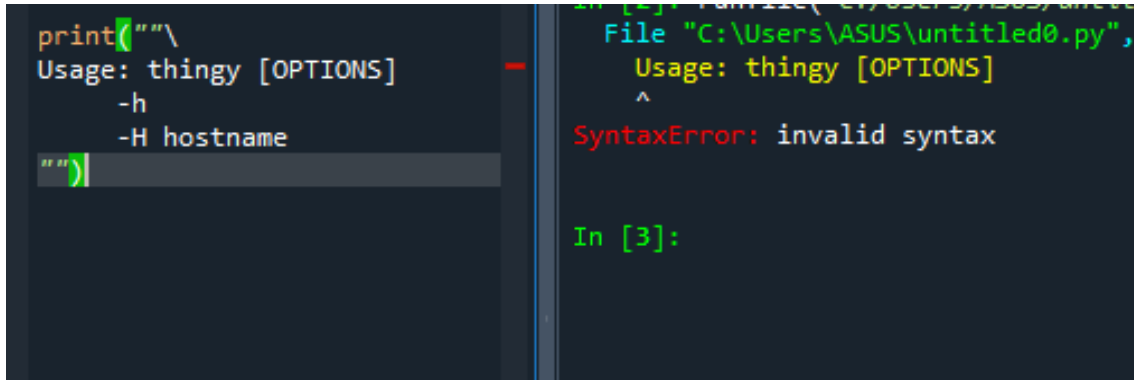


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
File "C:\Users\ASUS\untitled0.py",
  Usage: thingy [OPTIONS]
  ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 105: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

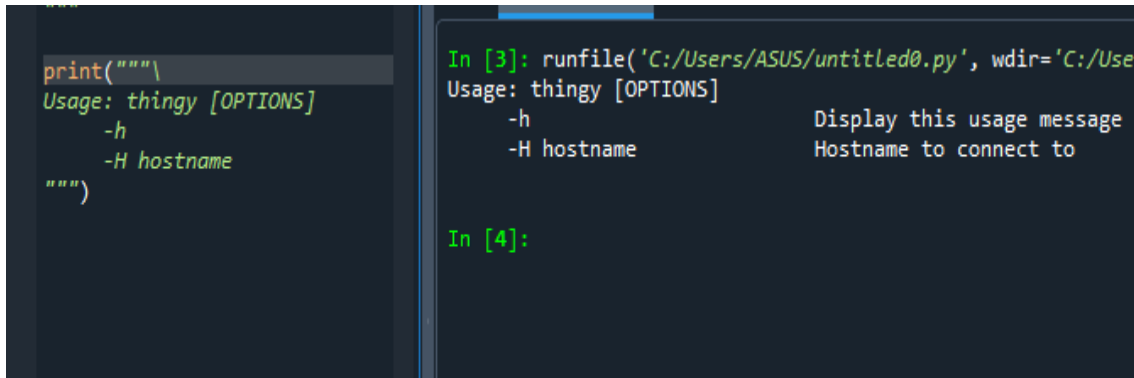


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 106: Case-6 Solved

54 Case Print

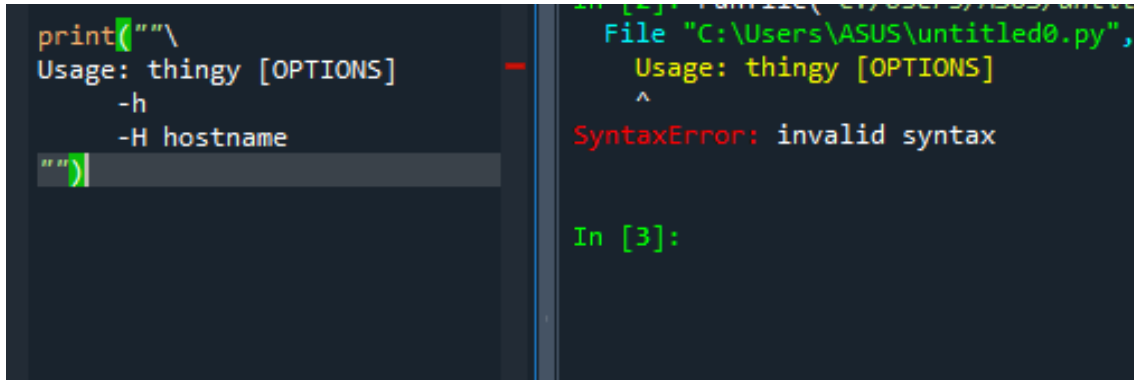


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
File "C:\Users\ASUS\untitled0.py",
  Usage: thingy [OPTIONS]
    ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 107: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

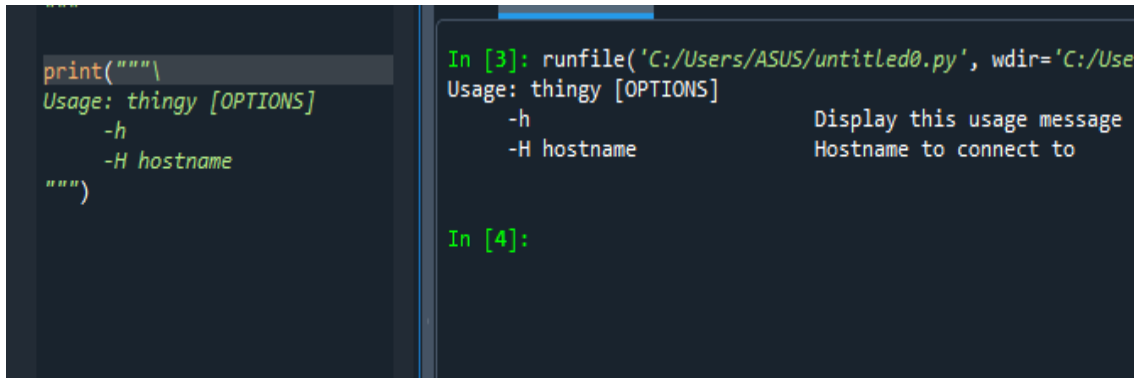


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 108: Case-6 Solved

55 Case Print

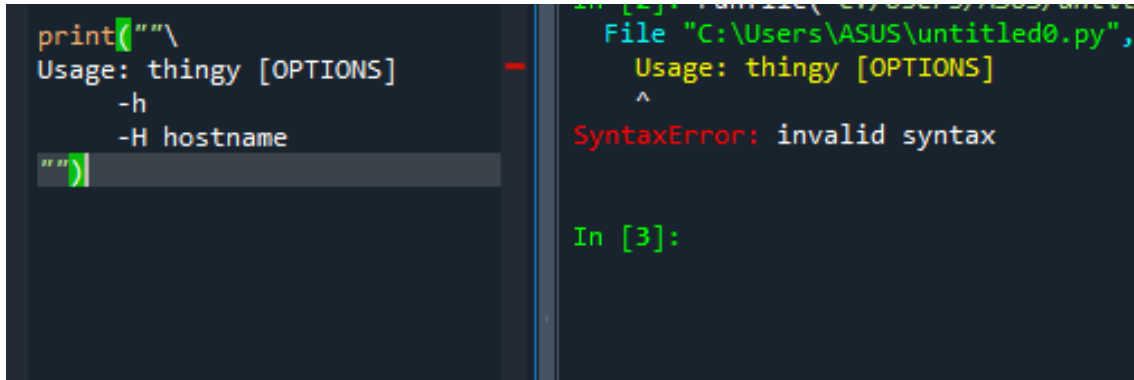


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 109: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

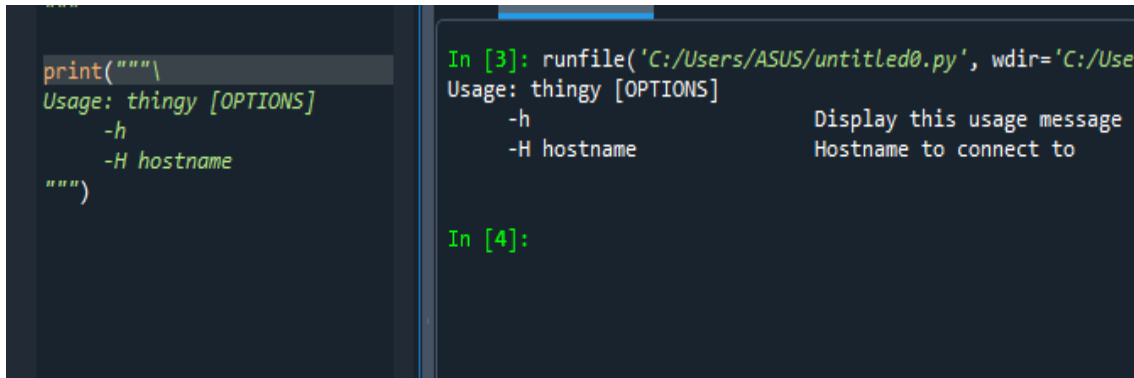


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 110: Case-6 Solved

56 Case Print

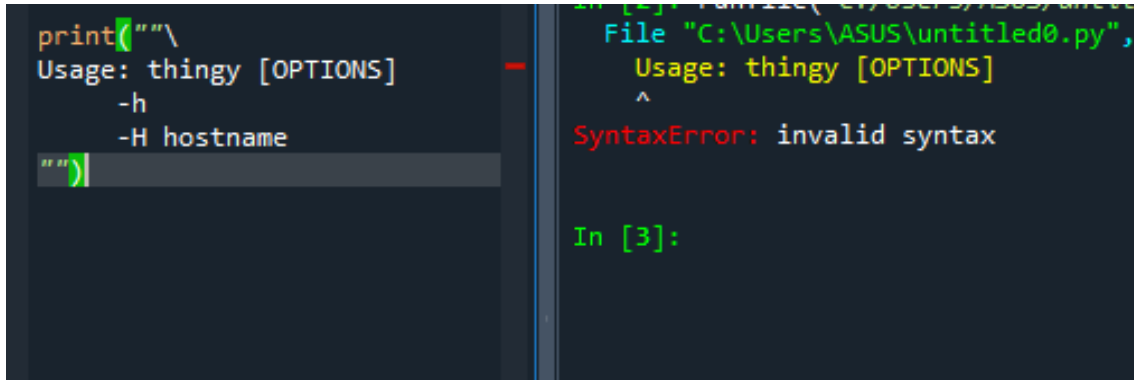


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 111: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

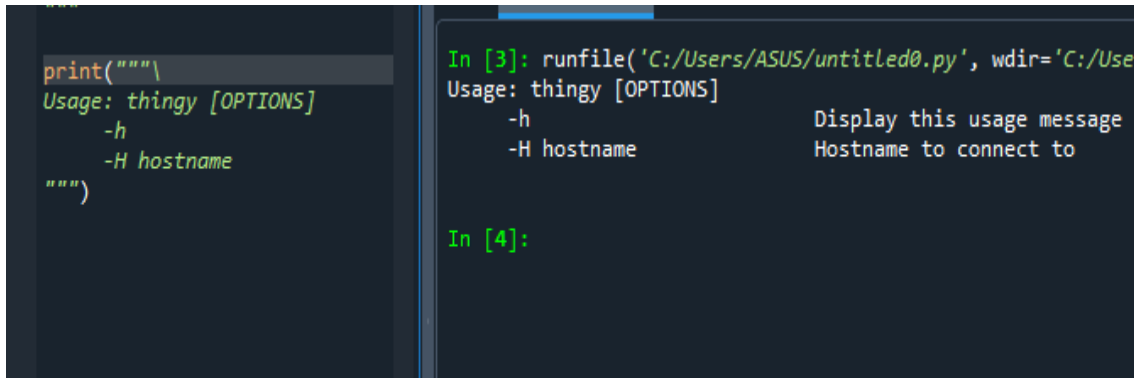


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 112: Case-6 Solved

57 Case Print

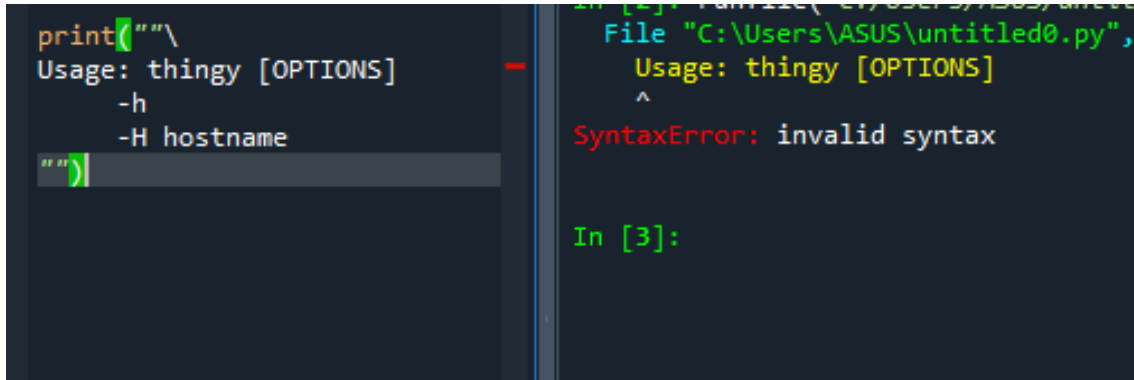


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
File "C:\Users\ASUS\untitled0.py",
  Usage: thingy [OPTIONS]
  ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 113: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

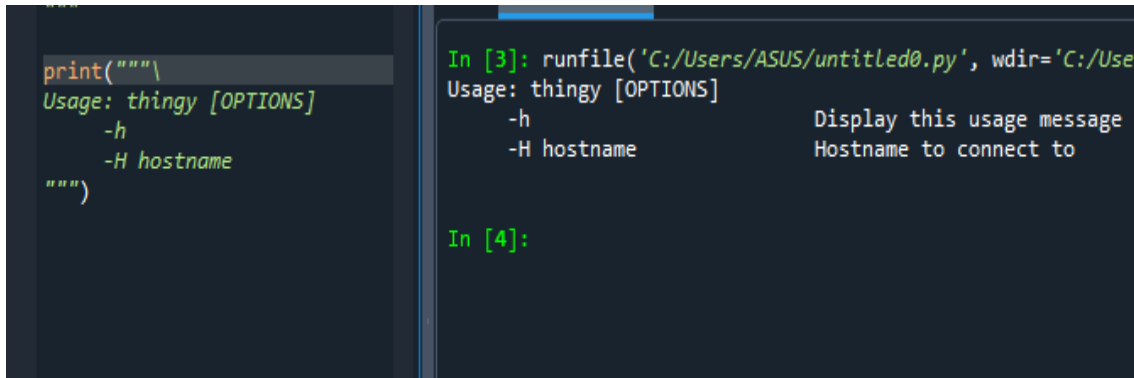


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 114: Case-6 Solved

58 Case Print

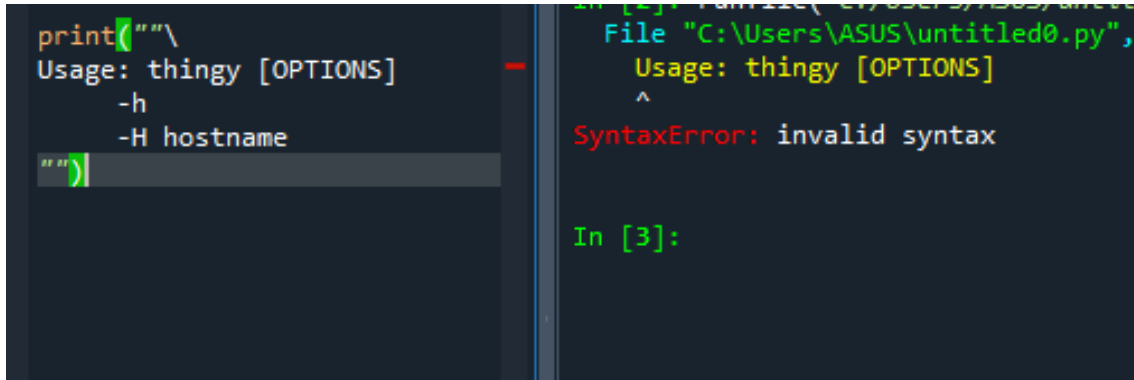


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 115: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

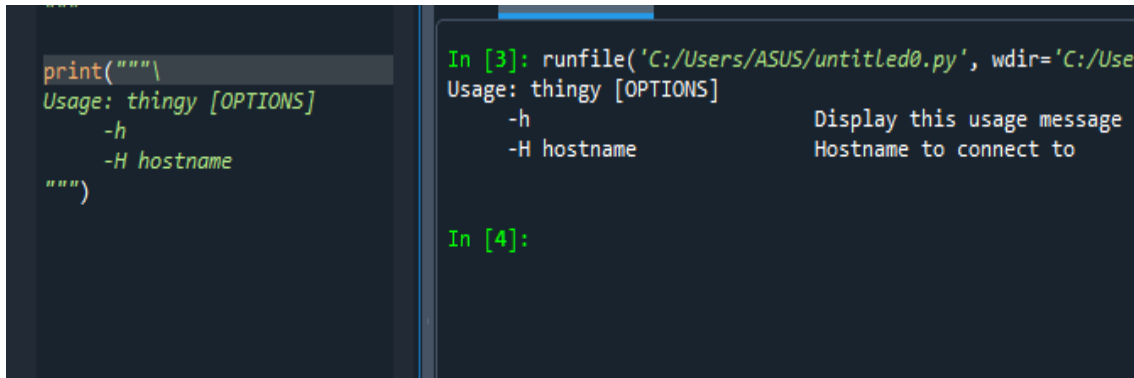


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 116: Case-6 Solved

59 Case Print

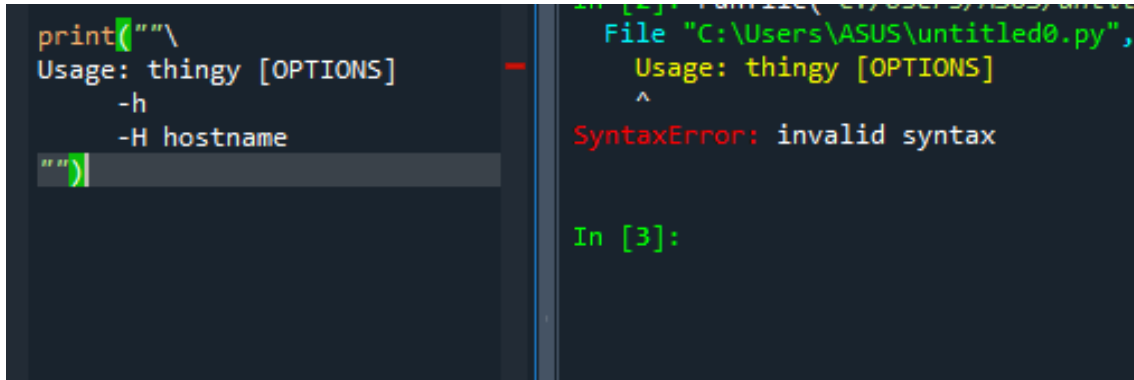


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 117: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

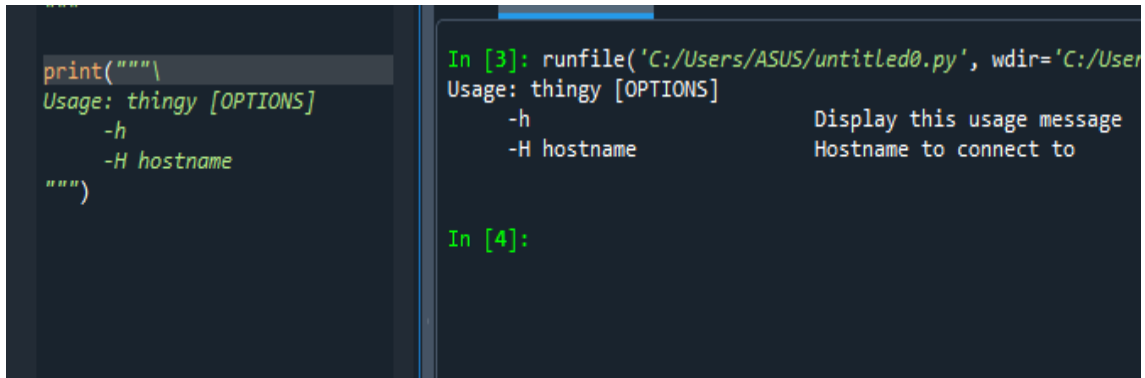


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 118: Case-6 Solved

60 Case Print

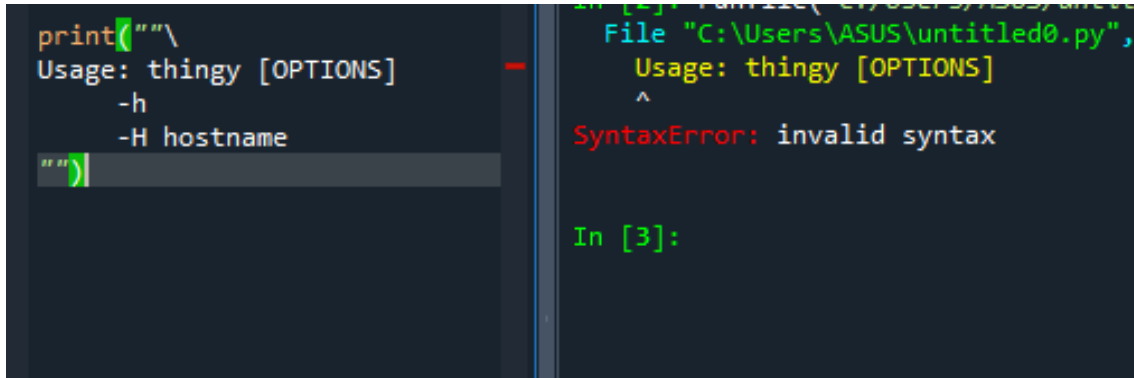


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
File "C:\Users\ASUS\untitled0.py",
  Usage: thingy [OPTIONS]
    ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 119: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

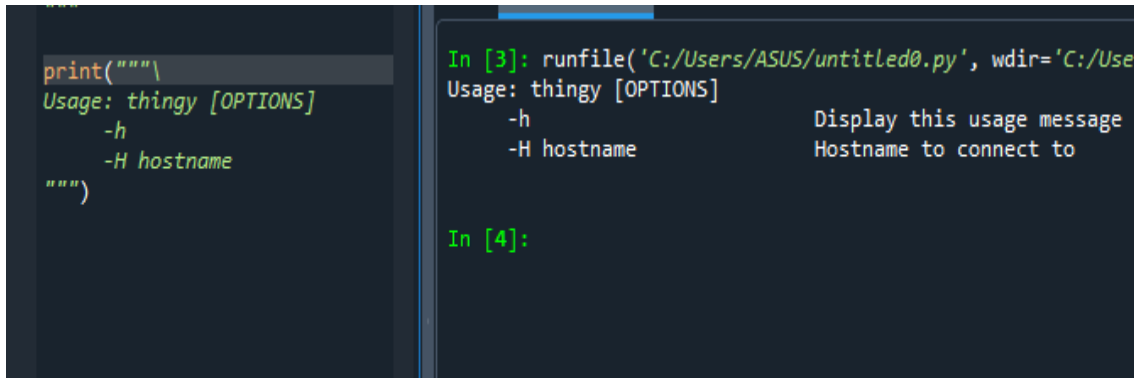


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 120: Case-6 Solved

61 Case Print

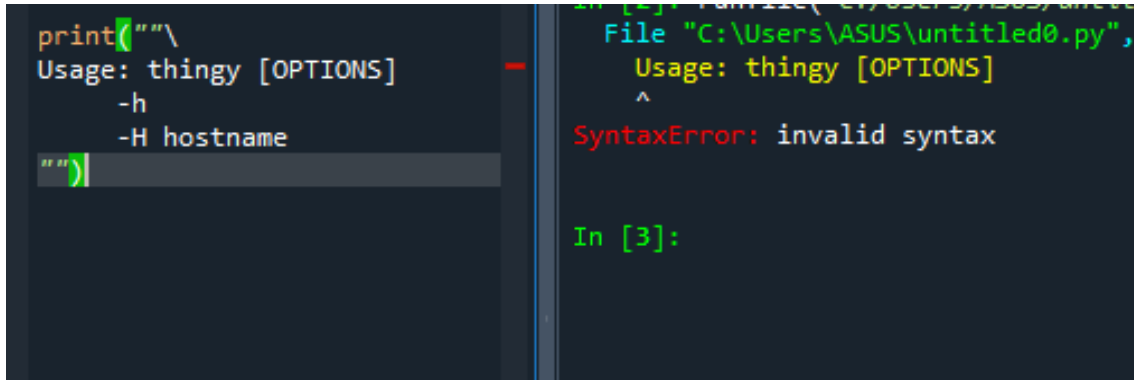


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
File "C:\Users\ASUS\untitled0.py",
  Usage: thingy [OPTIONS]
    ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 121: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

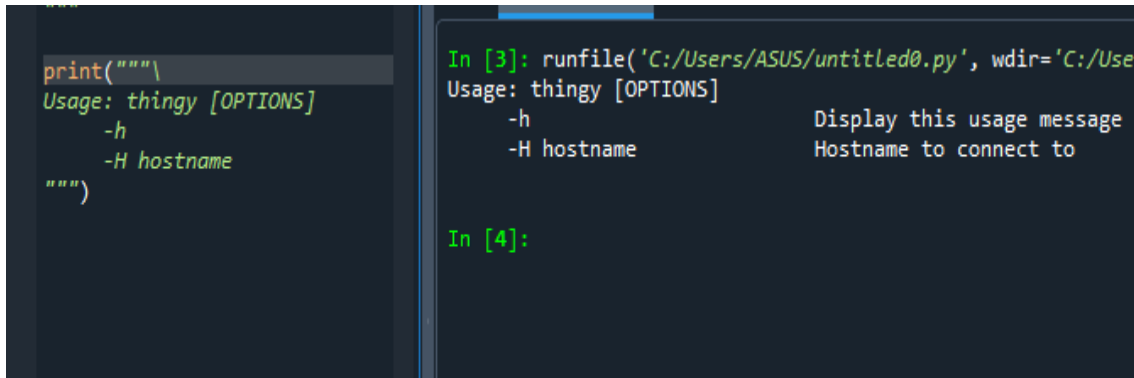


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 122: Case-6 Solved

62 Case Print

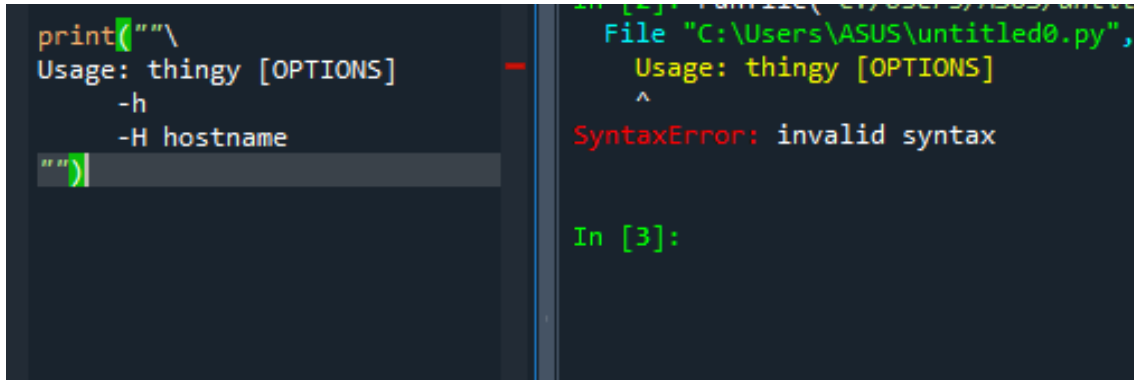


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
File "C:\Users\ASUS\untitled0.py",
  Usage: thingy [OPTIONS]
  ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 123: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

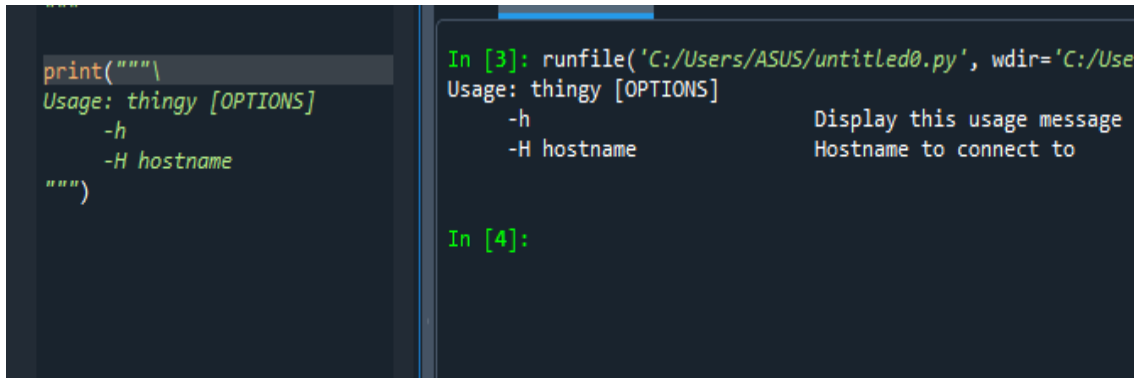


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 124: Case-6 Solved

63 Case Print

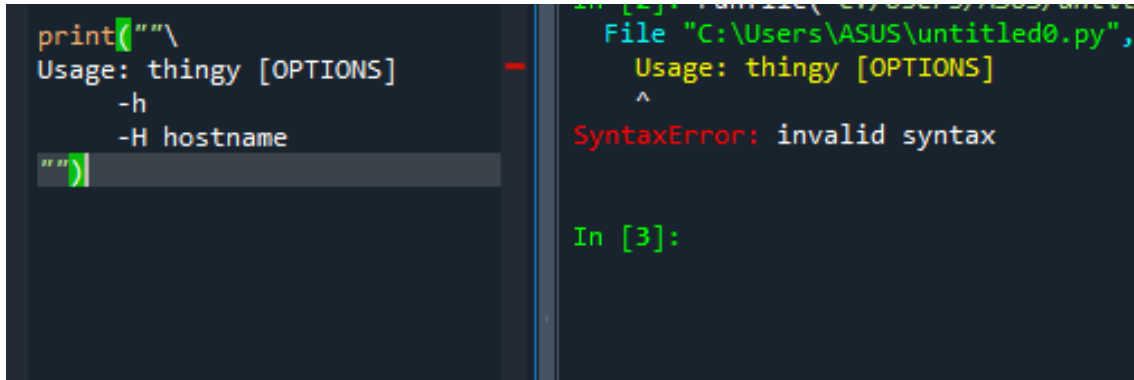


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/Users/ASUS')
File "C:/Users/ASUS/untitled0.py", line 3, in <module>
    Usage: thingy [OPTIONS]
    ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 125: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

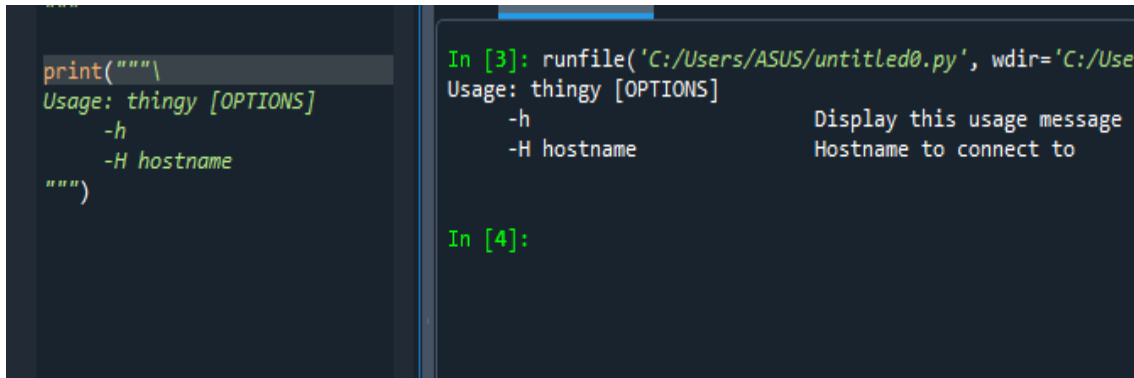


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/Users/ASUS')
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 126: Case-6 Solved

64 Case Print

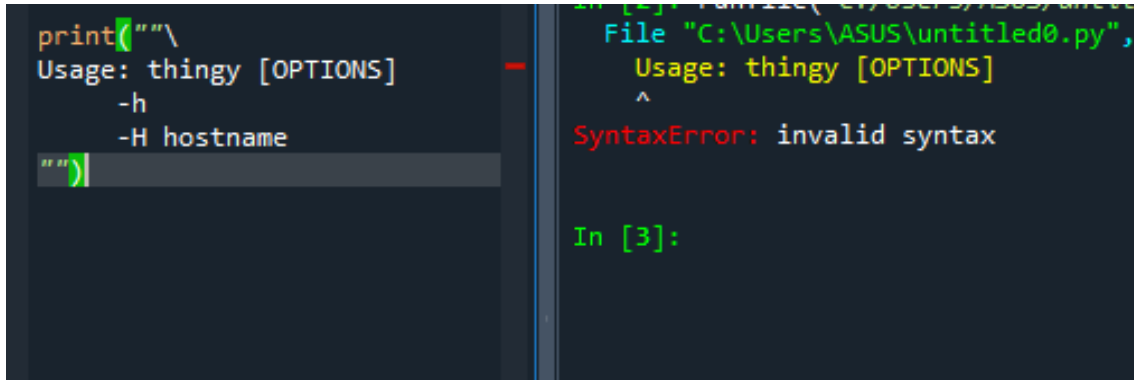


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 127: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

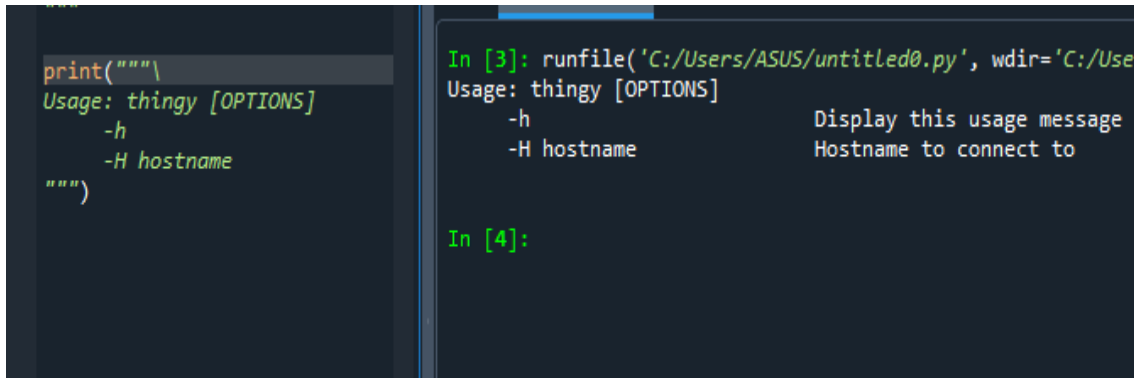


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 128: Case-6 Solved

65 Case Print

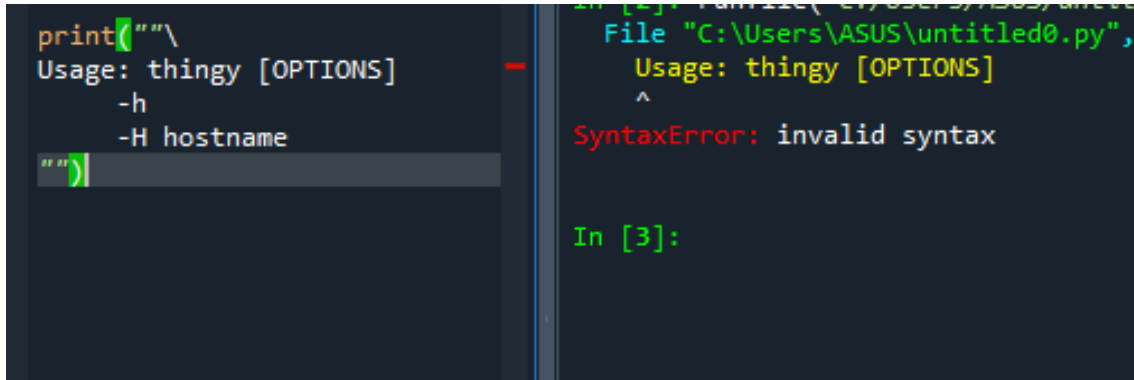


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")

In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 129: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

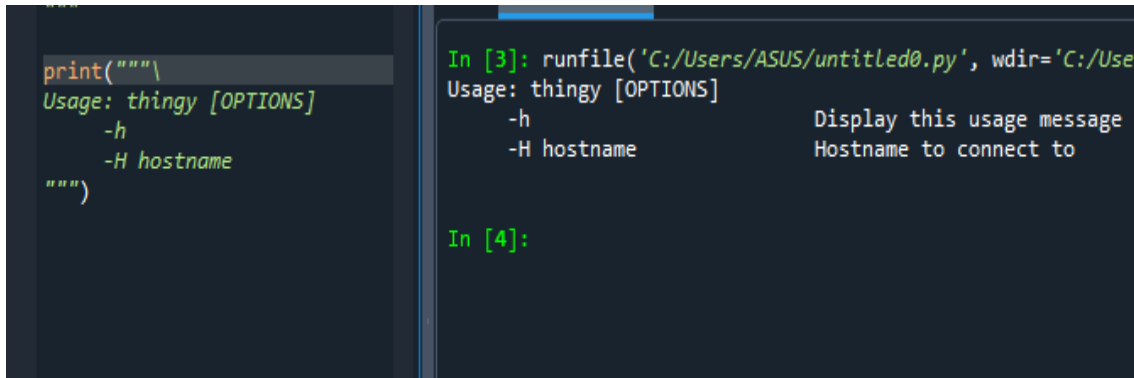


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")

In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 130: Case-6 Solved

66 Case Print

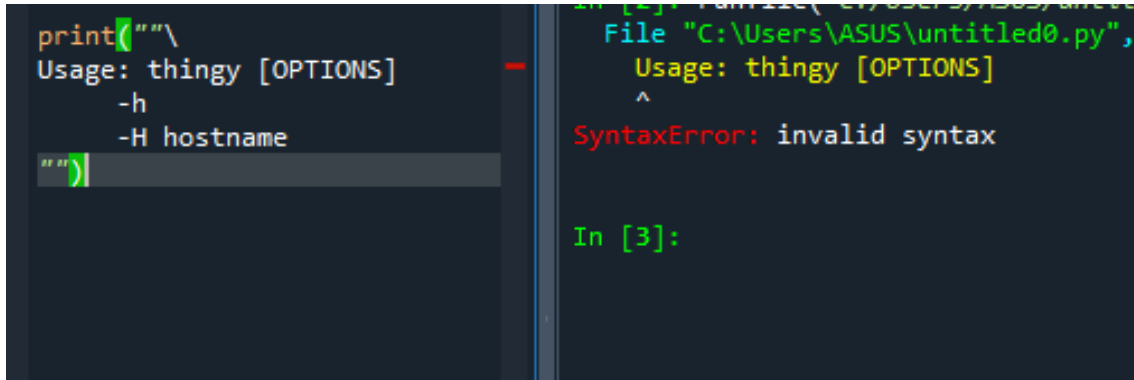


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 131: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

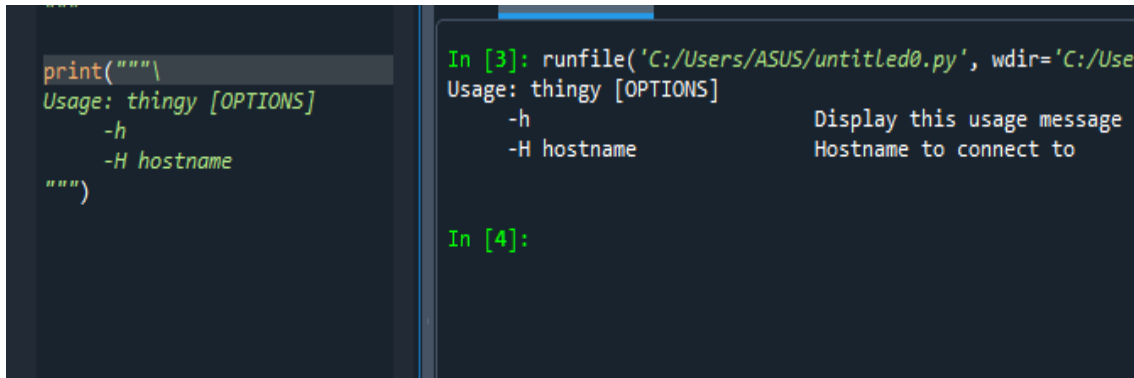


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 132: Case-6 Solved

67 Case Print

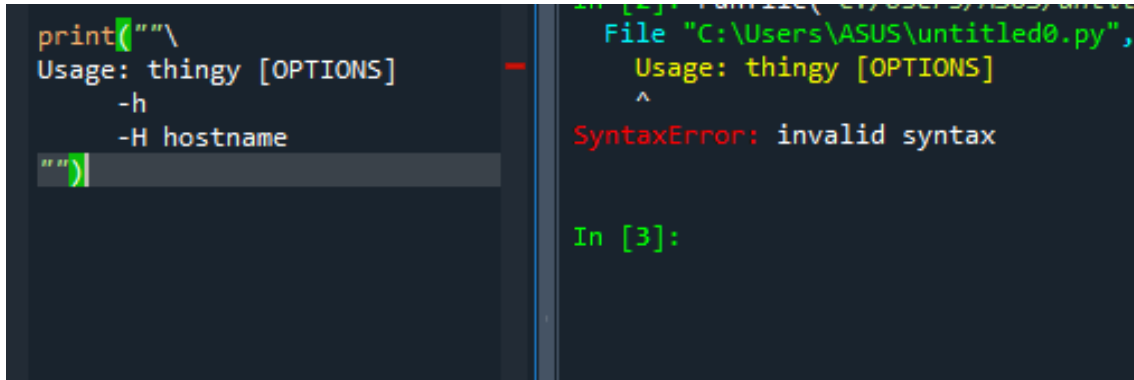


```
print("""\
Usage: thingy [OPTIONS]
  -h
  -H hostname
""")

In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 133: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

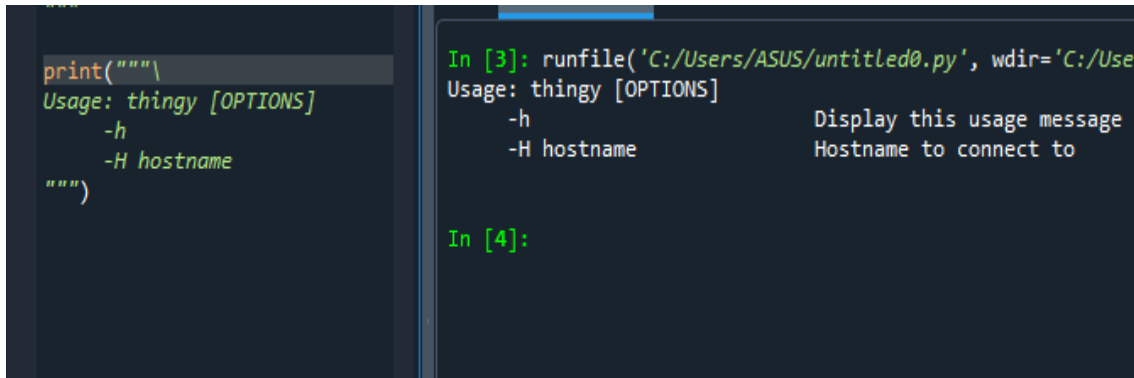


```
print("""\
Usage: thingy [OPTIONS]
  -h
  -H hostname
""")

In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
  -h                Display this usage message
  -H hostname       Hostname to connect to

In [4]:
```

Gambar 134: Case-6 Solved

68 Case Print

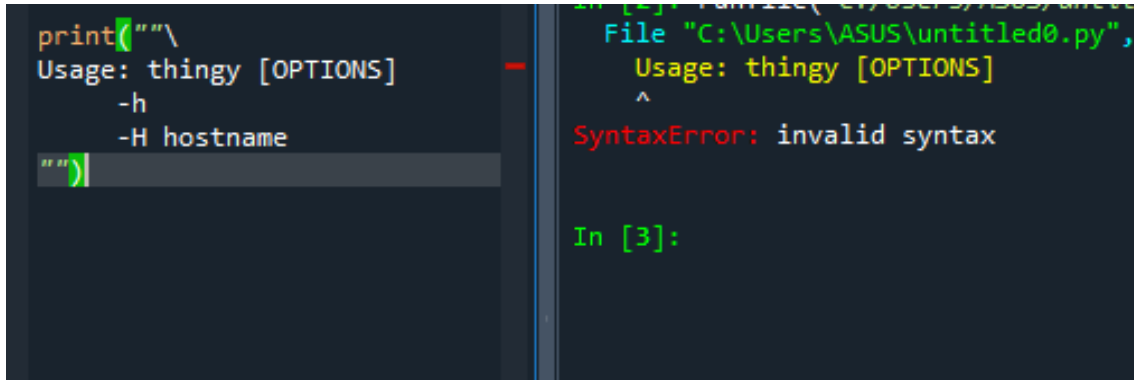


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/Users/ASUS')
File "C:/Users/ASUS/untitled0.py", line 3, in <module>
    Usage: thingy [OPTIONS]
    ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 135: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

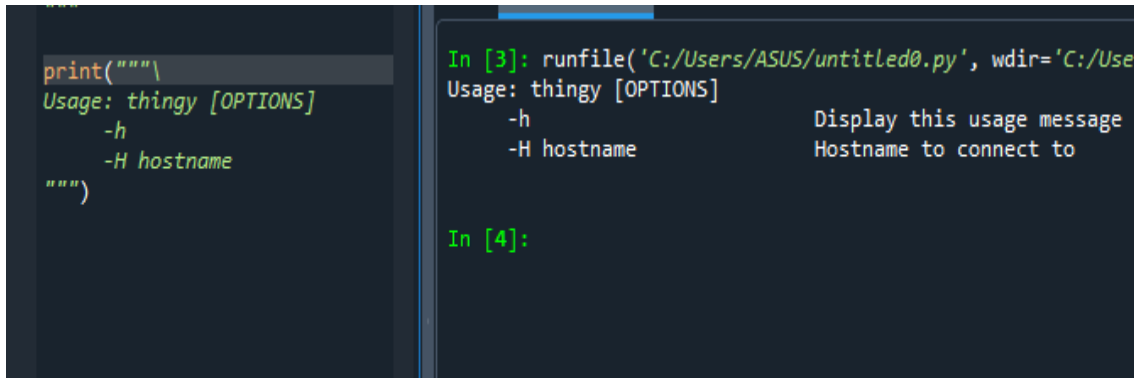


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/Users/ASUS')
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 136: Case-6 Solved

69 Case Print

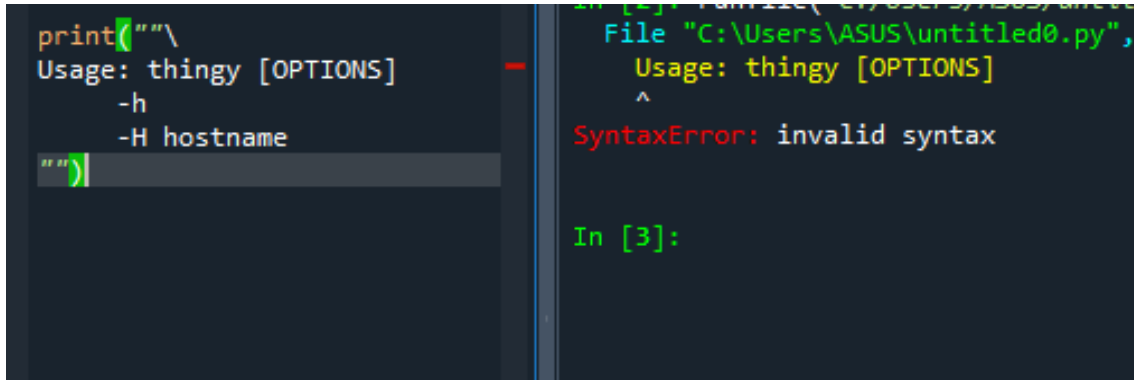


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
File "C:\Users\ASUS\untitled0.py",
  Usage: thingy [OPTIONS]
  ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 137: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

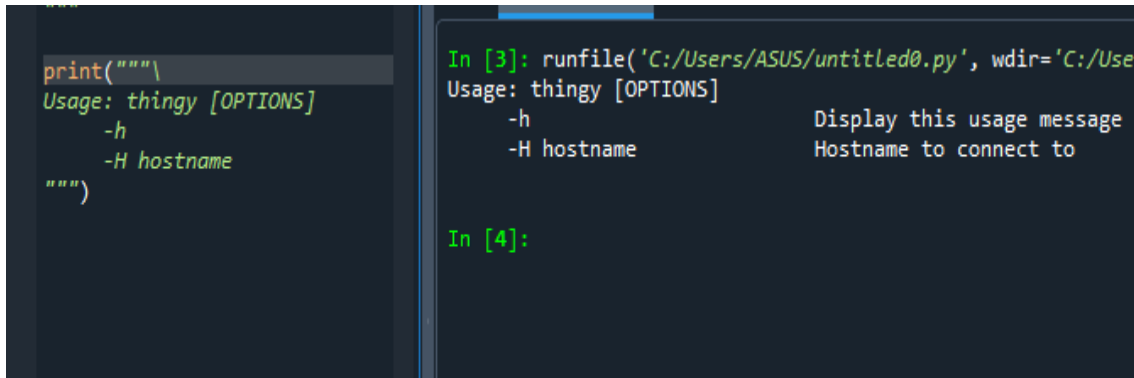


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 138: Case-6 Solved

70 Case Print

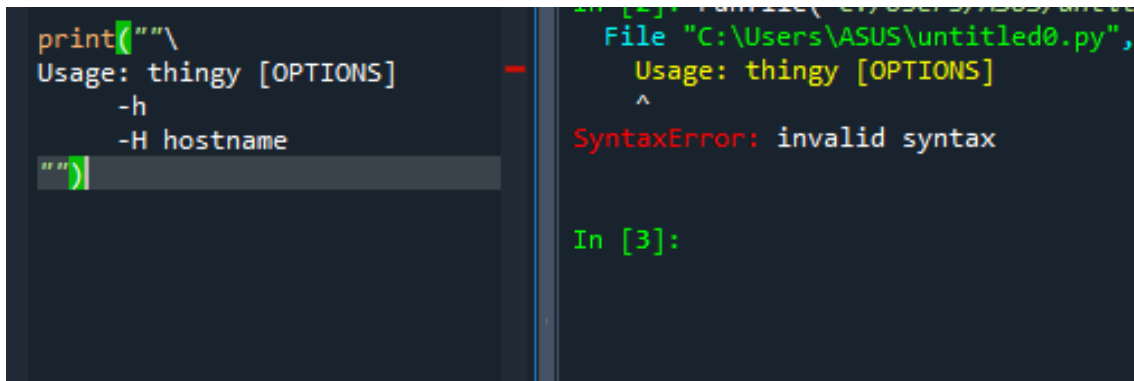


```
print("""\
Usage: thingy [OPTIONS]
  -h
  -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 139: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

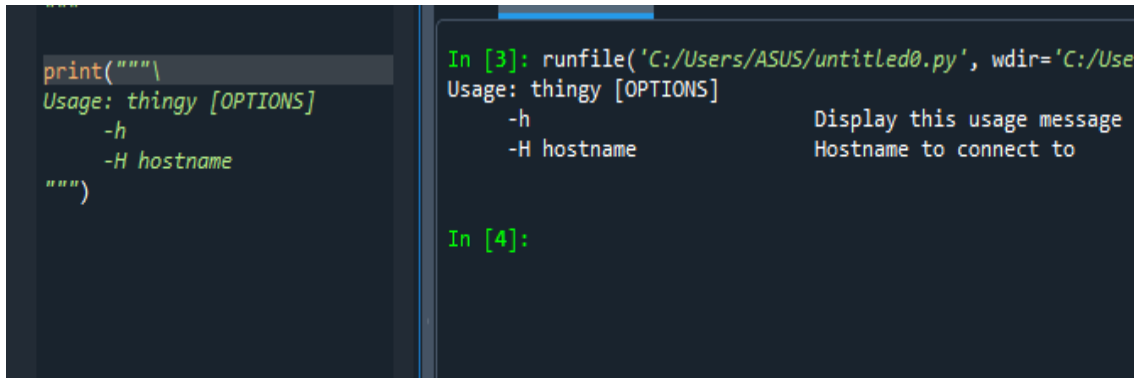


```
print("""\
Usage: thingy [OPTIONS]
  -h
  -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
  -h                Display this usage message
  -H hostname       Hostname to connect to

In [4]:
```

Gambar 140: Case-6 Solved

71 Case Print

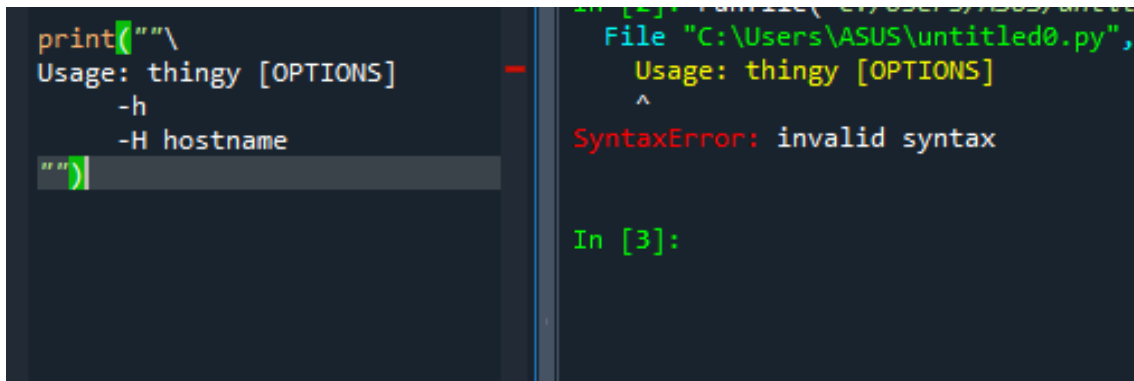


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")

In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 141: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

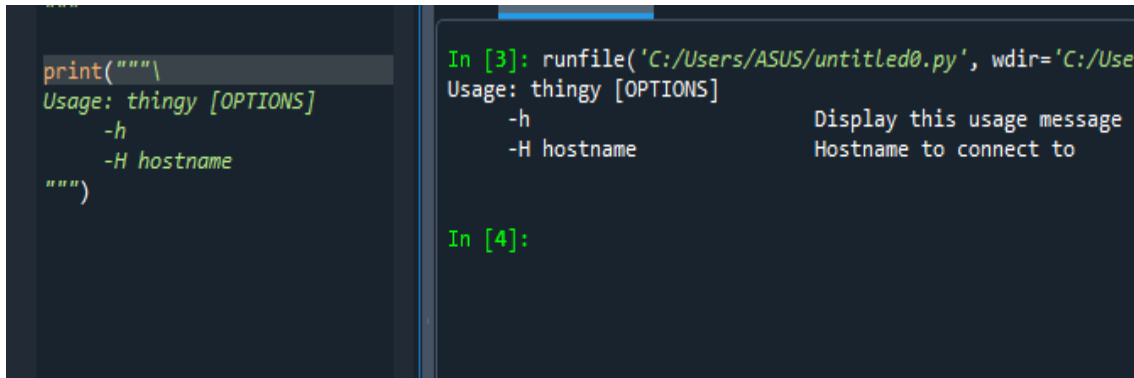


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")

In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 142: Case-6 Solved

72 Case Print

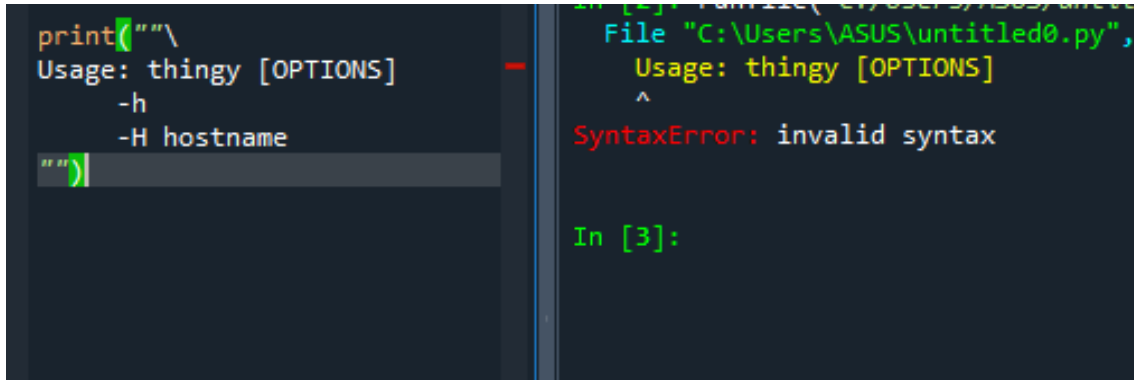


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
File "C:\Users\ASUS\untitled0.py",
  Usage: thingy [OPTIONS]
  ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 143: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

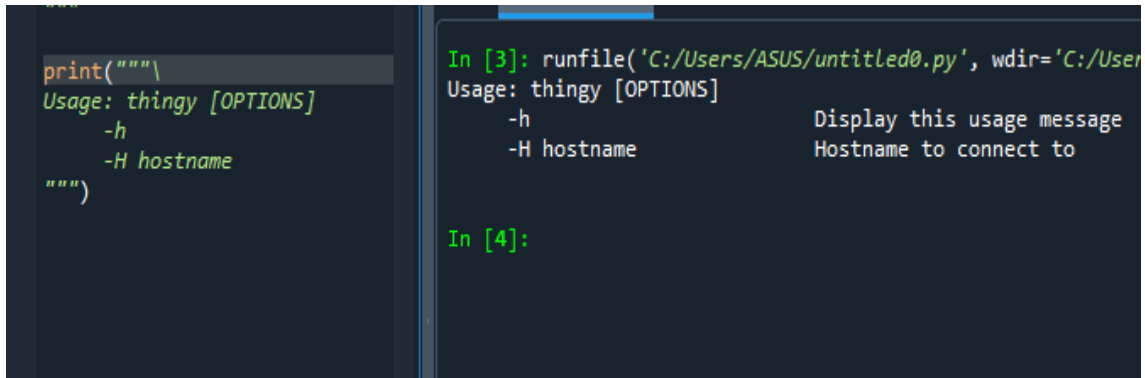


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 144: Case-6 Solved

73 Case Print

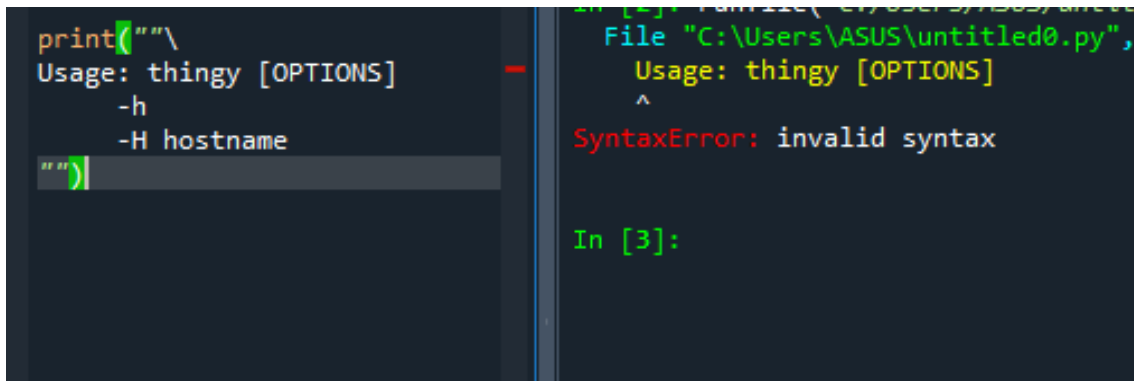


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 145: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

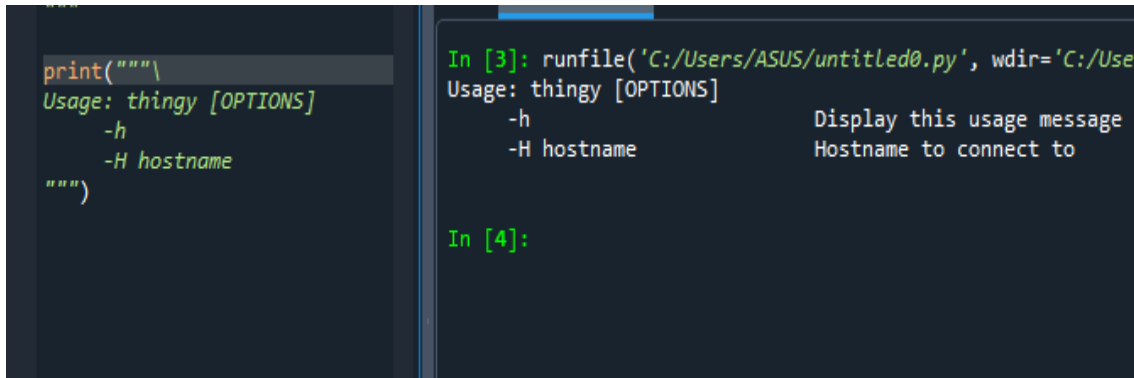


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 146: Case-6 Solved

74 Case Print

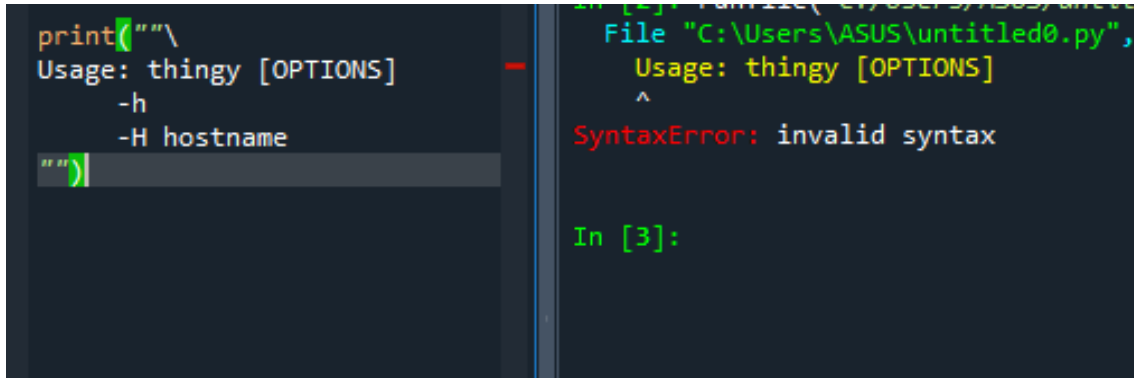


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 147: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

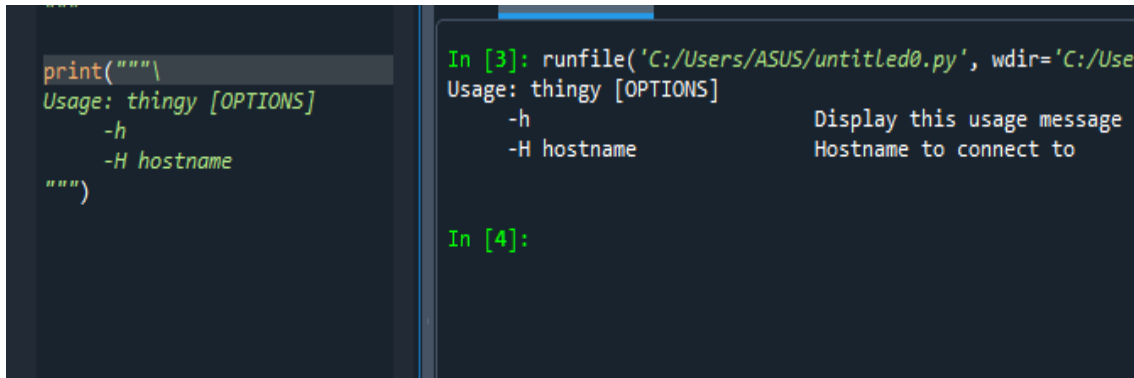


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 148: Case-6 Solved

75 Case Print

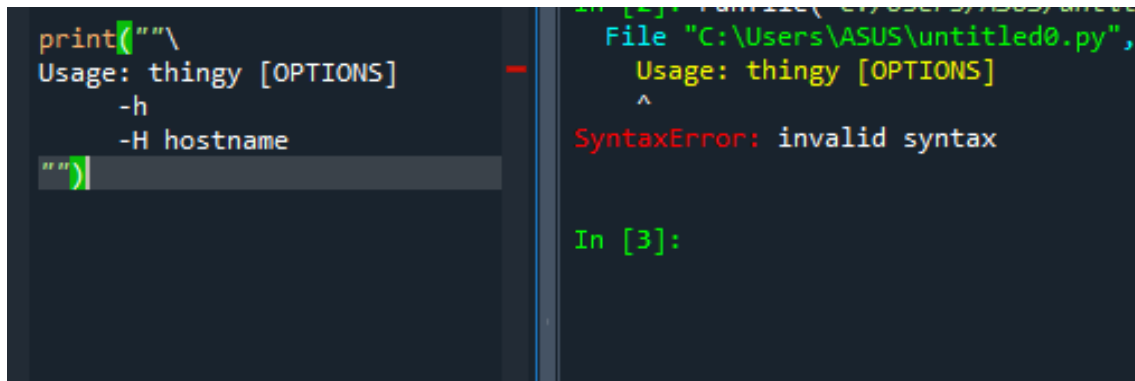


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
File "C:\Users\ASUS\untitled0.py",
  Usage: thingy [OPTIONS]
  ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 149: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

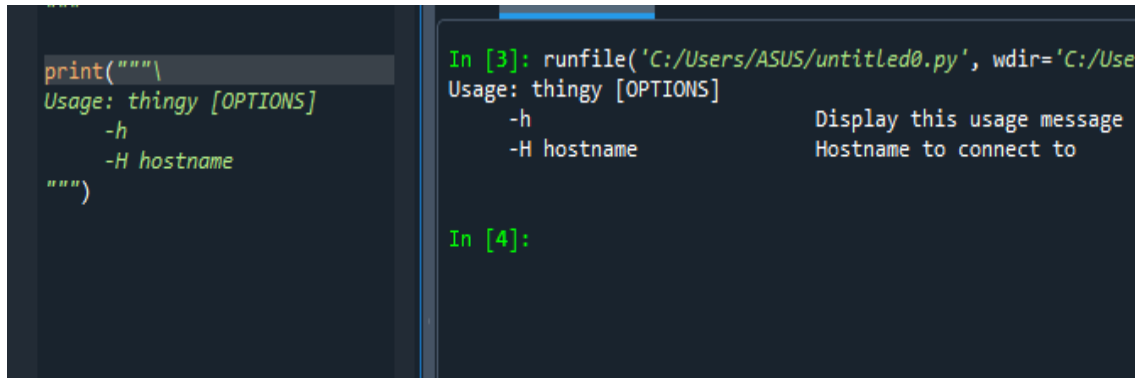


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 150: Case-6 Solved

76 Case Print

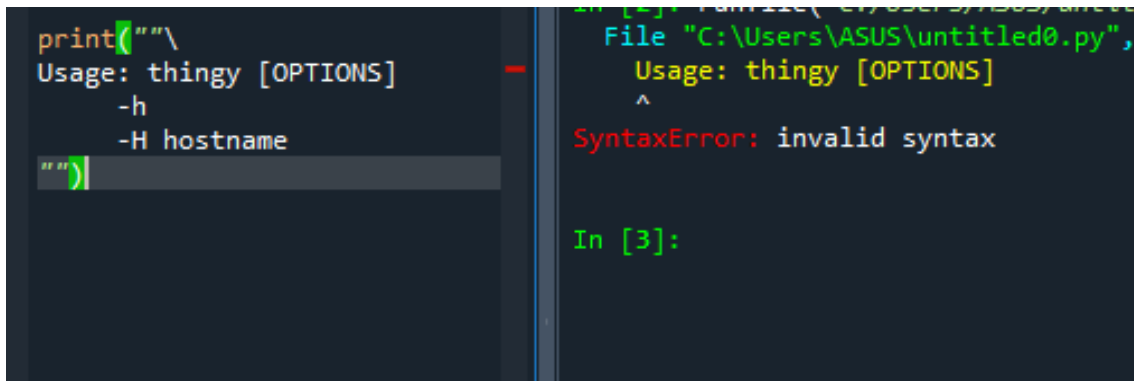


```
print("""\
Usage: thingy [OPTIONS]
  -h
  -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 151: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

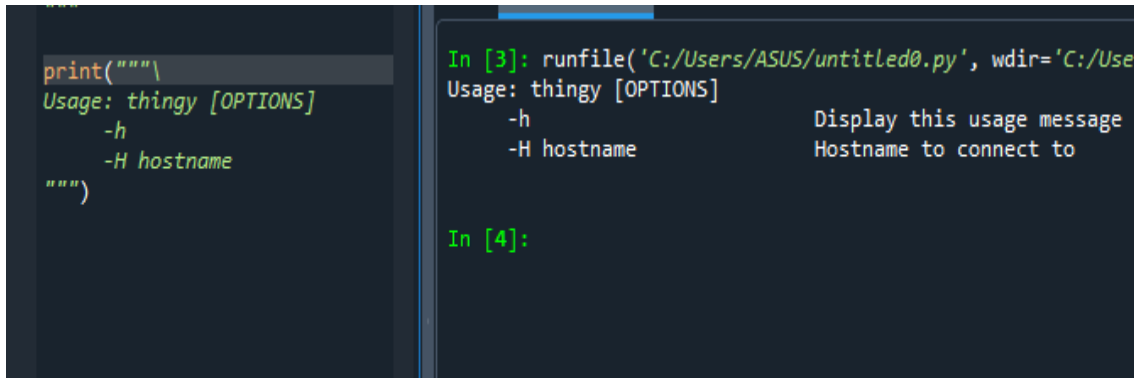


```
print("""\
Usage: thingy [OPTIONS]
  -h
  -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
  -h                Display this usage message
  -H hostname       Hostname to connect to

In [4]:
```

Gambar 152: Case-6 Solved

77 Case Print

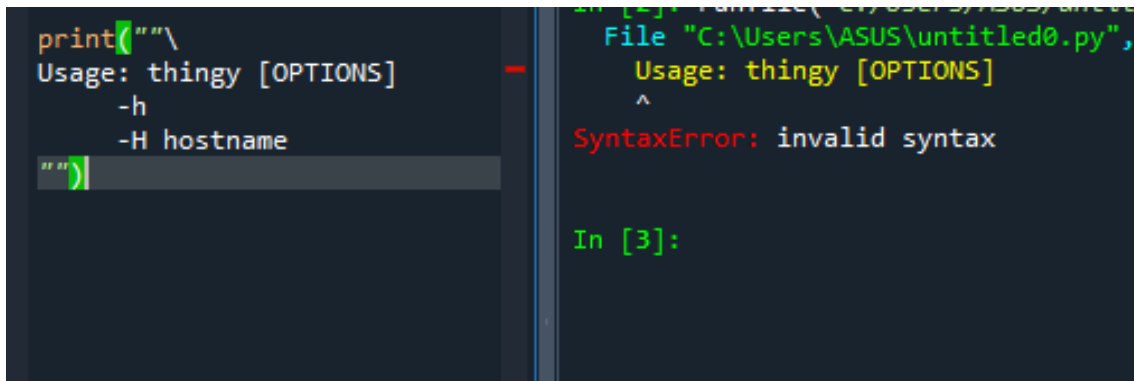


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
File "C:\Users\ASUS\untitled0.py",
  Usage: thingy [OPTIONS]
  ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 153: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

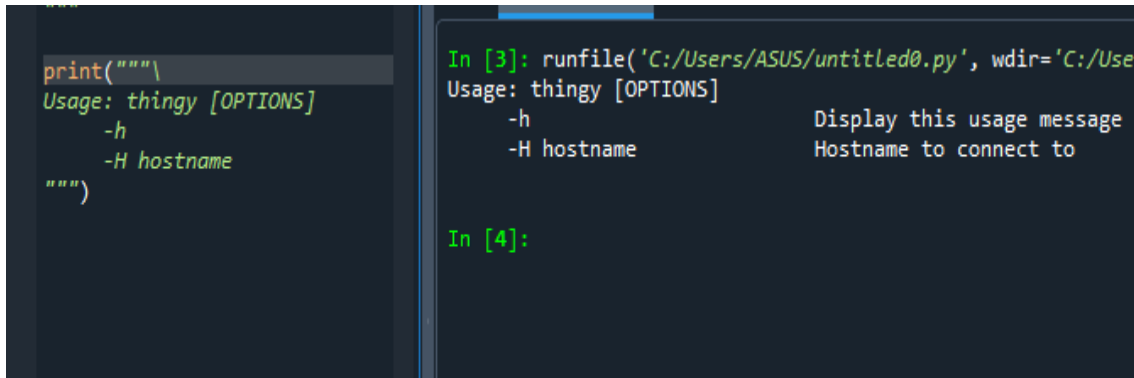


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 154: Case-6 Solved

78 Case Print

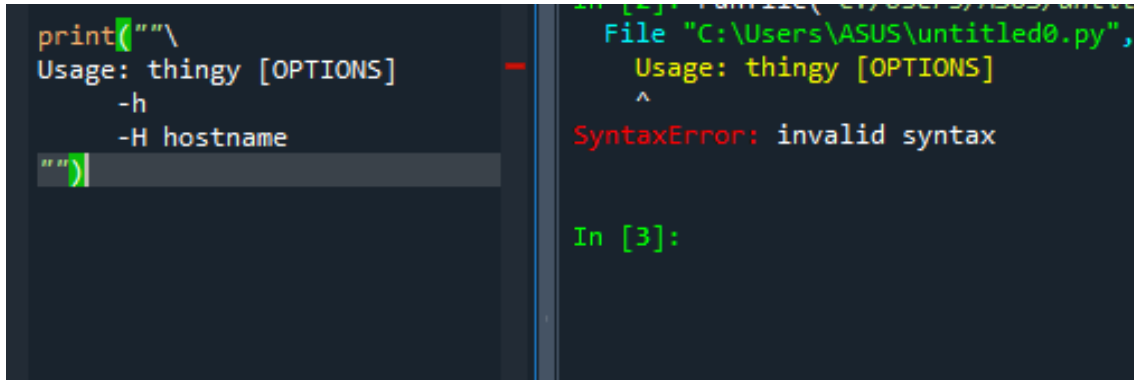


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 155: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

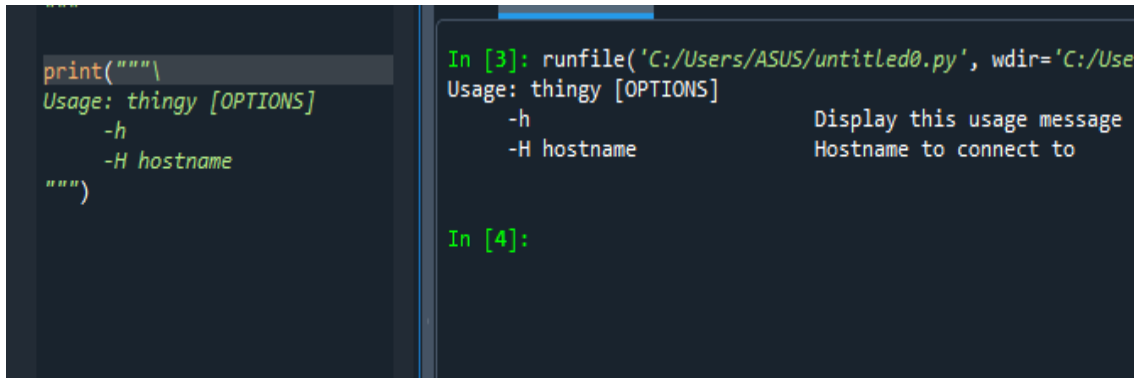


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 156: Case-6 Solved

79 Case Print

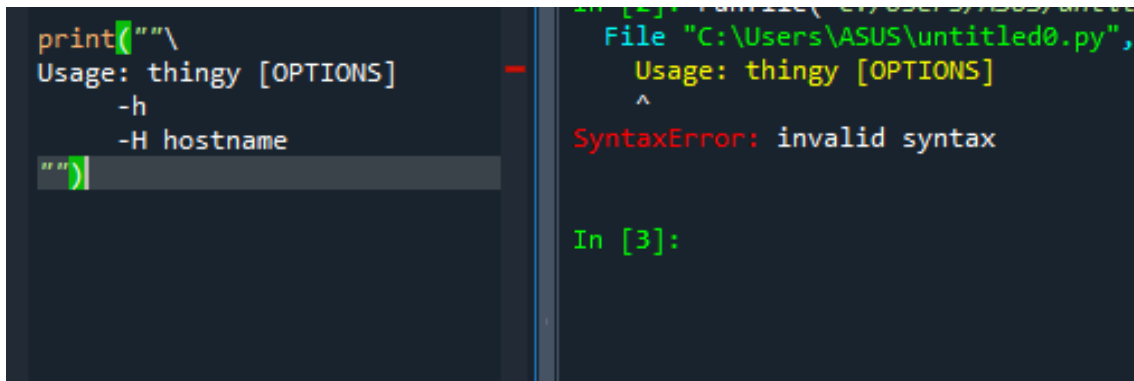


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 157: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

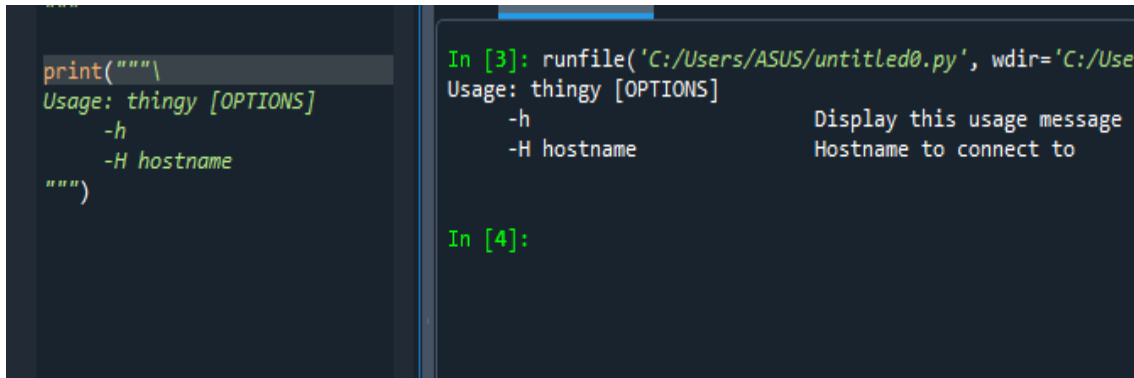


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 158: Case-6 Solved

80 Case Print

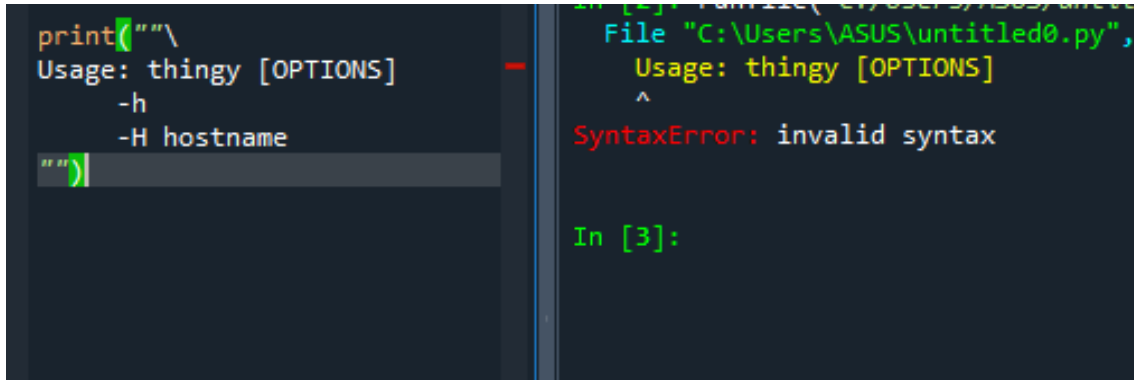


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 159: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

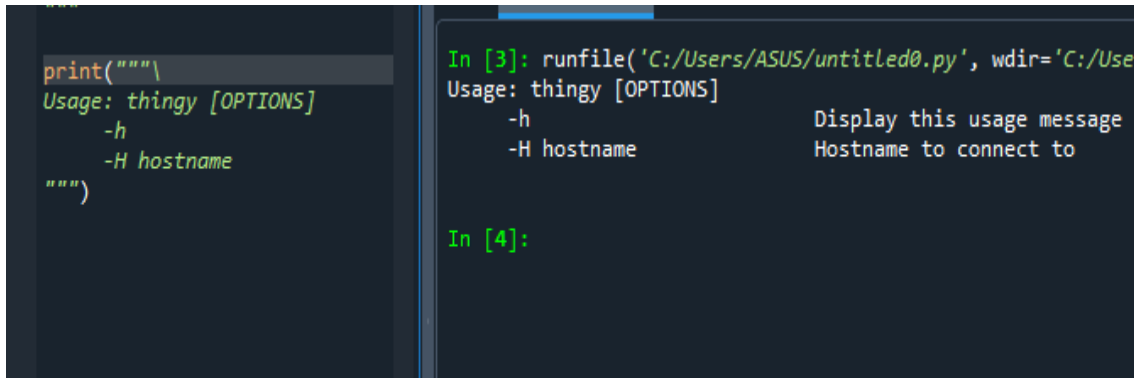


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 160: Case-6 Solved

81 Case Print

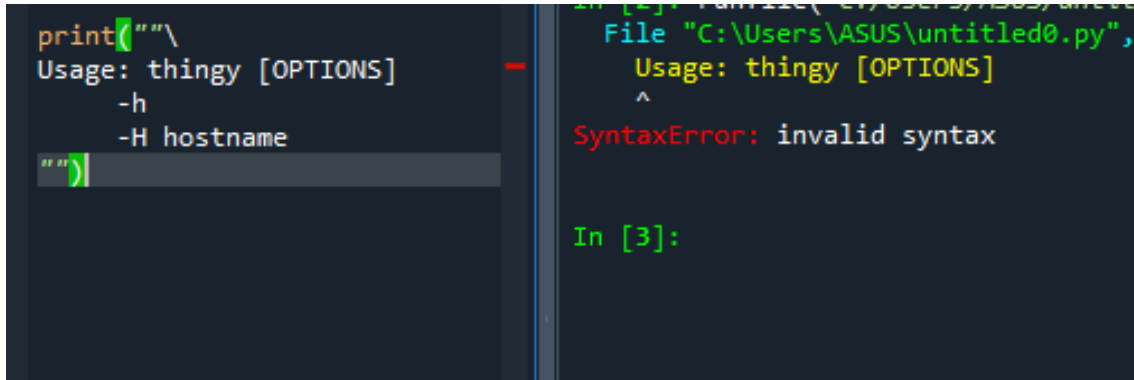


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 161: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

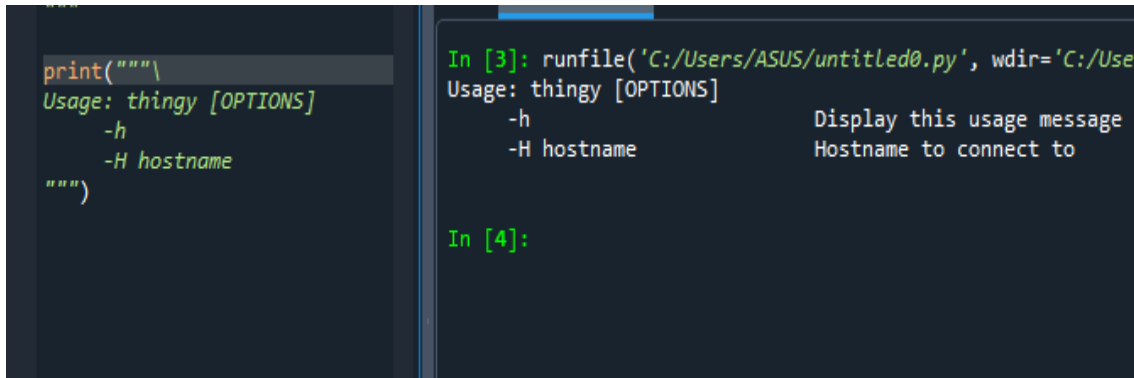


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 162: Case-6 Solved

82 Case Print

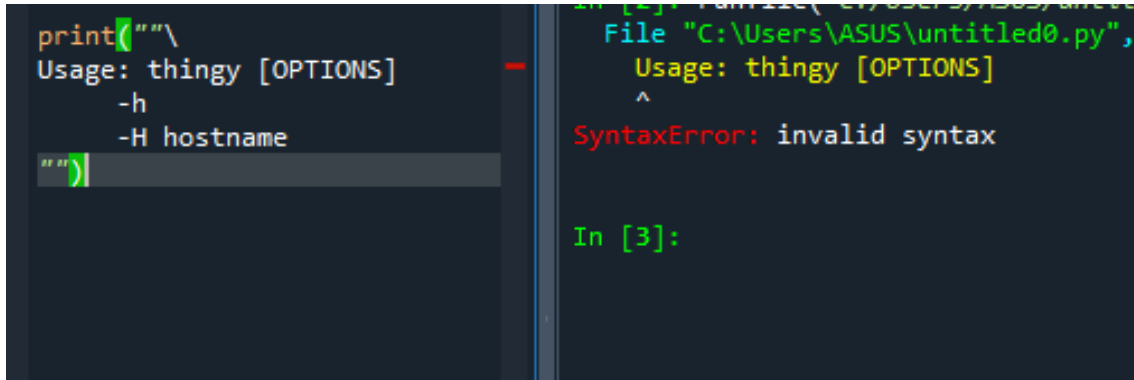


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 163: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

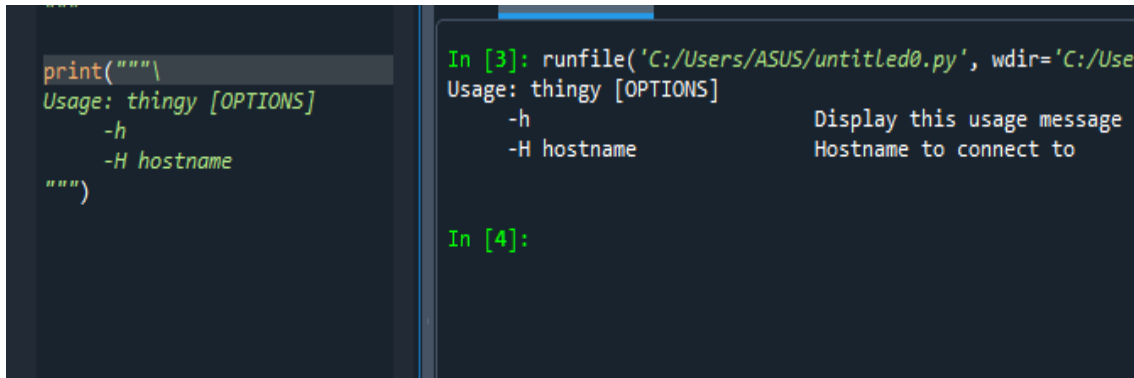


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 164: Case-6 Solved

83 Case Print

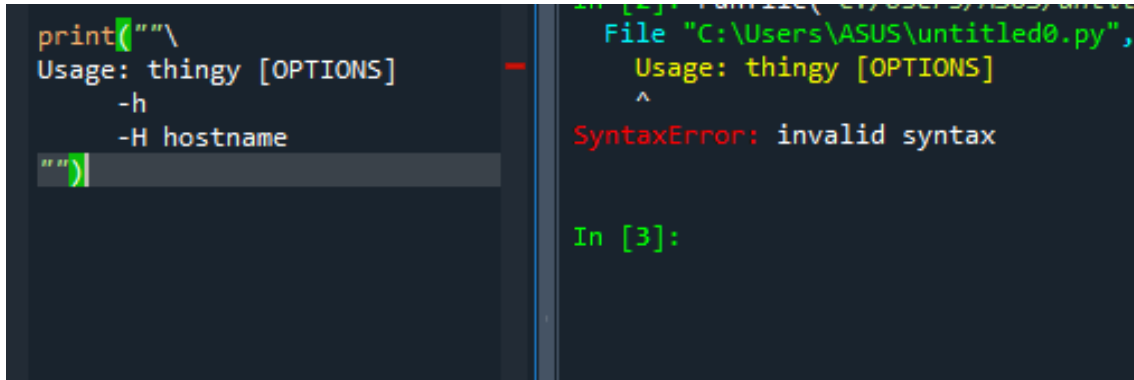


```
print("""\
Usage: thingy [OPTIONS]
  -h
  -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 165: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

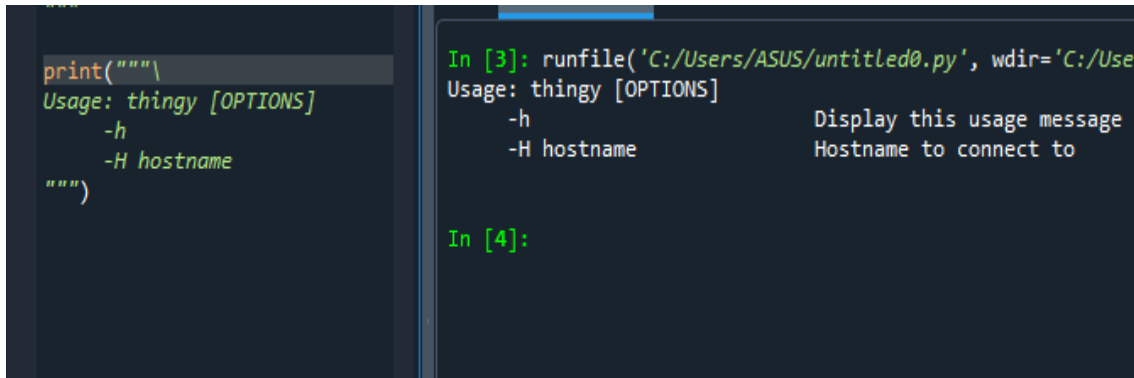


```
print("""\
Usage: thingy [OPTIONS]
  -h
  -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
  -h                Display this usage message
  -H hostname       Hostname to connect to

In [4]:
```

Gambar 166: Case-6 Solved

84 Case Print

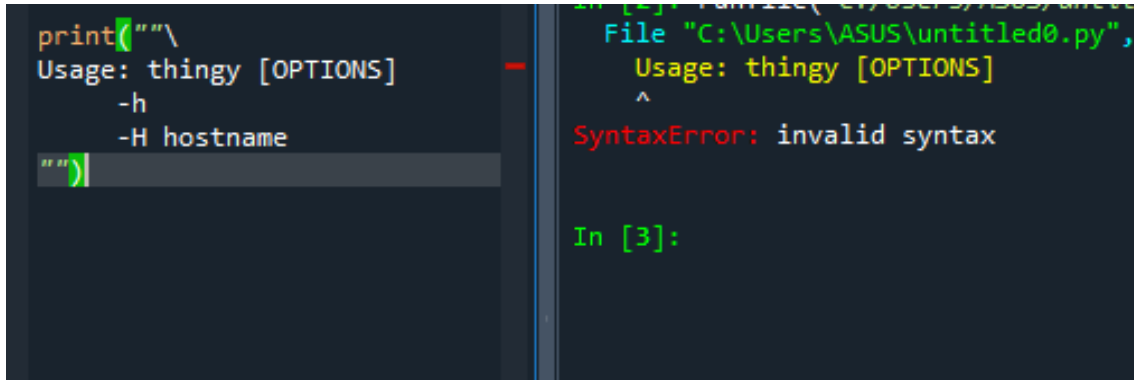


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 167: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

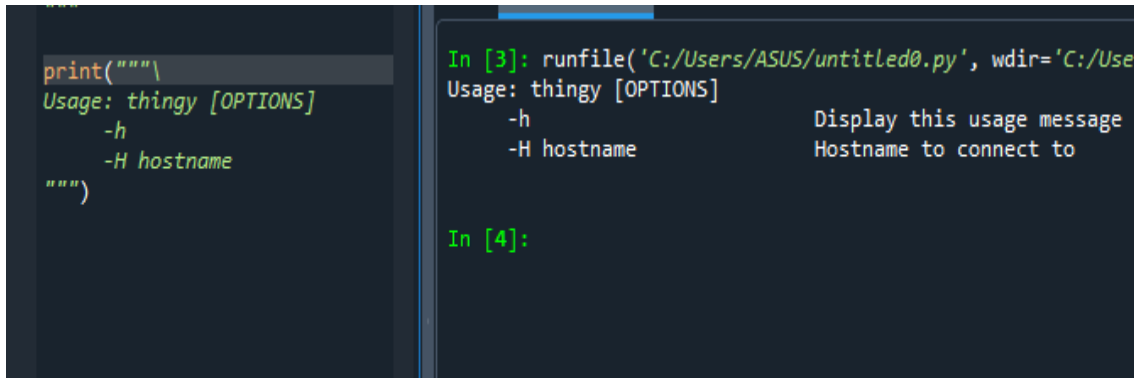


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 168: Case-6 Solved

85 Case Print

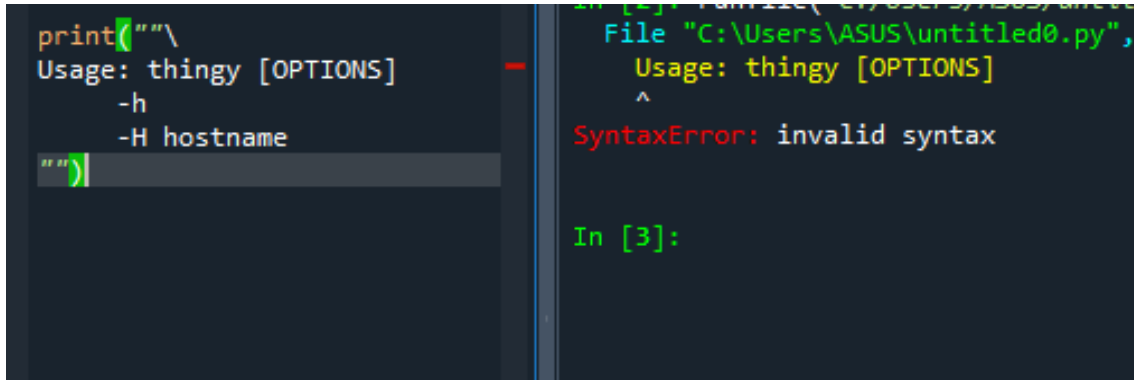


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
File "C:\Users\ASUS\untitled0.py",
  Usage: thingy [OPTIONS]
  ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 169: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

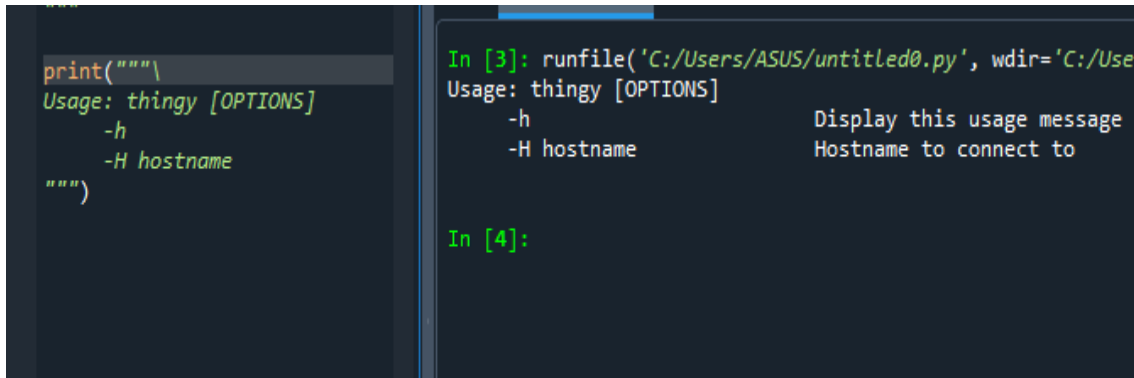


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 170: Case-6 Solved

86 Case Print

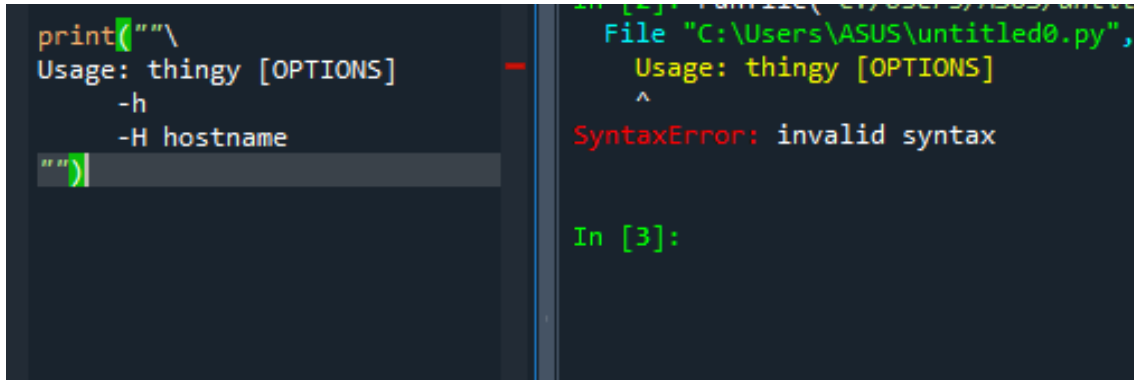


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")

In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 171: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

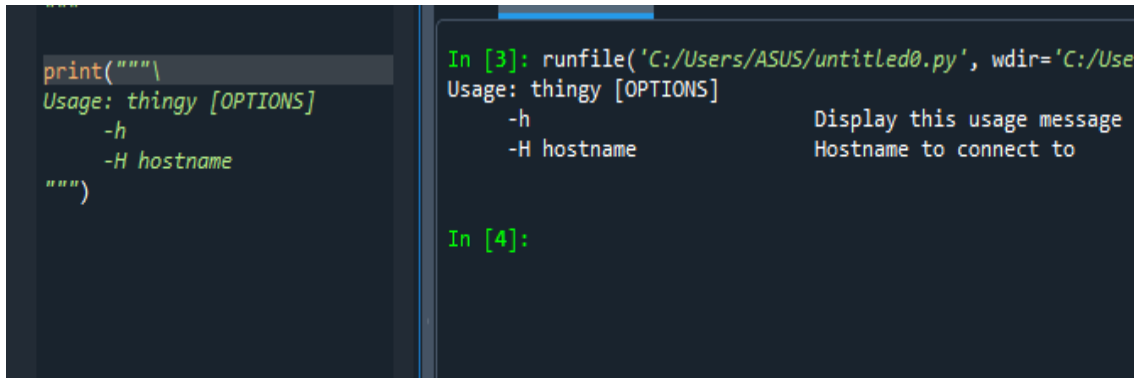


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")

In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 172: Case-6 Solved

87 Case Print

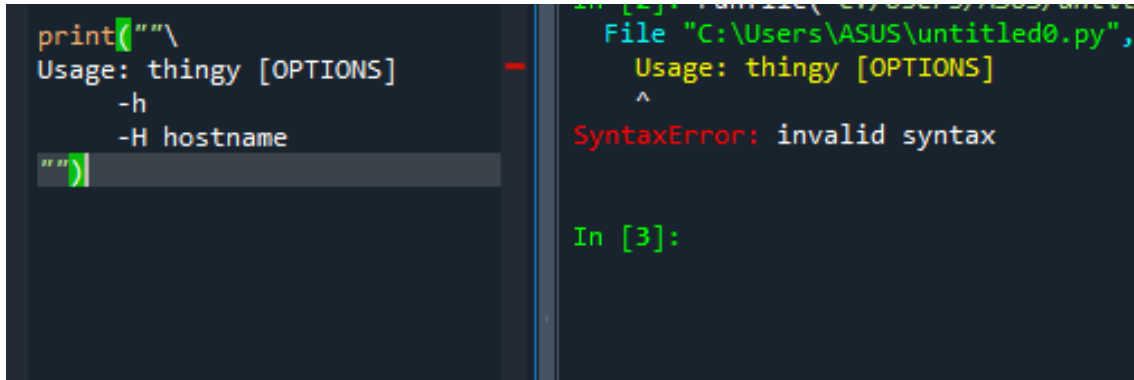


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
File "C:\Users\ASUS\untitled0.py",
  Usage: thingy [OPTIONS]
  ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 173: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

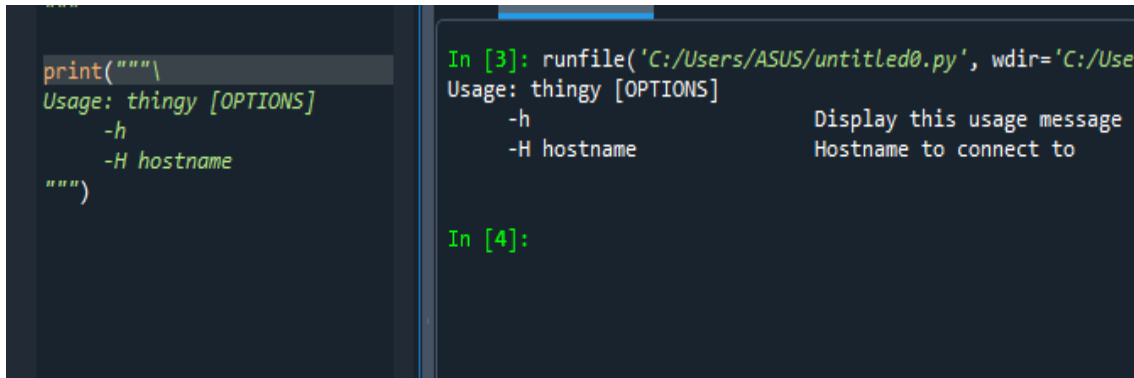


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 174: Case-6 Solved

88 Case Print

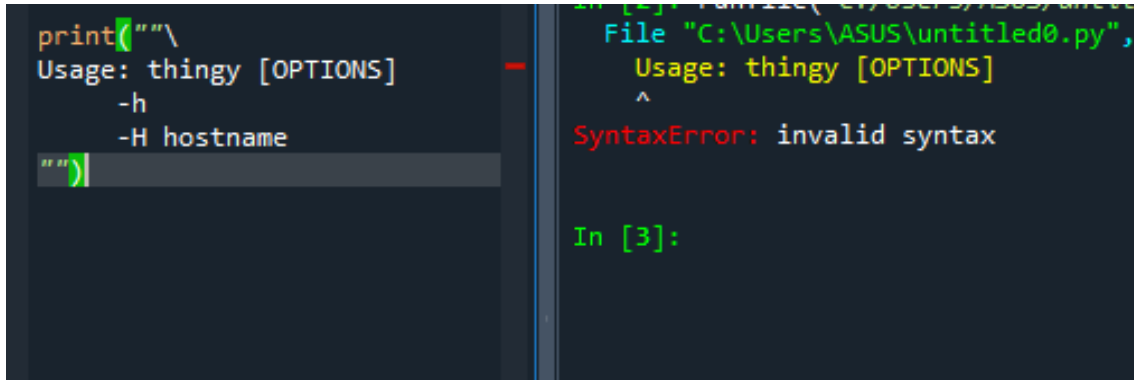


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
File "C:\Users\ASUS\untitled0.py",
    Usage: thingy [OPTIONS]
    ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 175: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

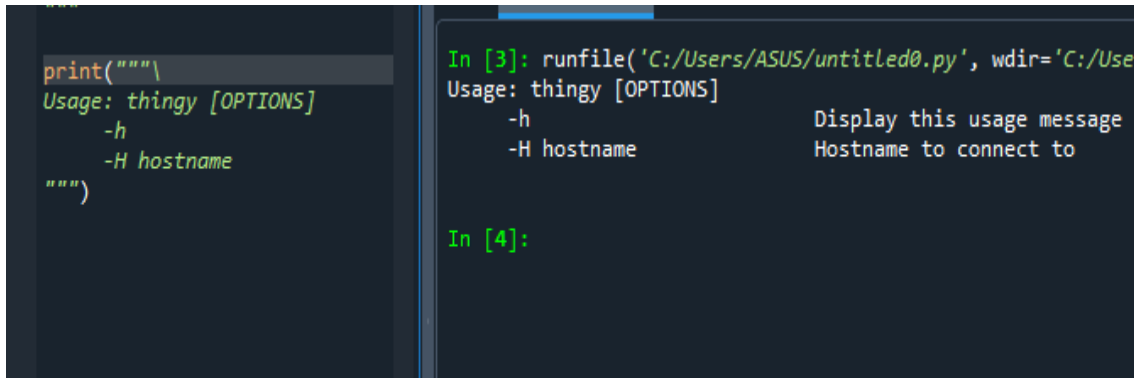


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 176: Case-6 Solved

89 Case Print

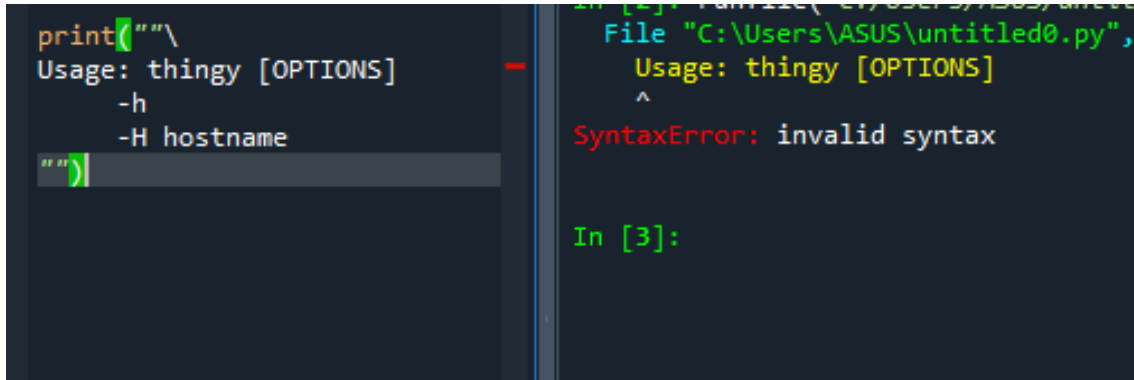


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 177: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

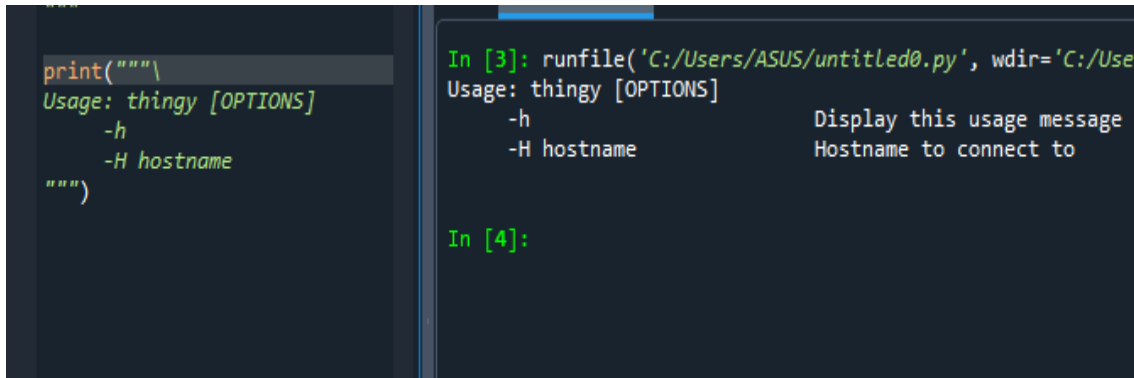


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 178: Case-6 Solved

90 Case Print

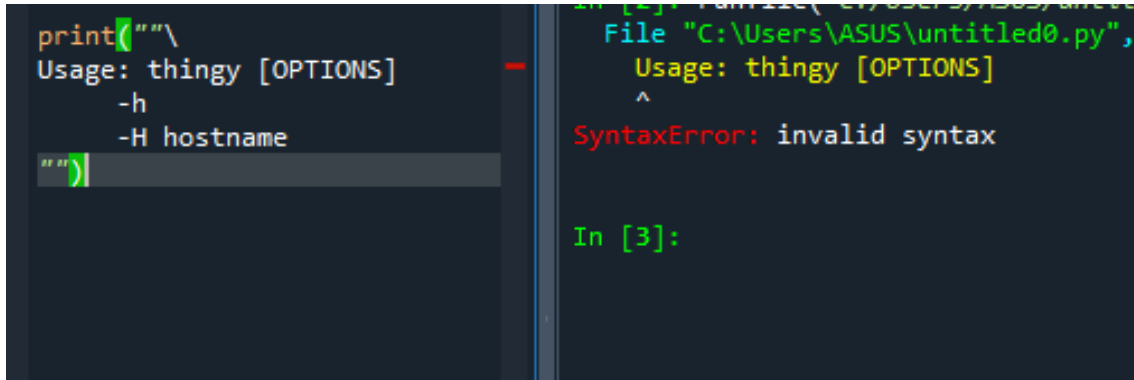


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 179: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

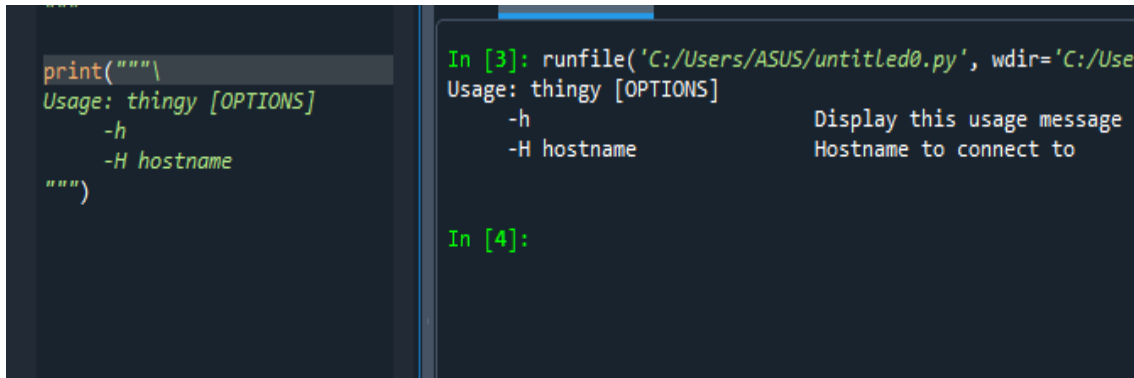


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 180: Case-6 Solved

91 Case Print

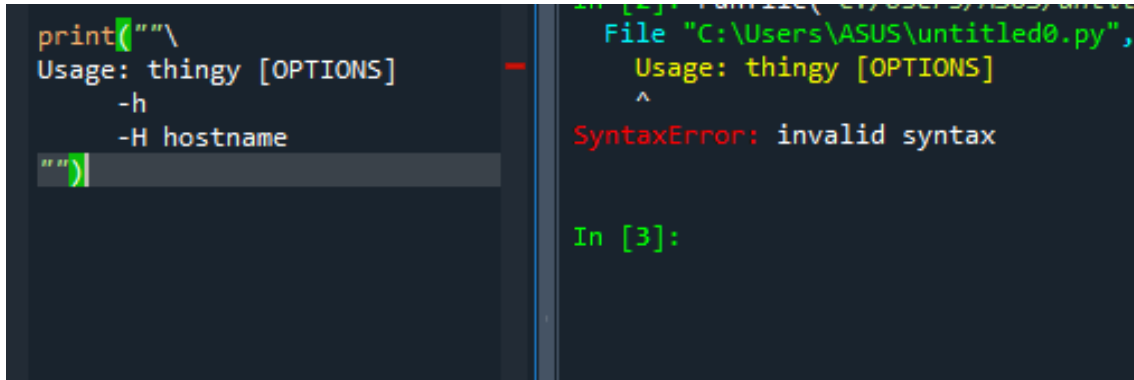


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
File "C:\Users\ASUS\untitled0.py",
  Usage: thingy [OPTIONS]
    ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 181: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

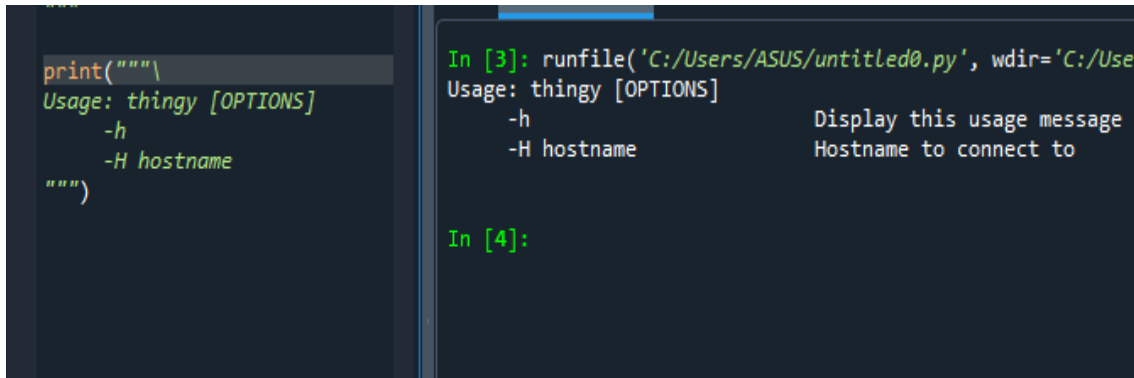


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 182: Case-6 Solved

92 Case Print

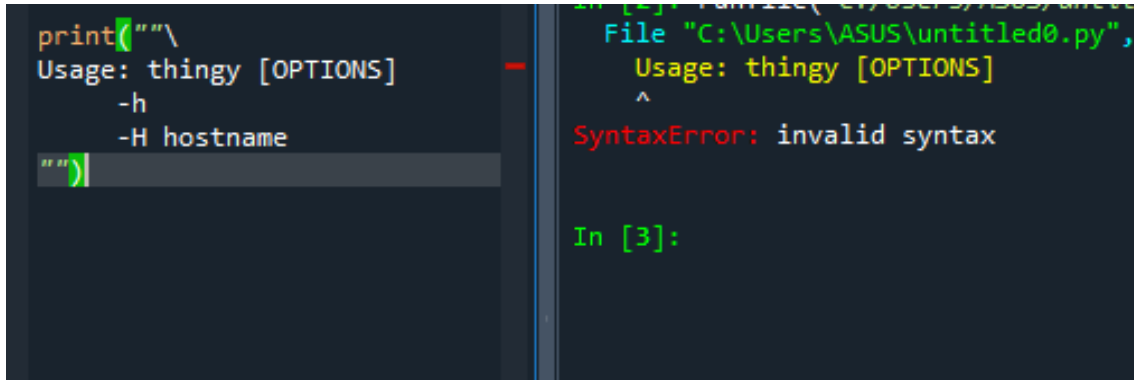


```
print("""\
Usage: thingy [OPTIONS]
  -h
  -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 183: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

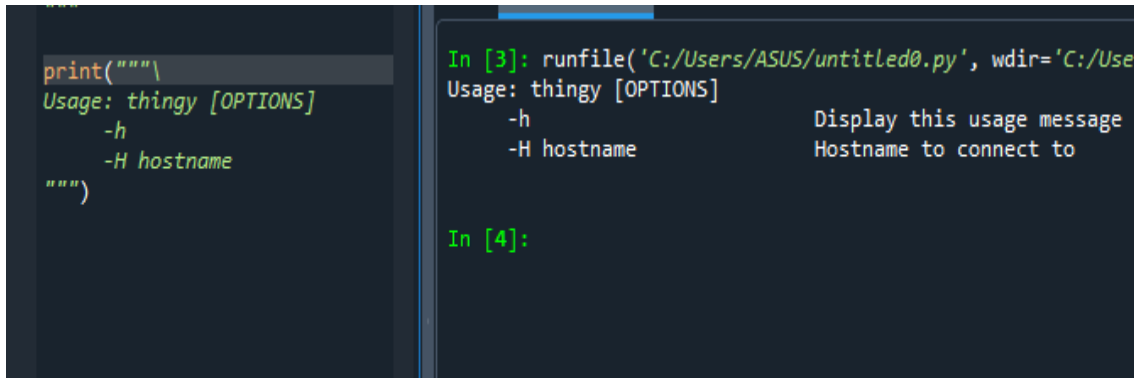


```
print("""\
Usage: thingy [OPTIONS]
  -h
  -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
  -h                Display this usage message
  -H hostname       Hostname to connect to

In [4]:
```

Gambar 184: Case-6 Solved

93 Case Print

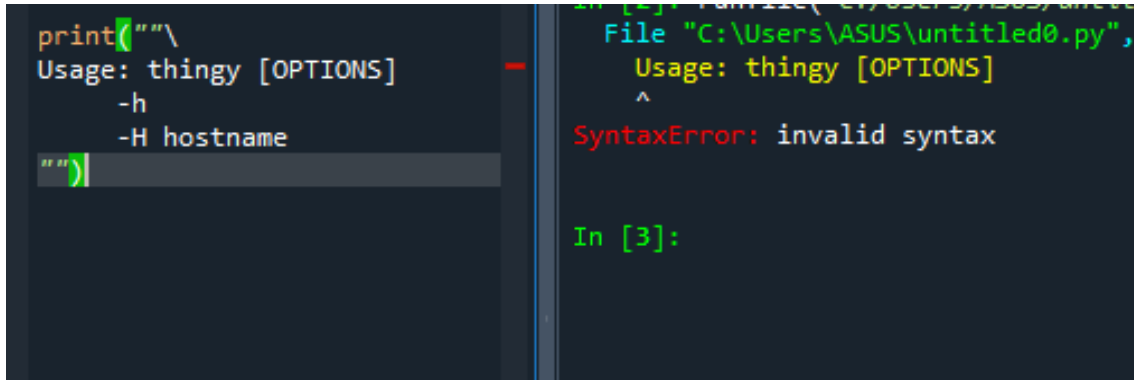


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 185: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

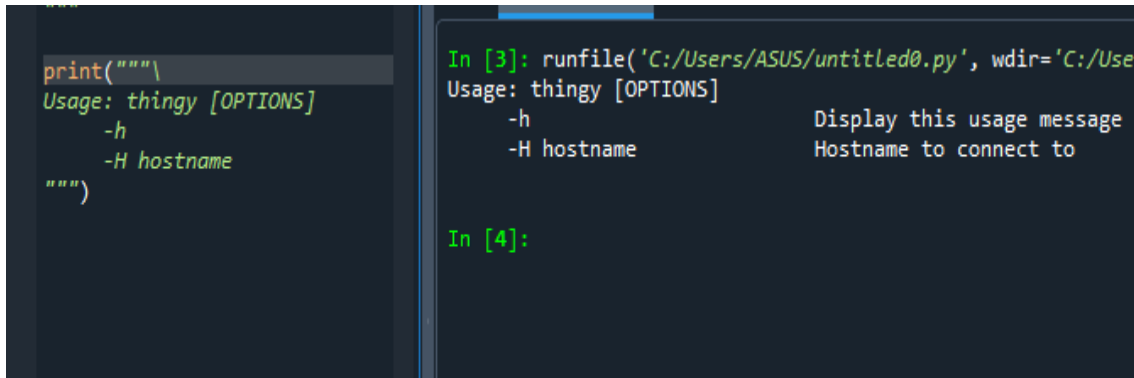


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 186: Case-6 Solved

94 Case Print

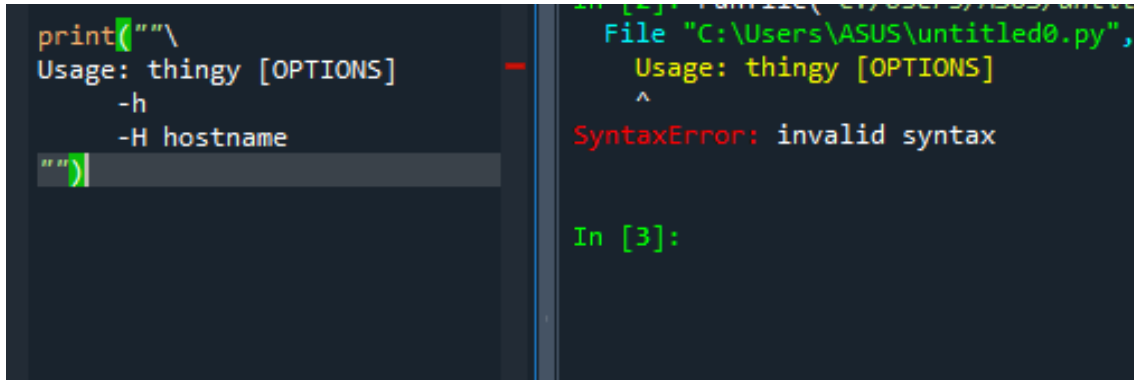


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 187: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

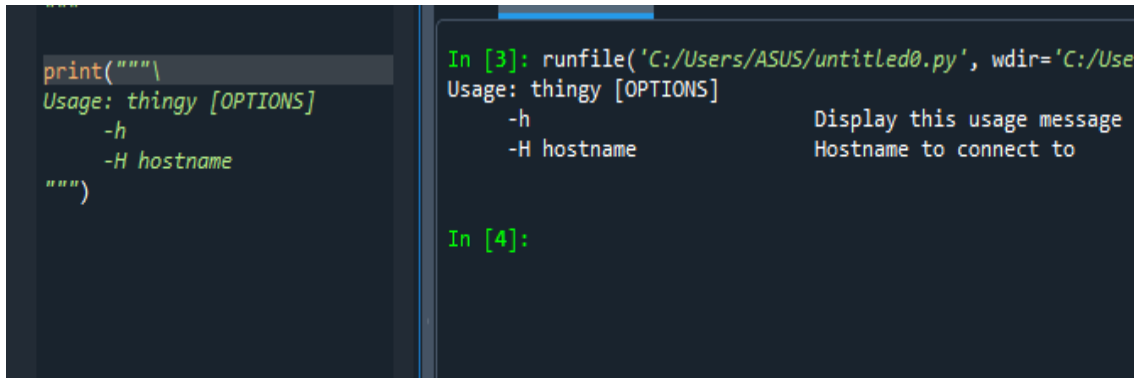


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 188: Case-6 Solved

95 Case Print

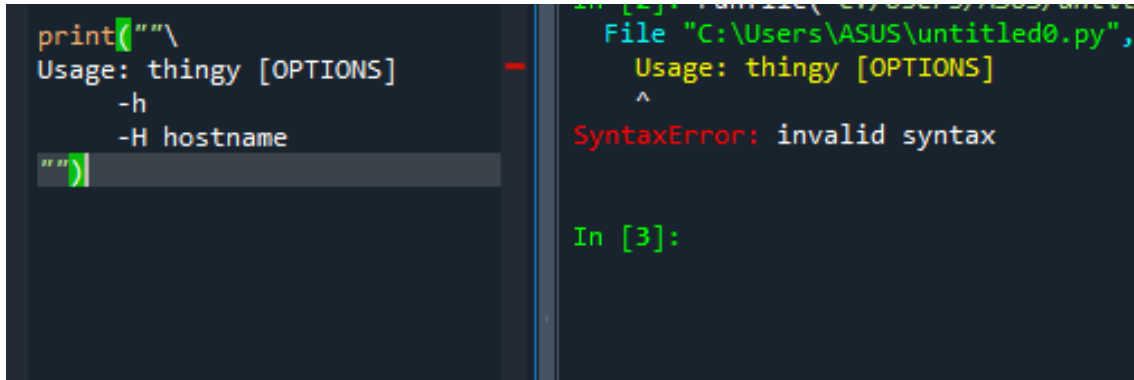


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 189: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

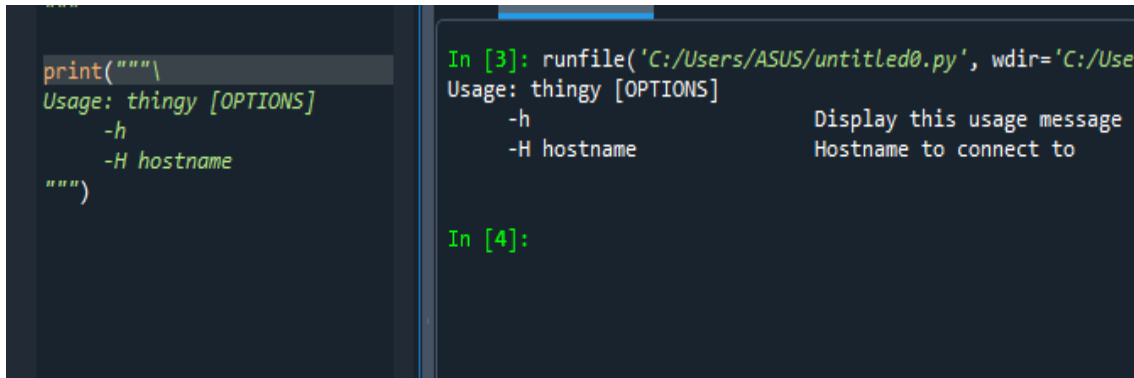


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 190: Case-6 Solved

96 Case Print

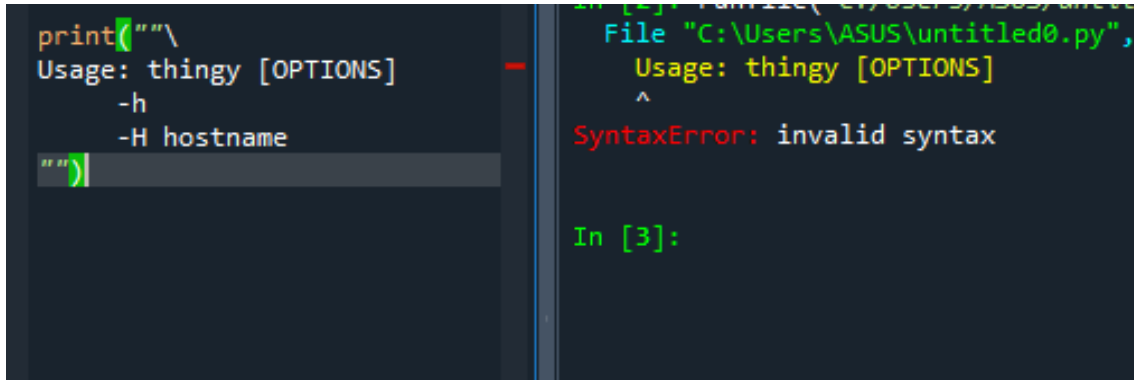


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 191: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

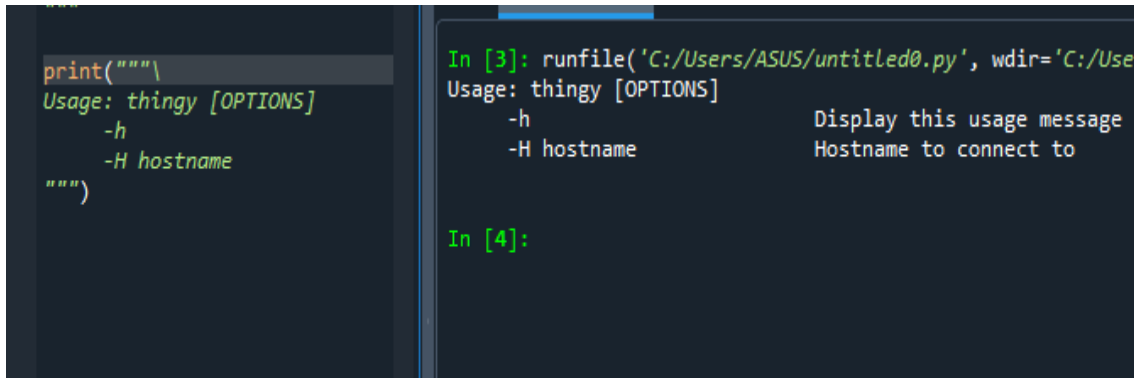


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 192: Case-6 Solved

97 Case Print

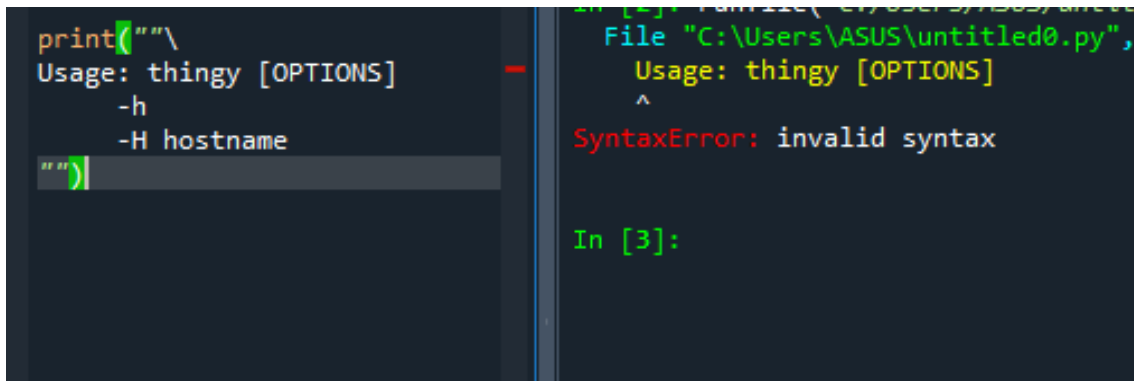


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")

In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/Users/ASUS/untitled0.py')
File "C:/Users/ASUS/untitled0.py", line 1, in <module>
    Usage: thingy [OPTIONS]
    ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 193: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

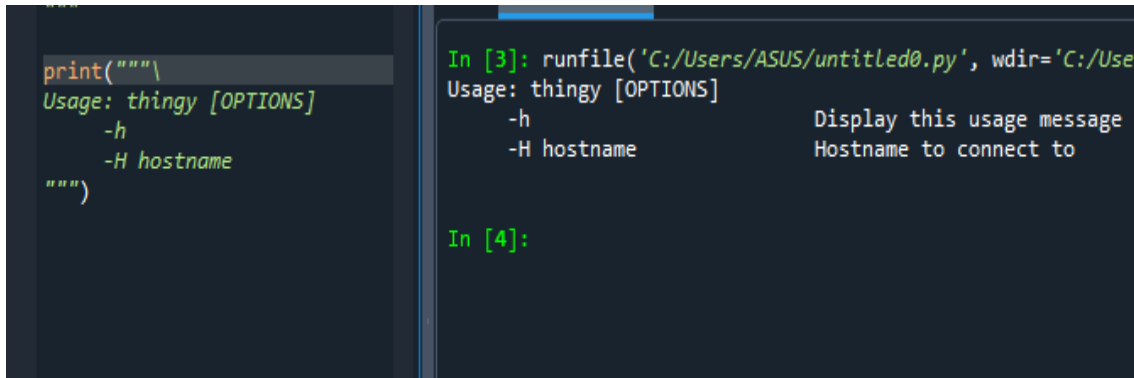


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")

In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/Users/ASUS/untitled0.py')
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 194: Case-6 Solved

98 Case Print

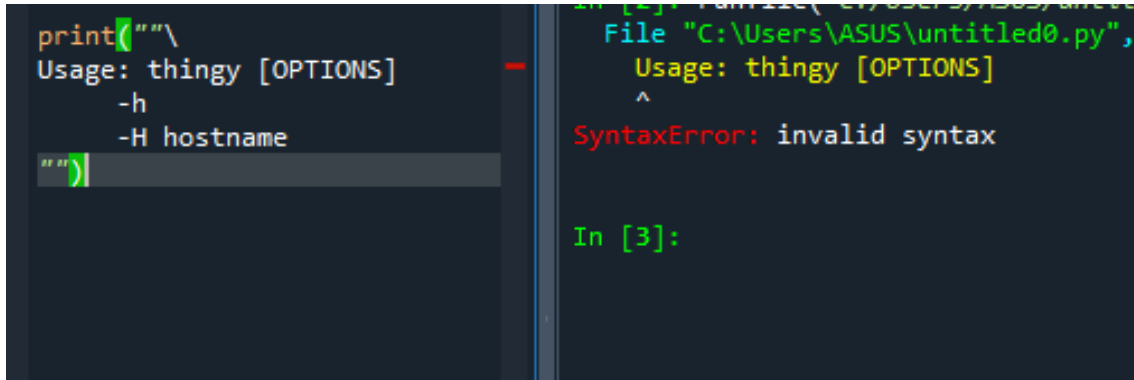


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
File "C:\Users\ASUS\untitled0.py",
  Usage: thingy [OPTIONS]
    ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 195: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

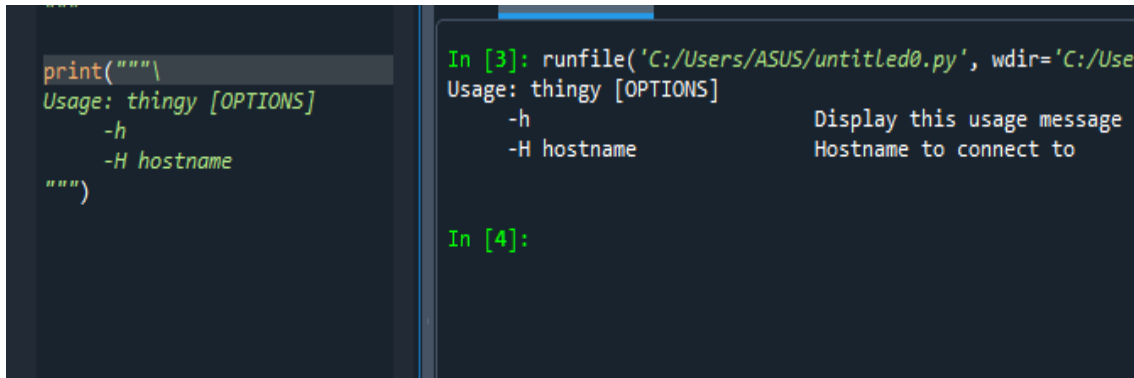


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 196: Case-6 Solved

99 Case Print

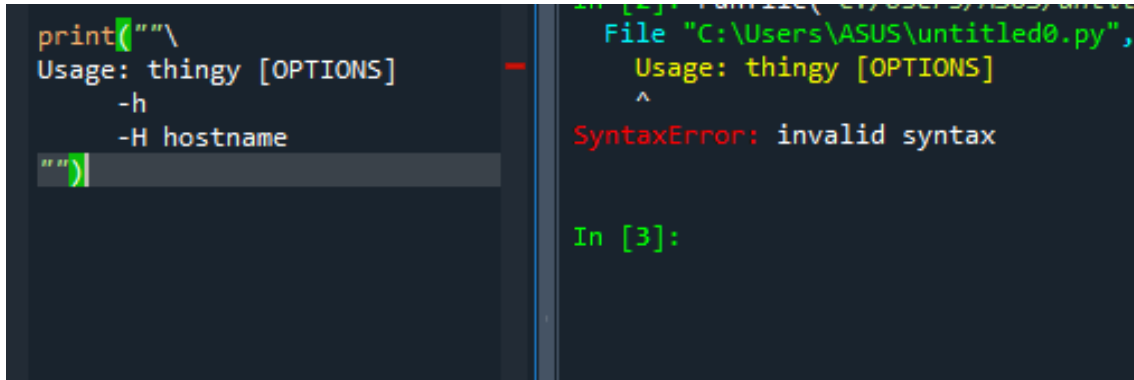


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 197: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

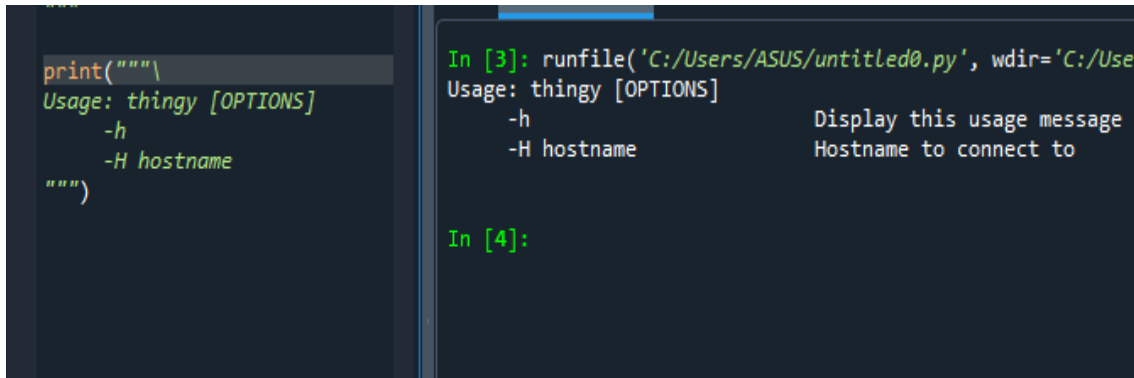


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")
```

```
In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 198: Case-6 Solved

100 Case Print

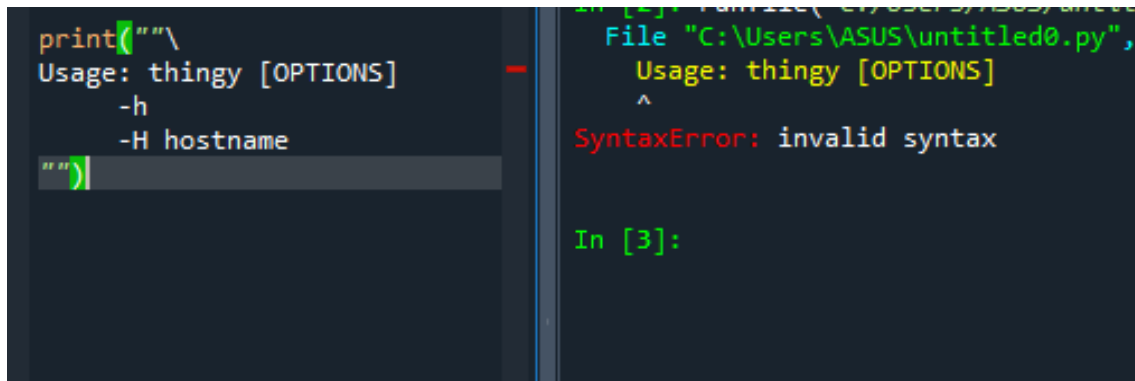


```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")

In [3]: runfile('C:/Users/ASUS/untitled0.py',
File "C:/Users/ASUS/untitled0.py",
      Usage: thingy [OPTIONS]
      ^
SyntaxError: invalid syntax

In [3]:
```

Gambar 199: Case-6 Error

Solusi-Case6 Ketika kita print beberapa baris secara langsung, maka yang harus dilakukan adalah dengan menggunakan petik 2 .. 3 kali... berikut contoh yang benar

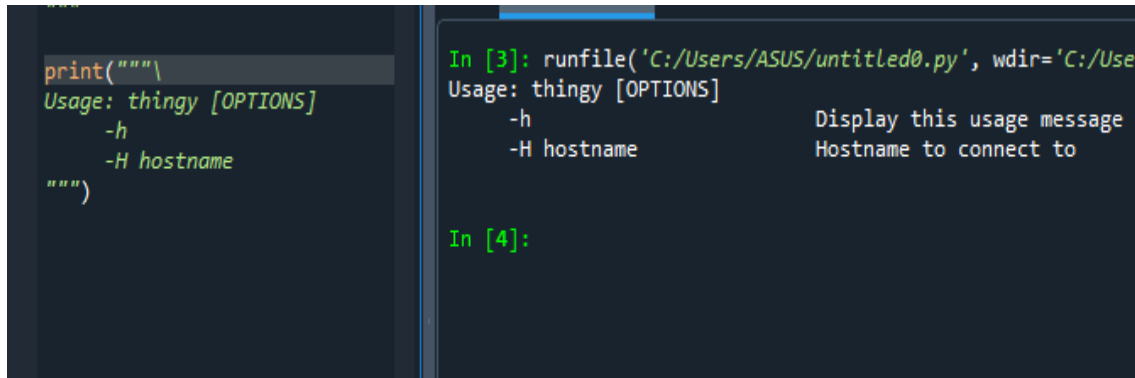

```
print("""\
Usage: thingy [OPTIONS]
    -h
    -H hostname
""")

In [3]: runfile('C:/Users/ASUS/untitled0.py', wdir='C:/User
Usage: thingy [OPTIONS]
    -h                Display this usage message
    -H hostname       Hostname to connect to

In [4]:
```

Gambar 200: Case-6 Solved

¹<https://github.com/Muhammad-Rizal-Supriadi/100-Error-Python>