

Programming fundamentals

Lecture 8: Loops, Nested loops, pattern printing
with nested loops

Recap

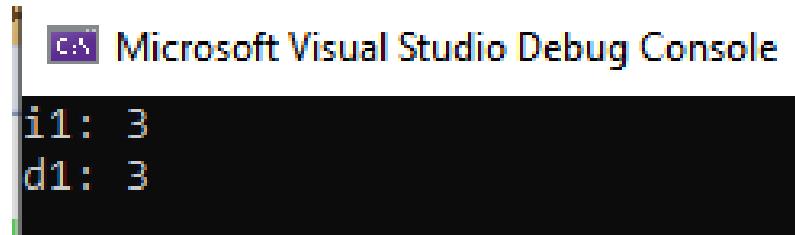
- Switch statement
- While loop

Agenda

- Do while loop
- For loop
- Nested loops

Typecasting: implicit

```
double d = 3.4;  
int i = 3;  
int i1 = 0; double d1 = 0;  
//double to int  
i1 = d;  
cout <<"i1: " << i1 << endl;  
//int to double  
d1 = i;  
cout <<"d1: " << d1 << endl;
```

A screenshot of the Microsoft Visual Studio Debug Console. The title bar at the top reads "C:\ Microsoft Visual Studio Debug Console". The console output shows two lines: "i1: 3" and "d1: 3", both in a light blue monospaced font on a black background.

```
C:\ Microsoft Visual Studio Debug Console  
i1: 3  
d1: 3
```

Typecasting: explicit

```
double d = 3.4;
int i = 3;
int i1 = 0; double d1 = 0;
i1 = (int)d;
i1 = static_cast<int>(d);
cout <<"i1: "<< i1 << endl;

d1 = (double)i;
cout <<"d1: "<< d1 << endl;
```

Microsoft Visual Studio Debug Console

```
i1: 3
d1: 3
```

DIVISION RULES

```
double d = 3.4;
int a = 5, b = 2;
int res_int = a/b; double res_double = a/b;
cout << "res_int: " << res_int << endl;
cout << "res_double: " << res_int << endl;
```

```
double d = 3.4;
double a = 5; double b = 2;
int res_int = a/b;
double res_double = a/b;
cout << "res_int: " << res_int << endl;
cout << "res_double: " << res_double << endl;
```

One of the variables must be double to retain the decimal part while dividing

```
double d = 3.4;
int a = 5; double b = 2;
int res_int = a/b;
double res_double = a/b;
cout << "res_int: " << res_int << endl;
cout << "res_double: " << res_double << endl;
```

Microsoft Visual Studio Debug Console

```
res_int: 2
res_double: 2
```

Microsoft Visual Studio Debug Console

```
res_int: 2
res_double: 2.5
```

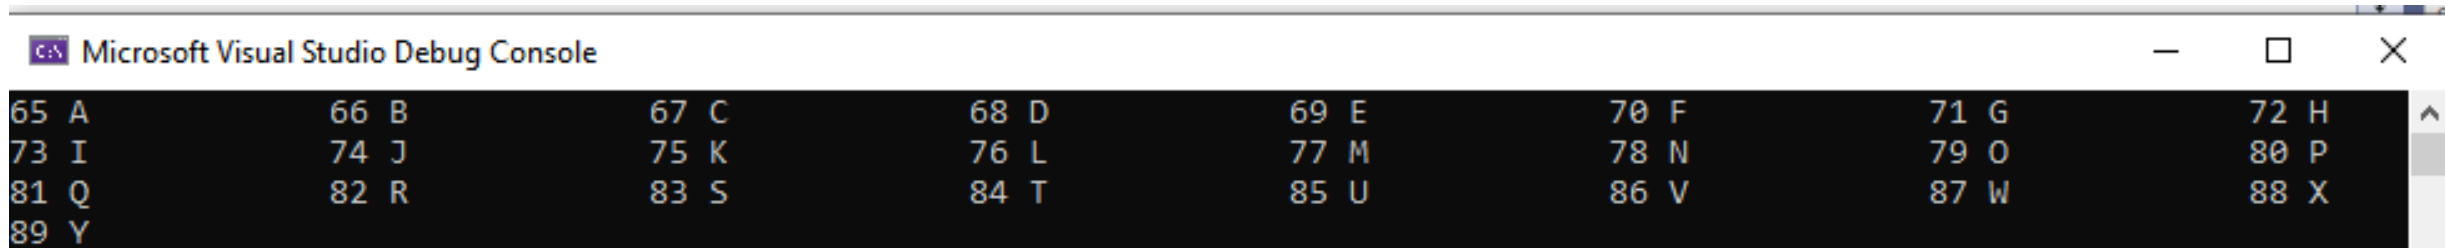
Microsoft Visual Studio Debug Console

```
res_int: 2
res_double: 2.5
```

Some examples..

- `cout<< (char)65; //prints letter A`
- `cout<< static_cast<char> (65);`

```
for (int x = 65; x < 90; x++)  
{  
    cout << x << " " << (char)x << " ";  
}
```



```
Microsoft Visual Studio Debug Console
```

65 A	66 B	67 C	68 D	69 E	70 F	71 G	72 H
73 I	74 J	75 K	76 L	77 M	78 N	79 O	80 P
81 Q	82 R	83 S	84 T	85 U	86 V	87 W	88 X
89 Y							

Comparing int with double

```
double d = 3.4;
int i = 3;
if (i == d)//d= 3.3999999999999999    i=3
    cout << "same" << endl;
else
    cout << "different" << endl;
```

```
double d = 3.4;
int i = 3;
if (i == (int)d)//d= 3    i=3
    cout << "same" << endl;
else
    cout << "different" << endl;
```

Microsoft Visual Studio Debug Console

```
same
```

Microsoft Visual Studio Debug Console

```
different
```

```
double d = 3.4;
int i = 3;
if ((double)i == d)//d= 3    i=3
    cout << "same" << endl;
else
    cout << "different" << endl;
```

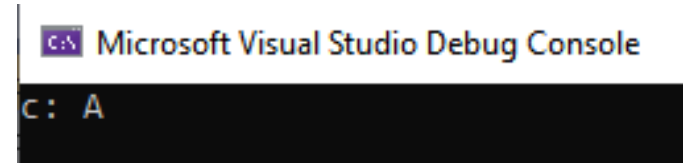
Microsoft Visual Studio Debug Console

```
different
```


Int to other types

- Int to char

```
int res_int = 65;  
char c;  
c = static_cast<char>(res_int);  
cout << "c: " << c << endl;
```

A screenshot of the Microsoft Visual Studio Debug Console. The title bar reads "C:\> Microsoft Visual Studio Debug Console". The console output shows "c: A" on a single line.

```
C:\> Microsoft Visual Studio Debug Console  
c: A
```

- Int to string (NOT ALLOWED)

double to other types

- double to char

```
int res_double = 65;  
char c;  
c = static_cast<char>(res_double);  
cout << "c: " << c << endl;
```

- double to string (NOT ALLOWED)

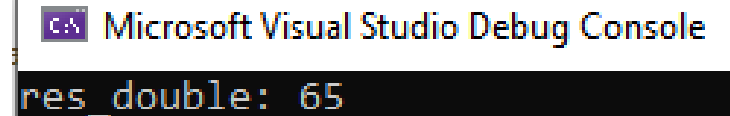
C:\> Microsoft Visual Studio Debug Console

c: A

Char to other types

- Char to double

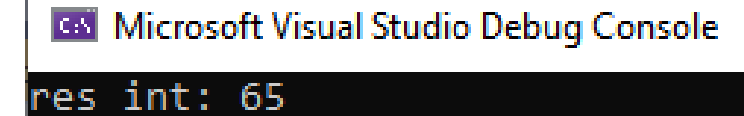
```
double res_double = 65.5;  
char c=65;  
res_double = static_cast<double>(c);  
cout <<"res_double: " << res_double << endl;
```

A screenshot of the Microsoft Visual Studio Debug Console showing the output of the C++ program. The text "res_double: 65" is displayed in a monospaced font on a black background.

Microsoft Visual Studio Debug Console
res_double: 65

- Char to int

```
int res_int = 65.5;  
char c=65;  
res_int = static_cast<int>(c);  
cout <<"res_int: " << res_int << endl;
```

A screenshot of the Microsoft Visual Studio Debug Console showing the output of the C++ program. The text "res_int: 65" is displayed in a monospaced font on a black background.

Microsoft Visual Studio Debug Console
res_int: 65

- char to string (NOT ALLOWED)

Find the number of digits after a decimal part

```
1. double no = 3.44;
2. int count = 0;
3. while (no != ((int)no)){
4.     count++;
5.     no = no * 10;}
6. cout<< count;
```

Line#	no	count	(int)no	no!=(int)no ?
1	3.44			
2	3.44	0		
3	3.44	0	3	3.44 != 3
4	3.44	1	3	
5	34.4	1	3	
3	34.4	1	34	34.4 != 34
4	34.4	2	34	
5	344.0	2	34	
3	344.0	2	344	344.0 != 344
6	Print 2			

Continue in while loop

- To bypass the loop's normal control structure
- The **continue** statement forces the next iteration of the loop to take place, skipping any code between itself and the conditional expression that controls the loop

```
#include <iostream>
using namespace std;
int main()
{
    int x = 0; int num = 0;
    while(x <= 5)
    {
        x++;
        cout << "before if iteration#" << x << endl;
        if ((num++) % 2==1) continue;
        cout << x << endl;
        cout << "after if iteration#" << x << endl;
    }
    return 0;
}
```

These statements will
be skipped if **continue**
gets executed



Microsoft Visual Studio Debug Console

```
before if iteration#1
1
after if iteration#1
before if iteration#2
before if iteration#3
3
after if iteration#3
before if iteration#4
before if iteration#5
5
after if iteration#5
before if iteration#6
```

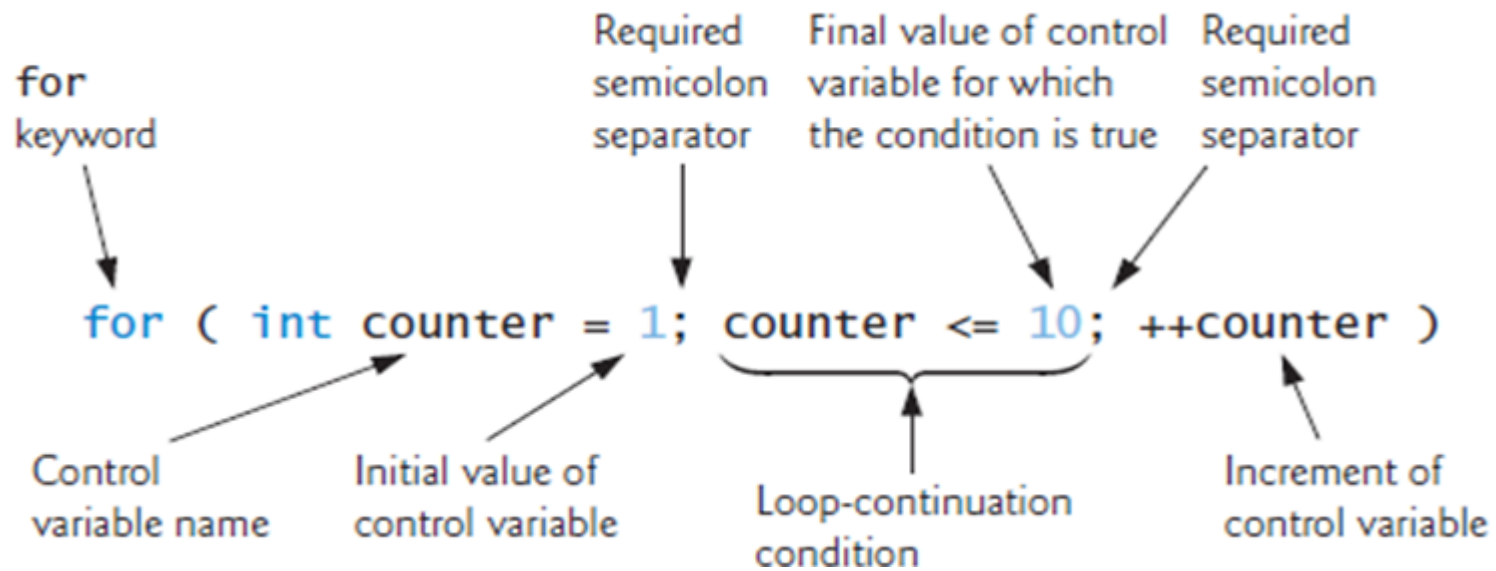
Do while loop

- The do..while loop is similar to the while loop with one important difference. The body of do...while loop is executed at least once. Only then, the test expression is evaluated.
- The syntax of the do...while loop is:

```
do
{
    // statements inside the body of the loop
}
while (testExpression);
```

```
do{
    bake 5 cookies;
} while (thereAreFriends);
```

For loop



Comparison... print first 10 numbers

```
for (int i=1;i<10;i++)  
{  
    cout << i << endl;  
}
```

```
int i = 1;  
while (i<=10)  
{  
    cout << i << endl;  
    i = i + 1;  
}
```

```
int i = 1;  
do  
{  
    cout << i << endl;  
    i = i + 1;  
} while (i <= 10);
```

Nested loops

- Loop within a loop

Pattern practice

```
*****  
*      *  
*      *  
*      *  
*****
```

```
@@@@@@  
$$$$$$  
&&&&&
```

Division and modulus operator

Number= 12345	
$12345 / 10 = 1$	$12345 \% 10 = 5$
Number= 2345	
$2345 / 10 = 2$	$2345 \% 10 = 5$
Number= 6547	
$6547 / 10 = 6$	$6547 \% 10 = 7$

Extracting each digit of an integer

Number=12345	d=10000
Number / d	Number % d
1	2345
Number=2345	d=1000
Number / d	Number % d
2	345
Number=345	d=100
Number / d	Number % d
3	45
Number=45	d=10
Number / d	Number % d
4	5

Palindrome

```
int num=12345;
int d = 10000;
while (num % d!=0)
{
    cout << "Digit: " << num/d<< endl;
    num = num % d;
    d = d / 10;
}
cout << "Digit: " << num / d << endl;
```

Multiple cases in a switch

```
switch (grade) // switch statement nested in while
{
    case 'A': // grade was uppercase A
    case 'a': // or lowercase a
        ++aCount; // increment aCount
        break; // necessary to exit switch
    case 'B': // grade was uppercase B
    case 'b': // or lowercase b
        ++bCount; // increment bCount
        break; // exit switch
    default: // catch all other characters
        cout << "Incorrect letter grade entered."
        << " Enter a new grade." << endl;
        break; // optional; will exit switch anyway
} // end switch
```

Recommended reads

- Dietal & Dietal
 - Chapter 5