


MANIPULATING STYLES WITH JQUERY

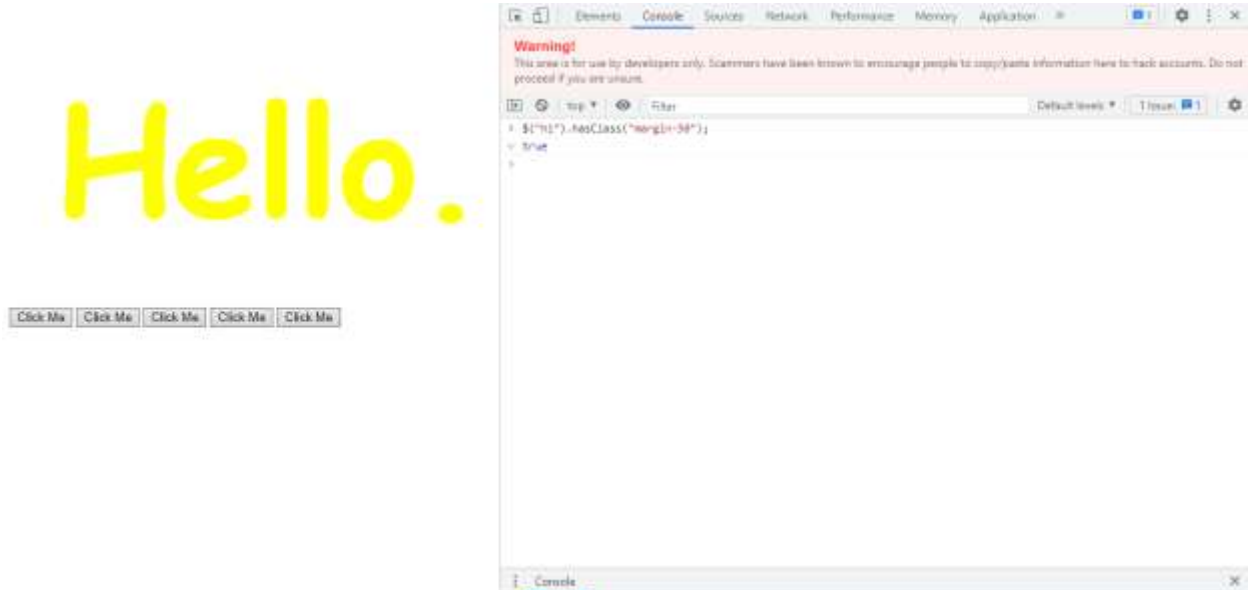

```
$("h1").hasClass("margin-50");
```

Code:

Index1.html:

```
<!DOCTYPE html>

<html lang="en" dir="ltr">

  <head>

    <meta charset="utf-8">

    <title>jQuery</title>

    <link rel="stylesheet" href="styles1.css">

  </head>

  <body>

    <h1>Hello.</h1>

    <br>

    <button>Click Me</button>

    <button>Click Me</button>

    <button>Click Me</button>
```

```
<button>Click Me</button>
```

```
<button>Click Me</button>
```

```
<script src="https://ajax.googleapis.com/ajax/libs/jquery/3.6.0/jquery.min.js"></script> <!--  
Paste it above below tag-->
```

```
<script src="index1.js" charset="utf-8"></script>
```

```
</body>
```

```
</html>
```

Index1.js:

```
//$('h1').css('color','green');           $('h1').css('color'); //this shows the current value of h1 element  
                                           console.log($('h1').css('color'));  
                                           if this property has single value then you are getting the value and if this property has 2  
                                           values then you are setting the value.  
//console.log($('h1').css('color'));  
//console.log($('h1').css('font-size'));  
//$('h1').css('font-size','5rem'); instead this add big-title class  
//$('h1').addClass('big-title');  
//Remove big-title class  
//$("h1").removeClass("big-title");  
$('h1').addClass('big-title margin-50'); //Two classes
```

```
$("button");
```

```
//Explore above code by runing one by one
```

Styles1.css:

```
.big-title{  
    font-size: 10rem;  
    font-family: cursive;  
    color: yellow;
```

```
}  
.margin-50{  
  margin: 50px;  
}
```