


# *Manipulating Attributes with jQuery*

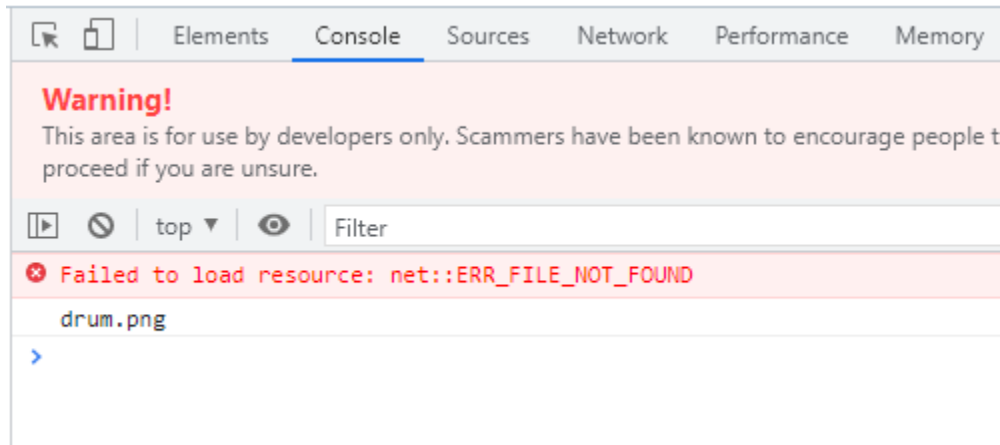

## *Code:*

### Index3.html:

```
<!DOCTYPE html>

<html lang="en" dir="ltr">

  <head>

    <meta charset="utf-8">

    <title>jQuery</title>

    <link rel="stylesheet" href="styles3.css">

  </head>

  <body>

    <h1 class="big-title margin-50">Hello.</h1>

    <a href="http://www.google.com">Search</a>

    <!--We want to add a and img attributes using js and jQuery-->

    <button>Click Me</button>

    <button>Click Me</button>

    <button>Click Me</button>
```

```
<button>Click Me</button>
```

```
<button>Click Me</button>
```

```
<script src="https://ajax.googleapis.com/ajax/libs/jquery/3.6.0/jquery.min.js"></script> <!--  
Paste it above below tag-->
```

```
<script src="index3.js" charset="utf-8"></script>
```

```
</body>
```

```
</html>
```

### **Index3.js:**

```
//We want to add a and img attributes using js and jQuery
```

```
//$("img").attr("src"); //<class>.attr<name of attribute>; attr means attribute and src means  
source
```

```
//console.log($(".img").attr("src"));
```

```
//console.log($(".a").attr("href"));
```

```
//Let's change attribute
```

```
$(".a").attr("href", "http://www.yahoo.com"); //<class>.attr<name of attribute, new attribute>;
```

```
//console.log($(".a").attr("href", "http://www.yahoo.com"));
```

```
console.log($(".h1").attr("class"));
```

### **Styles3.css:**

```
.big-title{
```

```
font-size: 10rem;
```

```
font-family: cursive;
```

```
color: yellow;
```

```
}
```

```
.margin-50{
```

```
margin: 50px;
```

```
}
```

