```
Thy Cp --NeIp for more information.

SbbasedEvopsvn-07:~/devops_mid$ cp -r ^C

cp: missing destination file operand after '^C'

Try 'cp --help' for more information.

SbbasedEvopsvn-07:~/devops_mid$ cd ...

SbbasedEvopsvn-07:~/nodeapp-iba/

SbbasedEvopsvn-07:~/nodeapp-iba$ ls

app.json Dockerfile index.js package.json Procfile public README.md

SbbasedEvopsvn-07:~/nodeapp-iba$ cp -r ../nodeapp-iba/.

cp: cannot copy a directory, '../nodeapp-iba/', into itself, './nodeapp-iba'

SbbasedEvopsvn-07:~/nodeapp-iba$ cd

SbbasedEvopsvn-07:~/devops_mid$ cd

SbbasedEvopsvn-07:~/devops_mid$ cp -r ../nodeapp-iba/

SbbasedEvopsvn-07:~/devops_mid$ rm -rf nodeapp-iba/


SbbasedEvopsvn-07:~/devops_mid$ rm -rf nodeapp-iba/

SbbasedEvopsvn-07:~/devops_mid$ cp -r ../nodeapp-iba/*

SbbasedEvopsvn-07:~/devops_mid$ ls

app.json Dockerfile index.js nodeapp-iba package.json Procfile public README.md
```

1.Nodeapp work

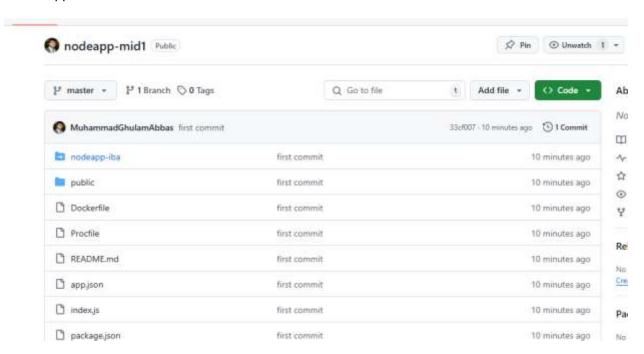

```
Him out get gotste An art get intell + y

Soft transport http://
gotste An art get intell + y

Soft transport http://
gotste An art get intell + y

gotste An art get intell

gotste An art get intelligente An art get intelligente

gotste An art get gotste An art get intelligente

gotste An art get gotste An art get gotste An art get intelligente

gotste An art gotste An art get gotste An art get intelligente

gotste An art gotste An art
```

2.jenkin installation

Getting Started

Unlock Jenkins

To ensure Jenkins is securely set up by the administrator, a password has been written to the log (not sure where to find it?) and this file on the server:

/var/jenkins_home/secrets/initialAdminPassword

Please copy the password from either location and paste it below.

Administrator password



```
server {
    listen 83;
    server_name gabbas-mt-jenkins.nendo.fun;

location / {
    proxy_pass http://127.0.0.1:8083;
    proxy_set_header Host $host;
    proxy_set_header X-Real-IP $remote_addr;
    proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;
    proxy_set_header X-Forwarded-Proto $scheme;
    proxy_set_header Upgrade $http_upgrade;
    proxy_set_header Connection "Upgrade";
}
```

3. Nginix work

Α

