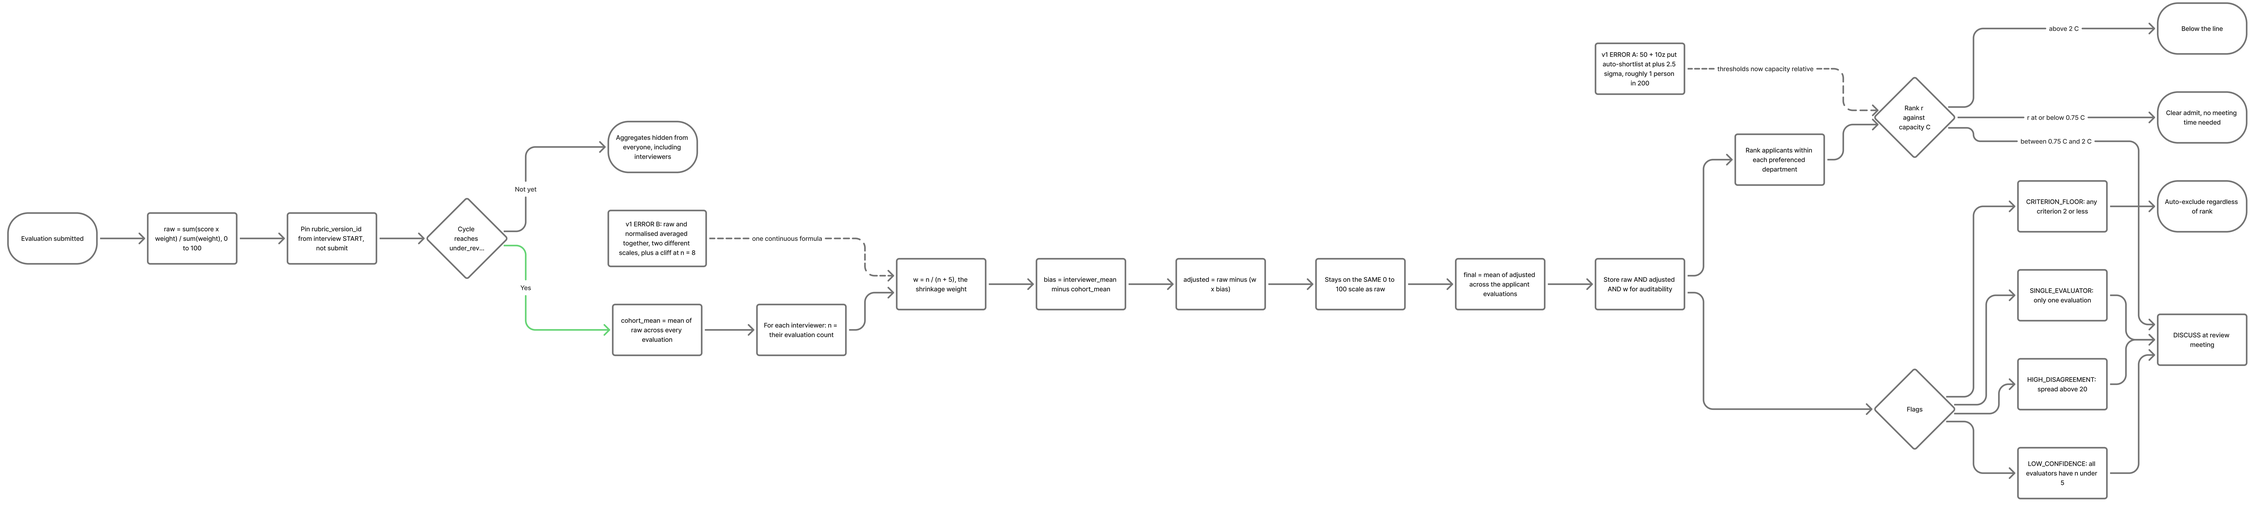

Evaluation submitted
raw = sum(score x weight) / sum(weight), 0 to 100
Pin rubric_version_id from interview START, not submit
Cycle reaches under_rev...
Not yet
Aggregates hidden from everyone, including interviewers
Yes
cohort_mean = mean of raw across every evaluation
For each interviewer: n = their evaluation count
v1 ERROR B: raw and normalised averaged together, two different scales, plus a cliff at n = 8
one continuous formula
w = n / (n + S), the shrinkage weight
bias = interviewer_mean minus cohort_mean
adjusted = raw minus (w x bias)
Stays on the SAME 0 to 100 scale as raw
final = mean of adjusted across the applicant evaluations
Store raw AND adjusted AND w for auditability
v1 ERROR A: 50 + 10z put auto-shortlist at plus 2.5 sigma, roughly 1 person in 200
thresholds now capacity relative
Rank applicants within each preferenced department
Rank r against capacity C
above 2 C
Below the line
r at or below 0.75 C
Clear admit, no meeting time needed
between 0.75 C and 2 C
Flags
CRITERION_FLOOR: any criterion 2 or less
Auto-exclude regardless of rank
SINGLE_EVALUATOR: only one evaluation
HIGH_DISAGREEMENT: spread above 20
LOW_CONFIDENCE: all evaluators have n under 5
DISCUSS at review meeting