Pf lab 3

Task 1 :-

```
#include<iostream>
using namespace std;
int main() {
 int age;
  double pay;
  char section;
  ~~cin>>age>>pay<<"~~
  cin >> age >>pay >> section;
  cout<< age<<" "<< pay<<" " section<<endl;
    return 0;
  }
```

Task 2 :-

Expression	value	working
28/4-2	5	28/4=7, then 7-2=5
6+12x2-8	22	12x2=4 first; 6+24=30; 30-8=22
4+8x2	20	8x2=16 first; 4+16=20 (Not 24: * beset)
6+17%3-2	6	17%3=2 (17=5x3+2); 6+2=8; 8-2=6
2+22x9(9-7)	46	Bracket first; 9-7=2; 22x2=44; 2+44=46
(8+7)x2	30	Bracket first 15; 15x2=30
(16+7)%2-1	0	Bracket 23; 23%2=1; 1-1=0
12/(10-6)	3	Bracket 4; 12/4=3
(19-3)x(2+2)/4	16	Bracket: 16 and 4; then left to right 16x4=64; 64/4=16

Task 3:-

correct answer is (B)
Because units is promoted to float, mass Remains a float, And the result is mass * units is a float.

Task 4:-

correct Answere is (B) = 8

Task 5:-

```
#include<iostream>
using namespace std;
int main() {
int qty = 17, salesRep = 4;
double unitsEach;
unitsEach = static_cast<double>(qty) / salesReps;
cout << unitsEach << endl;
return 0;
}
```

Task 6:-

```
#include<iostream>
#include<cstdlib>
#include<ctime>
#include<iomanip>
using namespace std;
int main() {
srand(time(0));
int num1 = rand() % 900 + 100;
int num = rand() % 900 + 100;
cout << setw(6) << num1 << endl;
cout << "+ " << setw(4) << num2 << endl;
cout << "------" << endl;
cout << "press Enter when you are ready to see answer...";
cin.get();
cout << endl;
cout << setw(6) << num1 << endl;
cout << "+ " << setw(4) << num2 << endl;
cout << setw(6) << num1 + num2 << endl;
return 0;
}
```

Task 1:-

Programe 1:- find the error.

```
using namespace std;
void main() {
double number1, number2, sum;
cout<<"enter a number:";
cin<<number2=sum;
cout "the sum of two number is"<<sum
}
```

errors.

Top of the programe no #include<iostream>
where void main(). it write int main()
cin number1; write it cin >> number;
number+number = sum; write it sum = number1 + number2;
cout "the sum ... <<sum. cout<<the sum... <<sum;
same line missing;
end of main No return 0;

Programs 2:-

```
#include<iostream>
using namespace std;
void main() {
int number1, number;
float, quotient;
cout<<"Enter two numbers And g will divide/n";
cout<<"the first by the second for you. \n";
cin >> number, number2;
quotient = float<<static_cast>(number1)/number;
cout<< quotient
}
```

find the errors..

```
void main()
cin >> number1, number2;
float<static_cast>number1)
cout << quotient
```

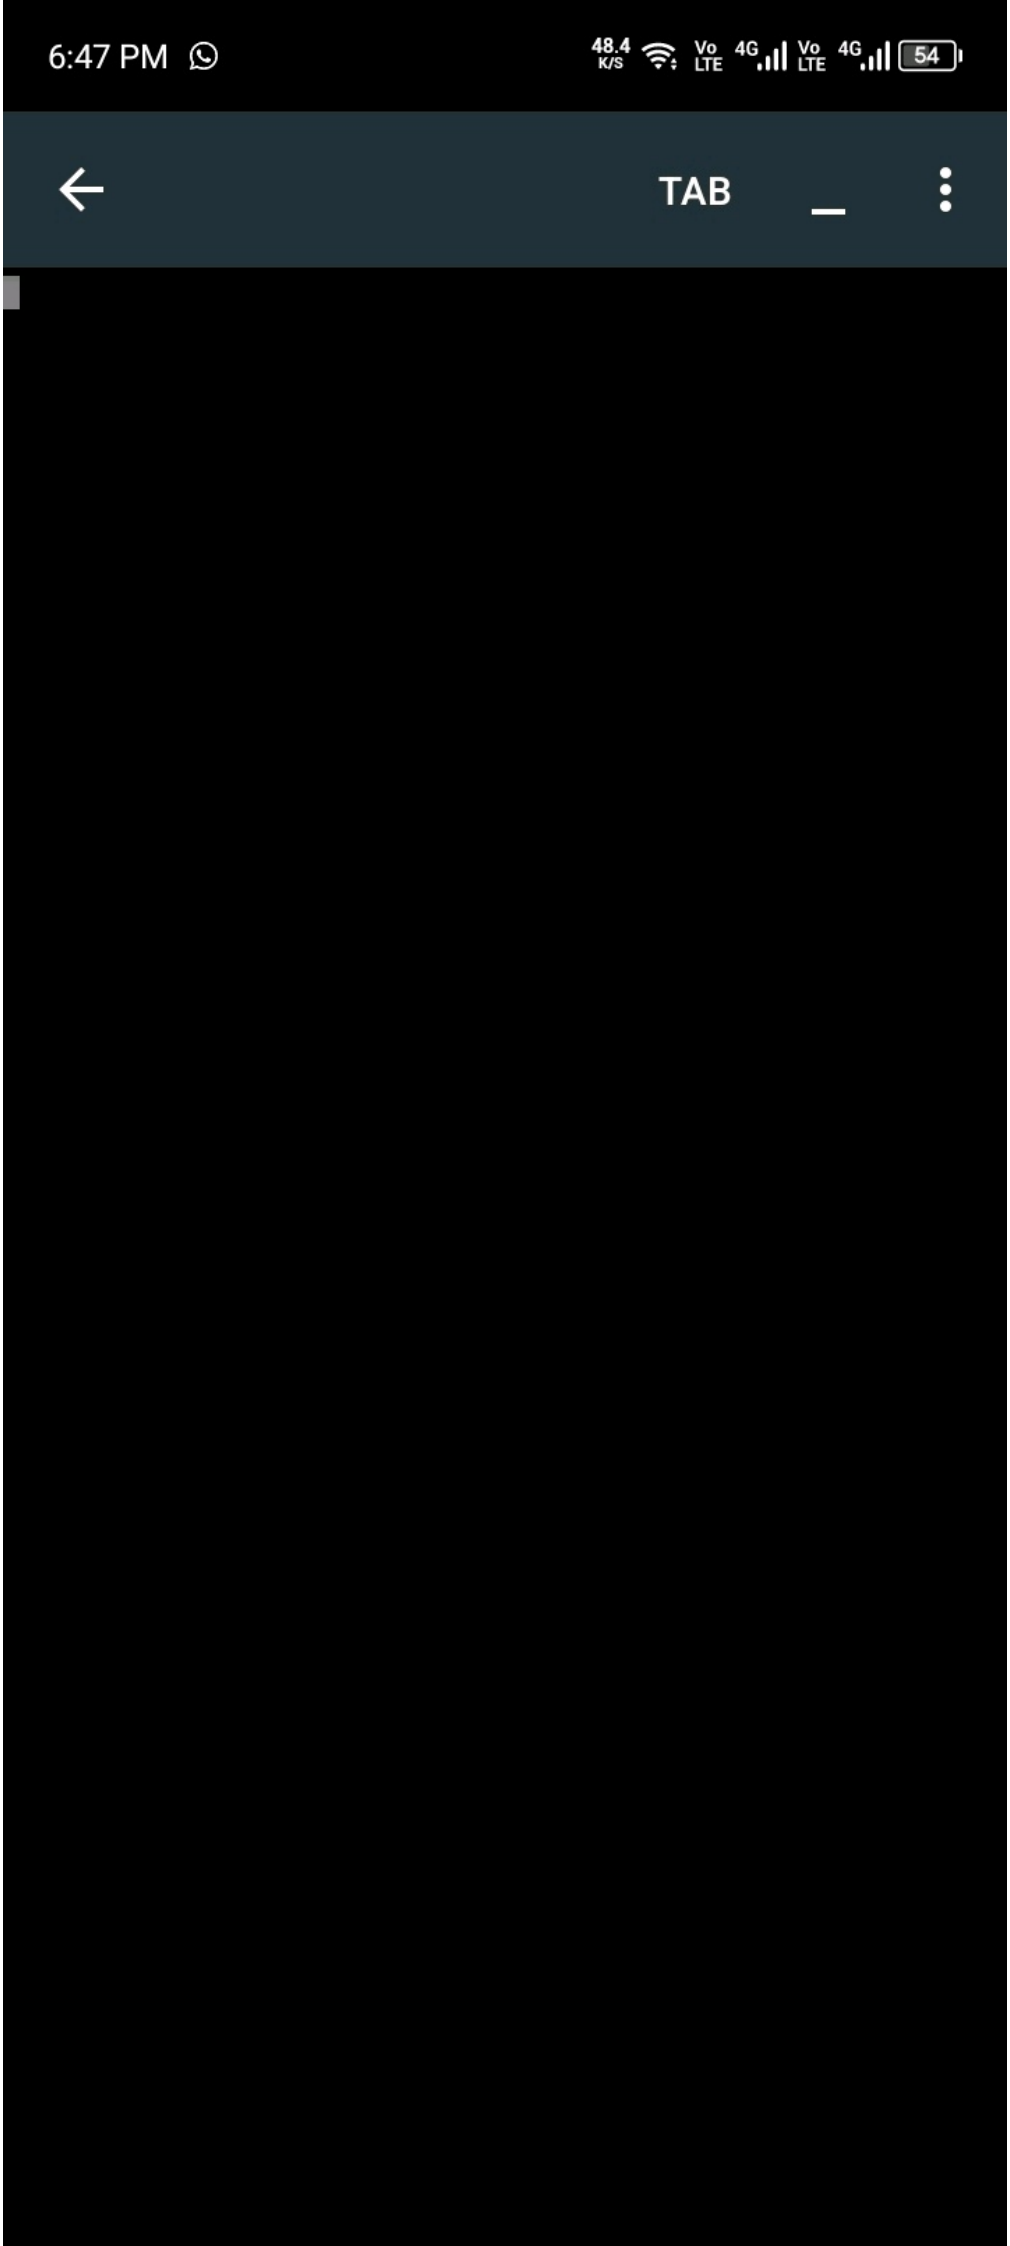
```
int main() and return 0;
cin >> number1 >> number
static_cast<float>(number)
Add;
```

Home task 2:-

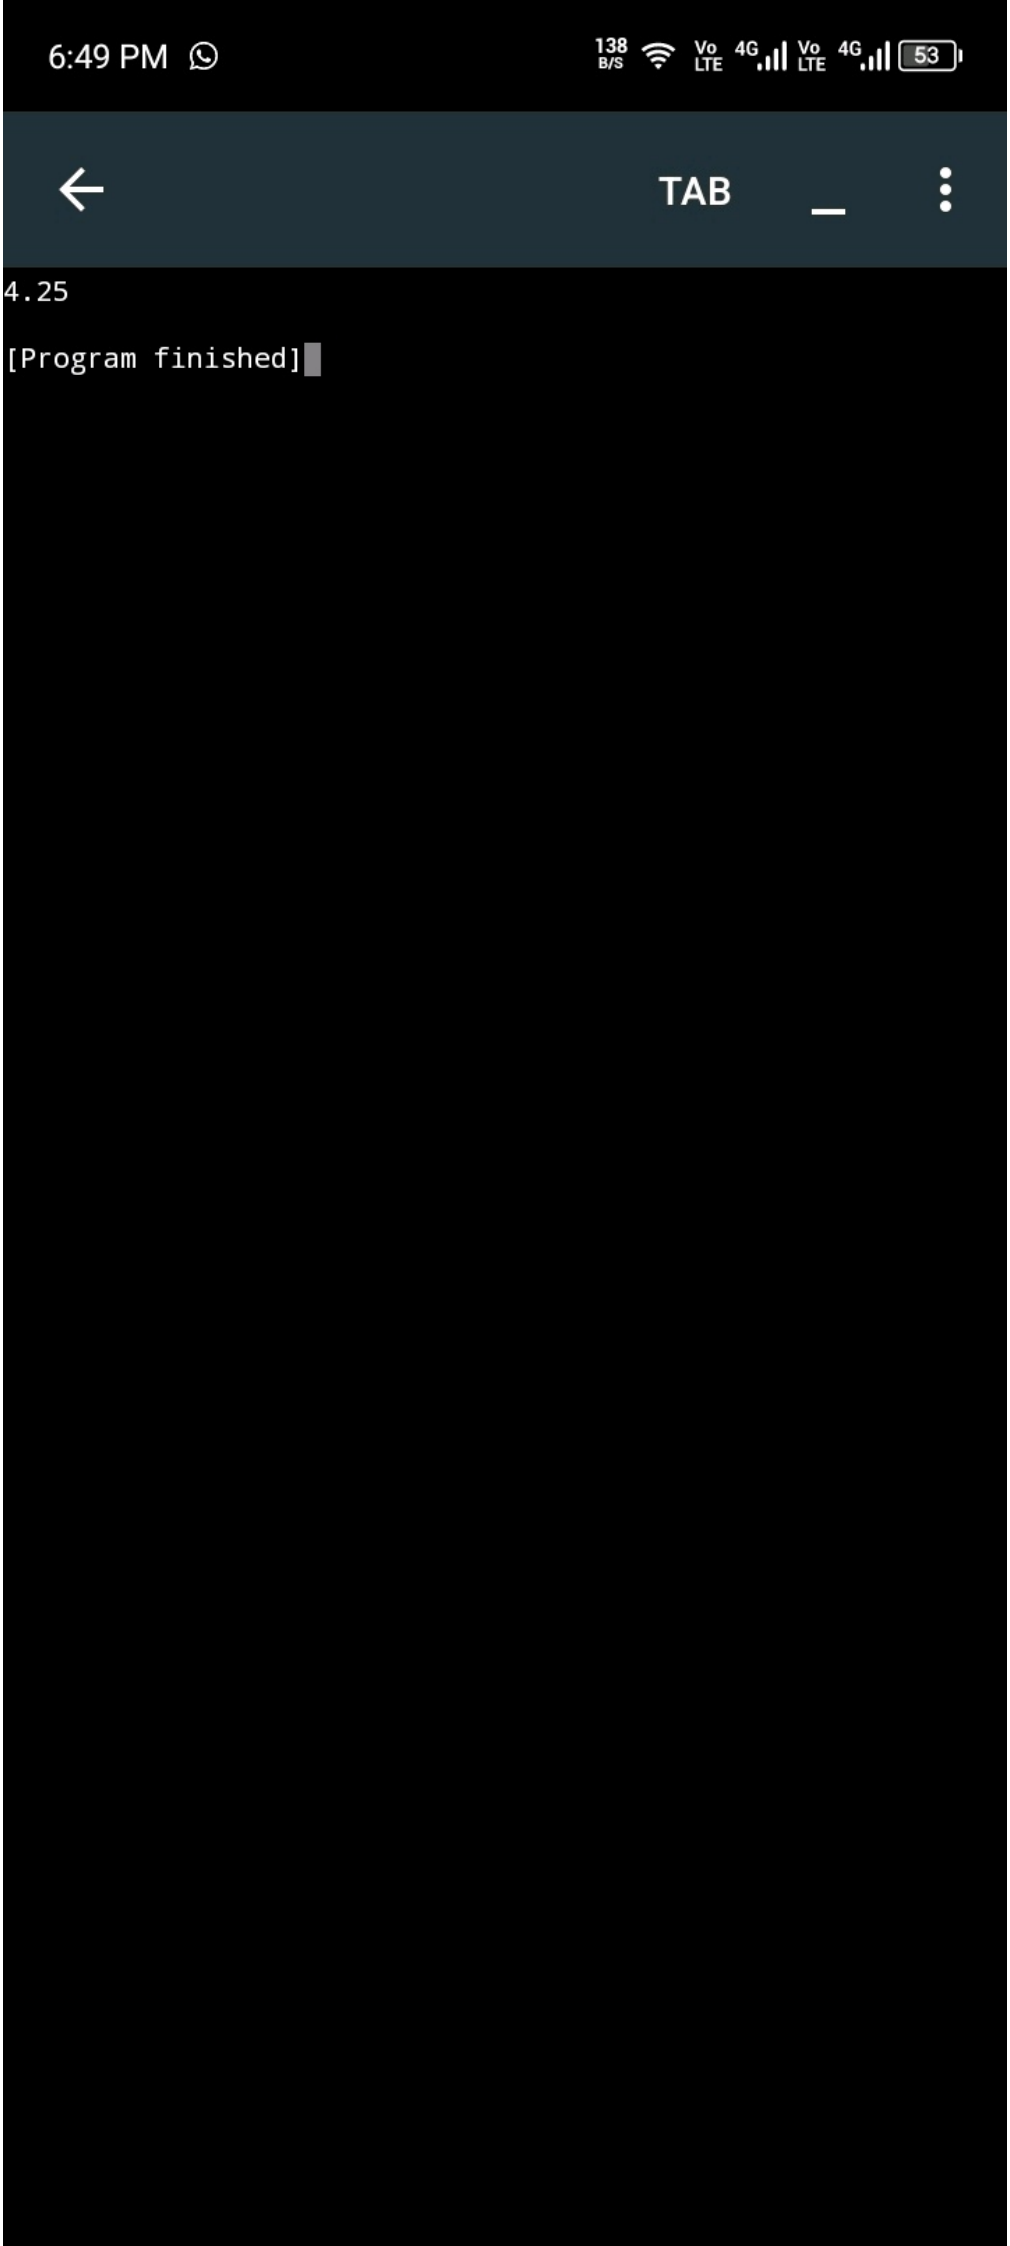
```
#include<iostream>
using namespace std;
int main() {
int V1 = 20, V2 = 32, V3 = 37, V = 24, V5 = 33;
int Sum;
double average;
Sum = V1+V2+V3+V4+V5;
 average = Sum / 5.0;
 cout<<"Sum = "<<sum<<endl;
 cout<<"Average = "<<Average<<endl;
  return 0;
}
```

6:47 PM 2.94 K/S Vo LTE 4G Vo LTE 4G 54


```
1  #include <iostream>
2  using namespace std;
3  int main()
4  {
5   int age;
6   double pay;
7   char section;
8   cin >> age >> pay >> section;
9   cout << age << " " << pay << " " << section
   << endl;
10  return 0;
11  }
```


6:47 PM
48.4 K/S
Vo LTE
4G
Vo LTE
4G
54
TAB

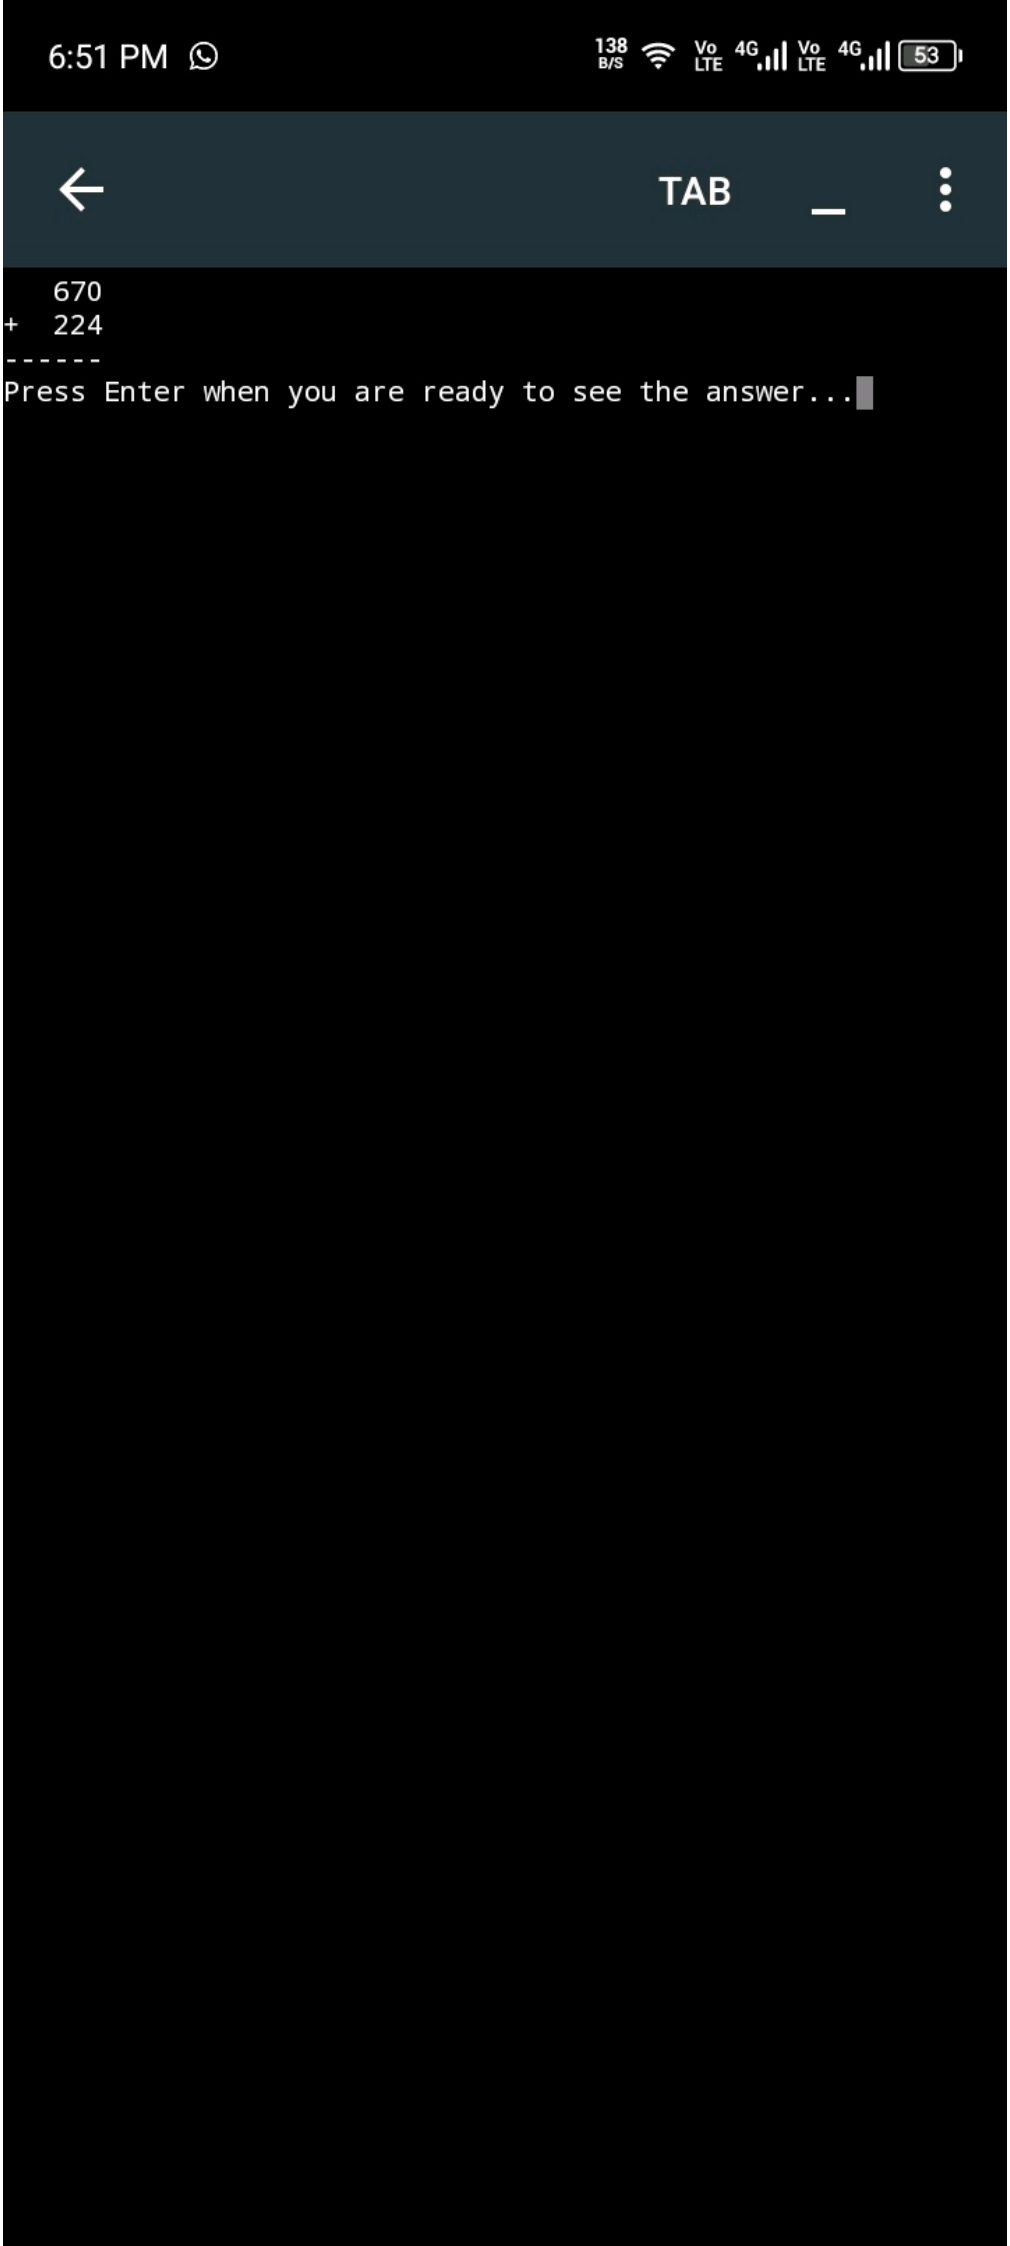
```cpp
#include <iostream>
using namespace std;
int main()
{
 int qty = 17, salesReps = 4;
 double unitsEach;
 unitsEach = static_cast<double>(qty) /
salesReps;
 cout << unitsEach << endl;
 return 0;
 }
```


6:49 PM
138 B/S
Vo LTE 4G
Vo LTE 4G
53
TAB
4.25
[Program finished]

6:50 PM 1.89 K/S Vo LTE 4G Vo LTE 4G 53

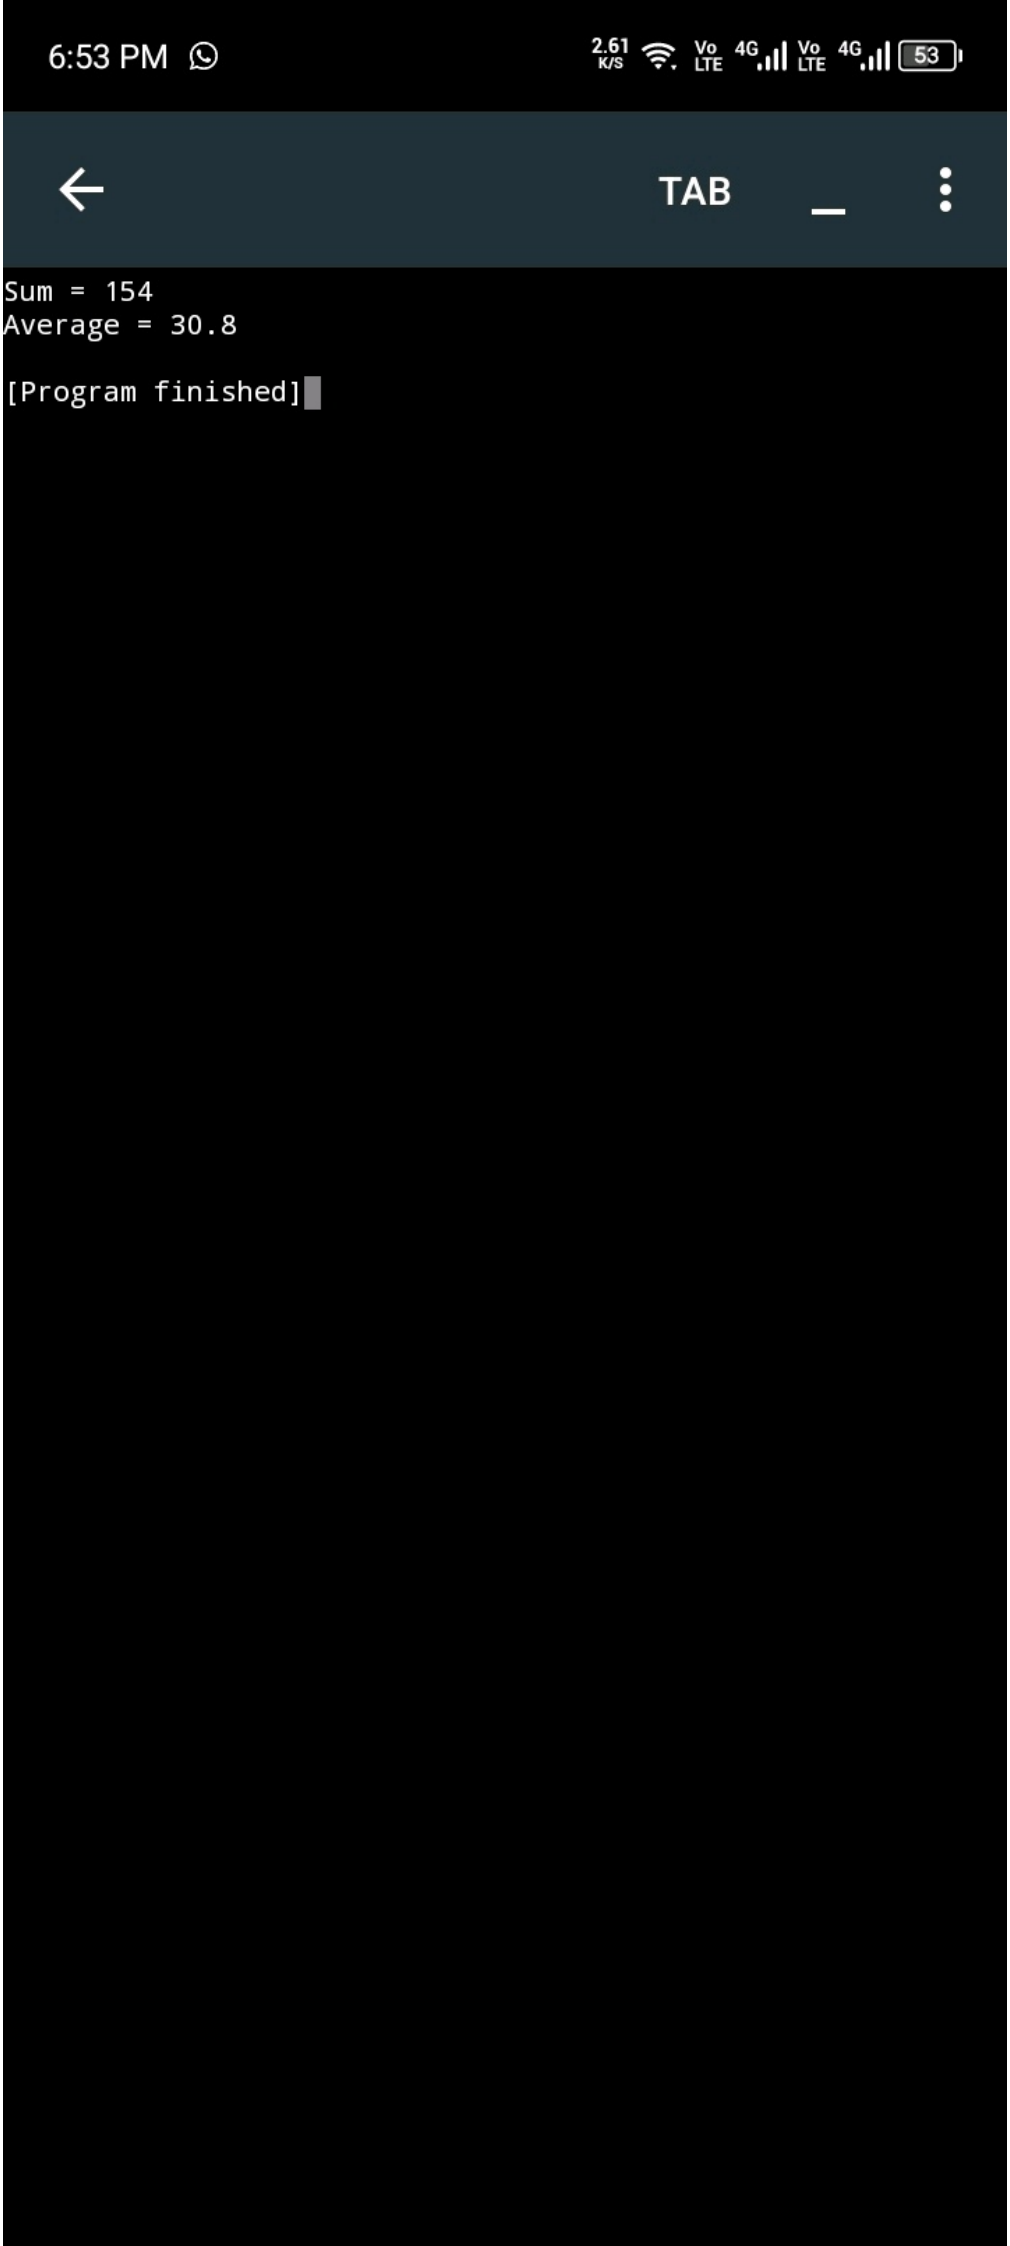

```cpp
#include <iostream>
#include <cstdlib>
#include <ctime>
#include <iomanip>
using namespace std;
int main()
{
 srand(time(0));
 int num1 = rand() % 900 + 100;
 int num2 = rand() % 900 + 100;
 cout << setw(6) << num1 << endl;
 cout << "+ " << setw(4) << num2 << endl;
 cout << "------" << endl;
 cout << "Press Enter when you are ready to see the answer...";
 cin.get();
 cout << endl;
 cout << setw(6) << num1 << endl;
 cout << "+ " << setw(4) << num2 << endl;
 cout << "------" << endl;
 cout << setw(6) << num1 + num2 << endl;
 return 0;
 }
```

Tab { } : ; "


6:51 PM
138 B/S
Vo LTE 4G
Vo LTE 4G
53
TAB
670
+ 224

Press Enter when you are ready to see the answer...

```cpp
#include <iostream>
using namespace std;
int main()
{
 int v1 = 28, v2 = 32, v3 = 37, v4 = 24, v5 =
33;
 int sum;
 double average;
 sum = v1 + v2 + v3 + v4 + v5;
 average = sum / 5.0;
 cout << "Sum = " << sum << endl;
 cout << "Average = " << average << endl;
 return 0;
 }
```


6:53 PM
2.61 K/S
Vo LTE
4G
Vo LTE
4G
53
TAB
Sum = 154
Average = 30.8
[Program finished]